


Exhibit 2
Hughes Network Systems Temporary Antenna Installation for
Satellite to Ground Tests on Thuraya Program

Testing of Thuraya satellite phones in handheld operation within the parking lot below the building. Operating distance from satellite test antennas on building not greater than 100meters

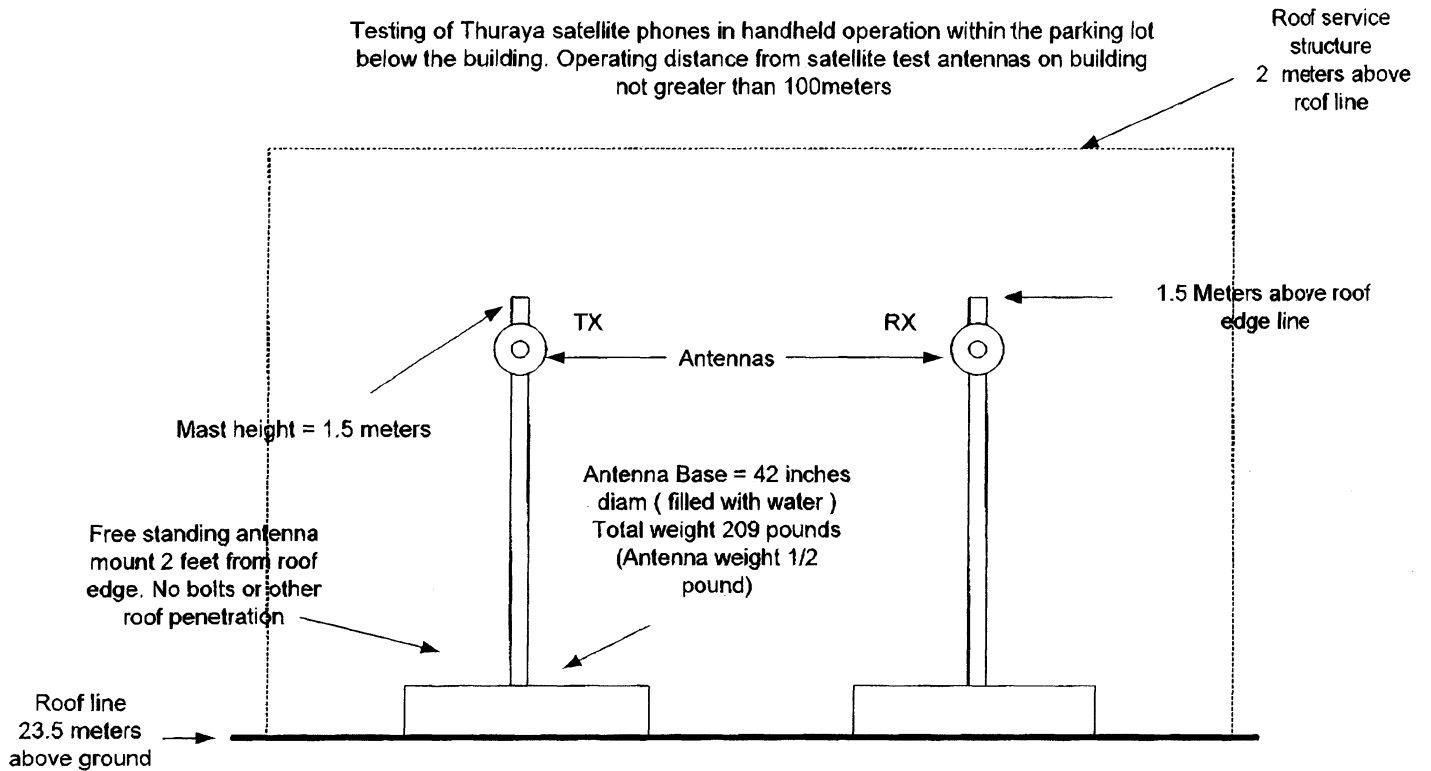

2 cables LDF 450 Heliax (one to each antenna). These are routed through the existing cable ways to the roof. Cables include lightning protection.

This building is lower than surrounding buildings and does not carry aircraft warning lights