

FILING RECEIPT



OC00000005312857

UNITED STATES DEPARTMENT OF COMMERCE
Patent and Trademark OfficeAddress: ASSISTANT SECRETARY AND
COMMISSIONER OF PATENT AND TRADEMARKS
Washington, D.C. 20231

APPLICATION NUMBER	FILING DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	DRAWINGS	TOT CLAIMS	IND CLAIMS
09/576,449	05/23/2000	2821	345	H001.P001U1	2	20	2

Bryan W Bockhop Esquire
Bryan W Bockhop LLC
3235 Statelike Boulevard
Building 400 Suite 300
Suluth, GA 30096

Date Mailed: 08/10/2000

Receipt is acknowledged of this nonprovisional Patent Application. It will be considered in its order and you will be notified as to the results of the examination. Be sure to provide the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION when inquiring about this application. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Customer Service Center. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the PTO processes the reply to the Notice, the PTO will generate another Filing Receipt incorporating the requested corrections (if appropriate).

Applicant(s)

Robert T. Hart, Eatonton, GA ;

Continuing Data as Claimed by Applicant

Foreign Applications

If Required, Foreign Filing License Granted 08/10/2000

** SMALL ENTITY **

Title

E H antenna

Preliminary Class

343

Data entry by : HINES, BRENDA

Team : OIPE

Date: 08/10/2000


RECEIVED
 8/16/00

8/10/00 7:52 AM

**LICENSE FOR FOREIGN FILING UNDER
Title 35, United States Code, Section 184
Title 37, Code of Federal Regulations, 5.11 & 5.15**

GRANTED

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 36 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Office of Export Administration, Department of Commerce (15 CFR 370.10 (j)); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

PLEASE NOTE the following information about the Filing Receipt:

- The articles such as "a," "an" and "the" are not included as the first words in the title of an application. They are considered to be unnecessary to the understanding of the title.
- The words "new," "improved," "improvements in" or "relating to" are not included as first words in the title of an application because a patent application, by nature, is a new idea or improvement.
- The title may be truncated if it consists of more than 600 characters (letters and spaces combined).
- The docket number allows a maximum of 25 characters.
- If your application was submitted under 37 CFR 1.10, your filing date should be the "date in" found on the Express Mail label. If there is a discrepancy, you should submit a request for a corrected Filing Receipt along with a copy of the Express Mail label showing the "date in."

Any corrections that may need to be done to your Filing Receipt should be directed to:

Assistant Commissioner for Patents
Office of Initial Patent Examination
Customer Service Center
Washington, DC 20231

Express Mail No. EK671410172US
PATENT

5

10

15

20

25 TO ALL WHOM IT MAY CONCERN:

Be it known that I, **ROBERT T. HART**, having a post office address and a
residence address at 120 Windsor Drive, Eatonton, Georgia 31024, a citizen of
30 U.S.A., have invented new and useful improvements in an

E H ANTENNA

for which the following is a specification.

E H ANTENNA**BACKGROUND OF THE INVENTION**5 1. **Field of the Invention**

The present invention relates to radio frequency communications and, more specifically, to an antenna system employed in radio frequency communications.

10 2. **Description of the Prior Art**

Radio signals usually start with electrical signals that have been modulated onto a radio frequency carrier wave. The resulting radio signal is transmitted using an antenna. The antenna is a resonant system that generates an electrical field (E field) and a magnetic field (H field) that vary in correspondence with the radio signal, thereby forming radio frequency radiation. At a distance from the antenna, as a result of transmission effects of the medium through which the radio frequency radiation is being transmitted, the E field and the H field fall into phase with each other, thereby generating a Poynting vector, which is given by $S = E \times H$, where S is the Poynting vector, E is the E field vector and H is the H field vector.

Most conventional antenna systems are resonant systems that take the form of wire dipoles that run electrically in parallel to the output circuitry of radio frequency transmitters and receivers. Such antenna systems require that the length of the wires of the dipoles be at least one fourth of the wavelength of the radiation being transmitted or received. For example, if the wavelength of the radiation is 1000 ft., the length of the wire must be 250 ft. Thus, the typical wire antenna requires a substantial amount of space as a function of the wavelength being transmitted and received.

30 A crossed field antenna, as disclosed in U.S. Patent No. 6,025,813, employs two separate sections which independently develop the E and H fields and are

configured to allow combining the E and H fields to generate radio frequency radiation. The result is that the antenna is not a resonant structure, thus a single structure may be used over a wide frequency range. The crossed field antenna is small, relative to wavelength (typically 1% to 3% of wavelength) and provides high efficiency. The crossed field antenna has the disadvantage of requiring a complicated physical structure to develop the E and H fields in separate sections of the antenna.

Therefore, there is a need for a simple and compact antenna.

SUMMARY OF THE INVENTION

The disadvantages of the prior art are overcome by the present invention which, in one aspect, is an antenna system for transmitting and receiving, in association with a radio device, electromagnetic radiation having an E-field component and an H-field component. The electromagnetic radiation corresponds to a radio frequency power signal having a current and a voltage at a radio frequency. The antenna system includes a first radiating element and a second radiating element, each comprising a conductive material. The second radiating element is spaced apart from, and in alignment with, the first radiating element. A phasing and matching network is in electrical communication with the first radiating element, the second radiating element and the radio device. The phasing and matching network aligns the relative phase between the current and the voltage of the radio frequency power signal so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component.

In another aspect, the invention is a method of transmitting and receiving, in association with a radio device, electromagnetic radiation having an E-field component and an H-field component, wherein the electromagnetic radiation corresponds to a radio frequency power signal having a current and a voltage at a radio frequency. In the method, the relative phase between the current and the voltage of the radio

frequency power signal is aligned so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component.

5 These and other aspects of the invention will become apparent from the following description of the preferred embodiments taken in conjunction with the following drawings. As would be obvious to one skilled in the art, many variations and modifications of the invention may be effected without departing from the spirit and scope of the novel concepts of the disclosure.

10 **BRIEF DESCRIPTION OF THE FIGURES OF THE DRAWINGS**

FIG. 1 is a schematic diagram of one illustrative embodiment of the invention.

15 **FIG. 2** is a schematic diagram of a second illustrative embodiment of the invention.

FIG. 3 is a schematic diagram of the embodiment of **FIG. 2** with covers added to the conic sections of the antenna.

20 **FIG. 4** is a schematic diagram of a third illustrative embodiment of the invention adapted for generating a substantially directed beam of radiation.

25 **DETAILED DESCRIPTION OF THE INVENTION**

A preferred embodiment of the invention is now described in detail. Referring to the drawings, like numbers indicate like parts throughout the views. As used in the description herein and throughout the claims, the following terms take the meanings
30 explicitly associated herein, unless the context clearly dictates otherwise: the meaning of "a," "an," and "the" includes plural reference, the meaning of "in" includes "in" and

“on.” As used herein, the term “in alignment with” includes both coaxial and slightly off coaxial.

5 A general discussion of Poynting vector theory may be found in the disclosure of U.S. Patent Nos. 5,155,495 and 6,025,813, which are incorporated herein by reference.

10 As shown in FIG. 1, one embodiment of the invention is illustrated as an antenna system **100** for transmitting and receiving, in association with a radio device **102** (such as a transmitter or a receiver), electromagnetic radiation having an E-field component and an H-field component. The electromagnetic radiation corresponds to a radio frequency power signal having a current and a voltage at a radio frequency.

15 The antenna system **100** includes an antenna unit **110** and a phasing/matching network **120**. The antenna unit **110** includes a first radiating element **112** made of a conductive material such as a metal (for example, aluminum) and a spaced-apart second radiating element **114**, also made of a conductive material such as a metal. The first radiating element **112** and the second radiating element **114** are substantially in alignment with each other, so that both tend to be disposed along a common axis **116**.
20 While the first radiating element is ideally coaxial with the second radiating element, they may be off coaxial without departing from the scope of the invention. However, performance of the antenna may degrade as the radiating elements get further off coaxial. Typically, the height of the antenna unit **110** need only be about 1.5% of the wavelength. Thus, the invention allows for relatively compact antenna designs.

25

In the embodiment of FIG. 1, the first radiating element **112** and the second radiating element **114** each comprise a cylinder. As will be shown below, the radiating elements could include conic sections as well, or many other shapes (or combinations thereof), as will be readily understood by those of skill in the art of antenna design.

30

The phasing and matching network 120 is in electrical communication with the first radiating element 112, the second radiating element 114 and the radio device 102. The phasing and matching network 120 aligns the relative phase between the current and the voltage of the radio frequency power signal so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component. The wires connecting the phasing and matching network 120 to the antenna unit 110 should be as short as practical so as to minimize transmission line effects. Because the E field and the H field are substantially in phase with each other near antenna unit 110 a Poynting vector is created almost immediately near the antenna unit 110.

In one illustrative embodiment, the phasing and matching network 120 includes a first inductor 122 that electrically couples a first terminal 104 of the radio device 102 to the first radiating element 112 and a first capacitor 124 electrically couples a second terminal 106 of the radio device 102 to the first radiating element 112. A second inductor 126 electrically couples the second terminal 106 of the radio device 102 to the second radiating element 114 and a second capacitor 128 is electrically in parallel with the second inductor 126. While one example of a reactive element circuit configuration embodying a phasing and matching network 120 is shown in FIG. 1, it is understood that many other circuit configurations may be used without departing from the scope of the invention.

An important feature of the phasing and matching network 120 is that it performs the step of aligning the relative phase between the current and the voltage of the radio frequency power signal so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component. As will be readily appreciated by those of skill in the art, the specific circuit elements and configuration used are unimportant so long as the result is proper performance of the phase alignment function.

In one specific example used to communicate with a signal having an operating frequency of 7 MHz with a bandwidth of 500 KHz, the first inductor **122** has an inductance of 17 μ H, the first capacitor **124** has a capacitance of 30 pf, the second inductor has an inductance of 19 μ H and the second capacitor has a capacitance of 42 pf. The phasing and matching network **120** is connected to the transmitter/receiver **102** by a coaxial cable (not shown). The first radiating element **112** and the second radiating element **114** are each aluminum cylinders having a height of 12 in. and a diameter of 4.5 in. and are spaced apart by 4.5 in. It was observed that this embodiment resulted in a system Q of (+/- 3 dB bandwidth) of approximately 7.5.

In one embodiment of the antenna unit **210**, as shown in FIG. 2, the first radiating element **212** and the second radiating element **214** each comprise conic sections that are supported by an axial non-conducting pipe (such as a PVC pipe). In this embodiment, the electromagnetic radiation **232** forms between the radiating elements **212** and **214** and is directed radially away from the antenna unit **210**. The angle of the conic sections of the radiating elements **212** and **214** depends on many factors and can vary depending on the specific application. The angle between the operative surfaces **218** of the radiating elements **212** and **214** can be selected in a range from nearly zero degrees (forming extremely wide diameter cones) to 180° (forming coaxial cylinders, as shown in FIG. 1). Theoretically, if the operative surfaces are exactly parallel (such that they form parallel disks) then the electromagnetic radiation would not escape the disks.

In one specific embodiment, used to transmit or receive a radiation having a wave length of 934 feet at 1 MHz, the wide ends of the conic sections have a diameter of 14.49 feet and a height of 1.95 feet each, with a 30° angle between the operative surfaces **218**. In this embodiment, the radiating elements **212** and **214** are supported by a coaxial 8 in. PVC pipe.

As shown in FIG. 3, a first cover **316** may be added to the first radiating element **312** to keep rain, snow and bird nests, etc., out of the first radiating element

312. Similarly, a second cover 318 may be added to the second radiating element 314 to keep out similar such debris.

5 As shown in FIG. 4, the antenna unit 410 may be placed in a reflective shape 430. Such an embodiment could be used in directing a beam 432 at a selected object. Such a shape 430 could be a parabolic reflector or some other shape (such as an inverted cone). When the beam is directed upward by the reflective shape 430 so that the beam 432 follows a near vertical profile, the embodiment of FIG. 4 could be used in near vertical incidence communications.

10

One advantage of the antenna system of the invention is that it responds only to true radiated signals, not to electrical noise. Therefore, the invention increases the signal-to-noise ratio compared to prior art systems.

15

The above described embodiments are given as illustrative examples only. It will be readily appreciated that many deviations may be made from the specific embodiments disclosed in this specification without departing from the invention. Accordingly, the scope of the invention is to be determined by the claims below rather than being limited to the specifically described embodiments above.

CLAIMS

What is claimed is:

1. An antenna system for transmitting and receiving, in association with a radio device, electromagnetic radiation having an E-field component and an H-field component, the electromagnetic radiation corresponding to a radio frequency power signal having a current and a voltage at a radio frequency, the current and the voltage each having a phase, the antenna system comprising:
 - a. a first radiating element comprising a conductive material;
 - b. a second radiating element comprising a conductive material, the second radiating element spaced apart from, and in alignment with, the first radiating element;
 - c. a phasing and matching network, in electrical communication with the first radiating element, the second radiating element and the radio device, that aligns the relative phase between the current and the voltage of the radio frequency power signal so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component.
2. The antenna system of Claim 1, wherein the radio device is a transmitter.
3. The antenna system of Claim 1, wherein the radio device is a receiver.
4. The antenna system of Claim 1, wherein the phasing and matching network comprises:
 - a. a first reactive element of a first type that electrically couples a first terminal of the radio device to the first radiating element;
 - b. a second reactive element of a second type that electrically couples a second terminal of the radio device to the first radiating element;

11. The antenna system of Claim 1, further comprising a reflective shape disposed around the first radiating element and the second radiating element so as to reflect a portion of any electromagnetic radiation emanating from between the first radiating element and the second radiating element along a preselected direction.
12. A method of transmitting and receiving, in association with a radio device, electromagnetic radiation having an E-field component and an H-field component, the electromagnetic radiation corresponding to a radio frequency power signal having a current and a voltage at a radio frequency, the current and the voltage each having a phase, comprising the step of aligning the relative phase between current and the voltage of the radio frequency power signal so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component.
13. The method of Claim 12, further comprising the step of directing the radio frequency power signal from a transmitter to an antenna having a first radiating element and a second radiating element, thereby generating the electromagnetic radiation between the first radiating element and the second radiating element.
14. The method of Claim 13, further comprising the step of disposing the first radiating element so as to be in alignment with the second radiating element.
15. The method of Claim 13, further comprising disposing the first radiating element and the second radiating element in a reflective shape so as to direct an electromagnetic beam substantially along a selected direction.
16. The method of Claim 15, further comprising the step of choosing a reflective shape so that the beam follows a near vertical incidence profile.

17. The method of Claim 12, further comprising the step of directing the radio frequency power signal from an antenna having a first radiating element and a second radiating element to a receiver.
18. The method of Claim 17, further comprising the step of disposing the first radiating element so as to be in alignment with the second radiating element.
19. The method of Claim 17, further comprising disposing the first radiating element and the second radiating element in a reflective shape so as to direct an electromagnetic beam substantially along a selected direction.
20. The method of Claim 19, further comprising the step of choosing a reflective shape so that the beam follows a near vertical incidence profile.

ABSTRACT

In an antenna system for transmitting and receiving, in association with a radio device, electromagnetic radiation has an E-field component and an H-field component.

- 5 The electromagnetic radiation corresponds to a radio frequency power signal having a current and a voltage at a radio frequency. The antenna system includes a first radiating element and a second radiating element, each comprising a conductive material. The second radiating element is spaced apart from, and in alignment with, the first radiating element. A phasing and matching network is in electrical
- 10 communication with the first radiating element, the second radiating element and the radio device. The phasing and matching network aligns the relative phase between the current and the voltage of the radio frequency power signal so that the H-field component of the corresponding electromagnetic signal is nominally in time phase with the E-field component.

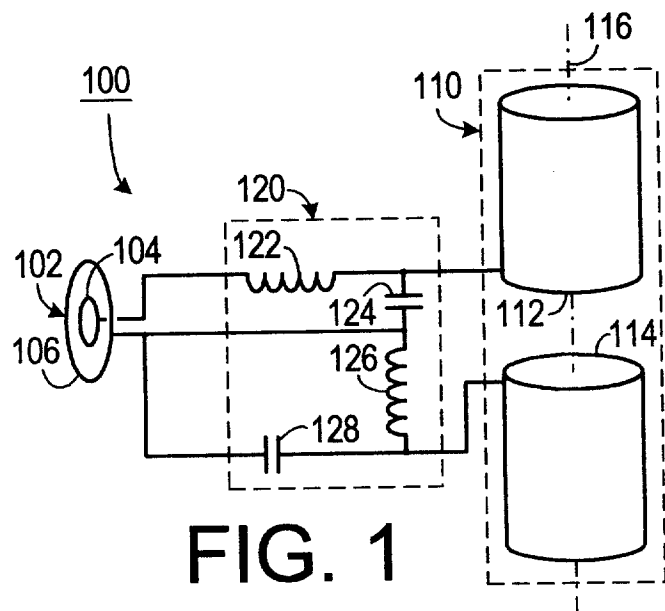


FIG. 1

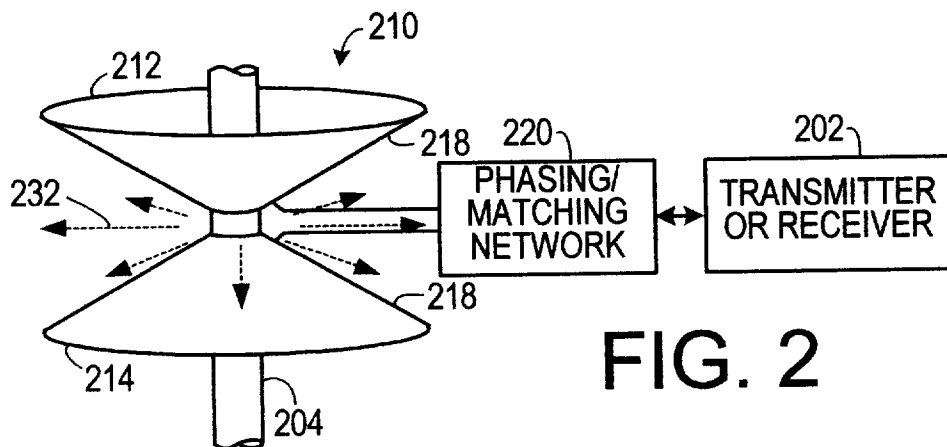


FIG. 2

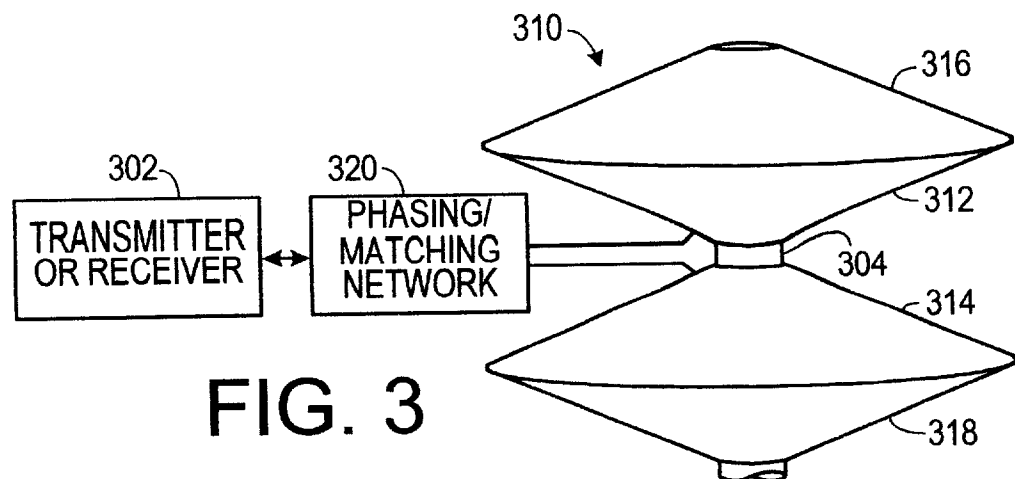


FIG. 3

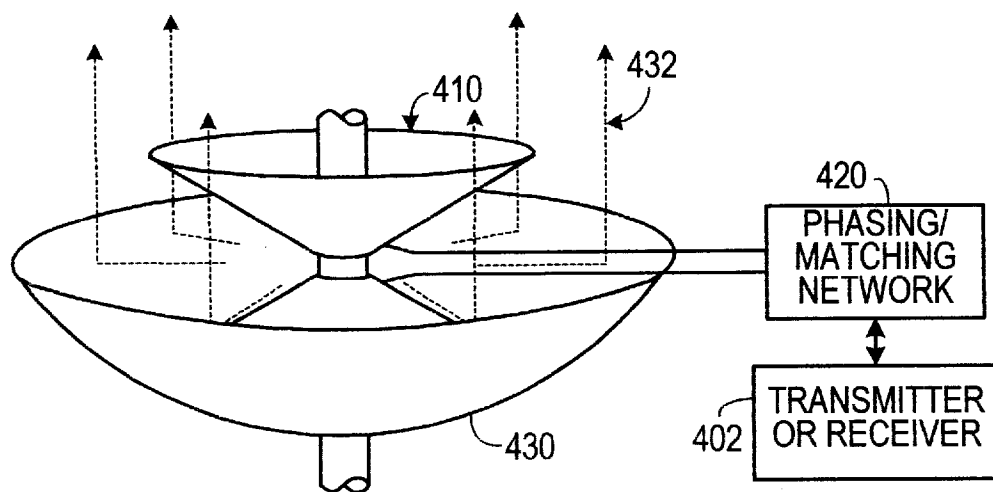


FIG. 4