



Appendix A. Test Result of AC Power Line Conducted Emission

for Adapter:

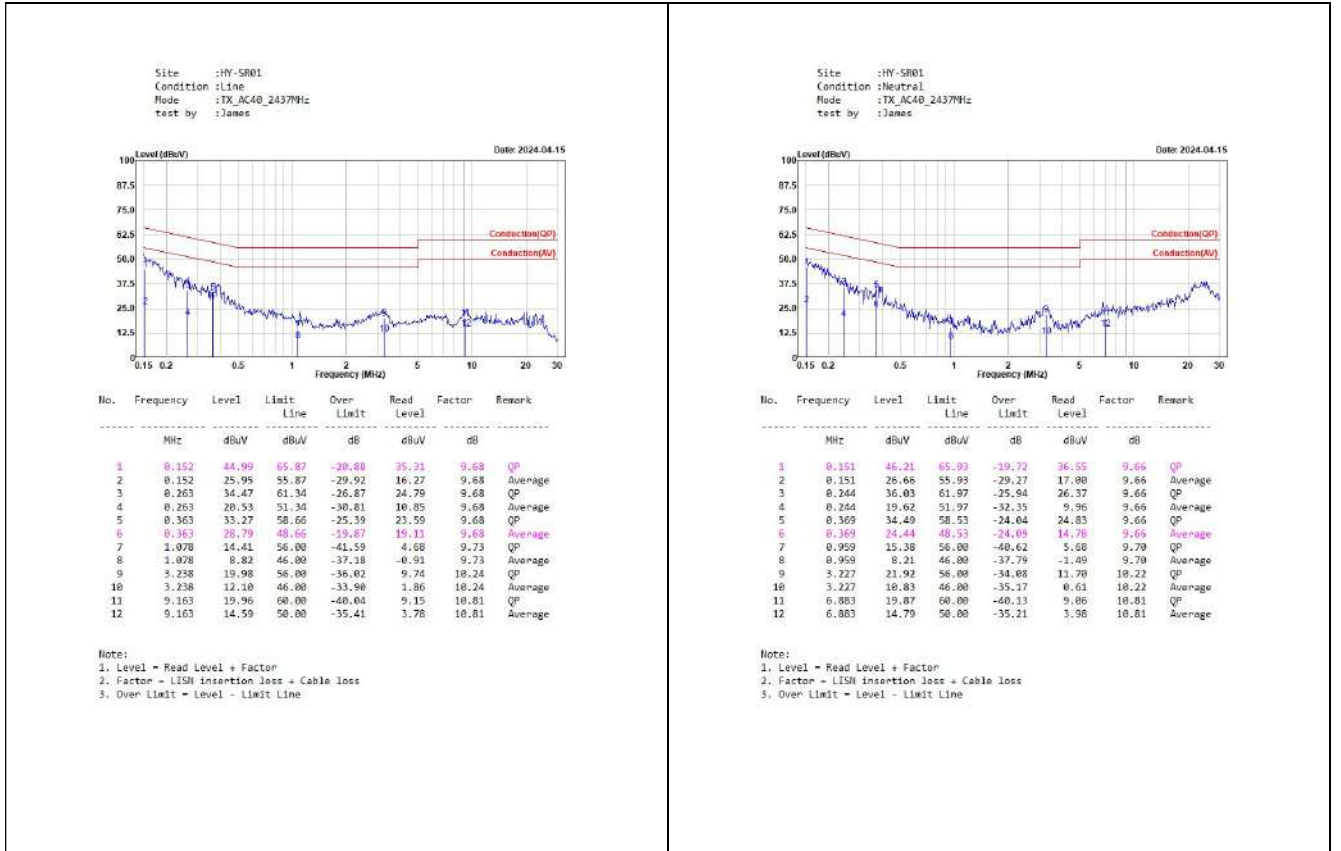


for PoE:

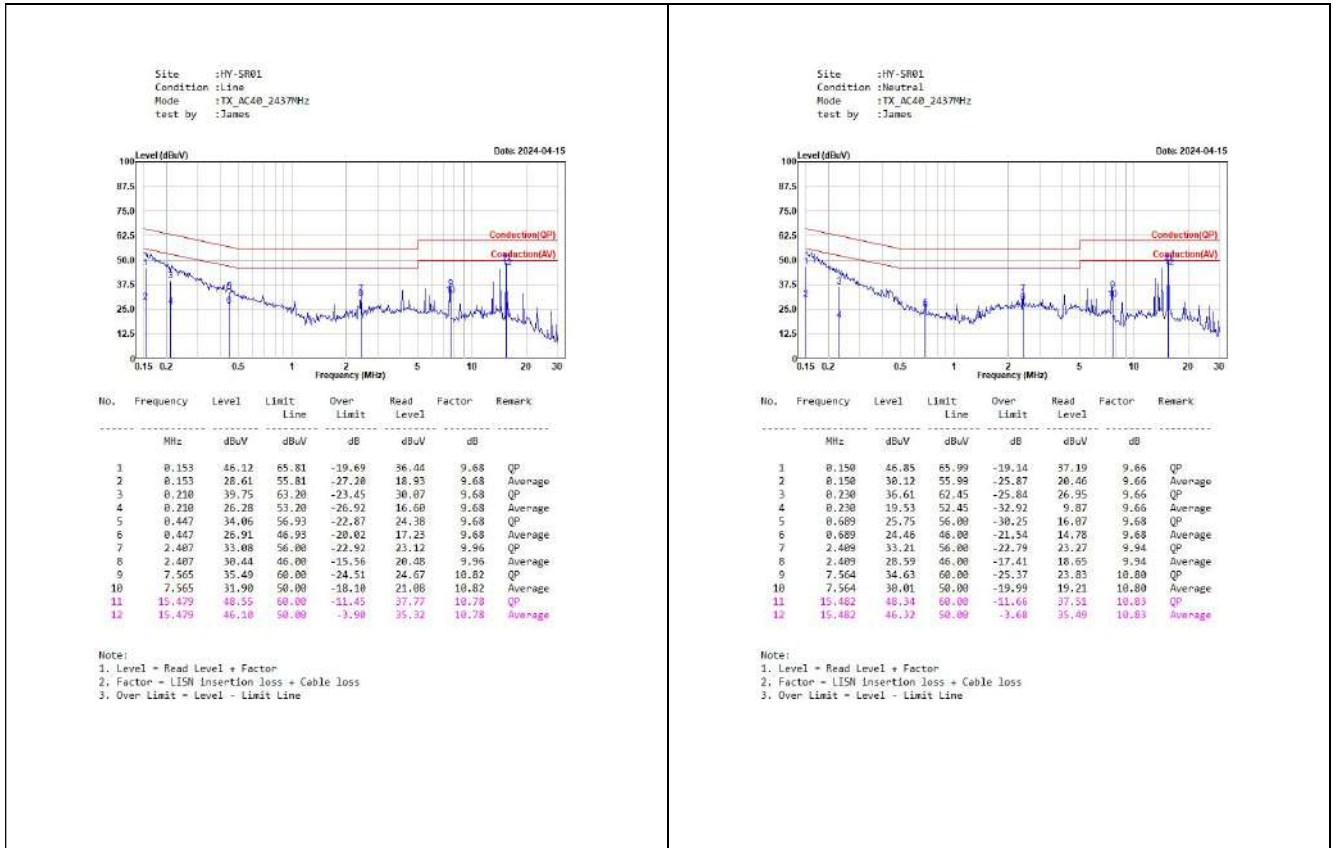

Appendix B. 6dB Bandwidth


Modulation	Chain	Frequency (MHz)	Measured Value (kHz)	Required Limit (kHz)
802.11b	A	2412	9071	>500
		2422	9071	>500
		2437	9071	>500
		2452	9071	>500
		2462	9031	>500
	B	2412	9550	>500
		2422	10030	>500
		2437	9550	>500
		2452	9550	>500
		2462	9071	>500
802.11g	A	2412	15105	>500
		2422	15105	>500
		2437	15105	>500
		2452	15105	>500
		2462	15105	>500
	B	2412	15105	>500
		2422	15105	>500
		2437	15105	>500
		2452	15065	>500
		2462	15105	>500
802.11ac (20 MHz)	A	2412	15105	>500
		2422	15105	>500
		2437	15105	>500
		2452	15105	>500
		2462	15105	>500
	B	2412	15105	>500
		2422	15105	>500
		2437	15105	>500
		2452	15105	>500
		2462	15105	>500
802.11ac (40 MHz)	A	2422	35085	>500
		2432	33806	>500
		2437	35085	>500
		2442	35085	>500
		2452	35085	>500
	B	2422	35085	>500
		2432	33806	>500
		2437	35085	>500
		2442	35085	>500
		2452	35085	>500

802.11b / Chain A / 2462 MHz

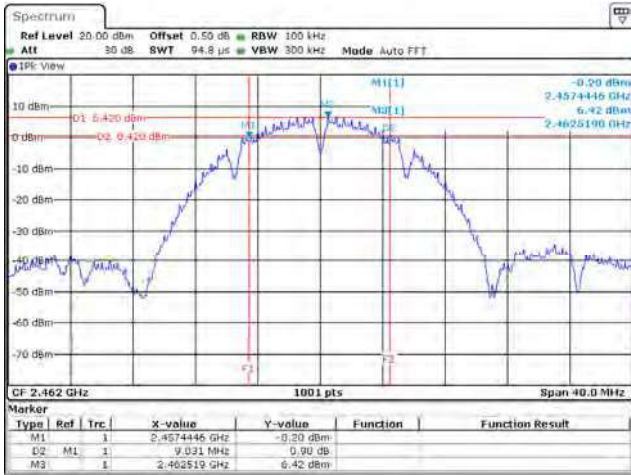


Date: 20.MAR.2024 10:45:48

802.11g / Chain B / 2452 MHz

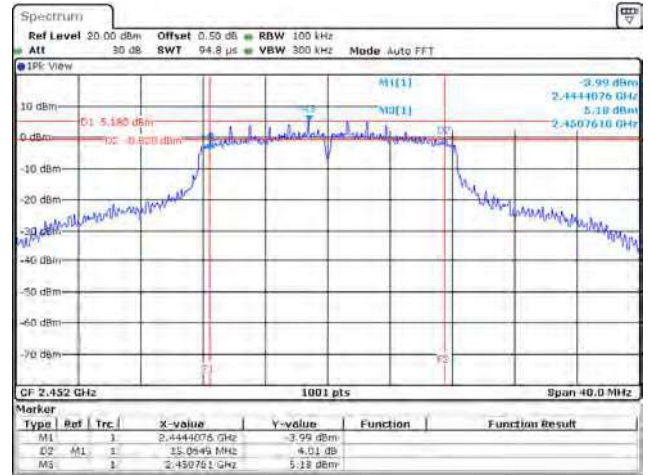


Date: 22.MAR.2024 18:14:18

802.11ac (20 MHz) / Chain A / 2412 MHz

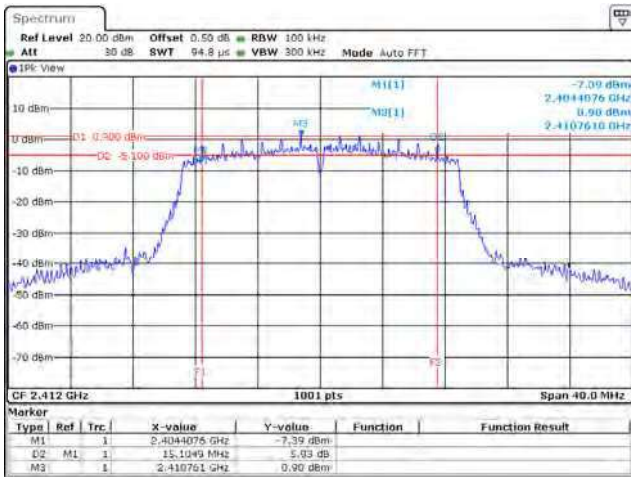

Date: 20.MAR.2024 11:15:10

802.11ac (40 MHz) / Chain A / 2432 MHz

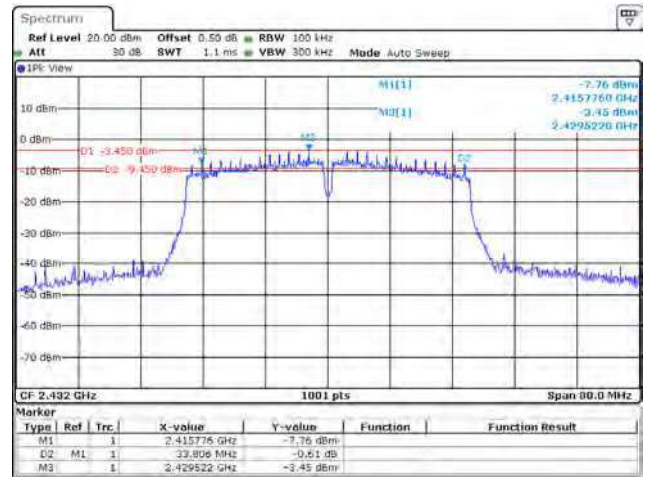

Date: 22.MAR.2024 19:40:52

Appendix C. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Average Output Power (dBm)	Limit (dBm)
802.11b	2412	19.18	19.41	22.31	<30
	2422	20.46	20.68	23.58	<30
	2437	19.00	19.65	22.35	<30
	2452	18.97	19.71	22.37	<30
	2462	17.00	17.98	20.53	<30
802.11g	2412	13.61	13.71	16.67	<30
	2422	19.54	18.64	22.12	<30
	2437	19.59	19.04	22.33	<30
	2452	16.35	17.08	19.74	<30
	2462	12.63	13.39	16.04	<30
802.11n (20 MHz)	2412	12.24	12.61	15.44	<30
	2422	16.73	17.01	19.88	<30
	2437	18.55	18.84	21.71	<30
	2452	15.69	16.57	19.16	<30
	2462	12.31	13.15	15.76	<30
802.11n (40 MHz)	2422	12.01	12.53	15.29	<30
	2432	10.74	11.22	14.00	<30
	2437	12.55	12.97	15.78	<30
	2442	10.97	11.75	14.39	<30
	2452	10.07	10.84	13.48	<30
802.11ac (20 MHz)	2412	12.35	12.70	15.54	<30
	2422	16.80	17.11	19.97	<30
	2437	18.60	18.94	21.78	<30
	2452	15.77	16.63	19.23	<30
	2462	12.44	13.22	15.86	<30
802.11ac (40 MHz)	2422	12.09	12.61	15.37	<30
	2432	10.83	11.30	14.08	<30
	2437	12.64	13.09	15.88	<30
	2442	11.04	11.87	14.49	<30
	2452	10.15	10.95	13.58	<30

Note: Average Output Power (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)})$


Appendix D. Test Result of Power Spectral Density


Modulation.	Frequency (MHz)	Data Rate (Mbps)	Chain	Measured Value (dBm)	Duty factor (dBm)	Total PSD (dBm)	Limit
							(dBm)
802.11b	2412	1	A	-8.550	0.000	-5.545	7.84
			B	-8.560			
	2422	1	A	-7.490	0.000	-4.598	7.84
			B	-7.730			
	2437	1	A	-8.370	0.000	-5.092	7.84
			B	-7.850			
	2452	1	A	-9.000	0.000	-5.775	7.84
			B	-8.580			
	2462	1	A	-10.150	0.000	-6.605	7.84
			B	-9.140			
802.11g	2412	6	A	-15.470	0.198	-12.015	7.84
			B	-14.990			
	2422	6	A	-9.080	0.198	-6.901	7.84
			B	-11.460			
	2437	6	A	-8.920	0.198	-6.292	7.84
			B	-10.170			
	2452	6	A	-13.110	0.198	-9.857	7.84
			B	-13.020			
	2462	6	A	-16.110	0.198	-12.516	7.84
			B	-15.370			
802.11ac (20 MHz)	2412	MCS0	A	-16.600	0.342	-13.14	7.84
			B	-16.390			
	2422	MCS0	A	-12.400	0.342	-9.04	7.84
			B	-12.390			
	2437	MCS0	A	-10.080	0.342	-7.01	7.84
			B	-10.660			
	2452	MCS0	A	-13.800	0.342	-10.18	7.84
			B	-13.280			
	2462	MCS0	A	-16.930	0.342	-12.93	7.84
			B	-15.720			
802.11ac (40 MHz)	2422	MCS0	A	-20.610	0.631	-17.30	7.84
			B	-21.300			
	2432	MCS0	A	-19.970	0.631	-16.38	7.84
			B	-20.070			
	2437	MCS0	A	-18.090	0.631	-14.29	7.84
			B	-17.770			
	2442	MCS0	A	-19.860	0.631	-16.15	7.84
			B	-19.720			
	2452	MCS0	A	-19.120	0.631	-15.82	7.84
			B	-19.820			


Note: Total PSD = 10*log (Chain A (mW) + Chain B (mW)) + Duty factor.

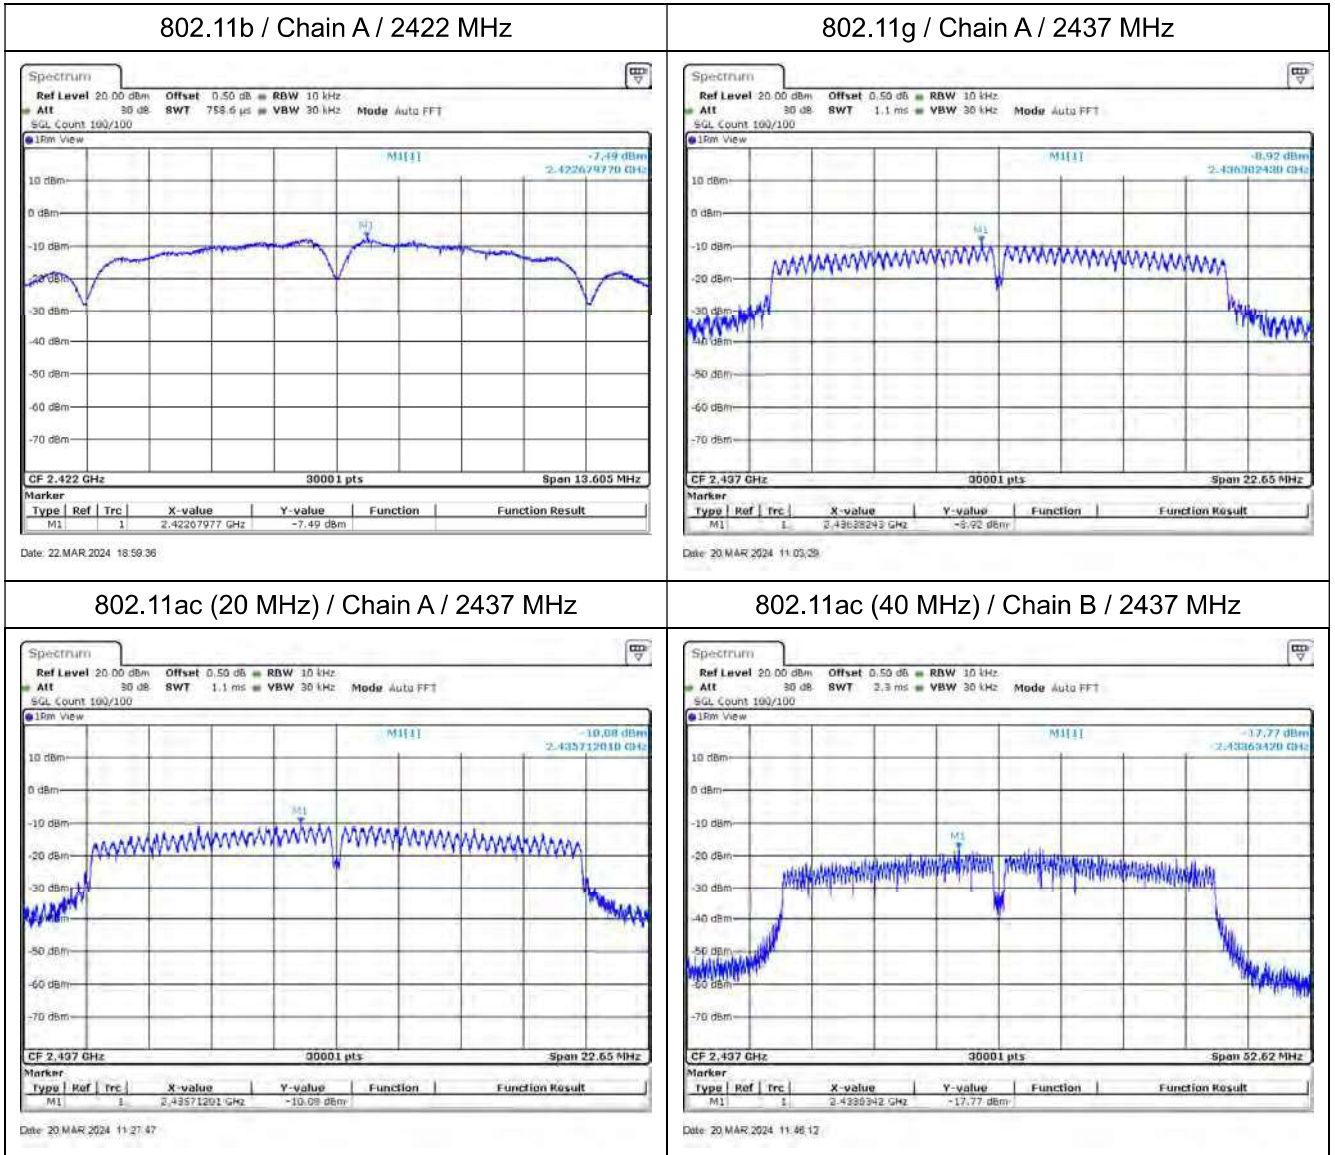


Appendix E. Test Result of Antenna Port Conducted Emission

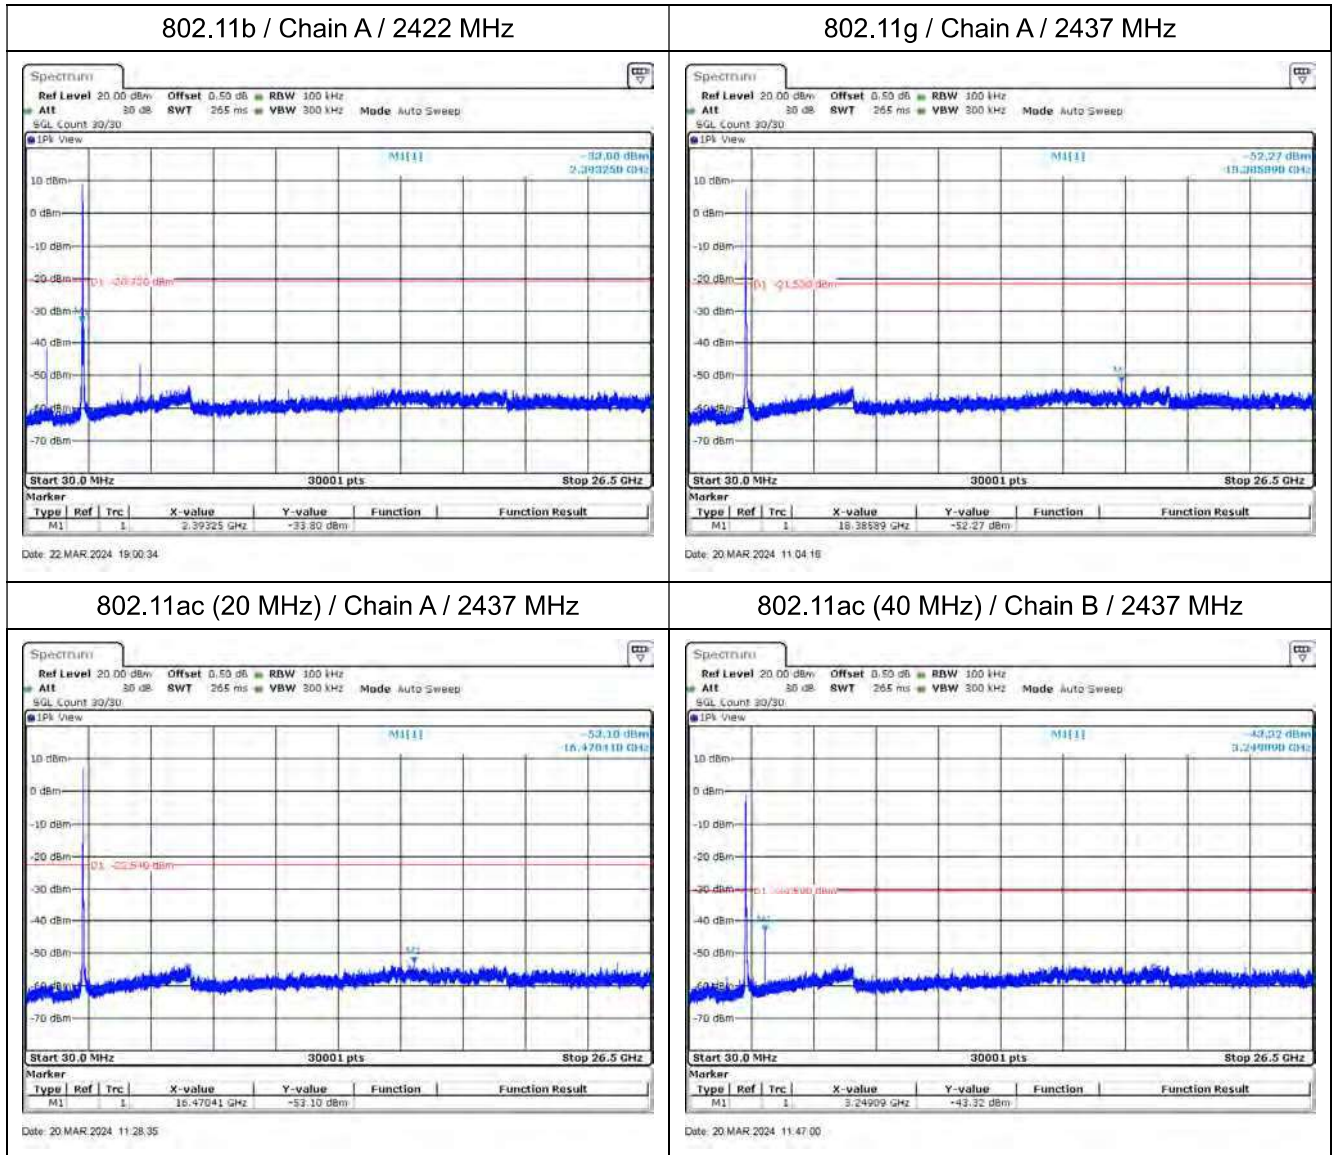

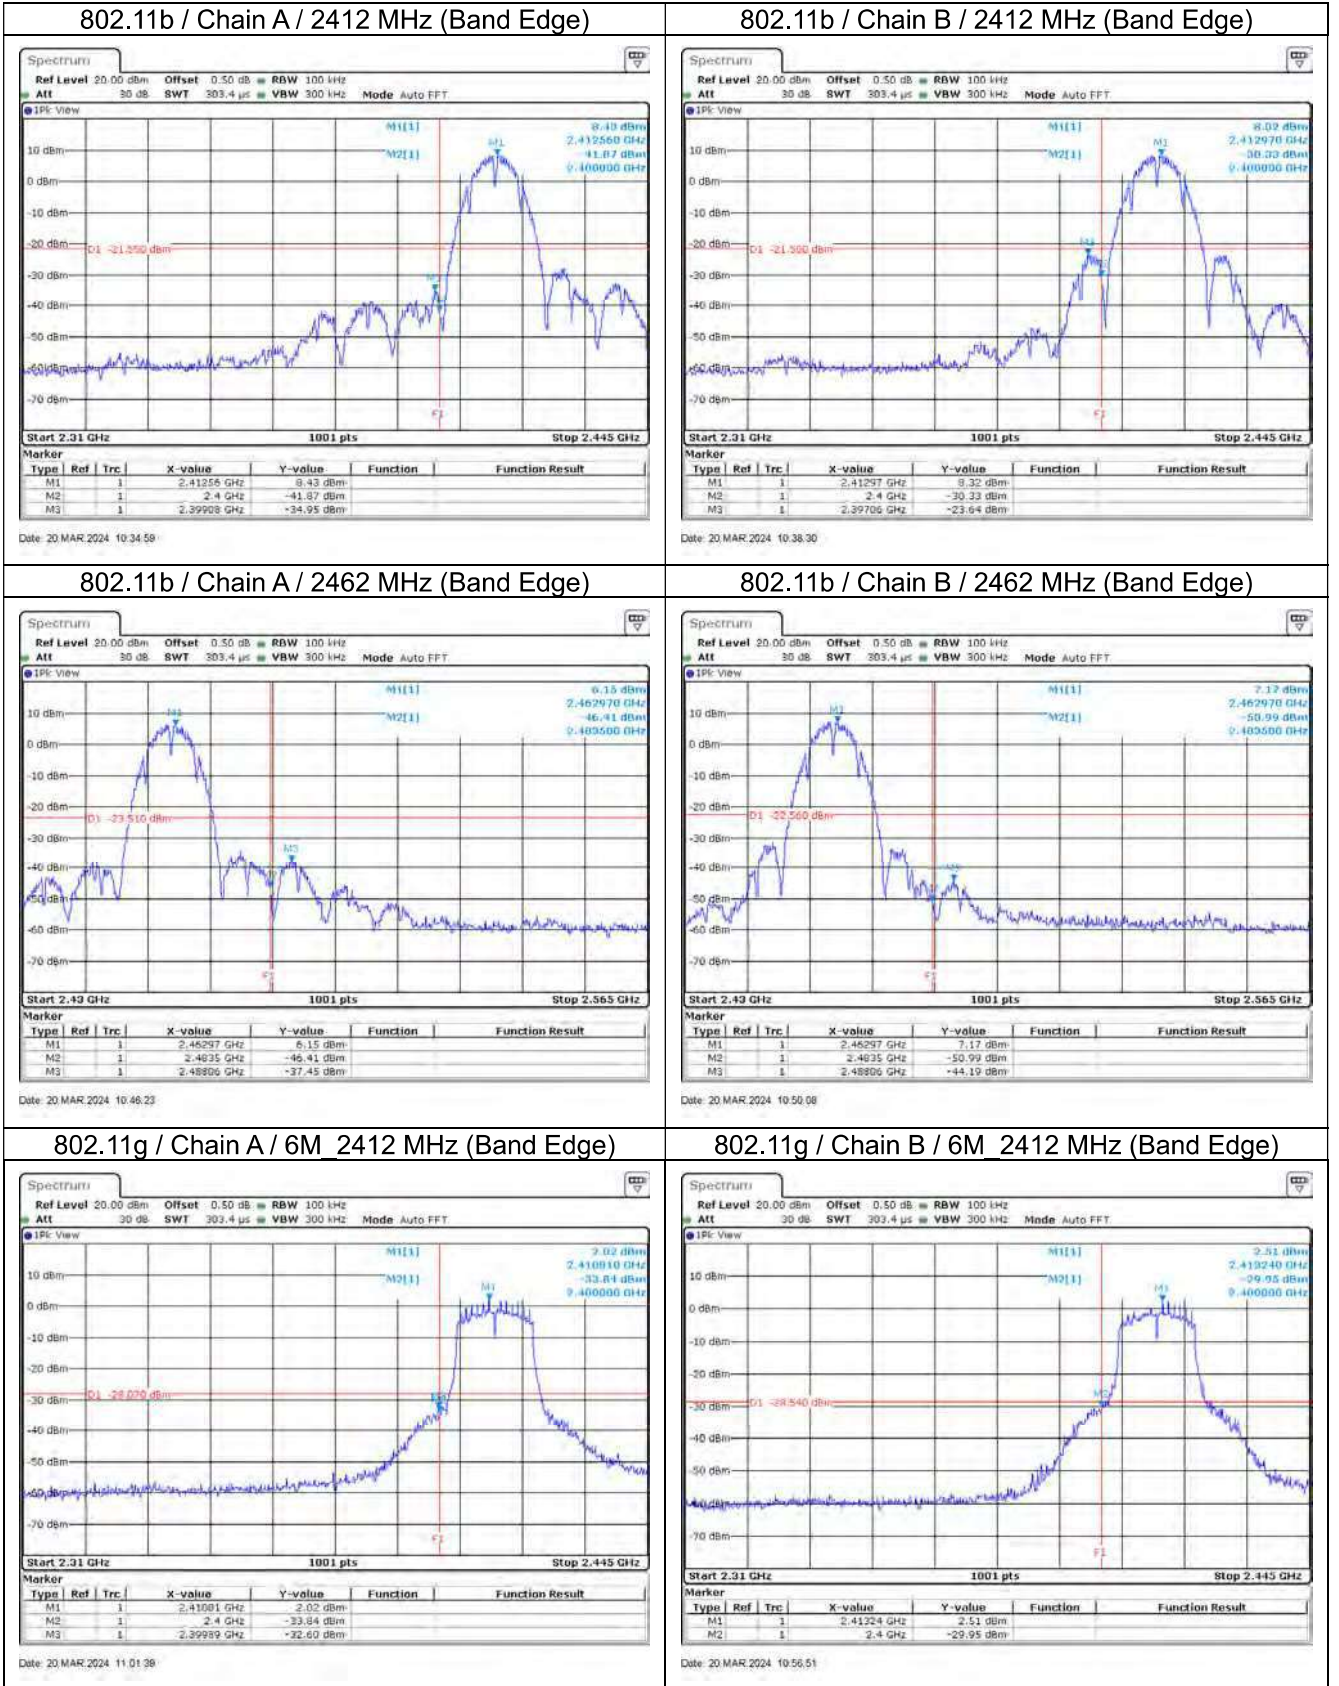

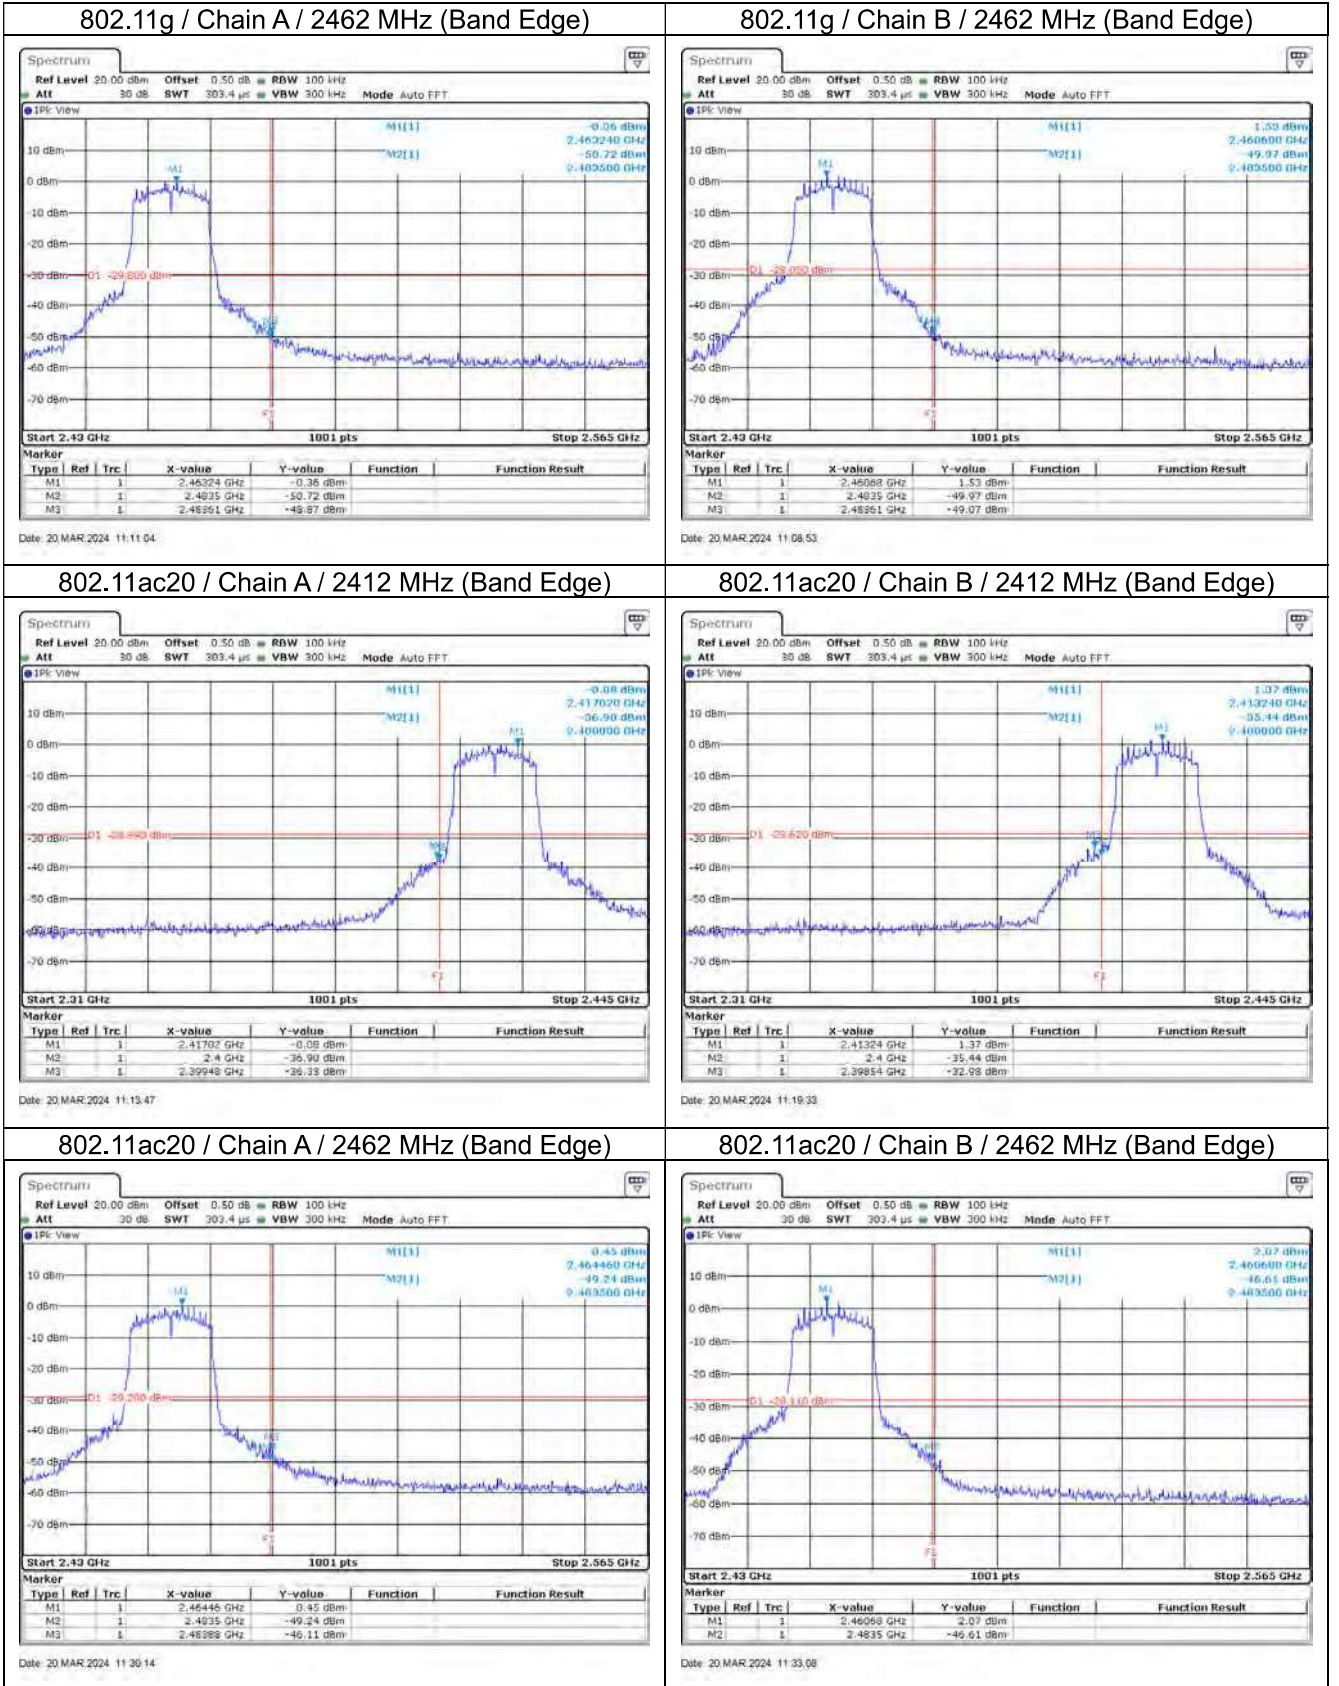


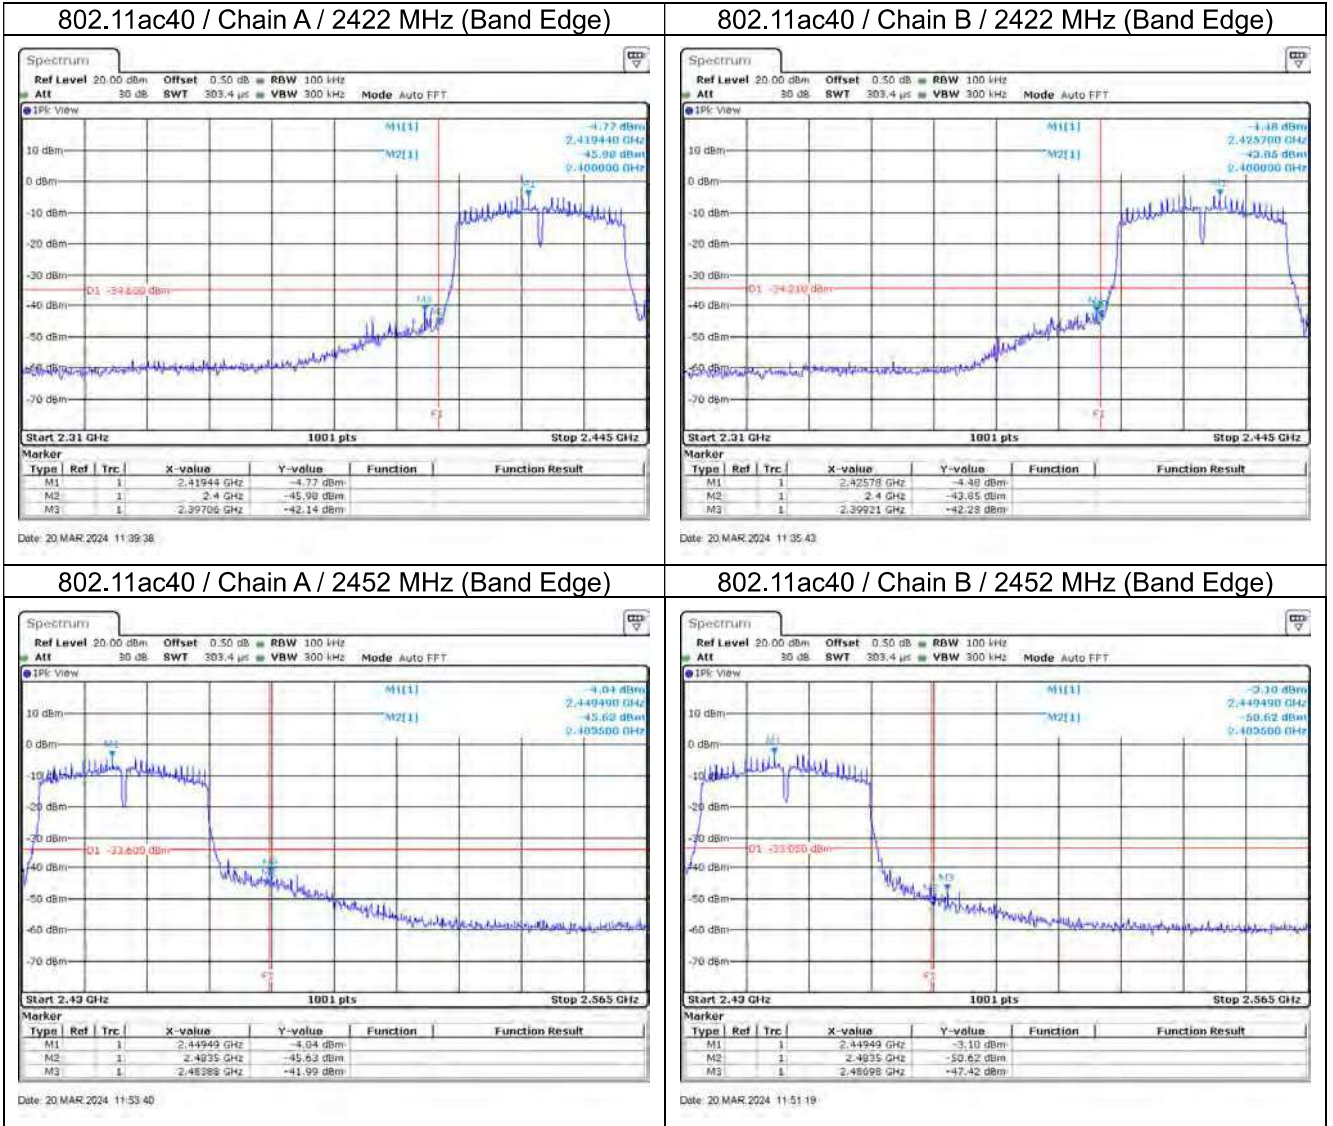

Appendix F. Test Result of Radiated Emission

<p>Site :HY-CB03 Condition :3m HORIZONTAL Mode :TX_b_2412MHz Test BY :Bob</p> <p style="text-align: right;">Date: 2024-03-12</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>44.90</td> <td>74.00</td> <td>-29.10</td> <td>58.87</td> <td>-13.97</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	44.90	74.00	-29.10	58.87	-13.97	Peak	<p>Site :HY-CB03 Condition :3m VERTICAL Mode :TX_b_2412MHz Test BY :Bob</p> <p style="text-align: right;">Date: 2024-03-12</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>50.76</td> <td>74.00</td> <td>-23.24</td> <td>64.73</td> <td>-13.97</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	50.76	74.00	-23.24	64.73	-13.97	Peak																																								
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																			
1	4824.000	44.90	74.00	-29.10	58.87	-13.97	Peak																																																																																		
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																			
1	4824.000	50.76	74.00	-23.24	64.73	-13.97	Peak																																																																																		
<p>Site :HY-CB03 Condition :3m HORIZONTAL Mode :TX_b_2422MHz Test BY :Bob</p> <p style="text-align: right;">Date: 2024-03-12</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.000</td> <td>43.88</td> <td>74.00</td> <td>-30.12</td> <td>57.74</td> <td>-13.86</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7266.000</td> <td>49.81</td> <td>74.00</td> <td>-24.19</td> <td>56.22</td> <td>-6.41</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>12110.000</td> <td>52.36</td> <td>74.00</td> <td>-21.64</td> <td>52.83</td> <td>-6.47</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4844.000	43.88	74.00	-30.12	57.74	-13.86	Peak	2	7266.000	49.81	74.00	-24.19	56.22	-6.41	Peak	3	12110.000	52.36	74.00	-21.64	52.83	-6.47	Peak	<p>Site :HY-CB03 Condition :3m VERTICAL Mode :TX_b_2422MHz Test BY :Bob</p> <p style="text-align: right;">Date: 2024-03-12</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4844.000</td> <td>58.77</td> <td>54.00</td> <td>-5.23</td> <td>64.63</td> <td>-13.86</td> <td>Average</td> </tr> <tr> <td>2</td> <td>4844.000</td> <td>54.12</td> <td>74.00</td> <td>-19.88</td> <td>67.98</td> <td>-13.86</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7266.000</td> <td>40.56</td> <td>54.00</td> <td>-13.44</td> <td>46.97</td> <td>-6.41</td> <td>Average</td> </tr> <tr> <td>4</td> <td>7266.000</td> <td>55.72</td> <td>74.00</td> <td>-18.28</td> <td>62.13</td> <td>-6.41</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4844.000	58.77	54.00	-5.23	64.63	-13.86	Average	2	4844.000	54.12	74.00	-19.88	67.98	-13.86	Peak	3	7266.000	40.56	54.00	-13.44	46.97	-6.41	Average	4	7266.000	55.72	74.00	-18.28	62.13	-6.41	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																			
1	4844.000	43.88	74.00	-30.12	57.74	-13.86	Peak																																																																																		
2	7266.000	49.81	74.00	-24.19	56.22	-6.41	Peak																																																																																		
3	12110.000	52.36	74.00	-21.64	52.83	-6.47	Peak																																																																																		
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																			
1	4844.000	58.77	54.00	-5.23	64.63	-13.86	Average																																																																																		
2	4844.000	54.12	74.00	-19.88	67.98	-13.86	Peak																																																																																		
3	7266.000	40.56	54.00	-13.44	46.97	-6.41	Average																																																																																		
4	7266.000	55.72	74.00	-18.28	62.13	-6.41	Peak																																																																																		


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_b_2437MHz
 Test BY :Bob

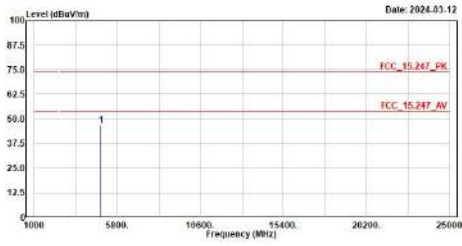

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	46.94	74.00	-27.06	60.63	-13.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_b_2437MHz
 Test BY :Bob

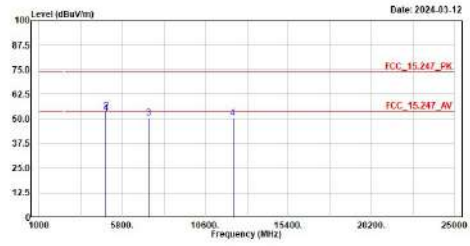

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	52.89	54.00	-1.11	66.58	-13.69	Average
2	4874.000	54.09	74.00	-19.91	67.78	-13.69	Peak
3	7311.000	50.42	74.00	-23.58	56.80	-6.38	Peak
4	12185.000	50.57	74.00	-23.43	58.97	-6.40	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_b_2452MHz
 Test BY :Bob

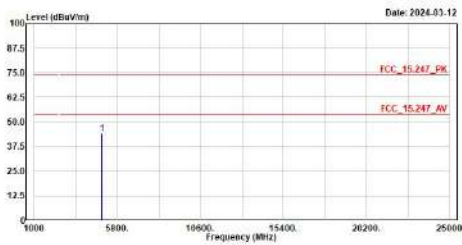

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4904.000	44.01	74.00	-29.99	57.55	-13.54	Peak





Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_b_2452MHz
 Test BY :Bob

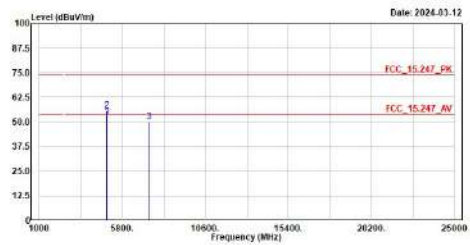


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4904.000	52.85	54.00	-1.15	66.39	-13.54	Average
2	4904.000	55.89	74.00	-18.11	69.43	-13.54	Peak
3	7356.000	50.25	74.00	-23.75	56.78	-6.53	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

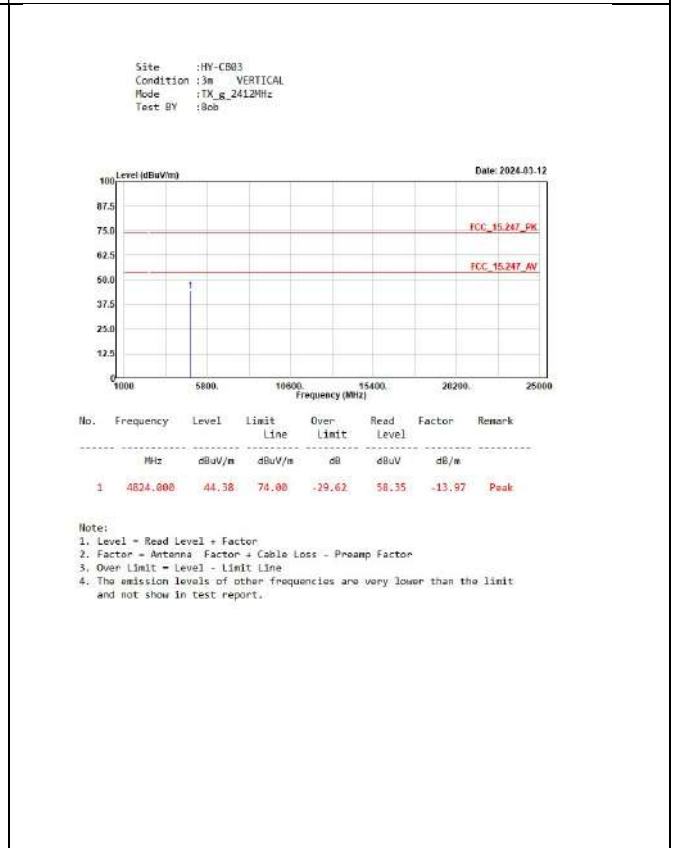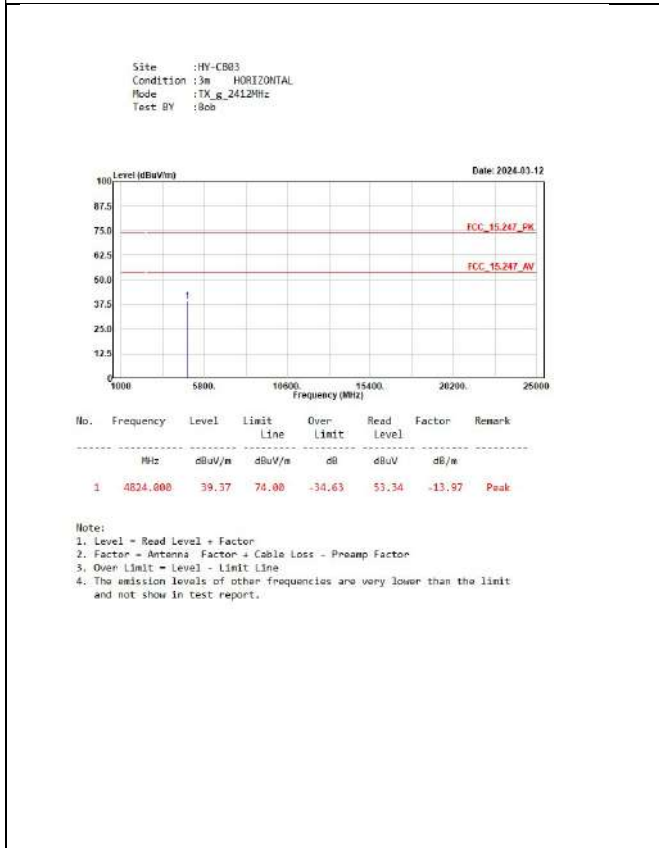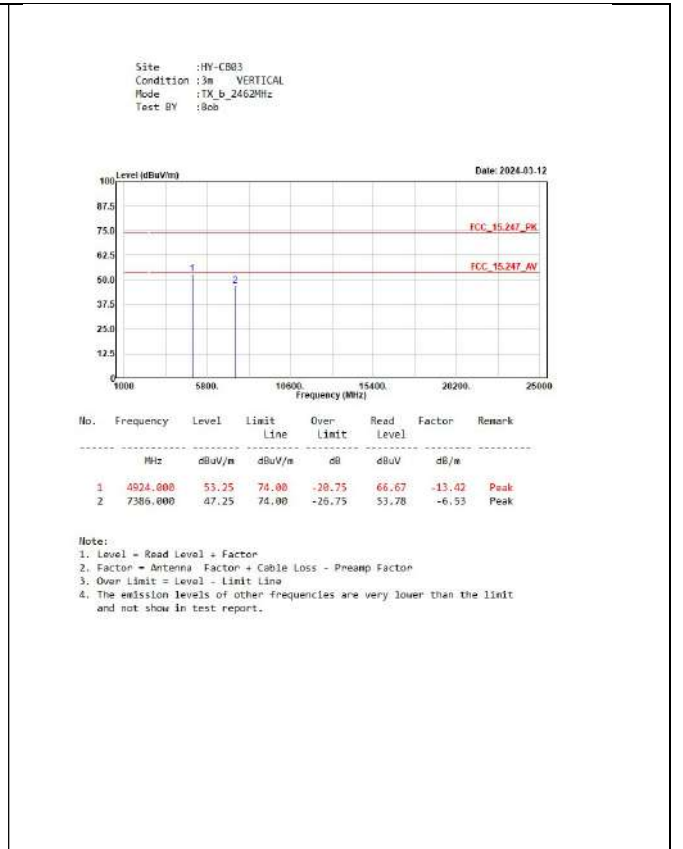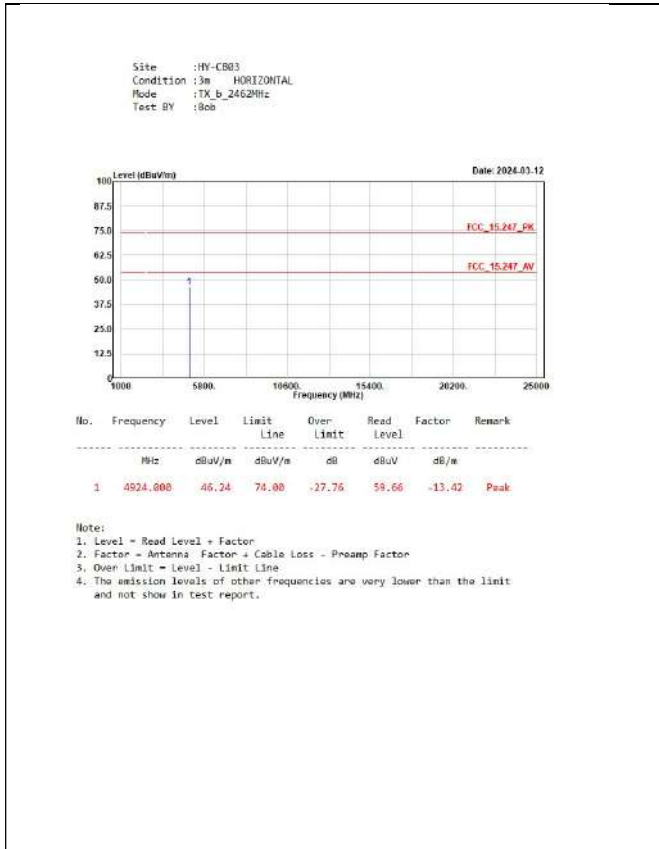


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_g_2422MHz
 Test BY :Bob

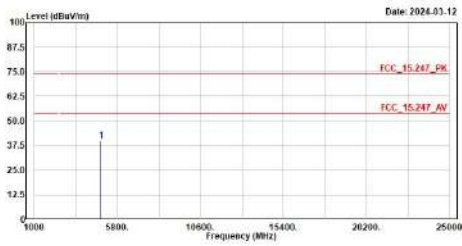

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	39.86	74.00	-34.14	53.72	-13.86	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_g_2422MHz
 Test BY :Bob

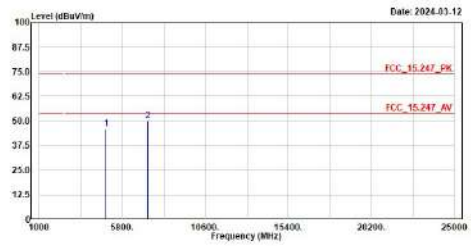

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	46.05	74.00	-27.95	59.91	-13.86	Peak
2	7266.000	50.29	74.00	-23.71	56.78	-6.41	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_g_2437MHz
 Test BY :Bob

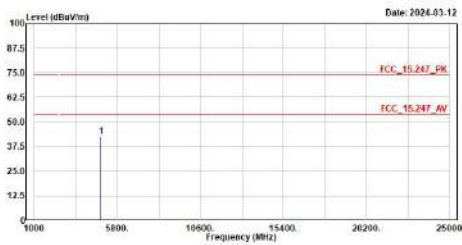

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	42.63	74.00	-31.37	56.32	-13.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_g_2437MHz
 Test BY :Bob

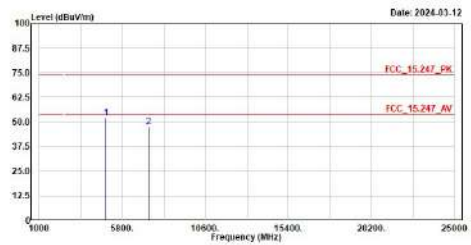

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4874.000	52.09	74.00	-21.91	65.78	-13.69	Peak
2	7311.000	47.39	74.00	-26.61	53.77	-6.38	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_g_2452MHz
 Test BY :800

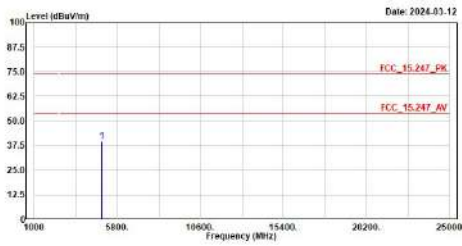

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	39.75	74.00	-34.25	53.29	-13.54	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_g_2452MHz
 Test BY :800

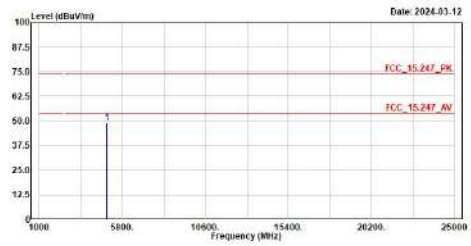

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	49.88	74.00	-24.92	62.62	-13.54	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_g_2462MHz
 Test BY :800

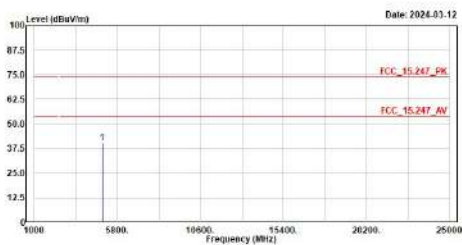

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	40.50	74.00	-33.50	53.92	-13.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_g_2462MHz
 Test BY :800

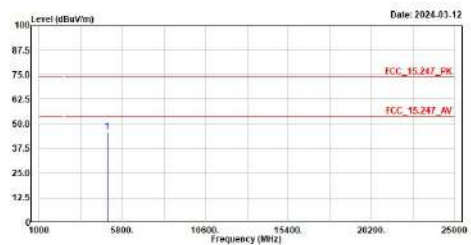

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	45.88	74.00	-28.12	59.30	-13.42	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac20_2412MHz
 Test BY :80b

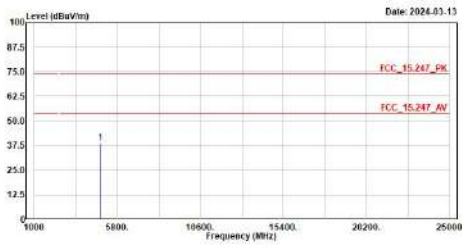

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	39.04	74.00	-34.96	53.01	-13.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac20_2412MHz
 Test BY :80b

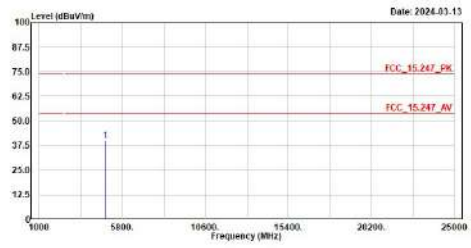

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	40.16	74.00	-33.84	54.13	-13.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac20_2422MHz
 Test BY :80b

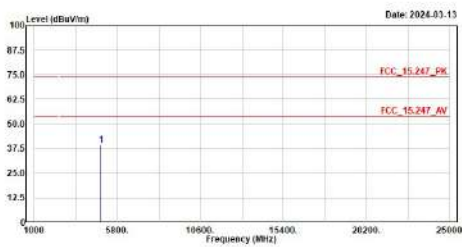

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	39.43	74.00	-34.57	53.29	-13.86	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac20_2422MHz
 Test BY :80b

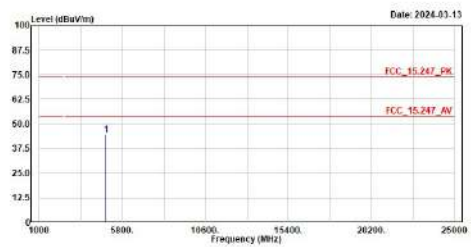

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	44.51	74.00	-29.49	58.37	-13.86	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac20_2437MHz
 Test BY :Bob

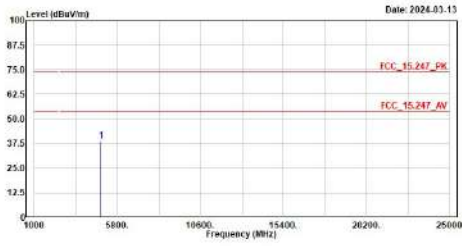

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.89	74.00	-35.11	52.58	-13.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac20_2437MHz
 Test BY :Bob

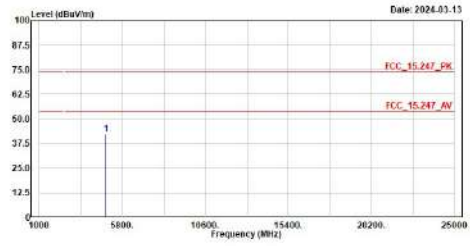

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	42.18	74.00	-31.82	55.87	-13.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac20_2452MHz
 Test BY :Bob

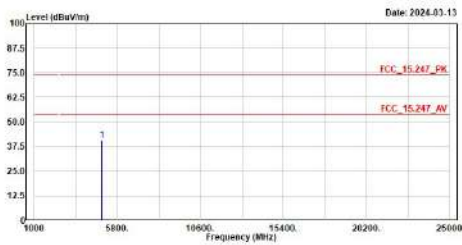

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	40.86	74.00	-33.14	54.40	-13.54	Peak





Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac20_2452MHz
 Test BY :Bob

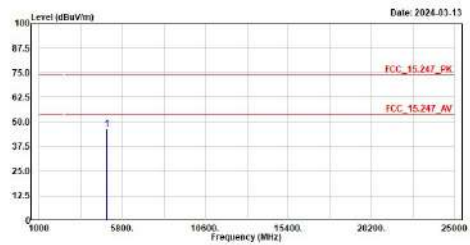


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	46.24	74.00	-27.76	59.78	-13.54	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

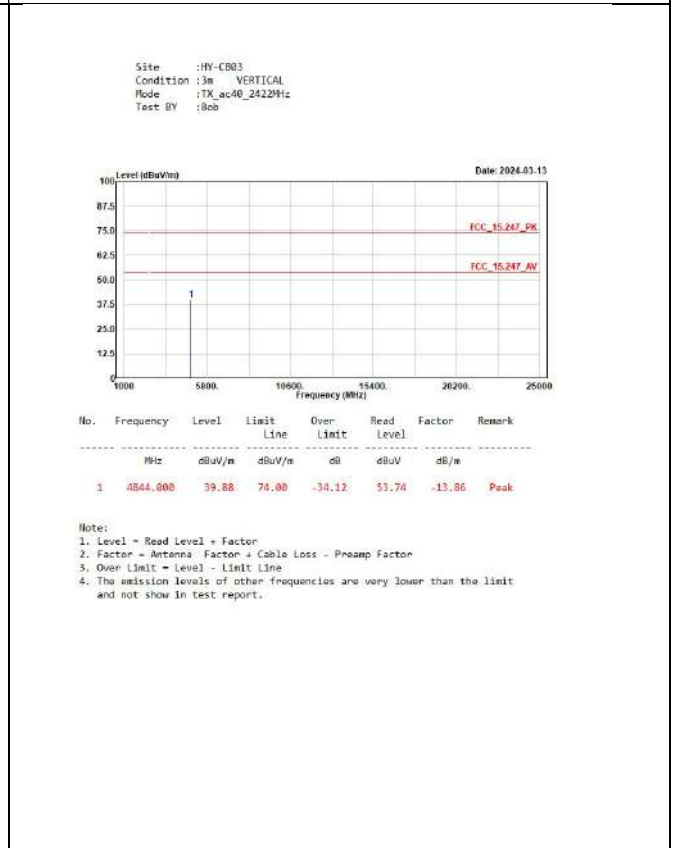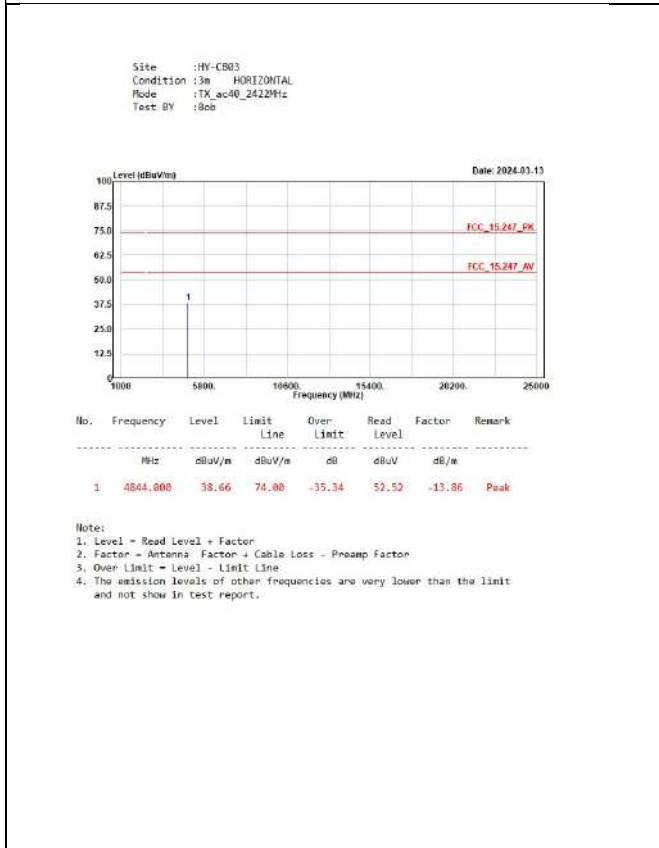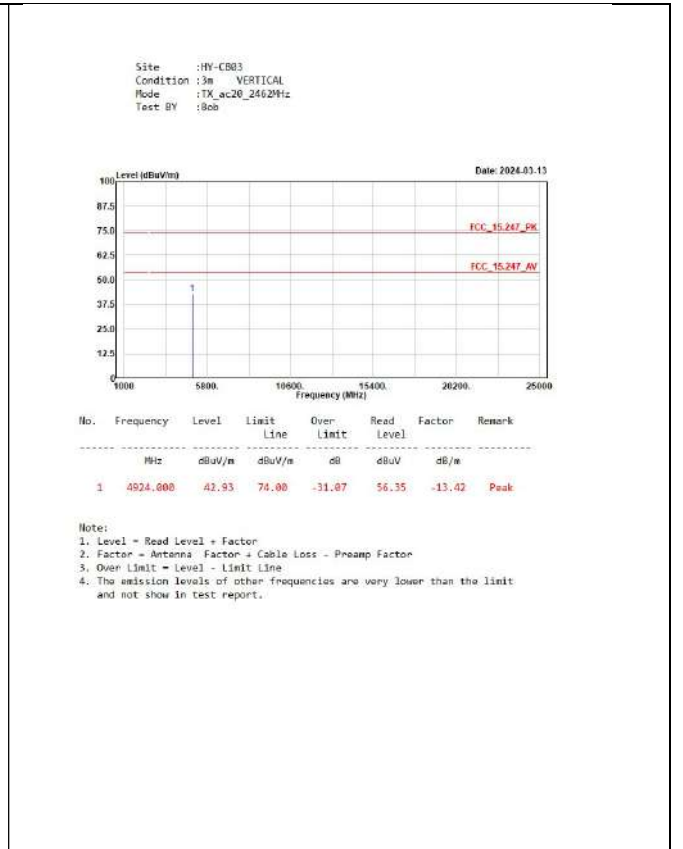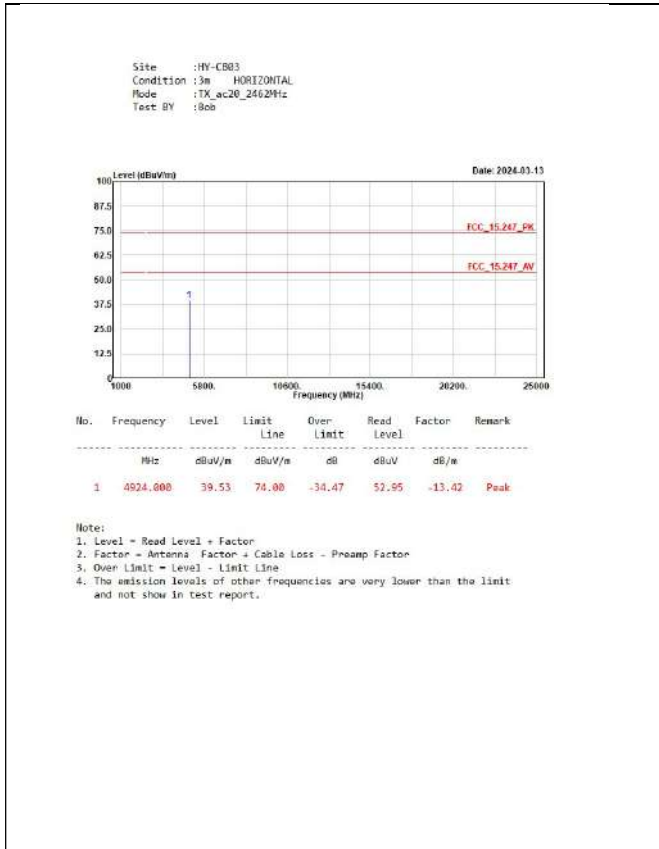


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac40_2432MHz
 Test BY :Bob

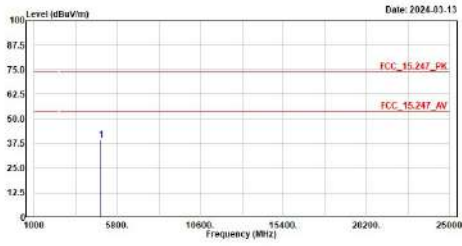

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4864.000	39.40	74.00	-34.60	53.15	-13.75	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac40_2432MHz
 Test BY :Bob

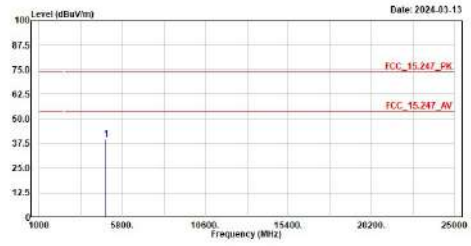

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4864.000	39.66	74.00	-34.34	53.41	-13.75	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac40_2437MHz
 Test BY :Bob

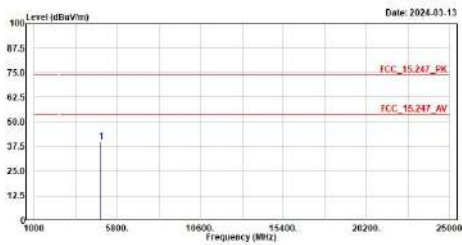

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	40.14	74.00	-33.86	53.83	-13.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac40_2437MHz
 Test BY :Bob

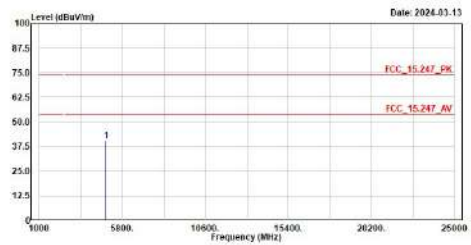

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	40.44	74.00	-33.56	54.13	-13.69	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac40_2442MHz
 Test BY :Bob

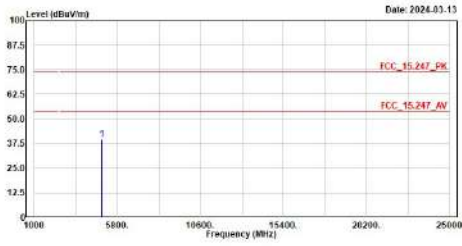

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	39.44	74.00	-34.56	53.07	-13.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac40_2442MHz
 Test BY :Bob

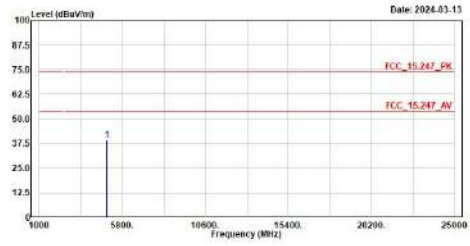

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	39.30	74.00	-34.70	52.93	-13.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HV-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac40_2452MHz
 Test BY :Bob

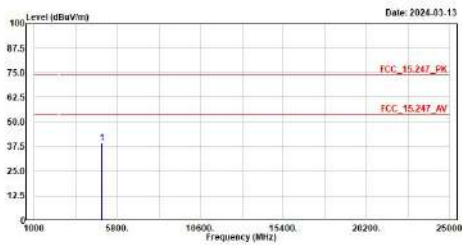

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	39.36	74.00	-34.64	52.90	-13.54	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HV-CB03
 Condition :3m VERTICAL
 Mode :TX_ac40_2452MHz
 Test BY :Bob

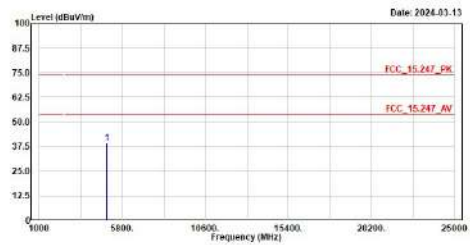


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	39.08	74.00	-34.92	52.62	-13.54	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


for Adapter:




for Terminal Block:

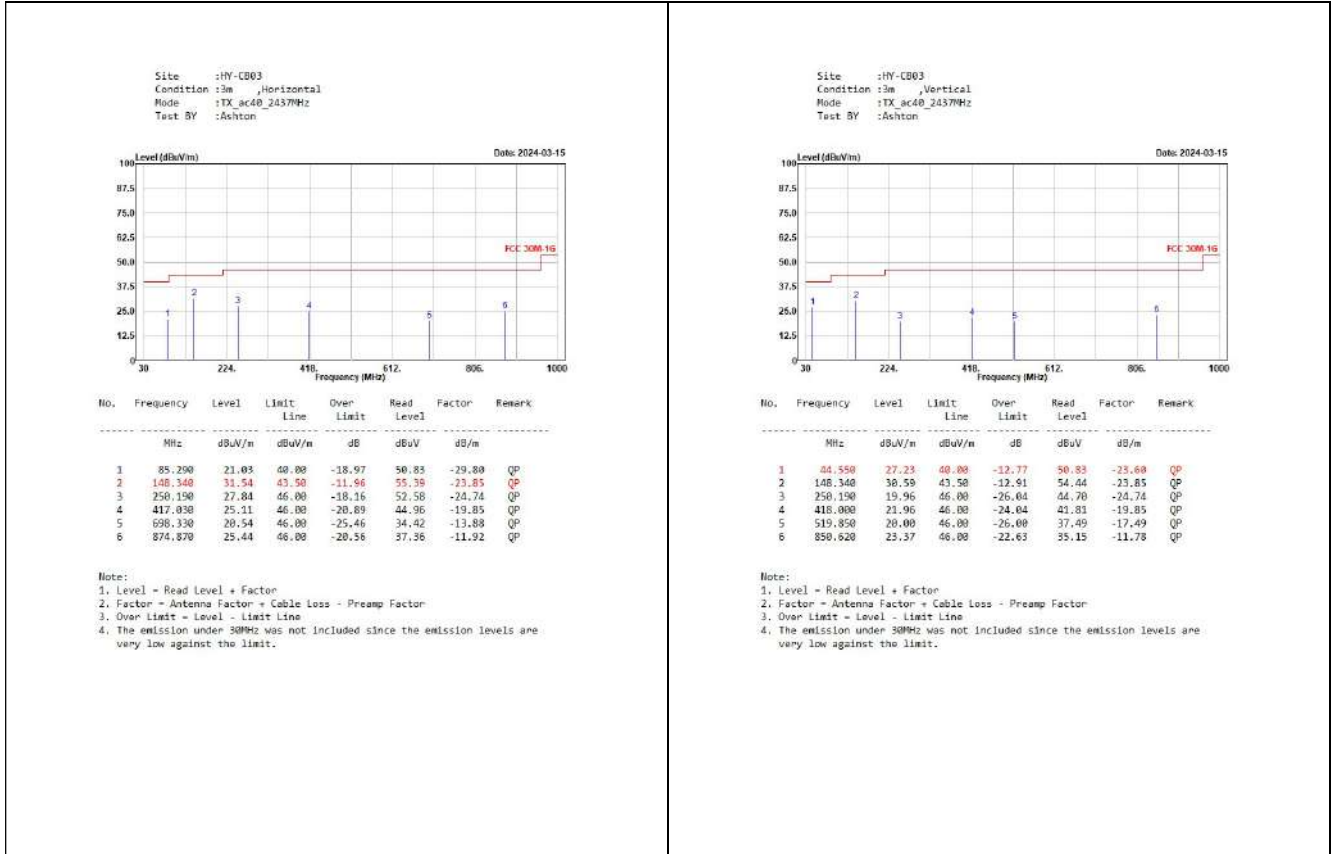

for PoE:

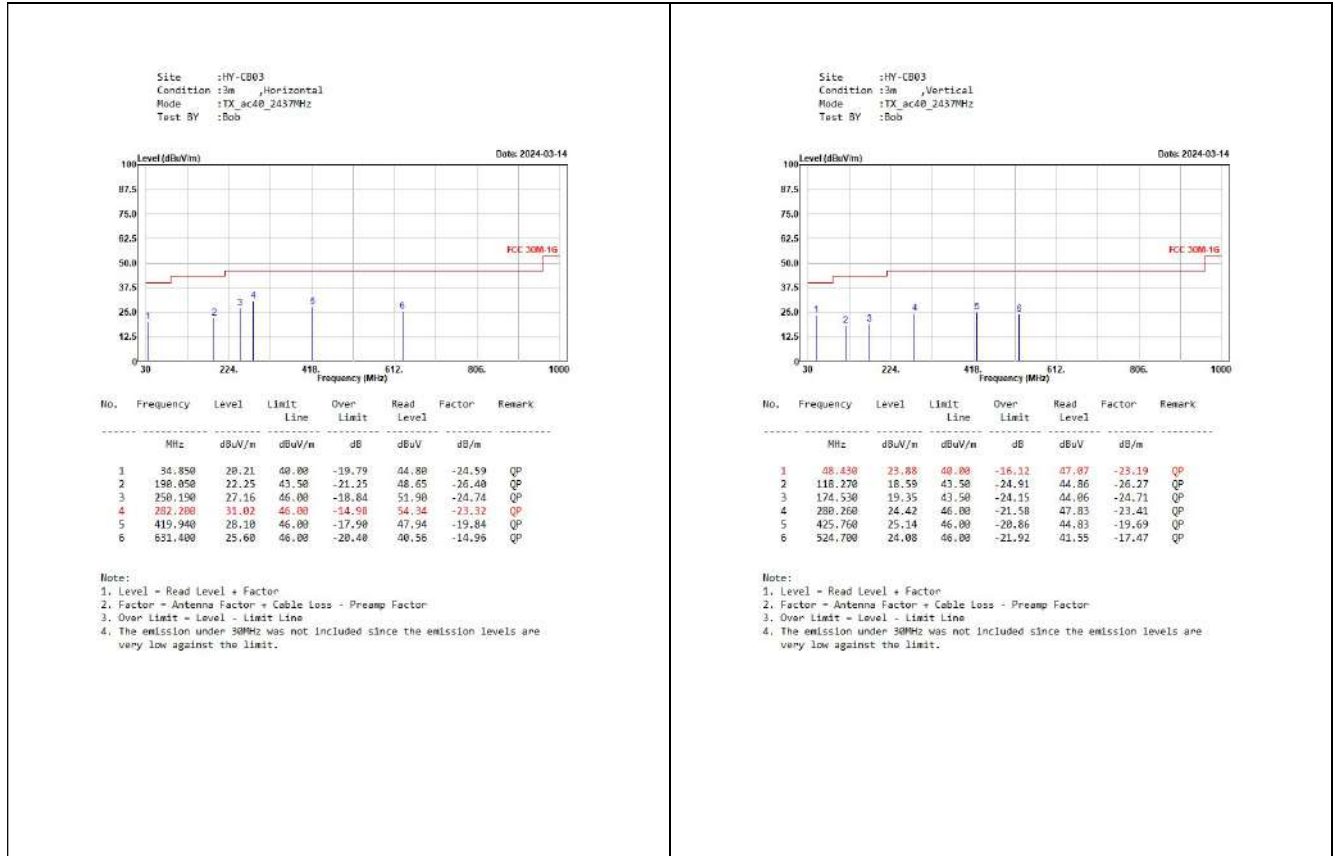


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_b_2412MHz
 Test BY :Ashton

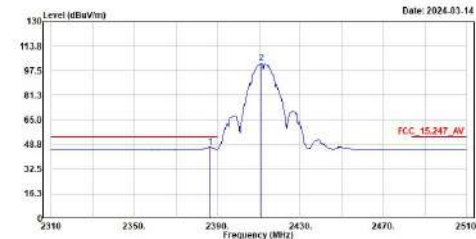

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.400	47.15	54.00	-6.85	16.54	30.61	Average
2	2411.400	102.71	-----	-----	72.09	30.62	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_b_2412MHz
 Test BY :Ashton

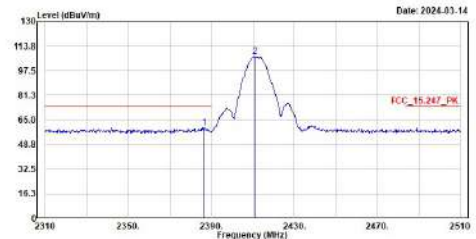

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.400	60.01	74.00	-13.99	29.40	30.61	Peak
2	2410.800	106.80	-----	-----	76.18	30.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_b_2412MHz
 Test BY :Ashton

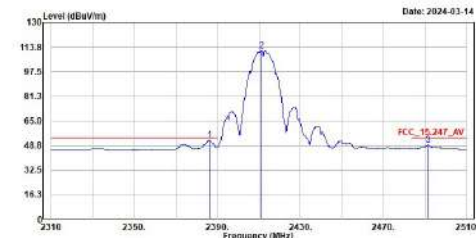

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.200	52.25	54.00	-1.75	21.64	30.61	Average
2	2411.400	111.60	-----	-----	80.98	30.62	Average
3	2491.400	49.24	54.00	-4.76	18.67	30.57	Average

Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_b_2412MHz
 Test BY :Ashton

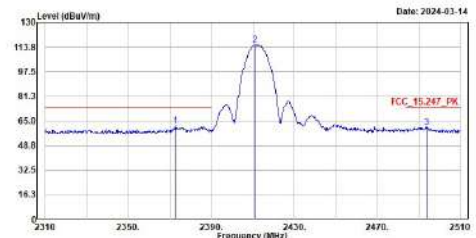

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2372.600	61.58	74.00	-12.42	30.30	30.60	Peak
2	2410.800	115.47	-----	-----	84.85	30.62	Peak
3	2493.600	60.79	74.00	-13.21	30.22	30.57	Peak

Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C883
 Condition :3m Horizontal
 Mode :TX_b_2422MHz
 Test BY :80b

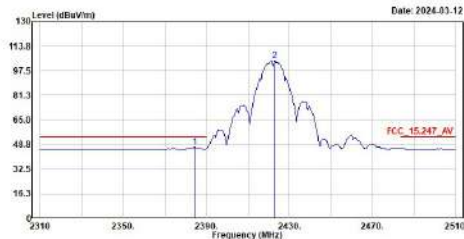

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2384.000	46.86	54.00	-7.14	16.26	30.60	Average
2	2422.800	103.54	-----	-----	73.31	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C883
 Condition :3m Horizontal
 Mode :TX_b_2422MHz
 Test BY :80b

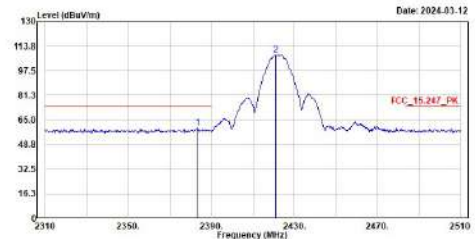

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2383.200	59.60	74.00	-14.40	29.80	30.60	Peak
2	2420.800	109.14	-----	-----	77.51	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C883
 Condition :3m Vertical
 Mode :TX_b_2422MHz
 Test BY :80b

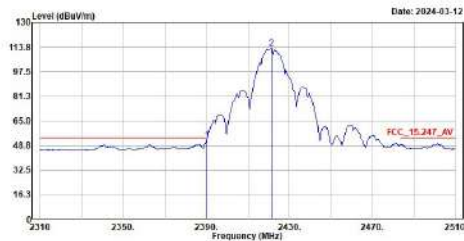

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.30	54.00	-1.70	21.69	30.61	Average
2	2421.200	113.07	-----	-----	82.44	30.63	Average





Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-C883
 Condition :3m Vertical
 Mode :TX_b_2422MHz
 Test BY :80b

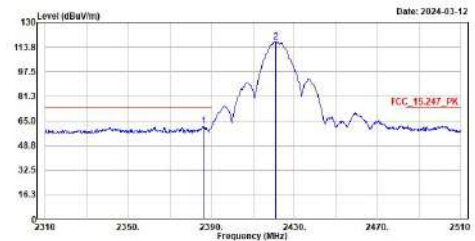


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.200	61.62	74.00	-12.38	31.81	30.61	Peak
2	2420.800	117.38	-----	-----	86.75	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

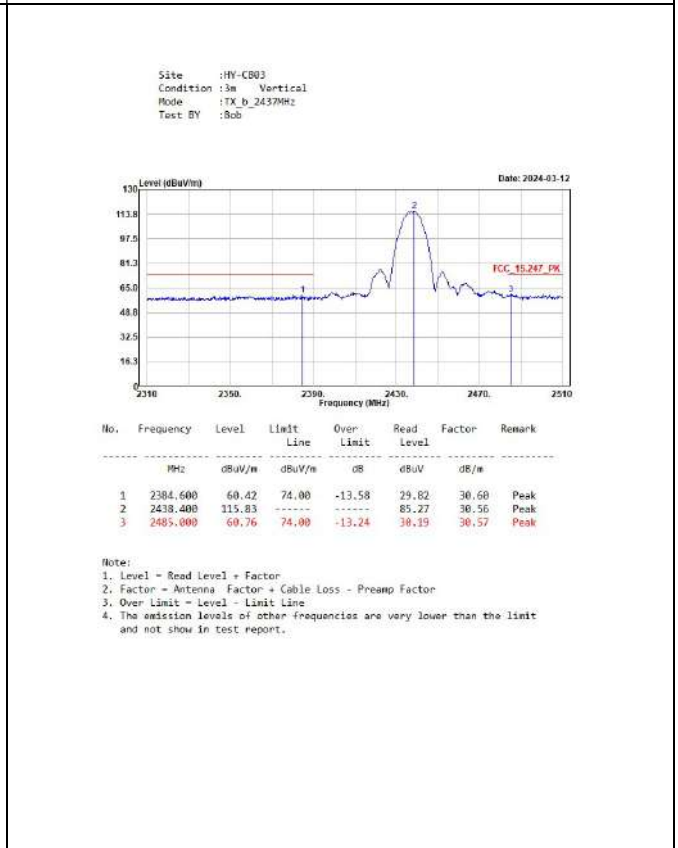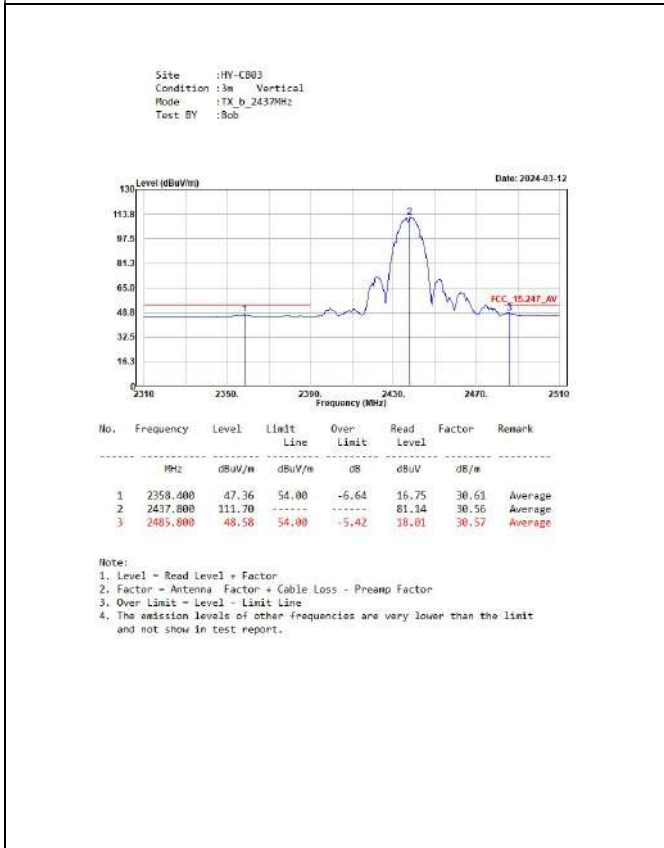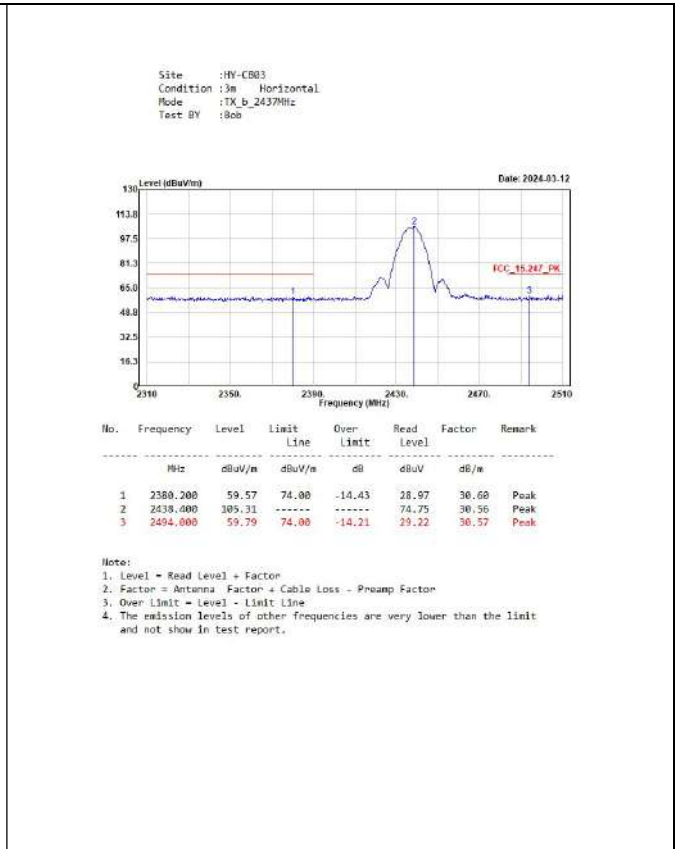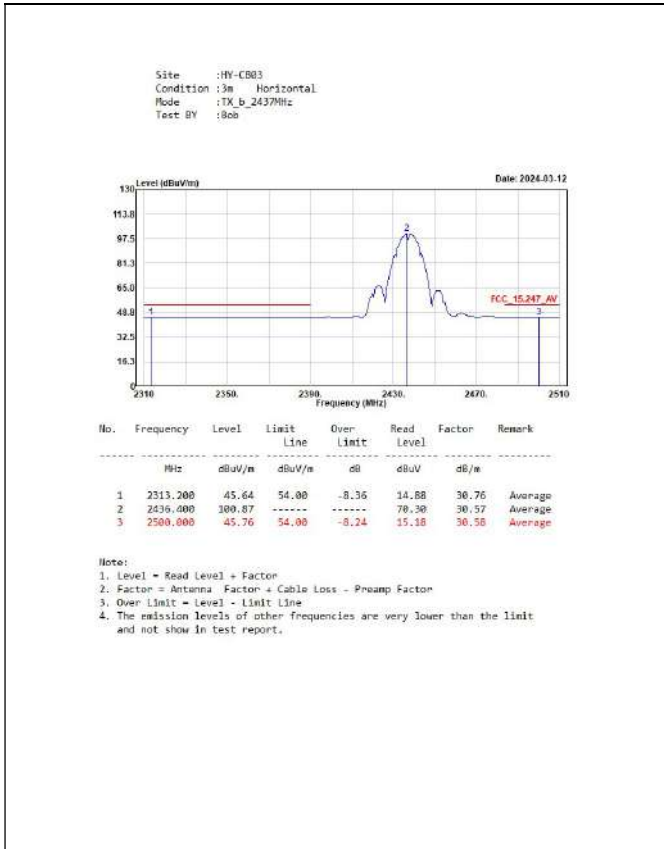


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_b_2452MHz
 Test BY :800

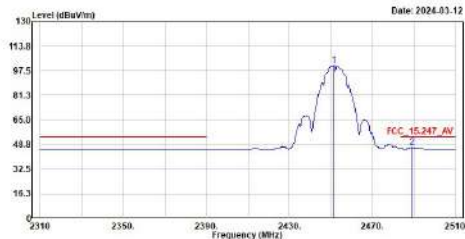

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.000	101.27	-----	-----	70.73	30.54	Average
2	2489.000	46.85	54.00	-7.15	16.28	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_b_2452MHz
 Test BY :800

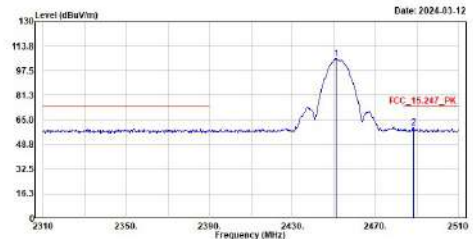

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.000	105.33	-----	-----	74.79	30.54	Peak
2	2489.000	59.65	74.00	-14.35	29.08	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_b_2452MHz
 Test BY :800

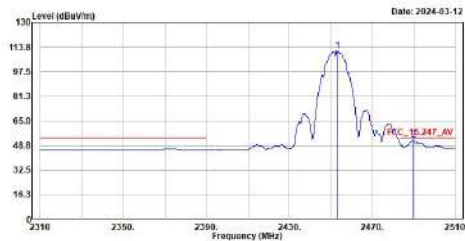

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.000	111.18	-----	-----	80.63	30.55	Average
2	2489.000	52.31	54.00	-1.69	21.74	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_b_2452MHz
 Test BY :800

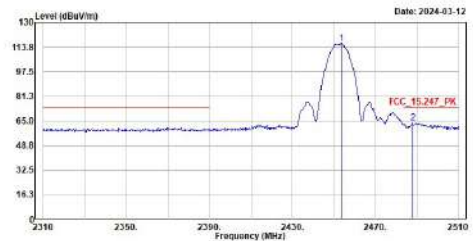

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.000	116.36	-----	-----	85.81	30.55	Peak
2	2489.000	63.71	74.00	-10.29	33.14	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_b_2462MHz
 Test BY :80b

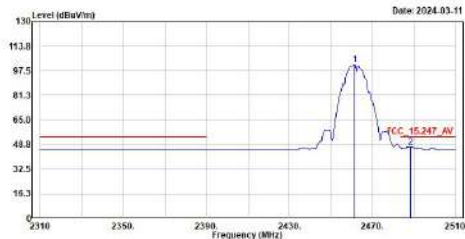

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	101.58	54.00	47.58	71.83	36.55	Average
2	2485.200	47.32	54.00	-6.68	15.75	36.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_b_2462MHz
 Test BY :80b

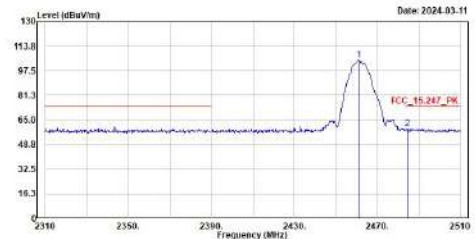

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	104.43	74.00	30.43	73.88	36.55	Peak
2	2485.200	59.47	74.00	-14.53	28.90	36.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_b_2462MHz
 Test BY :80b

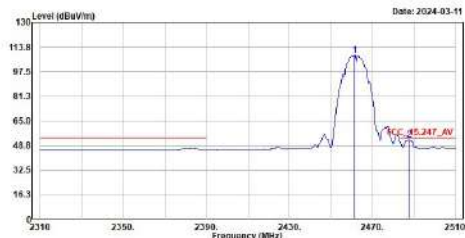

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	108.60	54.00	54.60	78.85	36.55	Average
2	2487.400	52.61	54.00	-1.39	22.04	36.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_b_2462MHz
 Test BY :80b

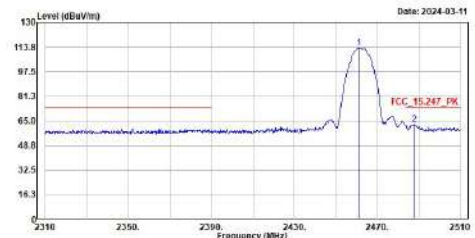

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	113.50	74.00	39.50	82.95	36.55	Peak
2	2487.600	62.60	74.00	-11.32	32.11	36.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2412MHz
 Test BY :Ashton

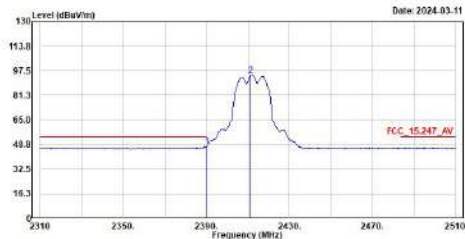

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.62	54.00	-6.38	17.81	30.61	Average
2	2411.000	94.42	-----	-----	63.80	30.62	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2412MHz
 Test BY :Ashton

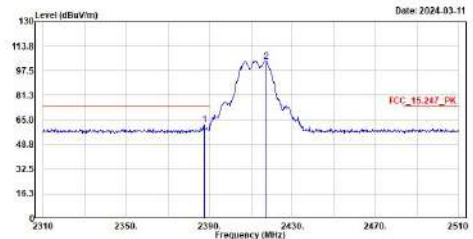

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.600	61.90	74.00	-12.10	31.29	30.61	Peak
2	2417.200	103.59	-----	-----	72.97	30.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2412MHz
 Test BY :Ashton

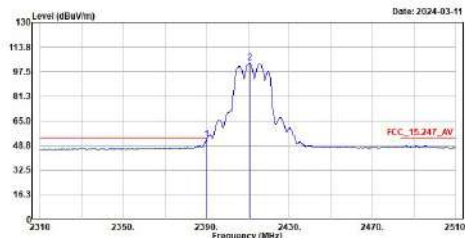

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.86	54.00	-1.14	22.25	30.61	Average
2	2411.000	103.43	-----	-----	72.81	30.62	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2412MHz
 Test BY :Ashton

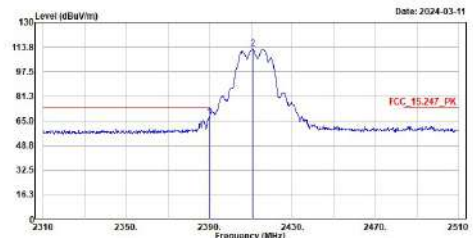

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	67.56	74.00	-6.44	36.95	30.61	Peak
2	2410.800	112.84	-----	-----	82.22	30.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2422MHz
 Test BY :80b

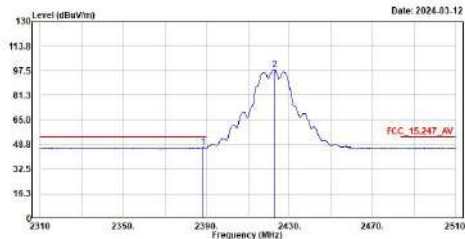

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.200	47.07	54.00	-6.93	16.46	30.61	Average
2	2422.000	98.25	-----	-----	67.62	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2422MHz
 Test BY :80b

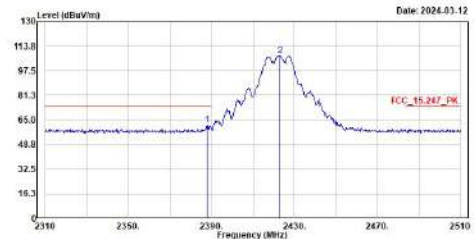

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.000	61.57	74.00	-12.43	30.96	30.61	Peak
2	2423.000	107.63	-----	-----	77.00	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2422MHz
 Test BY :80b

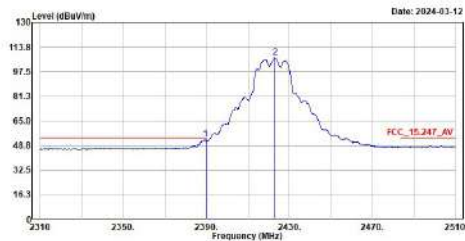

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	52.78	54.00	-1.22	22.17	30.61	Average
2	2423.000	106.89	-----	-----	76.26	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2422MHz
 Test BY :80b

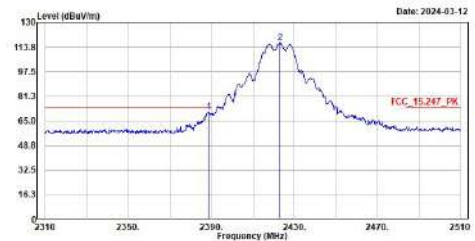

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.000	71.07	74.00	-2.93	40.46	30.61	Peak
2	2423.000	116.72	-----	-----	86.09	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2437MHz
 Test BY :Ashton

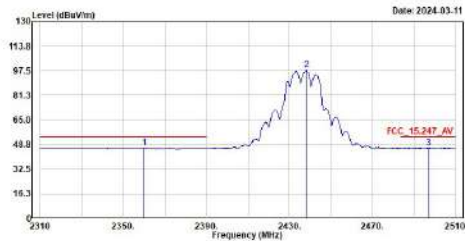

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2360.000	46.46	54.00	-7.54	15.87	30.59	Average
2	2438.000	97.91	-----	-----	67.35	30.56	Average
3	2497.000	48.58	54.00	-7.42	16.00	30.58	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2437MHz
 Test BY :Ashton

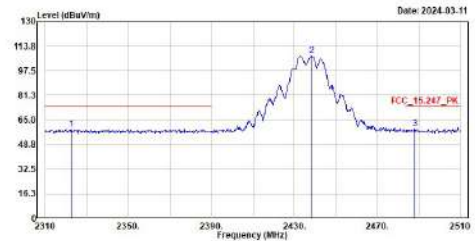

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2322.400	59.11	74.00	-14.89	28.36	30.75	Peak
2	2438.000	107.61	-----	-----	77.85	30.56	Peak
3	2487.800	59.42	74.00	-14.58	28.85	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2437MHz
 Test BY :Ashton

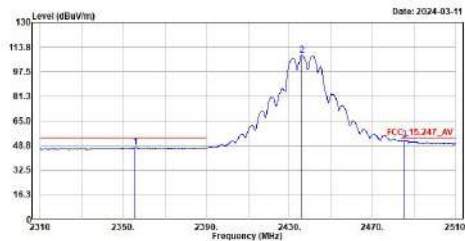

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2355.000	47.82	54.00	-6.18	17.19	30.63	Average
2	2436.000	109.64	-----	-----	78.87	30.57	Average
3	2485.200	52.28	54.00	-1.72	21.71	30.57	Average

Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2437MHz
 Test BY :Ashton

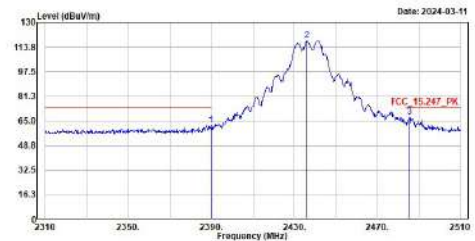

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.000	62.14	74.00	-11.86	31.53	30.61	Peak
2	2436.000	119.85	-----	-----	87.48	30.57	Peak
3	2485.400	67.93	74.00	-6.07	37.36	30.57	Peak

Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2452MHz
 Test BY :80b

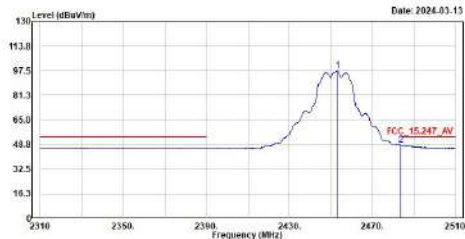

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.000	97.42	-----	-----	66.87	30.55	Average
2	2483.600	48.38	54.00	-5.62	17.81	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2452MHz
 Test BY :80b

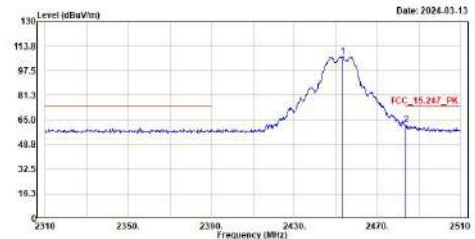

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.200	106.92	-----	-----	76.37	30.55	Peak
2	2483.600	61.62	74.00	-12.38	31.05	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2452MHz
 Test BY :80b

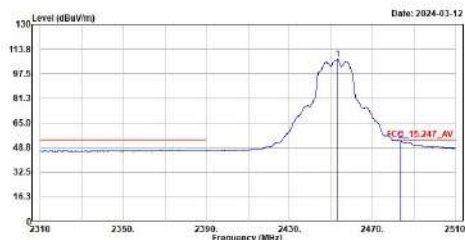

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.000	106.94	-----	-----	76.39	30.55	Average
2	2483.600	52.88	54.00	-1.12	22.31	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2452MHz
 Test BY :80b

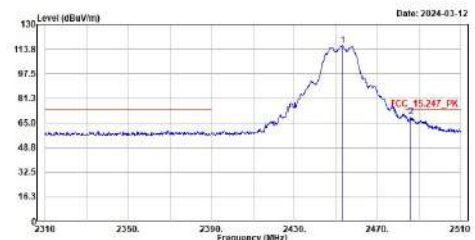

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.200	116.21	-----	-----	85.66	30.55	Peak
2	2486.200	69.86	74.00	-4.94	38.49	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2462MHz
 Test BY :Ashton

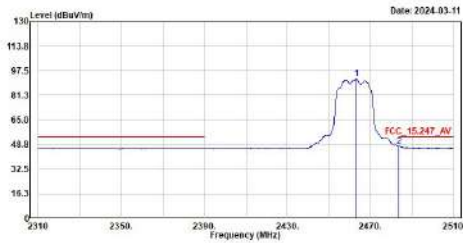

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.000	92.06	48.00	-6.29	61.51	30.55	Average
2	2483.600	47.71	54.00		17.14	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_R_2462MHz
 Test BY :Ashton

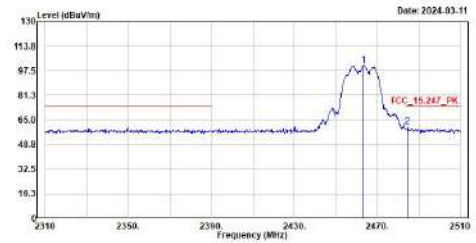

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.000	100.94	48.00	-13.00	70.39	30.55	Peak
2	2483.400	61.80	74.00		38.43	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2462MHz
 Test BY :Ashton

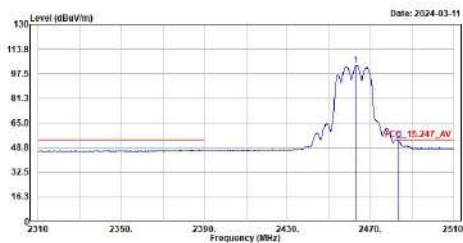

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.000	103.03	48.00	-1.20	72.48	30.55	Average
2	2483.500	52.80	54.00		22.23	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_R_2462MHz
 Test BY :Ashton

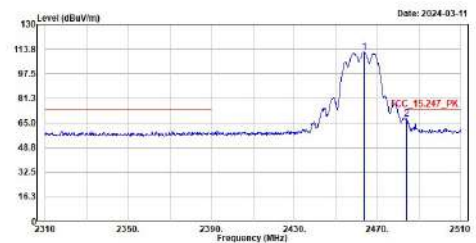

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.000	112.03	48.00	-6.35	81.48	30.55	Peak
2	2483.800	67.65	74.00		37.88	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2412MHz
 Test BY :8ob

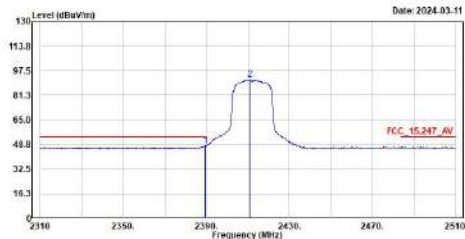

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.000	48.00	54.00	-6.00	17.39	30.61	Average
2	2411.000	91.57	-----	-----	68.95	30.62	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2412MHz
 Test BY :8ob

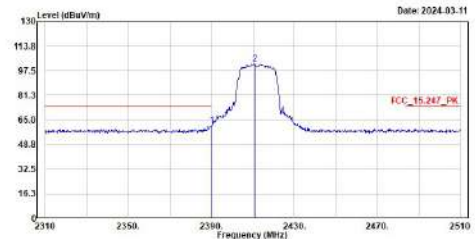

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2399.000	61.52	74.00	-12.48	38.91	30.61	Peak
2	2410.800	102.17	-----	-----	71.55	30.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2412MHz
 Test BY :8ob

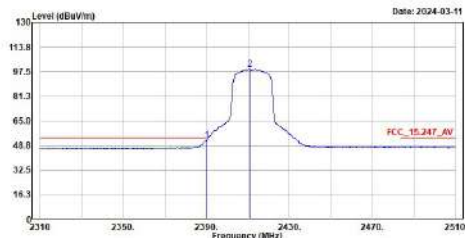

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.50	54.00	-1.50	21.89	30.61	Average
2	2410.800	99.85	-----	-----	68.43	30.62	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2412MHz
 Test BY :8ob

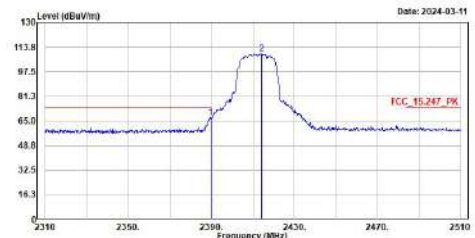

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	67.31	74.00	-6.69	36.70	30.61	Peak
2	2414.000	109.36	-----	-----	78.74	30.62	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2422MHz
 Test BY :8ob

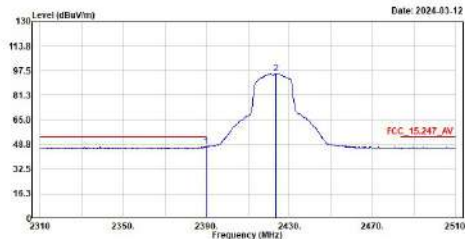

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	47.36	54.00	-6.64	16.75	30.61	Average
2	2423.000	95.54	-----	-----	64.91	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2422MHz
 Test BY :8ob

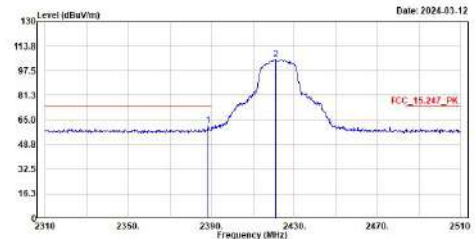

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.200	61.46	74.00	-12.54	30.85	30.61	Peak
2	2420.800	104.80	-----	-----	74.17	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2422MHz
 Test BY :8ob

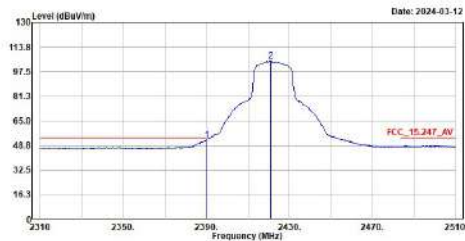

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.53	54.00	-1.47	21.92	30.61	Average
2	2421.000	104.62	-----	-----	73.99	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2422MHz
 Test BY :8ob

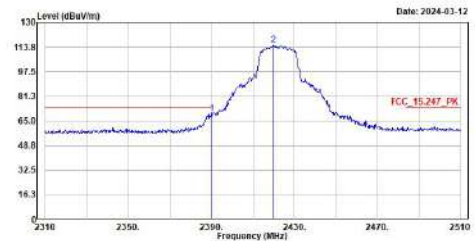

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	70.17	74.00	-3.83	39.56	30.61	Peak
2	2419.800	115.06	-----	-----	84.43	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2437MHz
 Test BY :80b

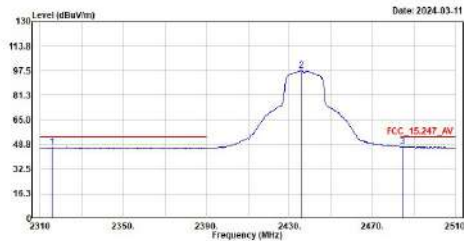

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2315.800	46.90	54.00	-7.10	16.14	30.76	Average
2	2435.600	97.70	-----	-----	67.13	30.57	Average
3	2484.200	47.59	54.00	-6.61	16.02	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2437MHz
 Test BY :80b

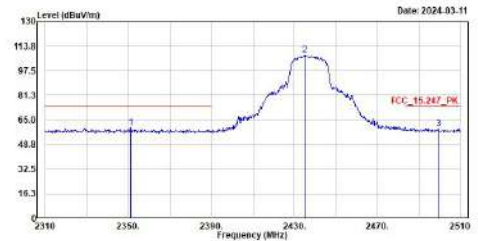

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2351.000	59.63	74.00	-14.37	28.96	30.67	Peak
2	2434.800	107.95	-----	-----	77.37	30.58	Peak
3	2499.200	59.52	74.00	-14.48	28.94	30.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2437MHz
 Test BY :80b

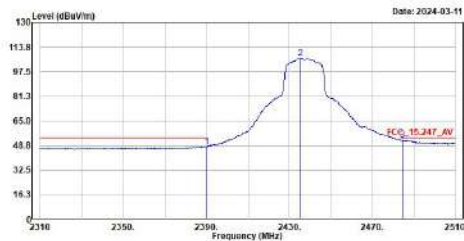

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	48.11	54.00	-5.89	17.50	30.61	Average
2	2435.200	106.30	-----	-----	75.72	30.58	Average
3	2484.400	52.27	54.00	-1.73	21.70	30.57	Average

Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2437MHz
 Test BY :80b

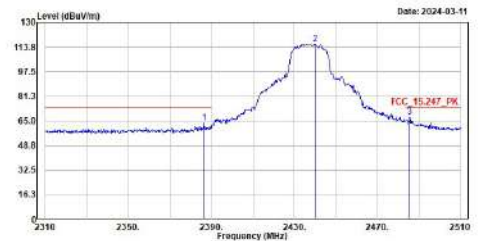

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.600	63.98	74.00	-10.02	33.37	30.61	Peak
2	2440.000	115.73	-----	-----	85.19	30.54	Peak
3	2485.400	67.90	74.00	-6.10	37.33	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2452MHz
 Test BY :8ob

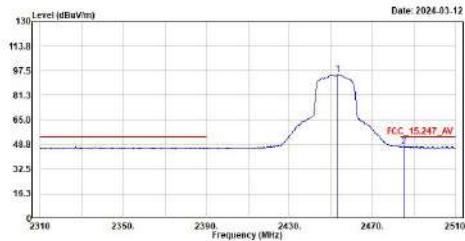

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.200	95.00	-----	-----	64.45	30.55	Average
2	2485.000	47.56	54.00	-6.44	16.99	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2452MHz
 Test BY :8ob

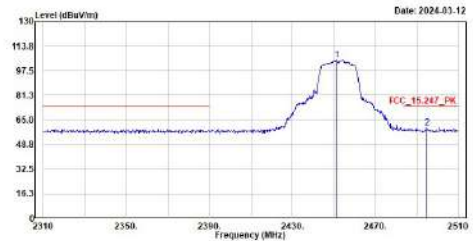

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2451.200	104.40	-----	-----	73.86	30.54	Peak
2	2494.800	59.78	74.00	-14.22	29.20	30.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2452MHz
 Test BY :8ob

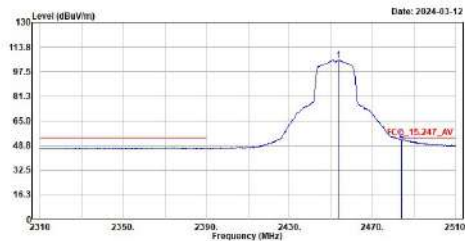

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.600	105.04	-----	-----	74.69	30.55	Average
2	2483.800	52.69	54.00	-1.31	22.12	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2452MHz
 Test BY :8ob

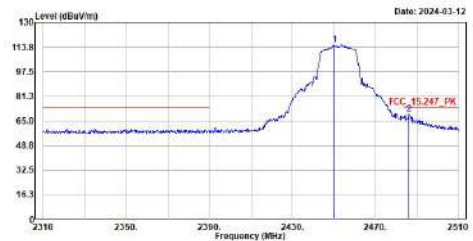

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.200	115.13	-----	-----	84.59	30.54	Peak
2	2486.200	69.64	74.00	-4.36	39.07	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2462MHz
 Test BY :80b

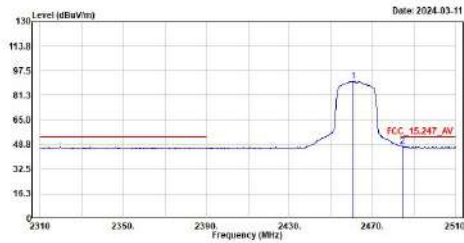

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.800	90.54	-----	-----	59.99	30.55	Average
2	2484.000	47.66	54.00	-6.34	17.89	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac20_2462MHz
 Test BY :80b

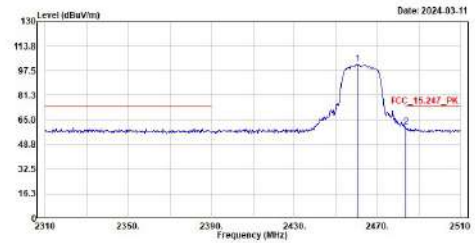

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.200	101.90	-----	-----	71.35	30.55	Peak
2	2483.600	69.25	74.00	-13.75	29.68	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2462MHz
 Test BY :80b

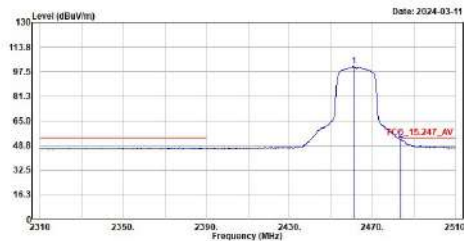

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	100.97	-----	-----	70.42	30.55	Average
2	2483.500	52.57	54.00	-1.43	22.00	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac20_2462MHz
 Test BY :80b

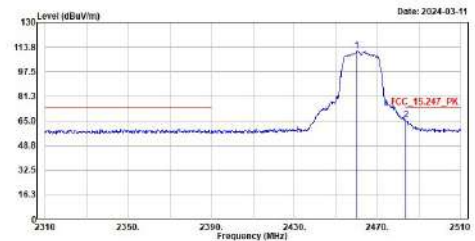

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.000	111.12	-----	-----	80.57	30.55	Peak
2	2483.500	65.70	74.00	-8.30	35.13	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac40_2422MHz
 Test BY :8ob

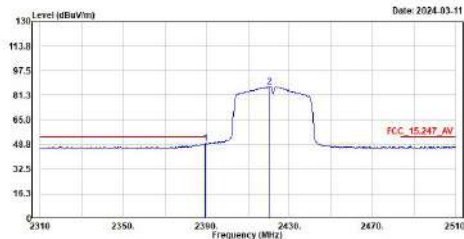

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	49.58	54.00	-4.42	18.97	30.61	Average
2	2420.200	87.07	-----	-----	56.44	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac40_2422MHz
 Test BY :8ob

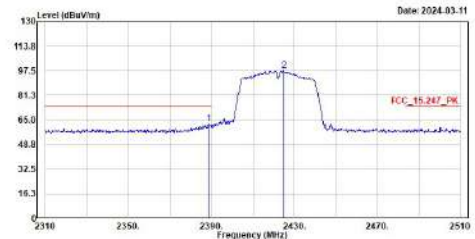

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.600	61.70	74.00	-11.30	32.89	30.61	Peak
2	2424.800	97.09	-----	-----	66.86	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac40_2422MHz
 Test BY :8ob

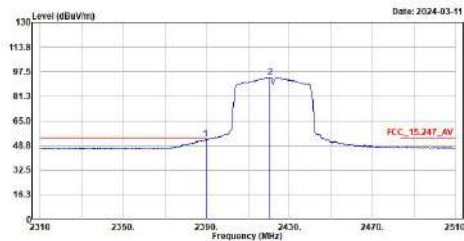

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	52.98	54.00	-1.02	22.37	30.61	Average
2	2420.600	93.74	-----	-----	63.11	30.63	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac40_2422MHz
 Test BY :8ob

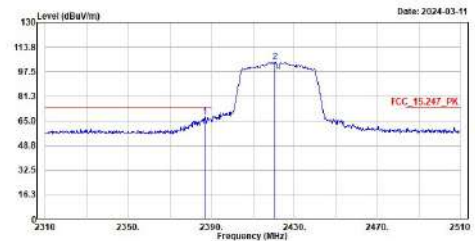

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.800	67.60	74.00	-6.40	36.99	30.61	Peak
2	2420.600	103.80	-----	-----	73.25	30.63	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac40_2432MHz
 Test BY :80b

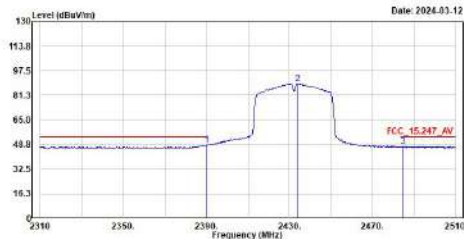

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	48.74	54.00	-5.26	18.13	30.61	Average
2	2433.000	89.98	-----	-----	58.39	30.59	Average
3	2484.000	47.53	54.00	-6.47	16.96	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Horizontal
 Mode :TX_ac40_2432MHz
 Test BY :80b

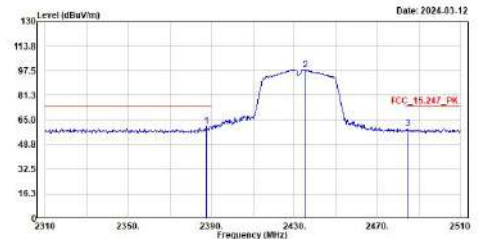

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.600	60.64	74.00	-13.36	30.03	30.61	Peak
2	2435.000	98.16	-----	-----	67.58	30.58	Peak
3	2484.000	59.42	74.00	-14.58	28.85	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac40_2432MHz
 Test BY :80b

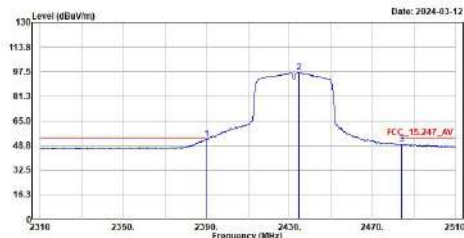

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	52.99	54.00	-1.01	22.38	30.61	Average
2	2434.000	97.05	-----	-----	66.46	30.59	Average
3	2483.000	49.54	54.00	-4.46	18.97	30.57	Average





Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-C003
 Condition :3m Vertical
 Mode :TX_ac40_2432MHz
 Test BY :80b

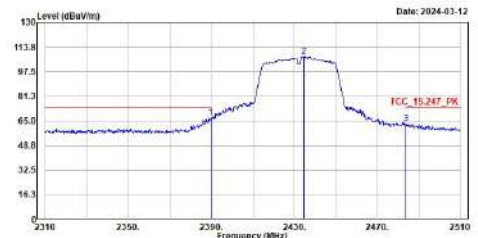


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	67.31	74.00	-6.69	36.70	30.61	Peak
2	2434.000	107.50	-----	-----	76.91	30.59	Peak
3	2483.000	63.08	74.00	-10.92	32.51	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

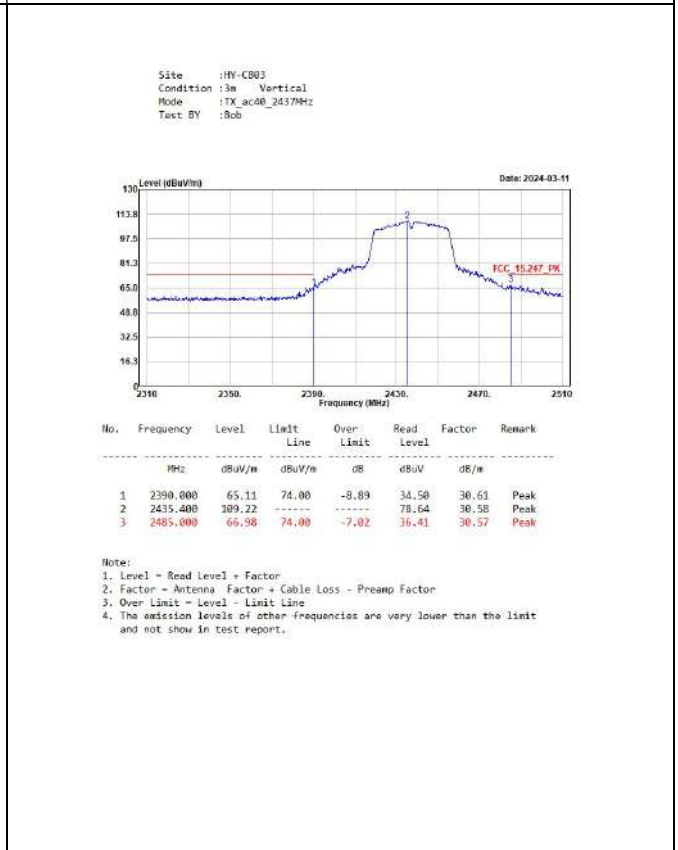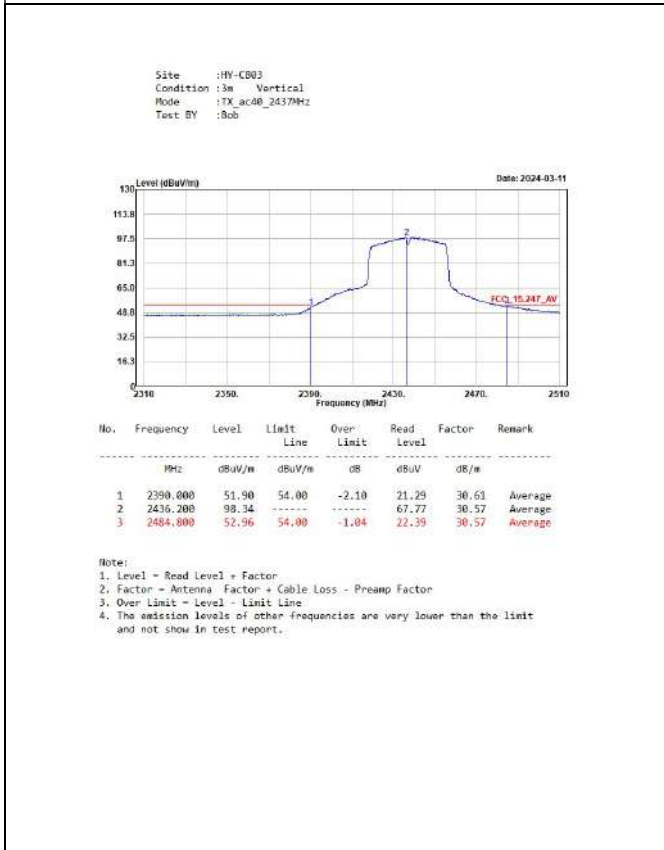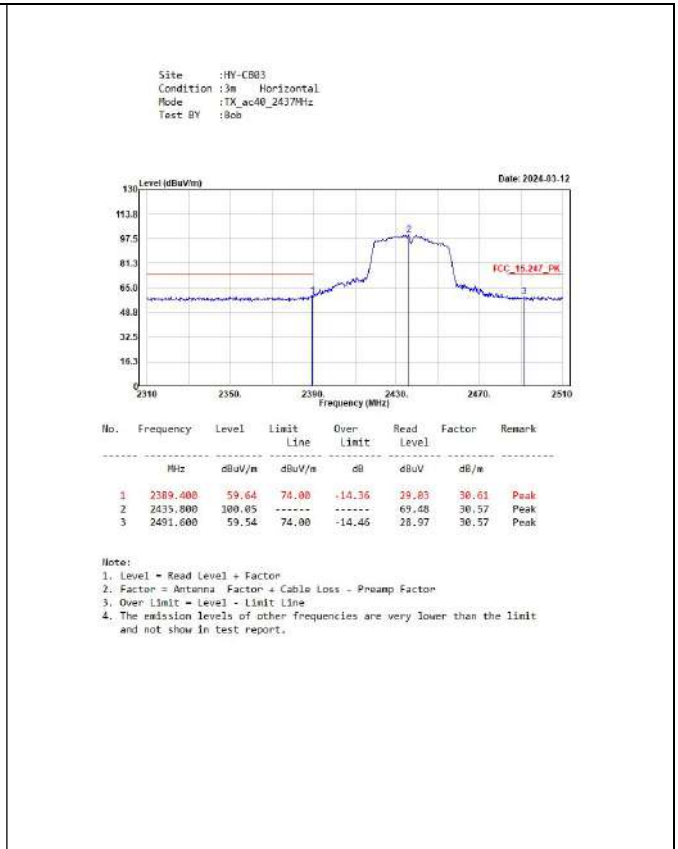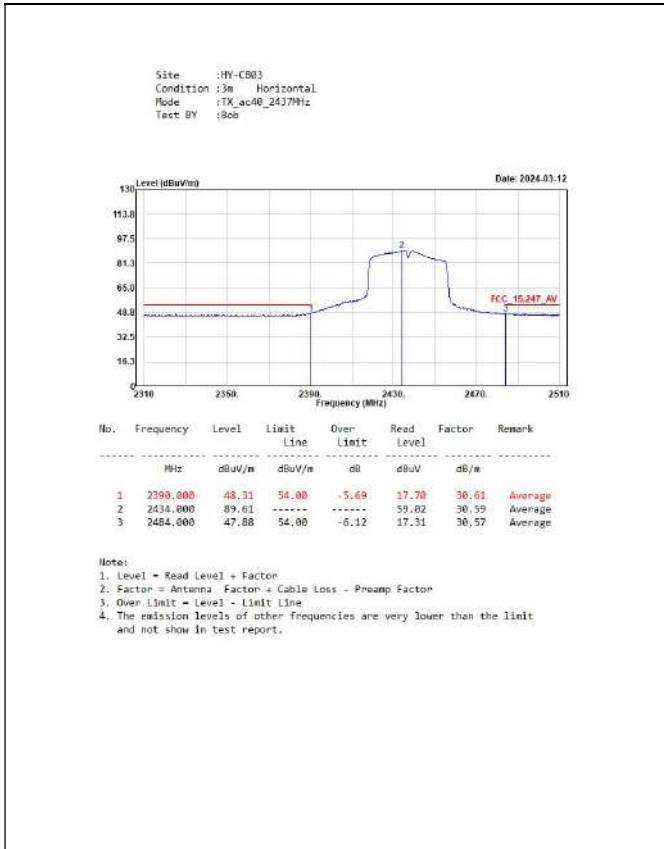


Site :HY-C883
 Condition :3m Horizontal
 Mode :TX_ac40_2442MHz
 Test BY :8ob

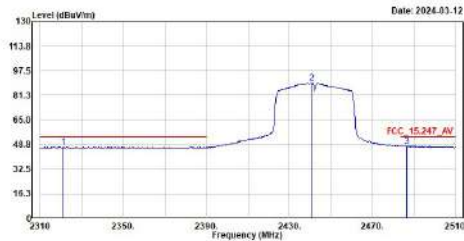

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.200	47.33	54.00	-6.67	16.57	30.76	Average
2	2440.800	89.34	-----	-----	58.80	30.54	Average
3	2485.400	47.80	54.00	-6.20	17.23	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C883
 Condition :3m Horizontal
 Mode :TX_ac40_2442MHz
 Test BY :8ob

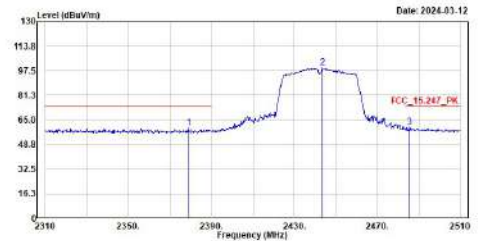

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2379.000	59.74	74.00	-14.26	29.14	30.60	Peak
2	2443.600	99.37	-----	-----	68.83	30.54	Peak
3	2485.400	60.13	74.00	-13.87	29.50	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C883
 Condition :3m Vertical
 Mode :TX_ac40_2442MHz
 Test BY :8ob

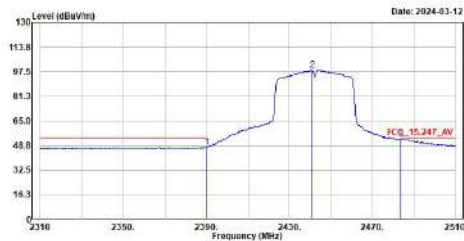

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.75	54.00	-6.25	17.14	30.61	Average
2	2441.000	98.37	-----	-----	67.83	30.54	Average
3	2483.600	52.88	54.00	-1.12	22.31	30.57	Average

Note:
 1. Level = Read level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-C883
 Condition :3m Vertical
 Mode :TX_ac40_2442MHz
 Test BY :8ob

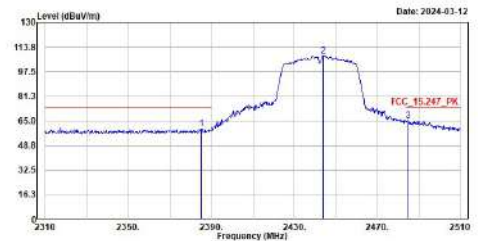

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.200	59.90	74.00	-14.10	29.30	30.60	Peak
2	2443.800	107.98	-----	-----	77.44	30.54	Peak
3	2484.800	65.25	74.00	-8.75	34.68	30.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_2452MHz
 Test BY :8ob

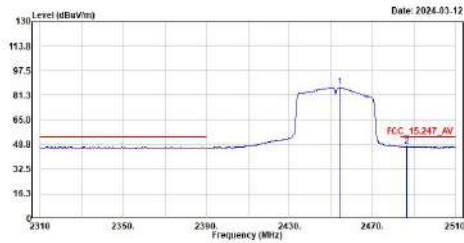

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.200	86.59	-----	-----	56.84	30.55	Average
2	2486.400	47.49	54.00	-6.51	16.92	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_2452MHz
 Test BY :8ob

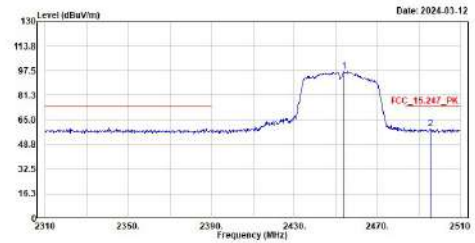

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	97.00	-----	-----	66.45	30.55	Peak
2	2495.400	59.21	74.00	-14.79	28.63	30.58	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_2452MHz
 Test BY :8ob

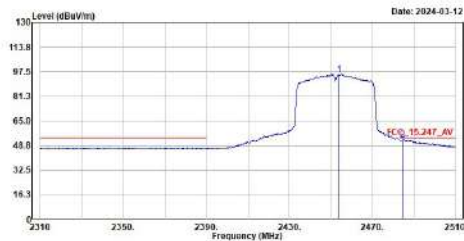

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	95.83	-----	-----	65.28	30.55	Average
2	2484.200	52.56	54.00	-1.44	21.99	30.57	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_2452MHz
 Test BY :8ob

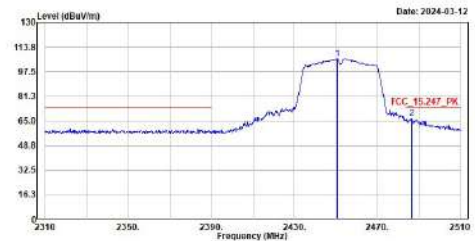

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.600	106.07	-----	-----	75.53	30.54	Peak
2	2486.400	69.60	74.00	-7.32	36.11	30.57	Peak


Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Appendix G. Test Result of Radiated Emissions Co-location

30 MHz ~ 1 GHz:
for Adapter:

<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_IRB0_CH20300 LTE_B4_20M_QPSK_IRB0_CH20300 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>74.620</td><td>30.11</td><td>40.00</td><td>-9.89</td><td>57.49</td><td>-27.38</td><td>QP</td></tr> <tr><td>2</td><td>156.100</td><td>28.31</td><td>43.50</td><td>-15.19</td><td>52.02</td><td>-25.71</td><td>QP</td></tr> <tr><td>3</td><td>250.190</td><td>29.11</td><td>46.00</td><td>-16.89</td><td>53.85</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>419.940</td><td>30.32</td><td>46.00</td><td>-15.68</td><td>50.16</td><td>-19.84</td><td>QP</td></tr> <tr><td>5</td><td>640.130</td><td>24.89</td><td>46.00</td><td>-21.11</td><td>39.76</td><td>-14.87</td><td>QP</td></tr> <tr><td>6</td><td>883.600</td><td>26.50</td><td>46.00</td><td>-19.50</td><td>38.25</td><td>-11.75</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	74.620	30.11	40.00	-9.89	57.49	-27.38	QP	2	156.100	28.31	43.50	-15.19	52.02	-25.71	QP	3	250.190	29.11	46.00	-16.89	53.85	-24.74	QP	4	419.940	30.32	46.00	-15.68	50.16	-19.84	QP	5	640.130	24.89	46.00	-21.11	39.76	-14.87	QP	6	883.600	26.50	46.00	-19.50	38.25	-11.75	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_IRB0_CH20300 LTE_B4_20M_QPSK_IRB0_CH20300 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>76.560</td><td>33.25</td><td>40.00</td><td>-6.75</td><td>61.20</td><td>-27.95</td><td>QP</td></tr> <tr><td>2</td><td>148.340</td><td>30.59</td><td>43.50</td><td>-12.91</td><td>54.64</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>424.790</td><td>26.23</td><td>46.00</td><td>-19.77</td><td>45.95</td><td>-19.72</td><td>QP</td></tr> <tr><td>4</td><td>530.520</td><td>25.43</td><td>46.00</td><td>-20.57</td><td>42.76</td><td>-17.33</td><td>QP</td></tr> <tr><td>5</td><td>786.600</td><td>24.48</td><td>46.00</td><td>-21.52</td><td>36.08</td><td>-12.50</td><td>QP</td></tr> <tr><td>6</td><td>902.030</td><td>25.15</td><td>46.00</td><td>-20.85</td><td>36.44</td><td>-11.29</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	76.560	33.25	40.00	-6.75	61.20	-27.95	QP	2	148.340	30.59	43.50	-12.91	54.64	-23.85	QP	3	424.790	26.23	46.00	-19.77	45.95	-19.72	QP	4	530.520	25.43	46.00	-20.57	42.76	-17.33	QP	5	786.600	24.48	46.00	-21.52	36.08	-12.50	QP	6	902.030	25.15	46.00	-20.85	36.44	-11.29	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	74.620	30.11	40.00	-9.89	57.49	-27.38	QP																																																																																																																										
2	156.100	28.31	43.50	-15.19	52.02	-25.71	QP																																																																																																																										
3	250.190	29.11	46.00	-16.89	53.85	-24.74	QP																																																																																																																										
4	419.940	30.32	46.00	-15.68	50.16	-19.84	QP																																																																																																																										
5	640.130	24.89	46.00	-21.11	39.76	-14.87	QP																																																																																																																										
6	883.600	26.50	46.00	-19.50	38.25	-11.75	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	76.560	33.25	40.00	-6.75	61.20	-27.95	QP																																																																																																																										
2	148.340	30.59	43.50	-12.91	54.64	-23.85	QP																																																																																																																										
3	424.790	26.23	46.00	-19.77	45.95	-19.72	QP																																																																																																																										
4	530.520	25.43	46.00	-20.57	42.76	-17.33	QP																																																																																																																										
5	786.600	24.48	46.00	-21.52	36.08	-12.50	QP																																																																																																																										
6	902.030	25.15	46.00	-20.85	36.44	-11.29	QP																																																																																																																										
<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+WCDMA_B4_CH1312 LTE_B4_20M_QPSK_IRB0_CH20300 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>75.590</td><td>29.07</td><td>40.00</td><td>-10.93</td><td>56.63</td><td>-27.56</td><td>QP</td></tr> <tr><td>2</td><td>148.340</td><td>28.48</td><td>43.50</td><td>-15.02</td><td>52.33</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>250.190</td><td>30.21</td><td>46.00</td><td>-15.79</td><td>54.95</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>427.700</td><td>26.94</td><td>46.00</td><td>-19.06</td><td>46.54</td><td>-19.60</td><td>QP</td></tr> <tr><td>5</td><td>640.130</td><td>24.21</td><td>46.00</td><td>-21.79</td><td>39.08</td><td>-14.87</td><td>QP</td></tr> <tr><td>6</td><td>880.690</td><td>25.88</td><td>46.00</td><td>-20.12</td><td>37.75</td><td>-11.87</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	75.590	29.07	40.00	-10.93	56.63	-27.56	QP	2	148.340	28.48	43.50	-15.02	52.33	-23.85	QP	3	250.190	30.21	46.00	-15.79	54.95	-24.74	QP	4	427.700	26.94	46.00	-19.06	46.54	-19.60	QP	5	640.130	24.21	46.00	-21.79	39.08	-14.87	QP	6	880.690	25.88	46.00	-20.12	37.75	-11.87	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+WCDMA_B4_CH1312 LTE_B4_20M_QPSK_IRB0_CH20300 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>75.590</td><td>33.54</td><td>40.00</td><td>-6.46</td><td>61.10</td><td>-27.56</td><td>QP</td></tr> <tr><td>2</td><td>99.840</td><td>31.35</td><td>43.50</td><td>-12.15</td><td>59.52</td><td>-28.17</td><td>QP</td></tr> <tr><td>3</td><td>239.520</td><td>23.99</td><td>46.00</td><td>-22.41</td><td>48.50</td><td>-24.91</td><td>QP</td></tr> <tr><td>4</td><td>425.760</td><td>26.02</td><td>46.00</td><td>-19.98</td><td>45.71</td><td>-19.69</td><td>QP</td></tr> <tr><td>5</td><td>605.210</td><td>25.41</td><td>46.00</td><td>-20.59</td><td>40.62</td><td>-15.21</td><td>QP</td></tr> <tr><td>6</td><td>878.020</td><td>25.37</td><td>46.00</td><td>-20.63</td><td>37.30</td><td>-11.93</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	75.590	33.54	40.00	-6.46	61.10	-27.56	QP	2	99.840	31.35	43.50	-12.15	59.52	-28.17	QP	3	239.520	23.99	46.00	-22.41	48.50	-24.91	QP	4	425.760	26.02	46.00	-19.98	45.71	-19.69	QP	5	605.210	25.41	46.00	-20.59	40.62	-15.21	QP	6	878.020	25.37	46.00	-20.63	37.30	-11.93	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	75.590	29.07	40.00	-10.93	56.63	-27.56	QP																																																																																																																										
2	148.340	28.48	43.50	-15.02	52.33	-23.85	QP																																																																																																																										
3	250.190	30.21	46.00	-15.79	54.95	-24.74	QP																																																																																																																										
4	427.700	26.94	46.00	-19.06	46.54	-19.60	QP																																																																																																																										
5	640.130	24.21	46.00	-21.79	39.08	-14.87	QP																																																																																																																										
6	880.690	25.88	46.00	-20.12	37.75	-11.87	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	75.590	33.54	40.00	-6.46	61.10	-27.56	QP																																																																																																																										
2	99.840	31.35	43.50	-12.15	59.52	-28.17	QP																																																																																																																										
3	239.520	23.99	46.00	-22.41	48.50	-24.91	QP																																																																																																																										
4	425.760	26.02	46.00	-19.98	45.71	-19.69	QP																																																																																																																										
5	605.210	25.41	46.00	-20.59	40.62	-15.21	QP																																																																																																																										
6	878.020	25.37	46.00	-20.63	37.30	-11.93	QP																																																																																																																										


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312+MCDMA_B4_CH1513
 Test BY :Ashton

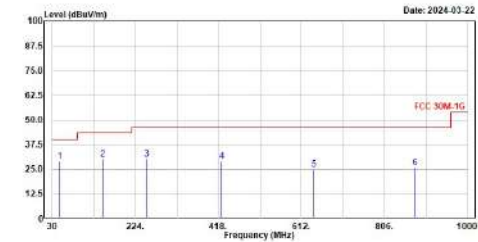

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over- Limit dB	Read Level dBuV	Factor dB/m	Remark
1	47.460	28.89	40.00	-11.11	52.20	-23.31	QP
2	348.340	30.29	43.50	-13.21	54.14	-23.85	QP
3	250.190	30.37	45.00	-15.63	55.11	-24.74	QP
4	424.790	28.98	46.00	-17.02	48.70	-19.72	QP
5	640.130	24.97	46.00	-21.03	39.04	-14.87	QP
6	877.780	25.51	46.00	-20.49	37.41	-11.90	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312+MCDMA_B4_CH1513
 Test BY :Ashton

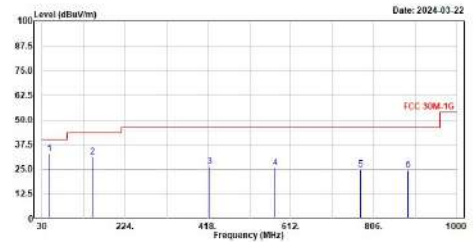


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over- Limit dB	Read Level dBuV	Factor dB/m	Remark
1	47.460	32.06	40.00	-7.14	56.17	-23.31	QP
2	348.340	31.31	43.50	-12.19	55.16	-23.85	QP
3	421.800	26.26	46.00	-19.74	46.86	-19.80	QP
4	575.140	25.52	46.00	-20.48	41.66	-16.14	QP
5	774.960	24.99	46.00	-21.01	37.55	-12.56	QP
6	886.510	24.66	46.00	-21.34	36.31	-11.65	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

for Terminal Block:

<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_1RB0_CH20050 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>55.220</td><td>17.55</td><td>40.00</td><td>-22.45</td><td>41.27</td><td>-23.72</td><td>QP</td></tr> <tr><td>2</td><td>183.260</td><td>21.55</td><td>43.50</td><td>-21.95</td><td>47.23</td><td>-25.68</td><td>QP</td></tr> <tr><td>3</td><td>250.190</td><td>28.83</td><td>46.00</td><td>-17.17</td><td>53.57</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>420.910</td><td>25.56</td><td>46.00</td><td>-20.44</td><td>45.38</td><td>-19.82</td><td>QP</td></tr> <tr><td>5</td><td>595.510</td><td>18.26</td><td>46.00</td><td>-27.74</td><td>33.68</td><td>-15.42</td><td>QP</td></tr> <tr><td>6</td><td>872.930</td><td>21.72</td><td>46.00</td><td>-24.28</td><td>33.64</td><td>-11.92</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	55.220	17.55	40.00	-22.45	41.27	-23.72	QP	2	183.260	21.55	43.50	-21.95	47.23	-25.68	QP	3	250.190	28.83	46.00	-17.17	53.57	-24.74	QP	4	420.910	25.56	46.00	-20.44	45.38	-19.82	QP	5	595.510	18.26	46.00	-27.74	33.68	-15.42	QP	6	872.930	21.72	46.00	-24.28	33.64	-11.92	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_1RB0_CH20050 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>43.580</td><td>29.51</td><td>40.00</td><td>-10.49</td><td>53.14</td><td>-23.63</td><td>QP</td></tr> <tr><td>2</td><td>87.230</td><td>23.47</td><td>40.00</td><td>-16.53</td><td>53.27</td><td>-29.80</td><td>QP</td></tr> <tr><td>3</td><td>200.720</td><td>16.95</td><td>43.50</td><td>-26.55</td><td>43.58</td><td>-26.63</td><td>QP</td></tr> <tr><td>4</td><td>422.850</td><td>21.05</td><td>46.00</td><td>-24.95</td><td>40.82</td><td>-19.77</td><td>QP</td></tr> <tr><td>5</td><td>500.450</td><td>20.81</td><td>46.00</td><td>-25.19</td><td>38.68</td><td>-17.87</td><td>QP</td></tr> <tr><td>6</td><td>821.520</td><td>20.95</td><td>46.00</td><td>-25.05</td><td>33.19</td><td>-12.24</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	43.580	29.51	40.00	-10.49	53.14	-23.63	QP	2	87.230	23.47	40.00	-16.53	53.27	-29.80	QP	3	200.720	16.95	43.50	-26.55	43.58	-26.63	QP	4	422.850	21.05	46.00	-24.95	40.82	-19.77	QP	5	500.450	20.81	46.00	-25.19	38.68	-17.87	QP	6	821.520	20.95	46.00	-25.05	33.19	-12.24	QP
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	55.220	17.55	40.00	-22.45	41.27	-23.72	QP																																																																																																										
2	183.260	21.55	43.50	-21.95	47.23	-25.68	QP																																																																																																										
3	250.190	28.83	46.00	-17.17	53.57	-24.74	QP																																																																																																										
4	420.910	25.56	46.00	-20.44	45.38	-19.82	QP																																																																																																										
5	595.510	18.26	46.00	-27.74	33.68	-15.42	QP																																																																																																										
6	872.930	21.72	46.00	-24.28	33.64	-11.92	QP																																																																																																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	43.580	29.51	40.00	-10.49	53.14	-23.63	QP																																																																																																										
2	87.230	23.47	40.00	-16.53	53.27	-29.80	QP																																																																																																										
3	200.720	16.95	43.50	-26.55	43.58	-26.63	QP																																																																																																										
4	422.850	21.05	46.00	-24.95	40.82	-19.77	QP																																																																																																										
5	500.450	20.81	46.00	-25.19	38.68	-17.87	QP																																																																																																										
6	821.520	20.95	46.00	-25.05	33.19	-12.24	QP																																																																																																										
<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>43.580</td><td>22.17</td><td>40.00</td><td>-17.83</td><td>45.00</td><td>-23.63</td><td>QP</td></tr> <tr><td>2</td><td>108.340</td><td>29.08</td><td>43.50</td><td>-14.42</td><td>52.93</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>250.190</td><td>31.54</td><td>46.00</td><td>-14.46</td><td>56.28</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>418.000</td><td>27.68</td><td>46.00</td><td>-18.32</td><td>47.53</td><td>-19.85</td><td>QP</td></tr> <tr><td>5</td><td>535.370</td><td>21.53</td><td>46.00</td><td>-24.47</td><td>38.76</td><td>-17.23</td><td>QP</td></tr> <tr><td>6</td><td>872.930</td><td>26.40</td><td>46.00</td><td>-19.60</td><td>30.32</td><td>-11.92</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	43.580	22.17	40.00	-17.83	45.00	-23.63	QP	2	108.340	29.08	43.50	-14.42	52.93	-23.85	QP	3	250.190	31.54	46.00	-14.46	56.28	-24.74	QP	4	418.000	27.68	46.00	-18.32	47.53	-19.85	QP	5	535.370	21.53	46.00	-24.47	38.76	-17.23	QP	6	872.930	26.40	46.00	-19.60	30.32	-11.92	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>43.580</td><td>27.37</td><td>40.00</td><td>-12.63</td><td>51.00</td><td>-23.63</td><td>QP</td></tr> <tr><td>2</td><td>108.340</td><td>31.39</td><td>43.50</td><td>-12.11</td><td>55.24</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>250.190</td><td>23.36</td><td>46.00</td><td>-22.64</td><td>48.10</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>424.790</td><td>26.00</td><td>46.00</td><td>-19.20</td><td>46.52</td><td>-19.72</td><td>QP</td></tr> <tr><td>5</td><td>530.520</td><td>24.88</td><td>46.00</td><td>-21.12</td><td>42.21</td><td>-17.33</td><td>QP</td></tr> <tr><td>6</td><td>831.220</td><td>24.92</td><td>46.00</td><td>-21.08</td><td>37.12</td><td>-12.20</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	43.580	27.37	40.00	-12.63	51.00	-23.63	QP	2	108.340	31.39	43.50	-12.11	55.24	-23.85	QP	3	250.190	23.36	46.00	-22.64	48.10	-24.74	QP	4	424.790	26.00	46.00	-19.20	46.52	-19.72	QP	5	530.520	24.88	46.00	-21.12	42.21	-17.33	QP	6	831.220	24.92	46.00	-21.08	37.12	-12.20	QP
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	43.580	22.17	40.00	-17.83	45.00	-23.63	QP																																																																																																										
2	108.340	29.08	43.50	-14.42	52.93	-23.85	QP																																																																																																										
3	250.190	31.54	46.00	-14.46	56.28	-24.74	QP																																																																																																										
4	418.000	27.68	46.00	-18.32	47.53	-19.85	QP																																																																																																										
5	535.370	21.53	46.00	-24.47	38.76	-17.23	QP																																																																																																										
6	872.930	26.40	46.00	-19.60	30.32	-11.92	QP																																																																																																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	43.580	27.37	40.00	-12.63	51.00	-23.63	QP																																																																																																										
2	108.340	31.39	43.50	-12.11	55.24	-23.85	QP																																																																																																										
3	250.190	23.36	46.00	-22.64	48.10	-24.74	QP																																																																																																										
4	424.790	26.00	46.00	-19.20	46.52	-19.72	QP																																																																																																										
5	530.520	24.88	46.00	-21.12	42.21	-17.33	QP																																																																																																										
6	831.220	24.92	46.00	-21.08	37.12	-12.20	QP																																																																																																										


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+KDMA_B4_CH1312+KDMA_B4_CH1513
 Test BY :Ashton

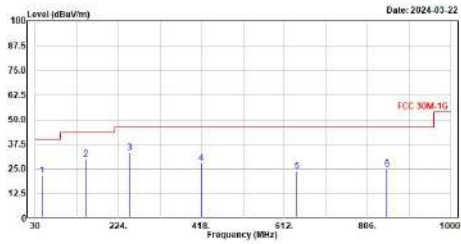

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	44.550	21.66	40.00	-18.34	45.26	-23.60	QP
2	148.340	29.94	43.50	-13.56	53.79	-23.85	QP
3	250.190	33.26	46.00	-12.74	58.00	-24.74	QP
4	417.030	27.78	46.00	-18.22	47.63	-19.85	QP
5	600.130	23.96	46.00	-22.04	38.83	-14.87	QP
6	850.620	24.84	46.00	-21.16	36.02	-11.76	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+KDMA_B4_CH1312+KDMA_B4_CH1513
 Test BY :Ashton

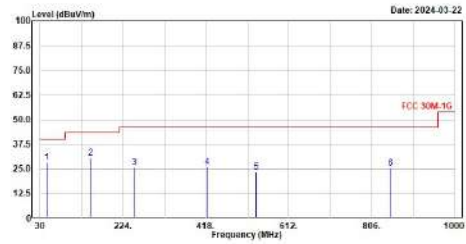


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	44.550	28.13	40.00	-11.87	51.73	-23.60	QP
2	148.340	30.73	43.50	-12.77	54.58	-23.85	QP
3	250.190	25.09	46.00	-20.91	50.23	-24.74	QP
4	419.940	26.10	46.00	-19.90	45.94	-19.84	QP
5	535.370	23.26	46.00	-22.74	40.49	-17.23	QP
6	849.650	25.28	46.00	-20.72	37.07	-11.79	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

for PoE:

<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_1R80_CH20050 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>43.580</td><td>23.23</td><td>40.00</td><td>-16.77</td><td>46.86</td><td>-23.63</td><td>QP</td></tr> <tr><td>2</td><td>148.340</td><td>30.24</td><td>43.50</td><td>-13.26</td><td>54.09</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>228.850</td><td>30.16</td><td>46.00</td><td>-15.84</td><td>55.92</td><td>-25.76</td><td>QP</td></tr> <tr><td>4</td><td>426.730</td><td>30.18</td><td>46.00</td><td>-15.82</td><td>49.83</td><td>-19.65</td><td>QP</td></tr> <tr><td>5</td><td>620.730</td><td>24.49</td><td>46.00</td><td>-21.51</td><td>39.67</td><td>-15.18</td><td>QP</td></tr> <tr><td>6</td><td>789.510</td><td>26.42</td><td>46.00</td><td>-19.58</td><td>38.93</td><td>-12.51</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	43.580	23.23	40.00	-16.77	46.86	-23.63	QP	2	148.340	30.24	43.50	-13.26	54.09	-23.85	QP	3	228.850	30.16	46.00	-15.84	55.92	-25.76	QP	4	426.730	30.18	46.00	-15.82	49.83	-19.65	QP	5	620.730	24.49	46.00	-21.51	39.67	-15.18	QP	6	789.510	26.42	46.00	-19.58	38.93	-12.51	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_1R80_CH20050 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>43.580</td><td>27.16</td><td>40.00</td><td>-12.84</td><td>50.79</td><td>-23.63</td><td>QP</td></tr> <tr><td>2</td><td>148.340</td><td>28.20</td><td>43.50</td><td>-15.30</td><td>52.05</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>420.910</td><td>28.10</td><td>46.00</td><td>-17.90</td><td>47.92</td><td>-19.82</td><td>QP</td></tr> <tr><td>4</td><td>605.210</td><td>24.06</td><td>46.00</td><td>-21.94</td><td>39.27</td><td>-15.21</td><td>QP</td></tr> <tr><td>5</td><td>789.510</td><td>24.71</td><td>46.00</td><td>-21.29</td><td>37.22</td><td>-12.51</td><td>QP</td></tr> <tr><td>6</td><td>875.840</td><td>25.06</td><td>46.00</td><td>-20.94</td><td>36.97</td><td>-11.91</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	43.580	27.16	40.00	-12.84	50.79	-23.63	QP	2	148.340	28.20	43.50	-15.30	52.05	-23.85	QP	3	420.910	28.10	46.00	-17.90	47.92	-19.82	QP	4	605.210	24.06	46.00	-21.94	39.27	-15.21	QP	5	789.510	24.71	46.00	-21.29	37.22	-12.51	QP	6	875.840	25.06	46.00	-20.94	36.97	-11.91	QP
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	43.580	23.23	40.00	-16.77	46.86	-23.63	QP																																																																																																										
2	148.340	30.24	43.50	-13.26	54.09	-23.85	QP																																																																																																										
3	228.850	30.16	46.00	-15.84	55.92	-25.76	QP																																																																																																										
4	426.730	30.18	46.00	-15.82	49.83	-19.65	QP																																																																																																										
5	620.730	24.49	46.00	-21.51	39.67	-15.18	QP																																																																																																										
6	789.510	26.42	46.00	-19.58	38.93	-12.51	QP																																																																																																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	43.580	27.16	40.00	-12.84	50.79	-23.63	QP																																																																																																										
2	148.340	28.20	43.50	-15.30	52.05	-23.85	QP																																																																																																										
3	420.910	28.10	46.00	-17.90	47.92	-19.82	QP																																																																																																										
4	605.210	24.06	46.00	-21.94	39.27	-15.21	QP																																																																																																										
5	789.510	24.71	46.00	-21.29	37.22	-12.51	QP																																																																																																										
6	875.840	25.06	46.00	-20.94	36.97	-11.91	QP																																																																																																										
<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>62.980</td><td>20.98</td><td>40.00</td><td>-19.02</td><td>46.00</td><td>-25.02</td><td>QP</td></tr> <tr><td>2</td><td>148.340</td><td>27.56</td><td>43.50</td><td>-15.94</td><td>51.41</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>228.850</td><td>32.75</td><td>46.00</td><td>-13.25</td><td>58.51</td><td>-25.76</td><td>QP</td></tr> <tr><td>4</td><td>421.880</td><td>31.36</td><td>46.00</td><td>-14.64</td><td>51.16</td><td>-19.00</td><td>QP</td></tr> <tr><td>5</td><td>620.730</td><td>24.31</td><td>46.00</td><td>-21.69</td><td>39.49</td><td>-15.18</td><td>QP</td></tr> <tr><td>6</td><td>783.690</td><td>26.36</td><td>46.00</td><td>-19.64</td><td>38.88</td><td>-12.52</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	62.980	20.98	40.00	-19.02	46.00	-25.02	QP	2	148.340	27.56	43.50	-15.94	51.41	-23.85	QP	3	228.850	32.75	46.00	-13.25	58.51	-25.76	QP	4	421.880	31.36	46.00	-14.64	51.16	-19.00	QP	5	620.730	24.31	46.00	-21.69	39.49	-15.18	QP	6	783.690	26.36	46.00	-19.64	38.88	-12.52	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312 Test BY :Ashton</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB/m</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>43.580</td><td>27.87</td><td>40.00</td><td>-12.13</td><td>51.50</td><td>-23.63</td><td>QP</td></tr> <tr><td>2</td><td>148.340</td><td>26.43</td><td>43.50</td><td>-17.07</td><td>50.28</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>229.820</td><td>25.53</td><td>46.00</td><td>-20.47</td><td>51.19</td><td>-25.66</td><td>QP</td></tr> <tr><td>4</td><td>423.820</td><td>25.23</td><td>46.00</td><td>-20.77</td><td>44.97</td><td>-19.74</td><td>QP</td></tr> <tr><td>5</td><td>605.210</td><td>24.27</td><td>46.00</td><td>-21.73</td><td>39.48</td><td>-15.21</td><td>QP</td></tr> <tr><td>6</td><td>800.690</td><td>26.90</td><td>46.00</td><td>-19.10</td><td>38.77</td><td>-11.87</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark	1	43.580	27.87	40.00	-12.13	51.50	-23.63	QP	2	148.340	26.43	43.50	-17.07	50.28	-23.85	QP	3	229.820	25.53	46.00	-20.47	51.19	-25.66	QP	4	423.820	25.23	46.00	-20.77	44.97	-19.74	QP	5	605.210	24.27	46.00	-21.73	39.48	-15.21	QP	6	800.690	26.90	46.00	-19.10	38.77	-11.87	QP
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	62.980	20.98	40.00	-19.02	46.00	-25.02	QP																																																																																																										
2	148.340	27.56	43.50	-15.94	51.41	-23.85	QP																																																																																																										
3	228.850	32.75	46.00	-13.25	58.51	-25.76	QP																																																																																																										
4	421.880	31.36	46.00	-14.64	51.16	-19.00	QP																																																																																																										
5	620.730	24.31	46.00	-21.69	39.49	-15.18	QP																																																																																																										
6	783.690	26.36	46.00	-19.64	38.88	-12.52	QP																																																																																																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark																																																																																																										
1	43.580	27.87	40.00	-12.13	51.50	-23.63	QP																																																																																																										
2	148.340	26.43	43.50	-17.07	50.28	-23.85	QP																																																																																																										
3	229.820	25.53	46.00	-20.47	51.19	-25.66	QP																																																																																																										
4	423.820	25.23	46.00	-20.77	44.97	-19.74	QP																																																																																																										
5	605.210	24.27	46.00	-21.73	39.48	-15.21	QP																																																																																																										
6	800.690	26.90	46.00	-19.10	38.77	-11.87	QP																																																																																																										


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312+MCDMA_B4_CH1513
 Test BY :Ashton

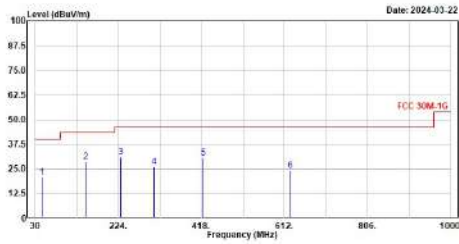

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	44.550	28.78	40.00	-19.22	44.38	-23.60	QP
2	148.340	28.65	43.50	-14.85	52.50	-23.85	QP
3	228.850	30.90	46.00	-15.10	56.66	-25.76	QP
4	307.420	26.16	46.00	-19.84	48.87	-22.71	QP
5	421.880	30.64	46.00	-15.36	50.44	-19.80	QP
6	625.500	24.28	46.00	-21.72	39.37	-15.09	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.





Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312+MCDMA_B4_CH1513
 Test BY :Ashton

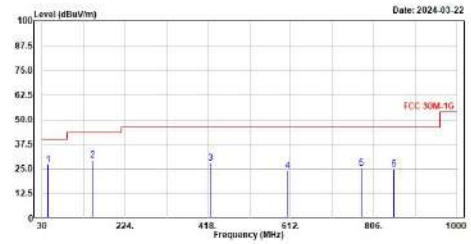


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	45.580	27.10	40.00	-12.90	50.73	-23.63	QP
2	148.340	29.49	43.50	-14.01	53.34	-23.85	QP
3	423.820	27.86	46.00	-18.14	47.60	-19.74	QP
4	605.210	24.24	46.00	-21.76	39.45	-15.21	QP
5	776.900	25.24	46.00	-20.76	37.79	-12.55	QP
6	853.530	24.00	46.00	-21.20	36.57	-11.77	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Above 1 GHz:

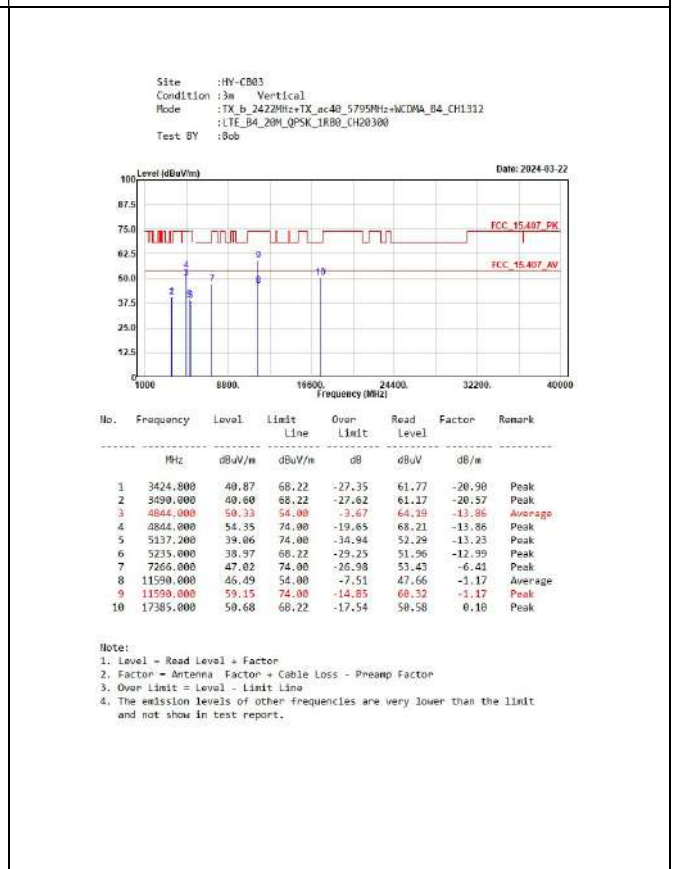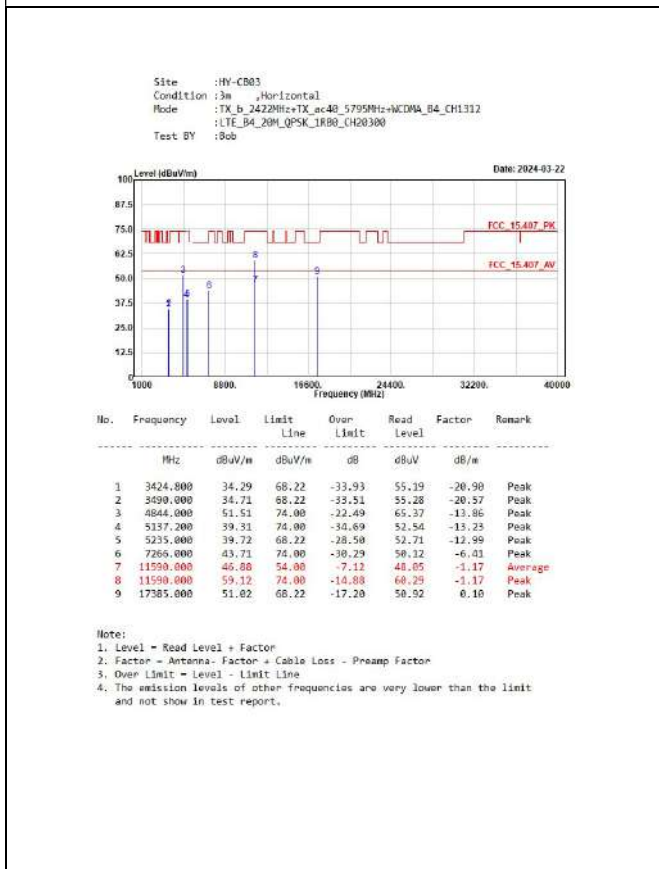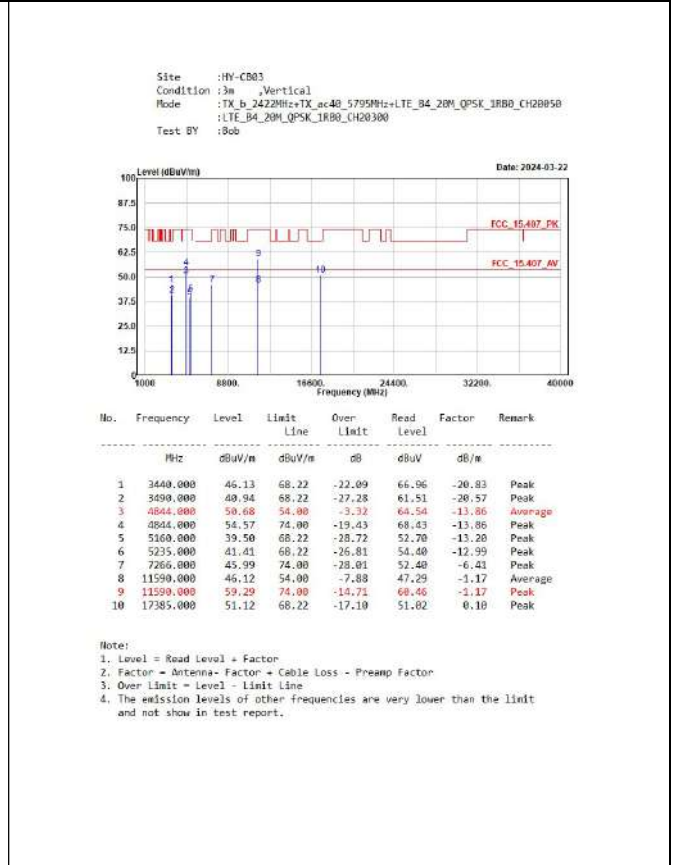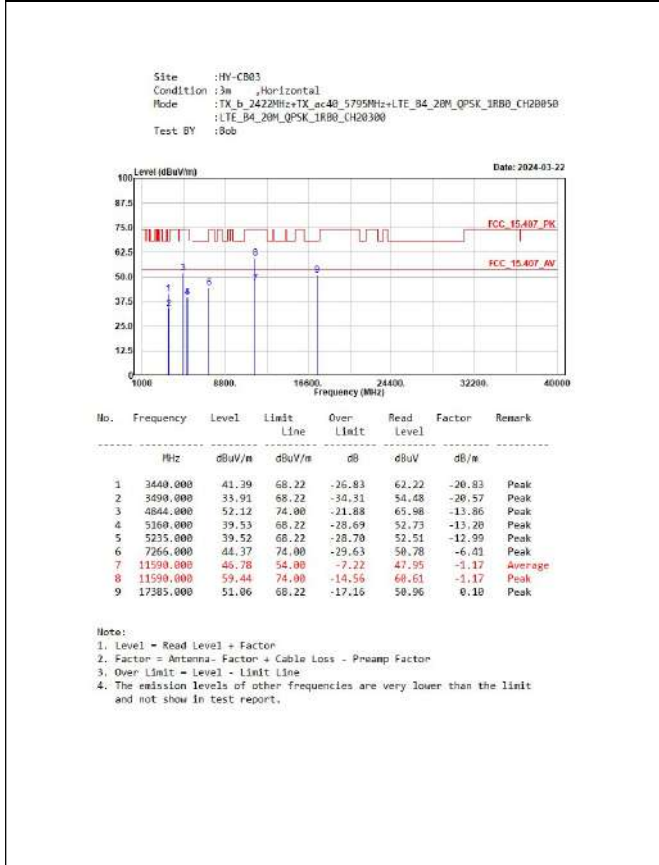


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312+MCDMA_B4_CH1513
 Test BY :8ob

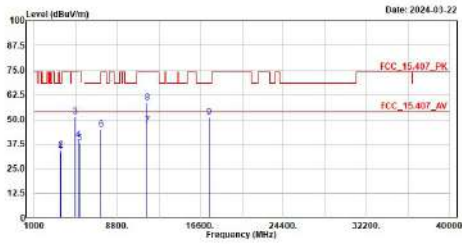

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3424.000	33.49	68.22	-34.73	54.39	-20.90	Peak
2	3505.200	34.52	68.22	-33.70	54.98	-20.46	Peak
3	4844.000	51.28	74.00	-22.72	65.14	-13.86	Peak
4	5137.200	39.57	74.00	-34.43	52.00	-13.23	Peak
5	5257.800	38.19	68.22	-30.03	51.20	-13.01	Peak
6	7266.000	44.98	74.00	-29.02	51.39	-6.41	Peak
7	11590.000	46.83	54.00	-7.17	48.00	-1.17	Average
8	11590.000	59.57	74.00	-15.43	59.74	-1.17	Peak
9	17385.000	51.00	68.22	-17.22	50.90	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+MCDMA_B4_CH1312+MCDMA_B4_CH1513
 Test BY :8ob

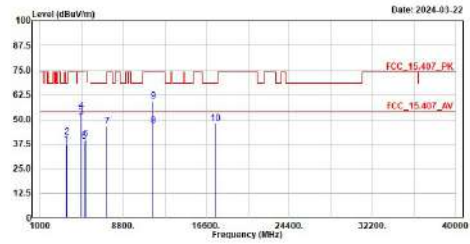

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3424.000	37.05	68.22	-31.17	57.95	-20.90	Peak
2	3505.200	40.95	68.22	-27.27	61.41	-20.46	Peak
3	4844.000	50.98	54.00	-3.02	64.04	-13.86	Average
4	4844.000	54.34	74.00	-19.66	68.20	-13.86	Peak
5	5137.200	38.82	74.00	-35.18	52.05	-13.23	Peak
6	5257.800	39.85	68.22	-28.39	52.04	-13.01	Peak
7	7266.000	46.44	74.00	-27.56	52.85	-6.41	Peak
8	11590.000	46.63	54.00	-7.37	47.00	-1.17	Average
9	11590.000	59.14	74.00	-14.86	68.31	-1.17	Peak
10	17385.000	47.91	68.22	-20.31	47.81	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.