


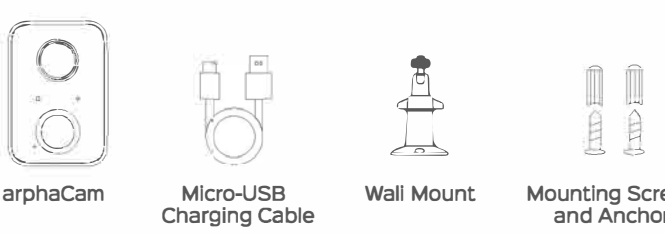
1/ GETTING STARTED

For HomeBase Installation



HomeBase, Power Adapter for HomeBase, Ethernet Cable

For arphaCam Installation




arphaCam, Micro-USB Charging Cable, Wall Mount, Mounting Screws and Anchors

1.Camera quantity and accessories vary by bundle package.
2.HomeBase power adapter varies by region.


2/ PRODUCT OVERVIEW

HomeBase

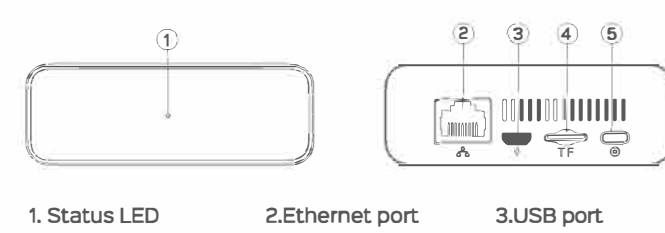


1. Status LED
2.Ethernet port
3.USB port
4.TF card slot
5.Syno/Reset button

arphaCam

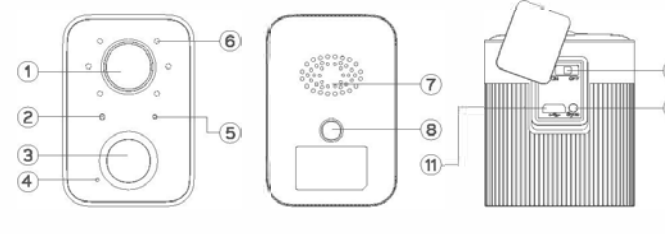


1. Lens
2. Light sensor
3. Motion sensor
4. Microphone
5. Status LED
6. Infrared LED
7. Speaker
8. Mounting hole
9. Power ON/OFF
10. Sync/Reset
11. Charging port

HomeBase



Status LED:
-Boot up: Red light always ON
-Waiting for network setting: Red light fast blinking
-Network connecting: Green light fast blinking
-Network connected: Green light always ON
-Abnormal status: Red light slow blinking
-During firmware upgrade: Yellow light always ON

arphaCam

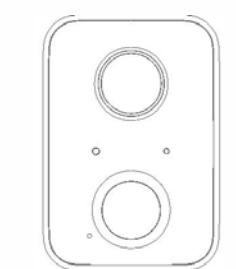


Status LED:
Boot up: Red light always ON
Waiting for network setting: Red light fast blinking
Network connecting: Green light fast blinking
Network connected: Green light always ON
Abnormal status: Red light slow blinking
During firmware upgrade: Yellow light always ON
Charging status: White light always ON during charging/ Turn OFF after fully charged


3/ CONNECTING THE HOMEBASE

Connect the HomeBase to the Internet

Power on the HomeBase, then use the ethernet cable provided to connect the HomeBase to your home router.

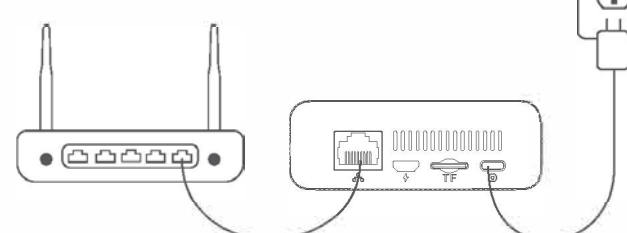


The LED Indicator turns green (this may take up to 1min) when HomeBase is ready for setup.

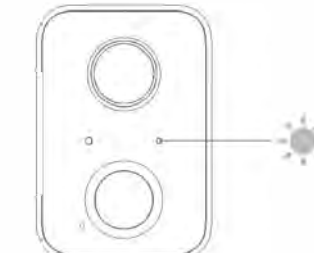


4/ SETTING UP THE SYSTEM

Download the App and Set up the System

1.Download the arpha app from the App Store (iOS devices) or Google Play store (Android devices).

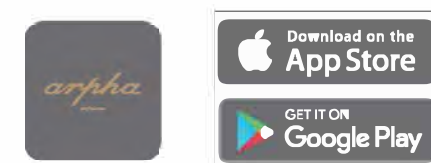


2.Make sure that your smartphone and the HomeBase are connected to the same home router.

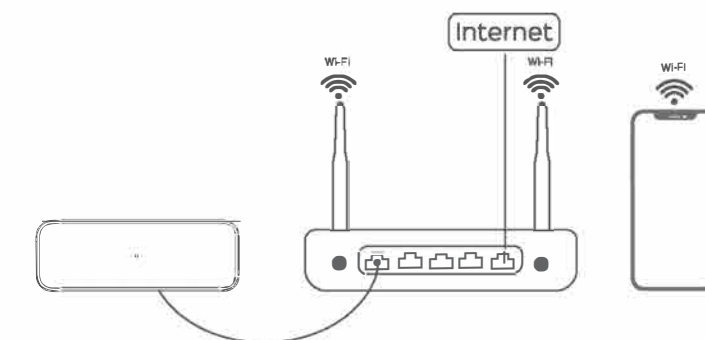


Sign up for a account and then follow the on screen instructions (HomeBase)


3.Launch the arpha app, click "Add Device", then select "Security&Video Surveillance", and follow the screenshot below.

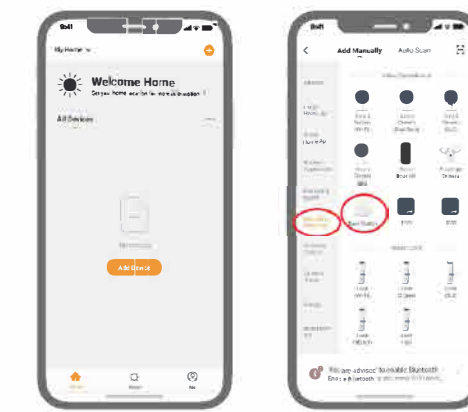

4.Make sure the Red Indicator on the device is blinking, then press "Next Step". (If the operation failed, press the reset button for over 5 seconds)



Add device of the Homebase (HomeBase)



arpha


This package kit includes below products:
2.4G WiFi Home Base: BS-04
2.4G WiFi Battery Camera: EC-20

Please read carefully before setting up the product


Add device of arphacam (arphaCam)

5. select "Add Device" on the home page. (Please make sure arphaCam is on)

Make sure power is on




6. Make sure the Red indicator on the device is blinking, then press "Next Step". (If the operation failed, press the reset button for over 5 seconds)



Complete to set up the system

7. Now the device is being added. After successful adding, the device will make two indicating sounds and the green light will be constantly ON.

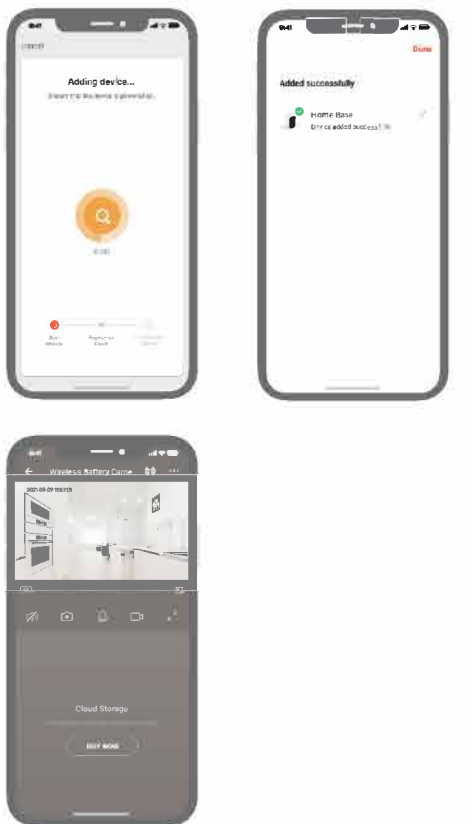


5/ MOUNTING THE CAMERA


The camera can be Mounted both indoors and outdoors.

Mount to any flat surface
Mount onto the wall


1.Please adjust the angle of the ball head bends before you mount. Drill holes with a 1/8" (3.175mm) drill bit then insert the anchors into the holes; anchors are necessary for walls that are made out of hard materials such as concrete, brick or stucco.

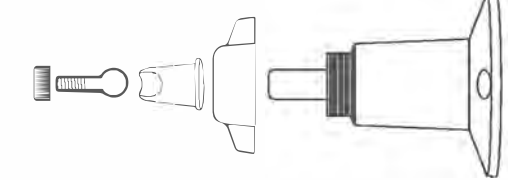

2. Firmly secure the base onto the wall using 3-5 screws(depends on actual wall mount) supplied in the package. Then tighten the camera to the mounting bracket and let metal head firmly screw the camera.

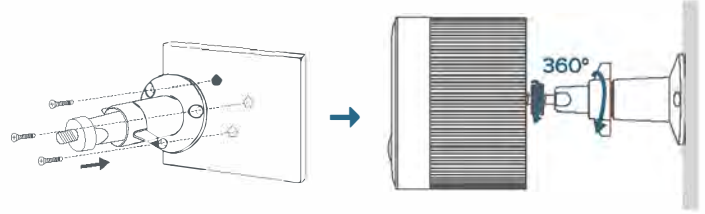


3. It is suggested to install arphacam 7-10 ft (2-3 m) above the ground. This height maximizes the detection range of the motion sensor of arphacam. Avoid placing arphacam under direct sunlight.

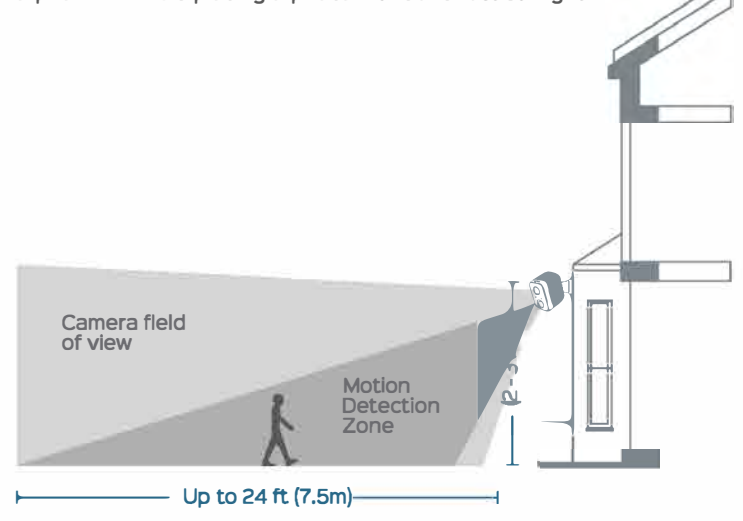

Up to 24 ft (7.5m)

6/ Charge arphacam

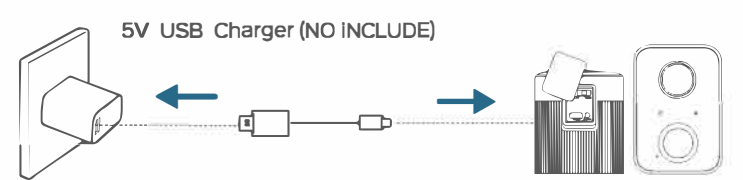

7/ Disclaimer

The contents in this manual, product specifications, size, and shape are subject to change without prior notice. The manufacturer makes no representations or warranties concerning the contents hereof and reserves the right to revise this manual without obligation to notify any person. The manufacturer shall not be liable for any technical or editorial errors or omissions contained in this manual, or for any damage, direct or indirect, from discrepancies between the manual and the product it describes. The manufacturer assumes no responsibility, directly or indirectly, for financial losses or claims from third persons resulting from the use of this product and any of its functions. The total accessible capacity varies depending on the operating environment. All references to speed are for comparison purposes only. Actual data throughput may vary.

LED Indication	Charging: Steady white ON
	Fully charged: OFF
Charging time	3.5 hours from 0% to 100%

8/ Customer Service

Warranty: 12 months limited warranty
Email us: support@arpha.com
website: www.arpha.com

9/ FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

arpha

QUICK START GUIDE

Home camera kit:
EC-21BS-04

