



Appendix B

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Projector

Test Model: J12C

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jeson Zhou
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	21.269	≥ 0.5	Pass
NVNT	a	5200	Ant1	21.62	≥ 0.5	Pass
NVNT	a	5240	Ant1	21.106	≥ 0.5	Pass
NVNT	n20	5180	Ant1	25.325	≥ 0.5	Pass
NVNT	n20	5200	Ant1	25.226	≥ 0.5	Pass
NVNT	n20	5240	Ant1	24.485	≥ 0.5	Pass
NVNT	ac20	5180	Ant1	26.171	≥ 0.5	Pass
NVNT	ac20	5200	Ant1	24.989	≥ 0.5	Pass
NVNT	ac20	5240	Ant1	24.245	≥ 0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

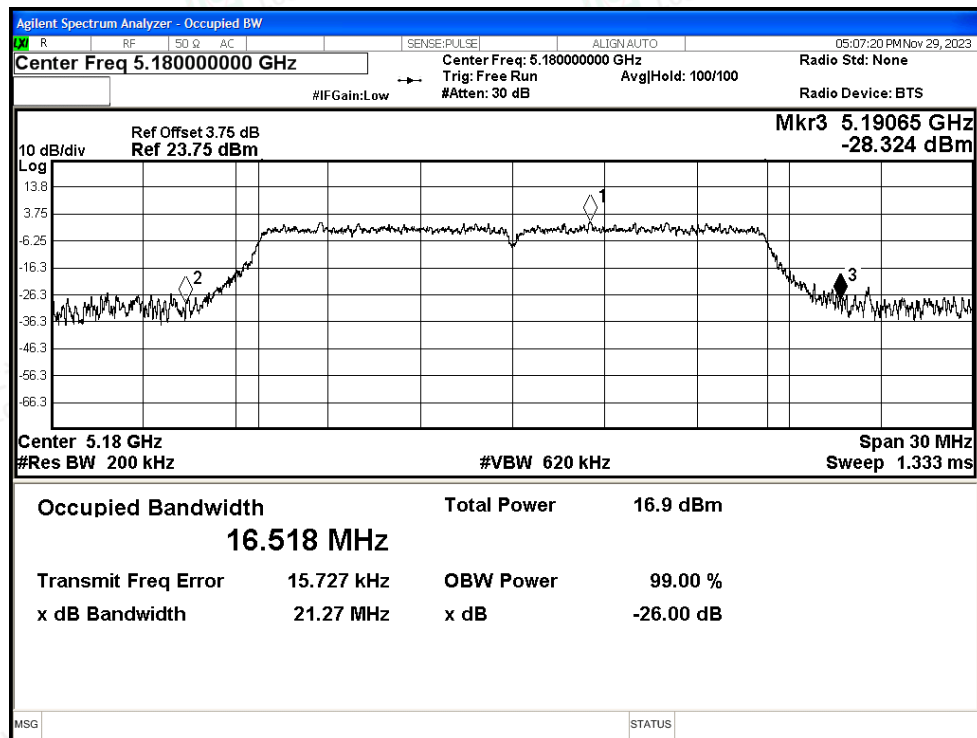


-26dB Bandwidth NVNT a 5200MHz Ant1

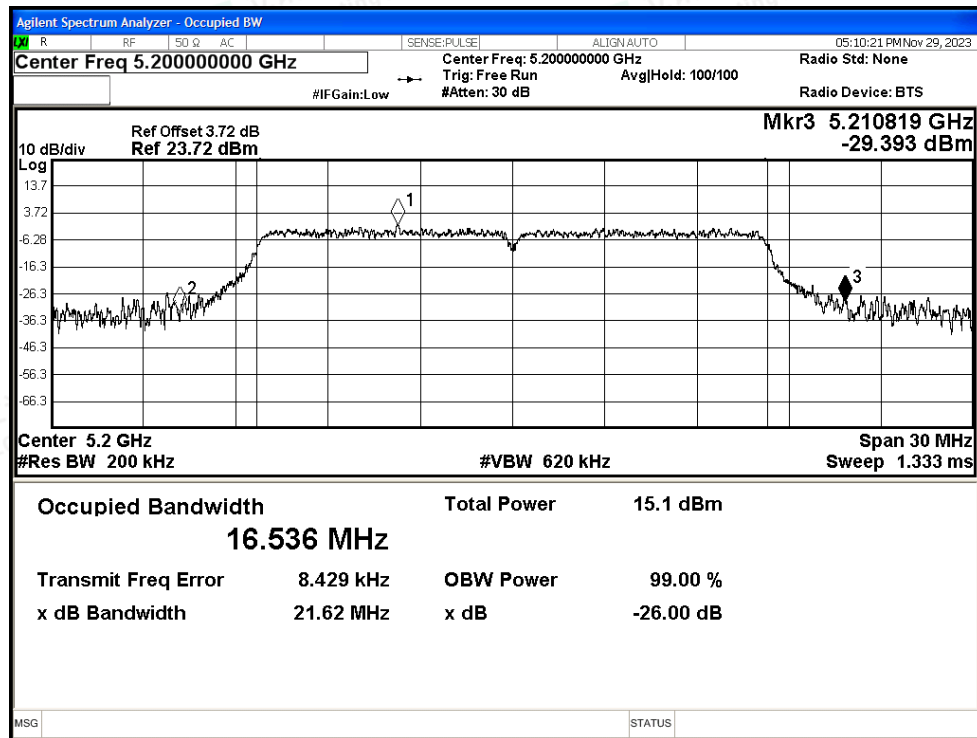




-26dB Bandwidth NVNT a 5240MHz Ant1

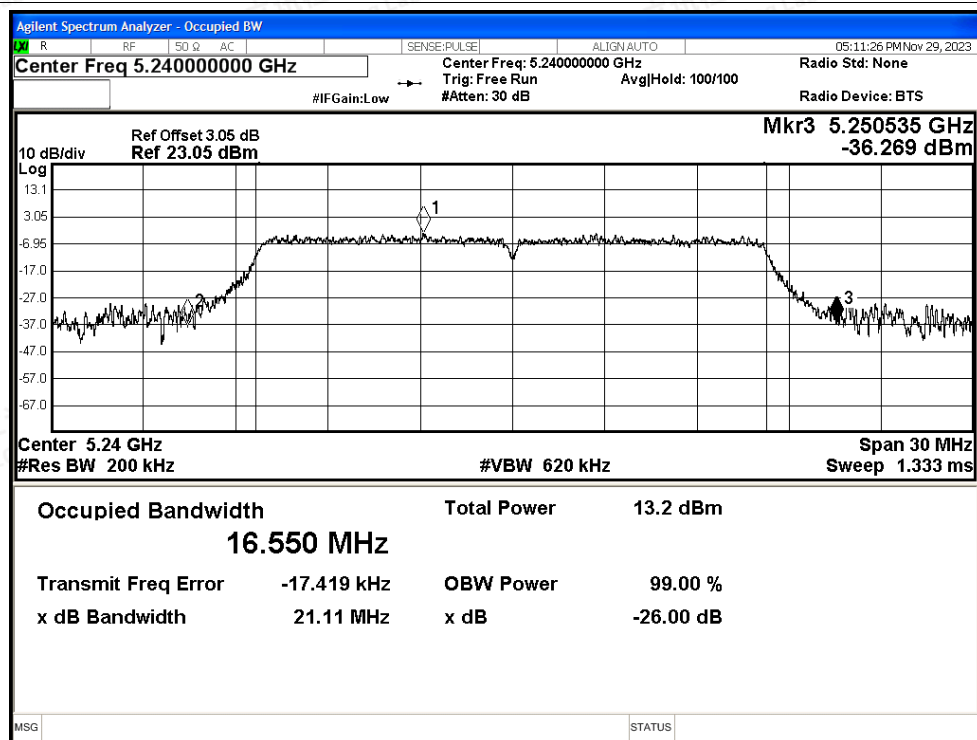

-26dB Bandwidth NVNT n20 5180MHz Ant1

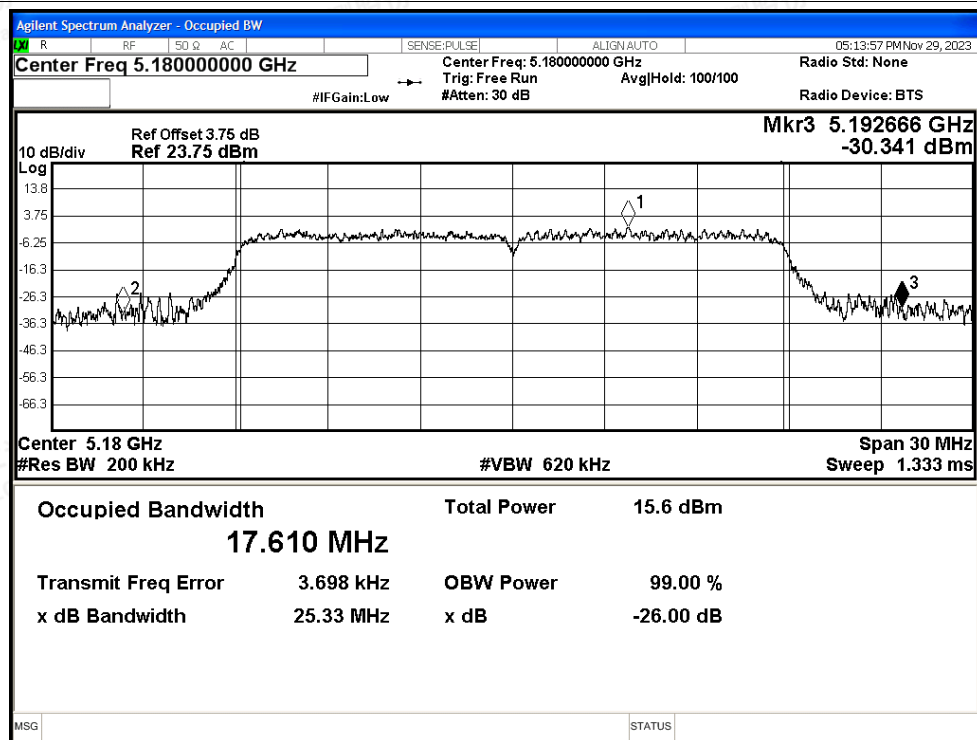

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5200MHz Ant1

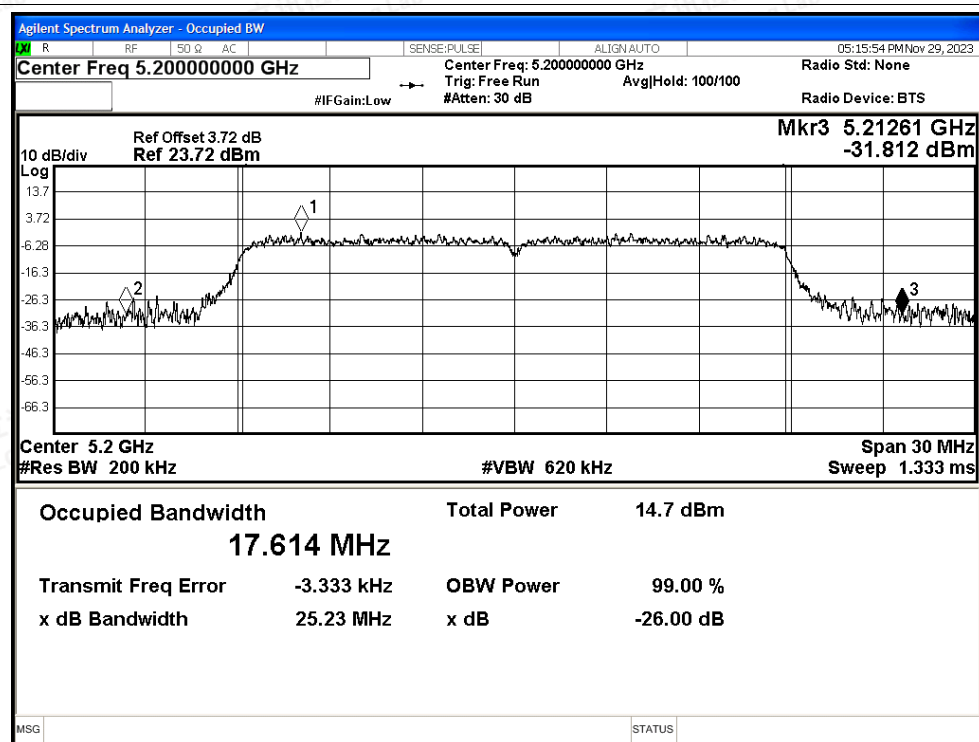


-26dB Bandwidth NVNT n20 5240MHz Ant1

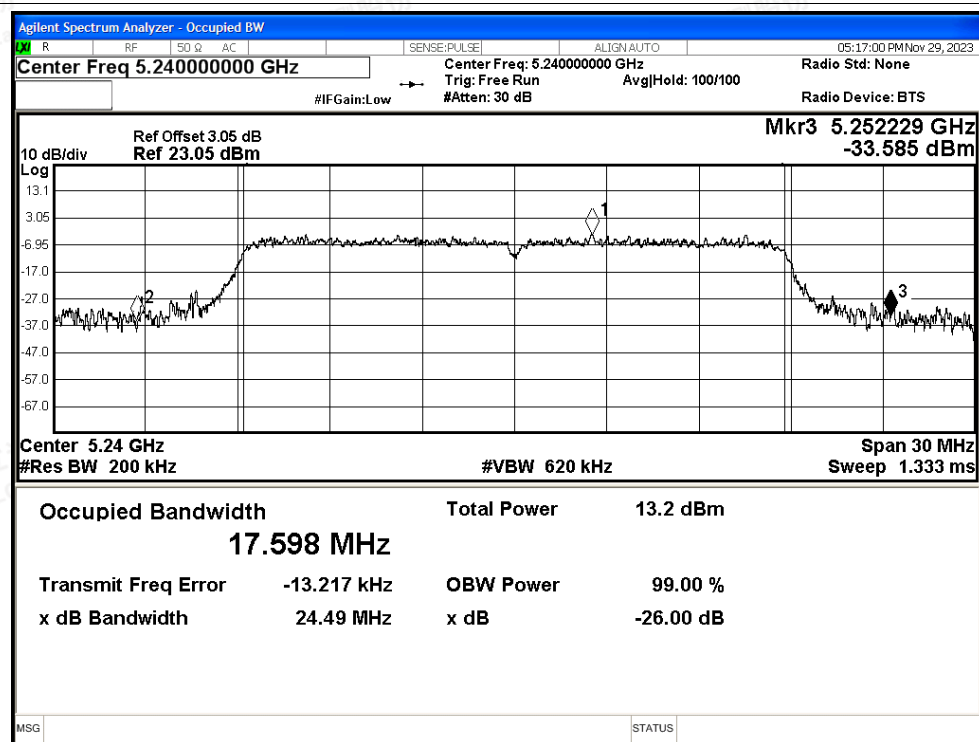





-26dB Bandwidth NVNT ac20 5180MHz Ant1

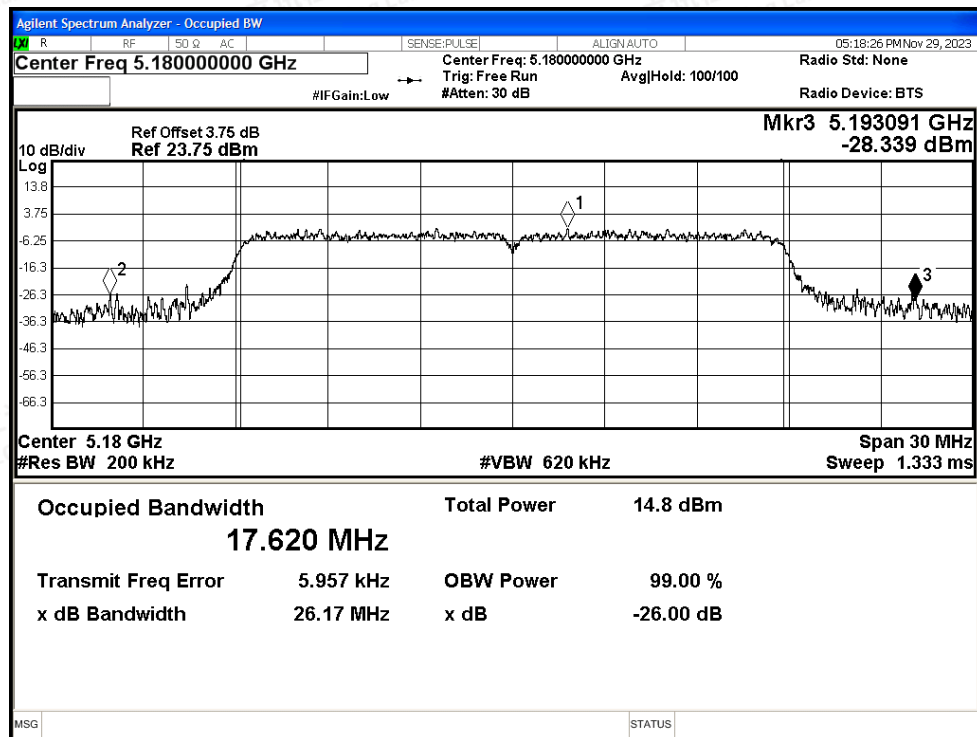

-26dB Bandwidth NVNT ac20 5200MHz Ant1

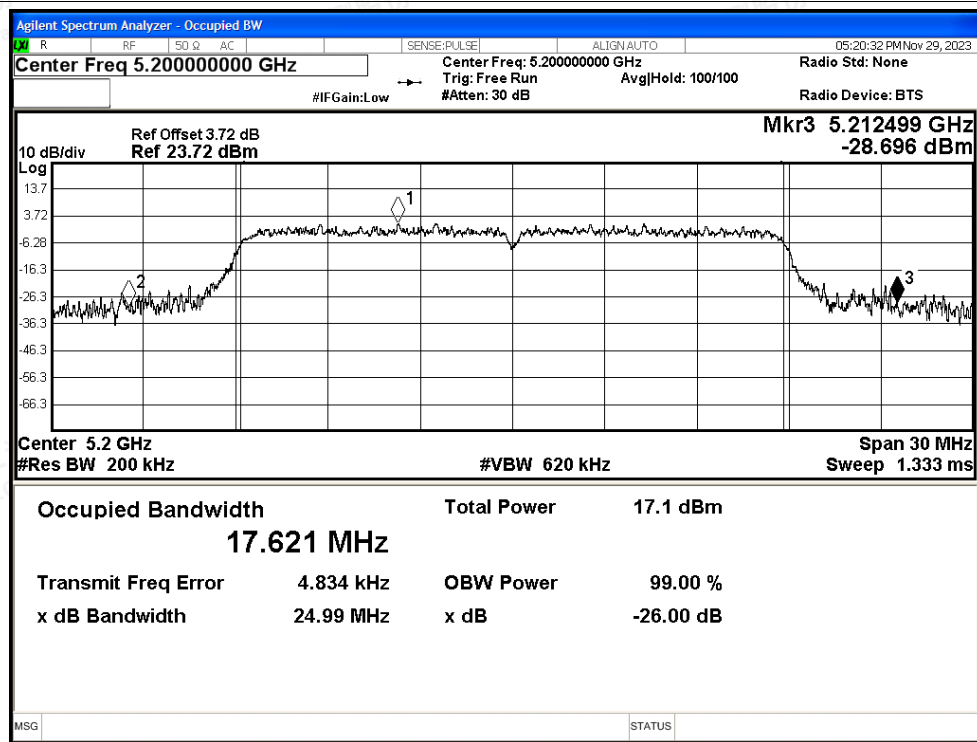

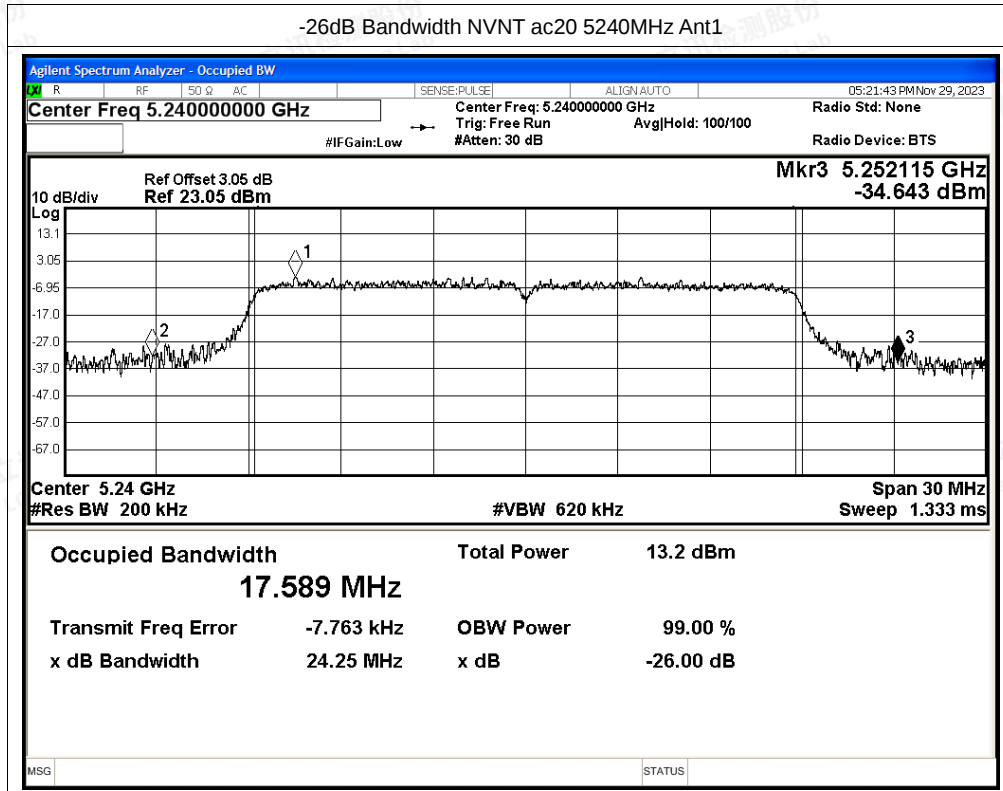



B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.14	0.19	11.33	24	Pass
NVNT	a	5200	Ant1	9.53	0.19	9.72	24	Pass
NVNT	a	5240	Ant1	7.7	0.19	7.89	24	Pass
NVNT	n20	5180	Ant1	9.48	0.23	9.71	24	Pass
NVNT	n20	5200	Ant1	9.09	0.23	9.32	24	Pass
NVNT	n20	5240	Ant1	7.43	0.23	7.66	24	Pass
NVNT	ac20	5180	Ant1	9.26	0.22	9.48	24	Pass
NVNT	ac20	5200	Ant1	11.47	0.22	11.69	24	Pass
NVNT	ac20	5240	Ant1	7.49	0.22	7.71	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	0.88	0.19	1.07	11	Pass
NVNT	a	5200	Ant1	-1.32	0.19	-1.13	11	Pass
NVNT	a	5240	Ant1	-2.66	0.19	-2.47	11	Pass
NVNT	n20	5180	Ant1	-0.86	0.23	-0.63	11	Pass
NVNT	n20	5200	Ant1	-1.87	0.23	-1.64	11	Pass
NVNT	n20	5240	Ant1	-3.14	0.23	-2.91	11	Pass
NVNT	ac20	5180	Ant1	-1.41	0.22	-1.19	11	Pass
NVNT	ac20	5200	Ant1	0.11	0.22	0.33	11	Pass
NVNT	ac20	5240	Ant1	-3.07	0.22	-2.85	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant1

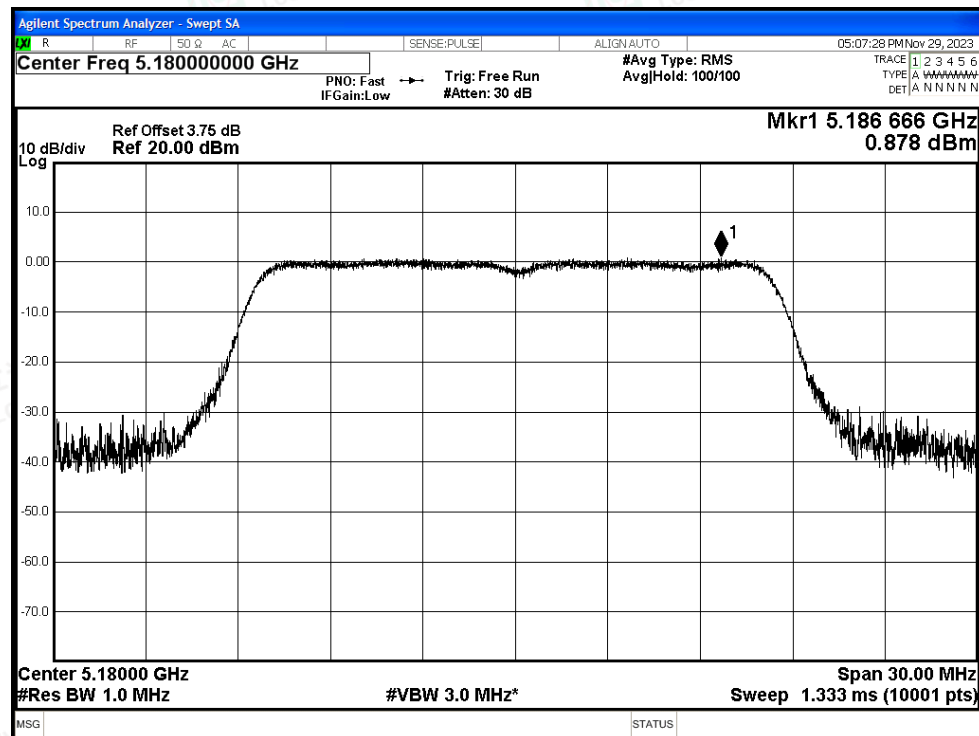


PSD NVNT a 5200MHz Ant1

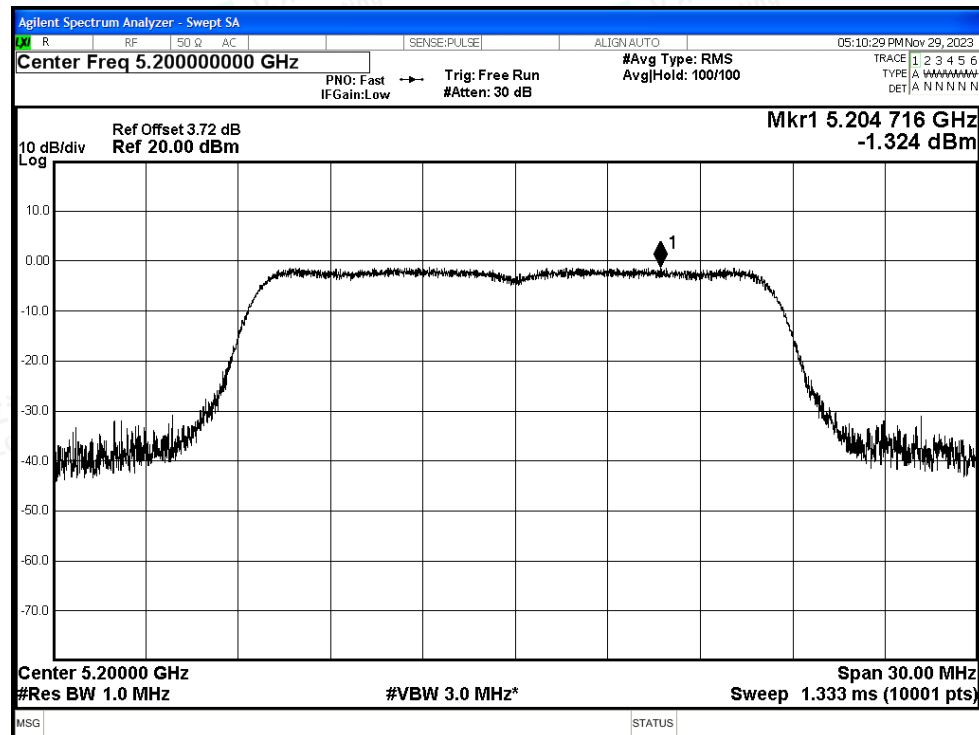








PSD NVNT a 5240MHz Ant1

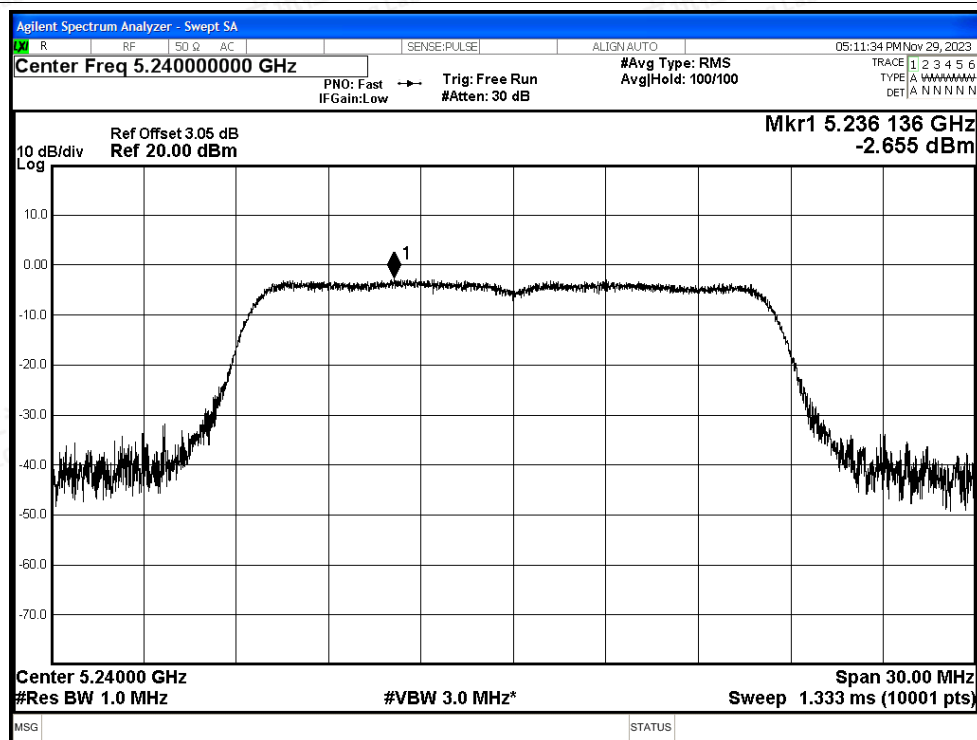


PSD NVNT n20 5180MHz Ant1

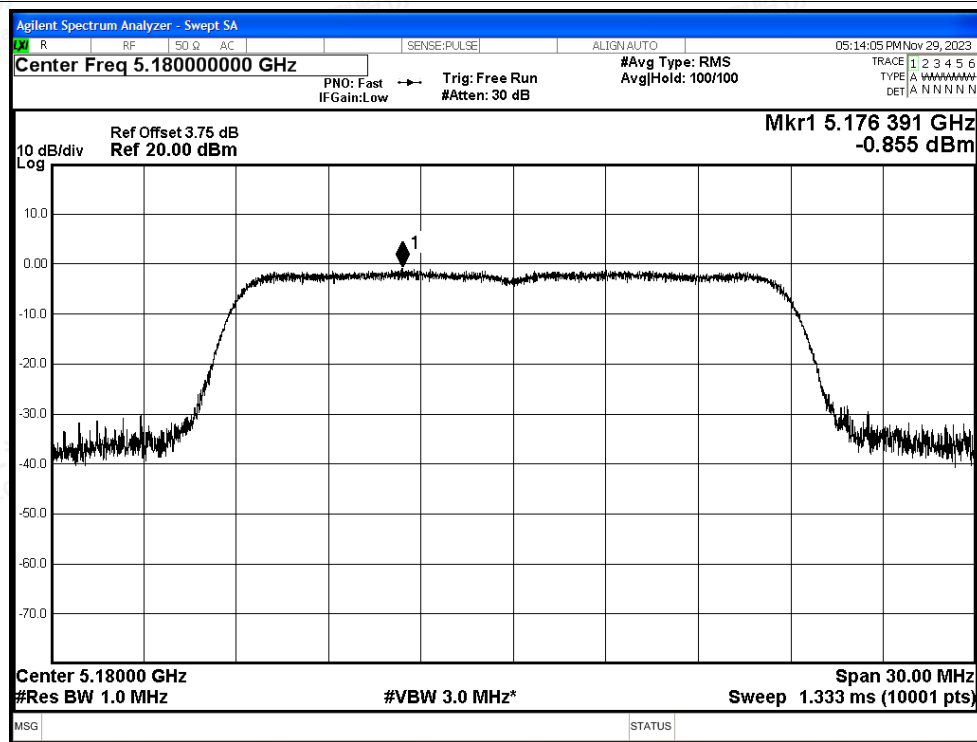

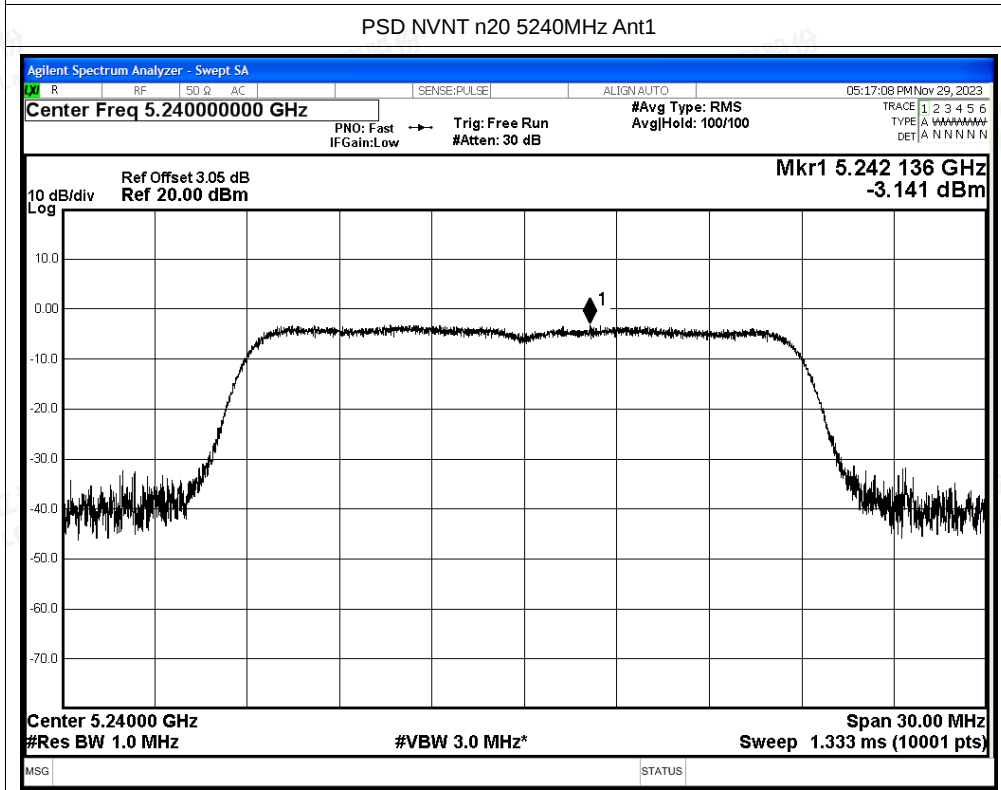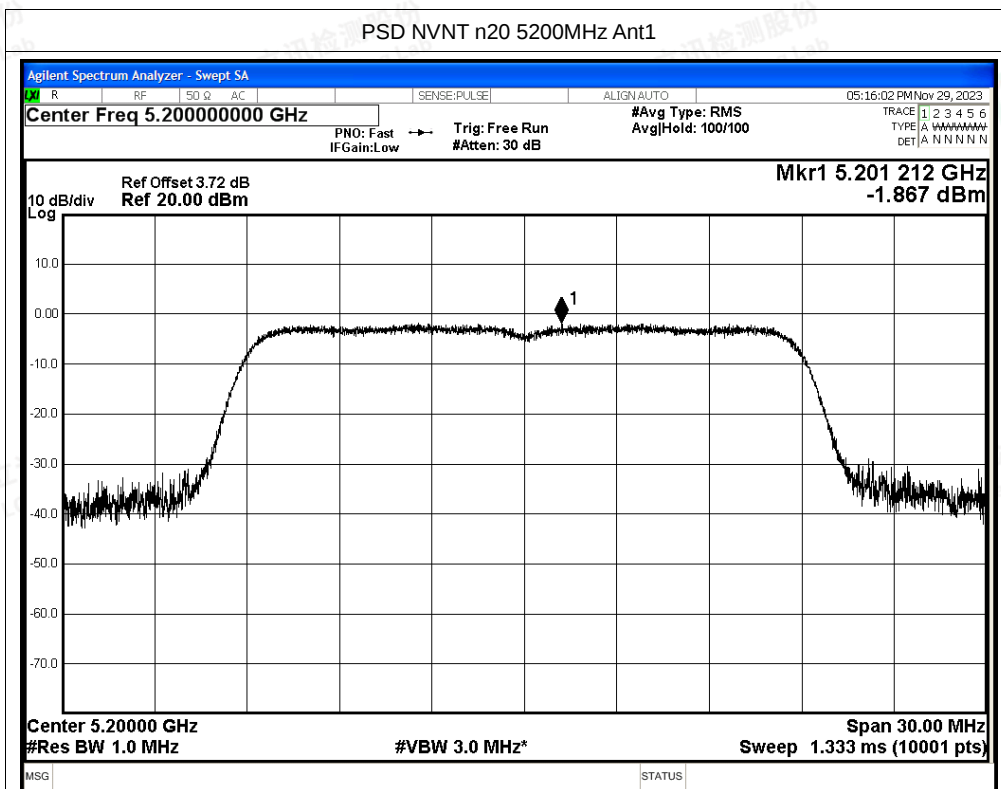

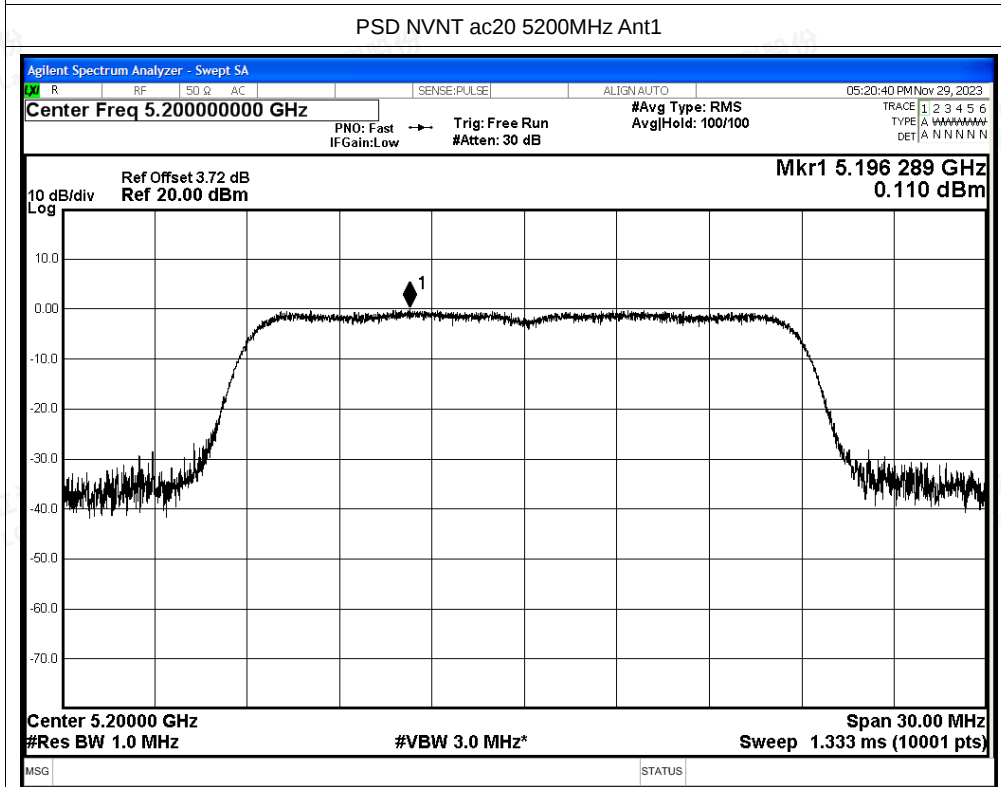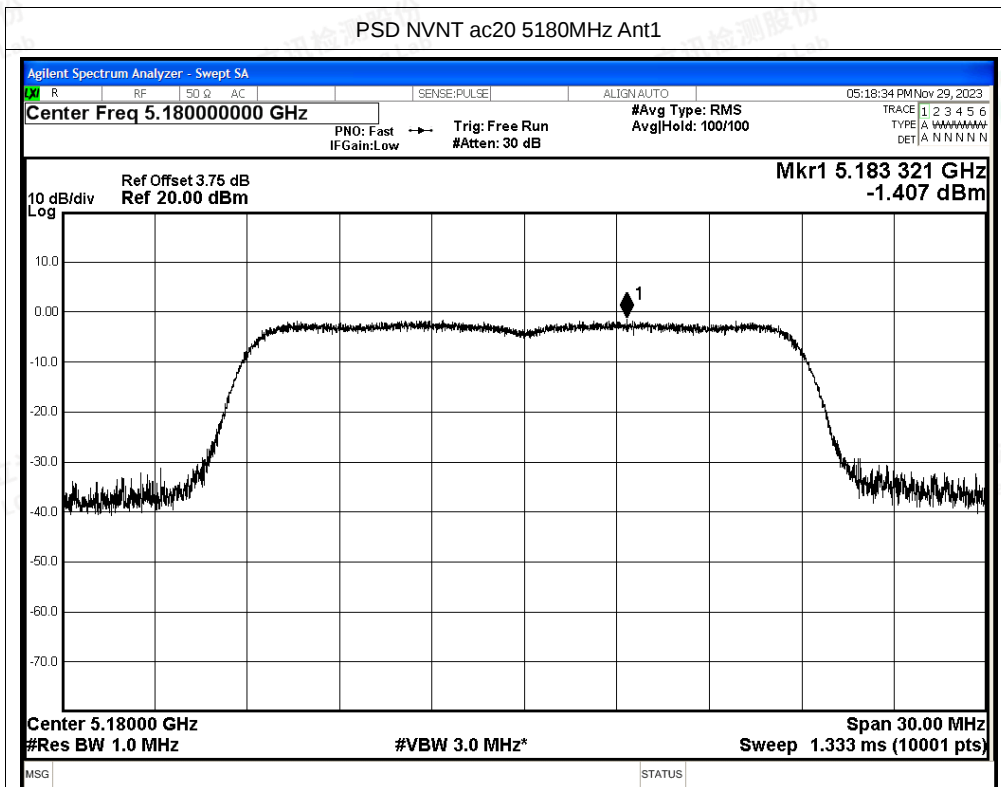

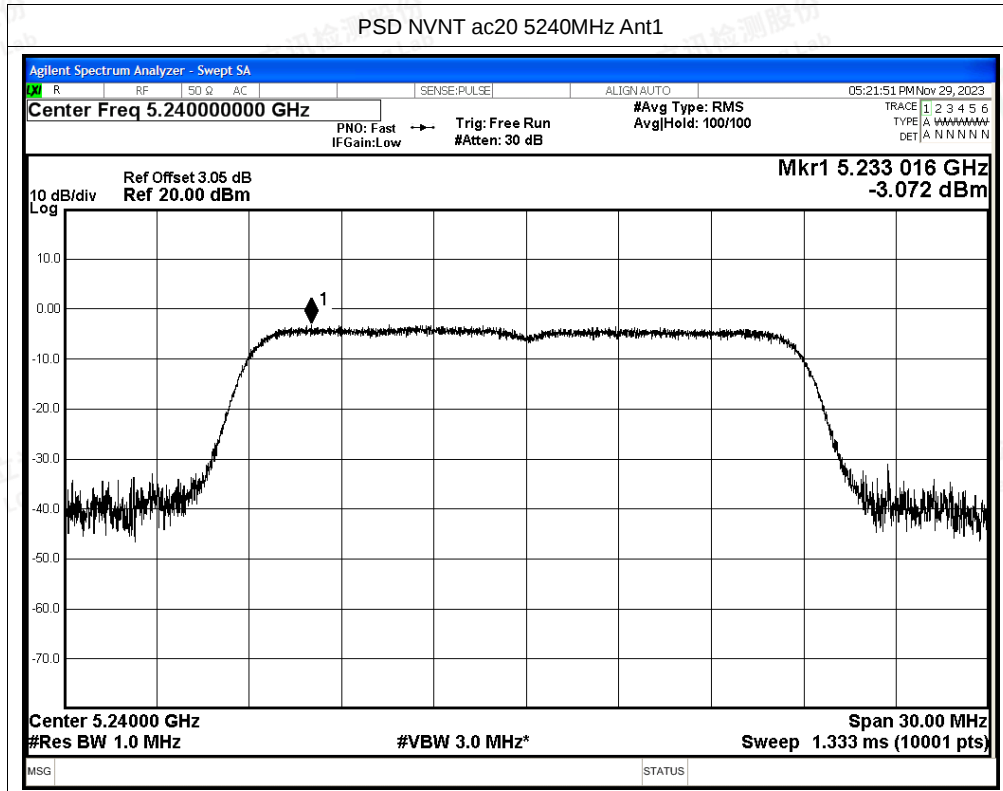



B.4 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-49.82	1.84	44.98	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-57.29	1.84	39.27	Average	54	Pass
NVNT	a	5180	Ant1	5148.2	-39.05	1.84	49.29	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-47.89	1.84	39.77	Average	54	Pass
NVNT	a	5180	Ant1	5150	-36.87	1.84	48.69	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-47.01	1.84	39.74	Average	54	Pass
NVNT	a	5240	Ant1	5350	-50.56	1.84	46.86	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-57.1	1.84	41.16	Average	54	Pass
NVNT	a	5240	Ant1	5352	-47.44	1.84	58.12	Peak	68.2	Pass
NVNT	a	5240	Ant1	5351.76	-56.94	1.84	41.29	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.99	1.84	46.87	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-57.28	1.84	39.93	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-50.54	1.84	48.02	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-57.07	1.84	40.56	Average	54	Pass
NVNT	n20	5180	Ant1	5148.9	-36.36	1.84	50.11	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-46.8	1.84	41.81	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-37.26	1.84	47.45	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-47.06	1.84	40.77	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-50.67	1.84	48.01	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-56.88	1.84	42.49	Average	54	Pass
NVNT	n20	5240	Ant1	5423.04	-47.54	1.84	54.89	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5393.04	-56.81	1.84	44.34	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.05	1.84	47.91	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.13	1.84	41.26	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-50.5	1.84	45.9	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-57.19	1.84	41.19	Average	54	Pass
NVNT	ac20	5180	Ant1	5147.5	-37.43	1.84	49.93	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5149.6	-48.31	1.84	41.61	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-36.73	1.84	47.72	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-47.24	1.84	41.02	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-49.5	1.84	50.83	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.07	1.84	42.67	Average	54	Pass
NVNT	ac20	5240	Ant1	5354.64	-47.23	1.84	59	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5414.88	-56.85	1.84	42.67	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-50.73	1.84	47.47	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-57.06	1.84	40.88	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

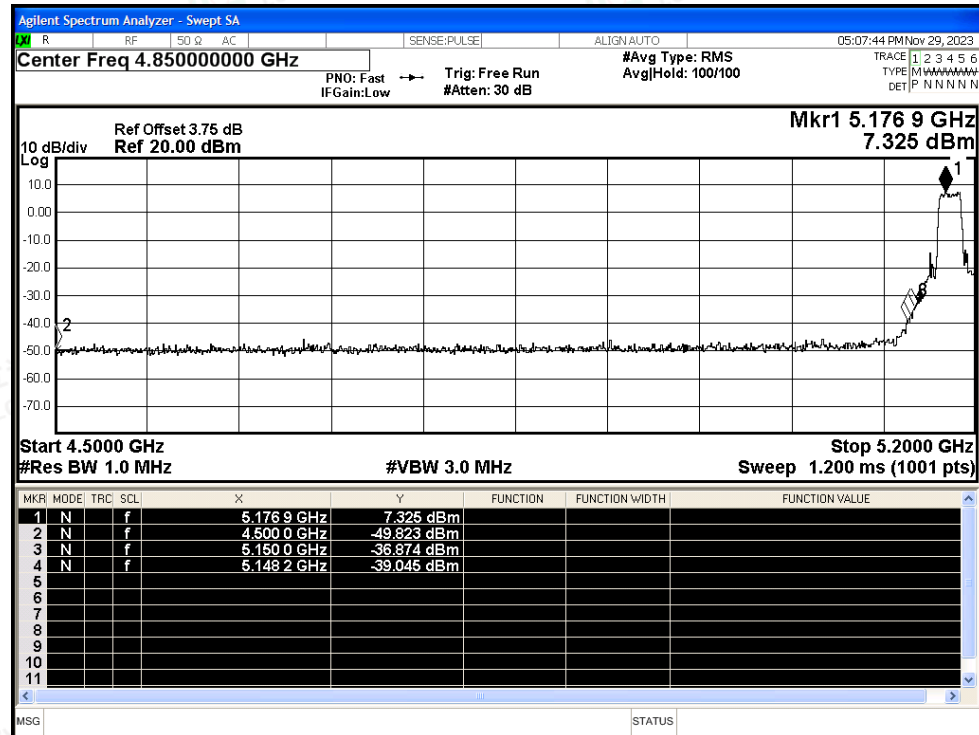


Restrict Band NVNT a 5180MHz Ant1 Average

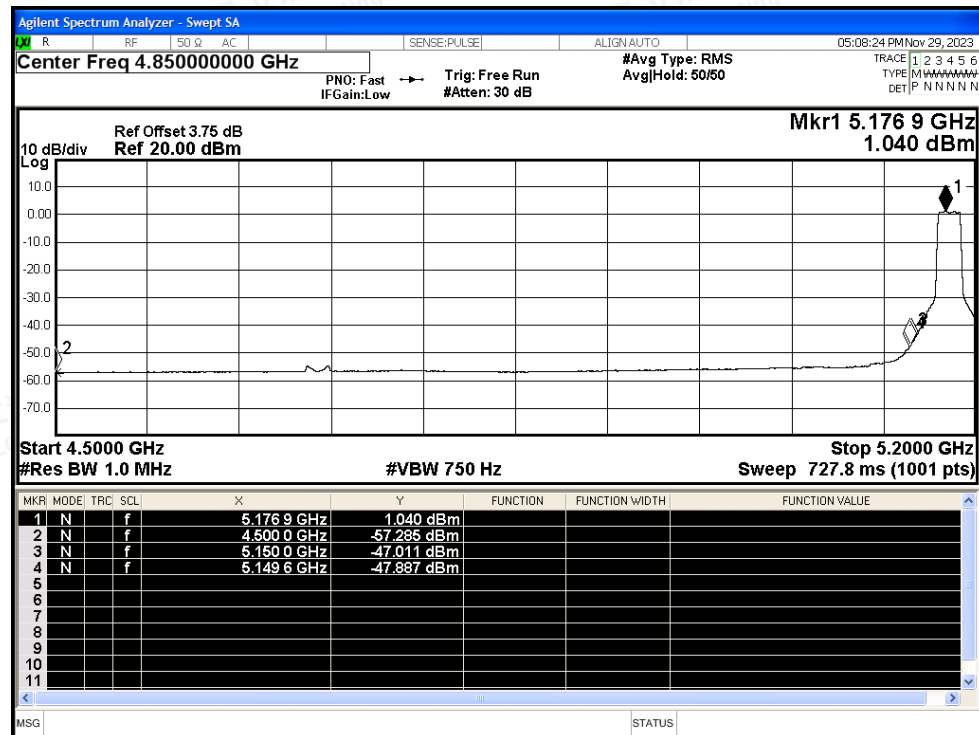




Restrict Band NVNT a 5240MHz Ant1 Peak

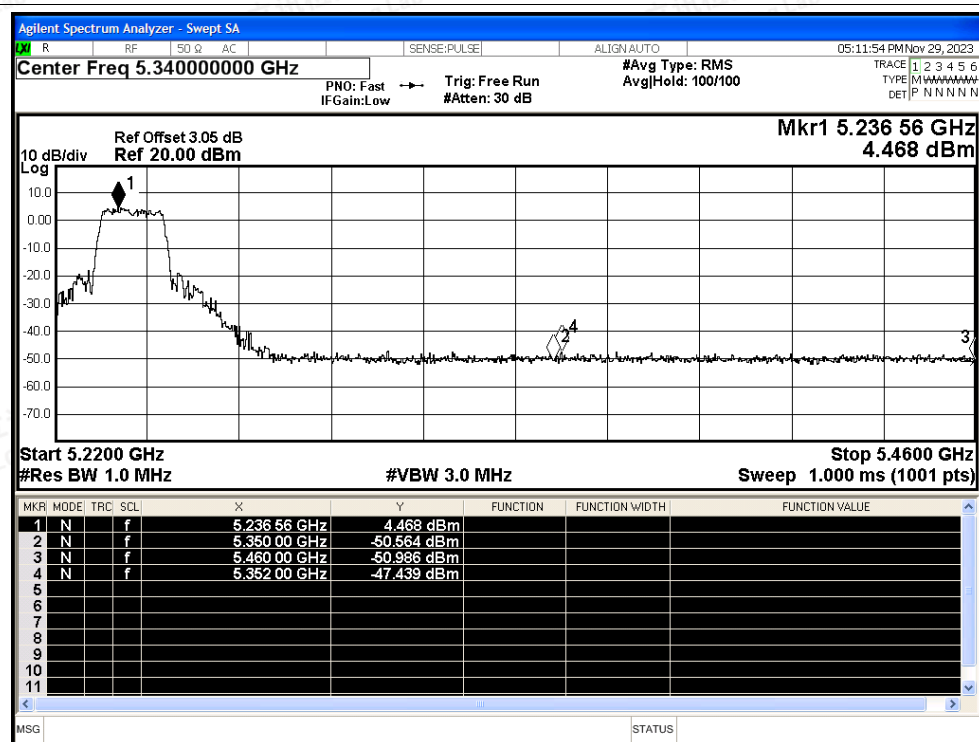


Restrict Band NVNT a 5240MHz Ant1 Average

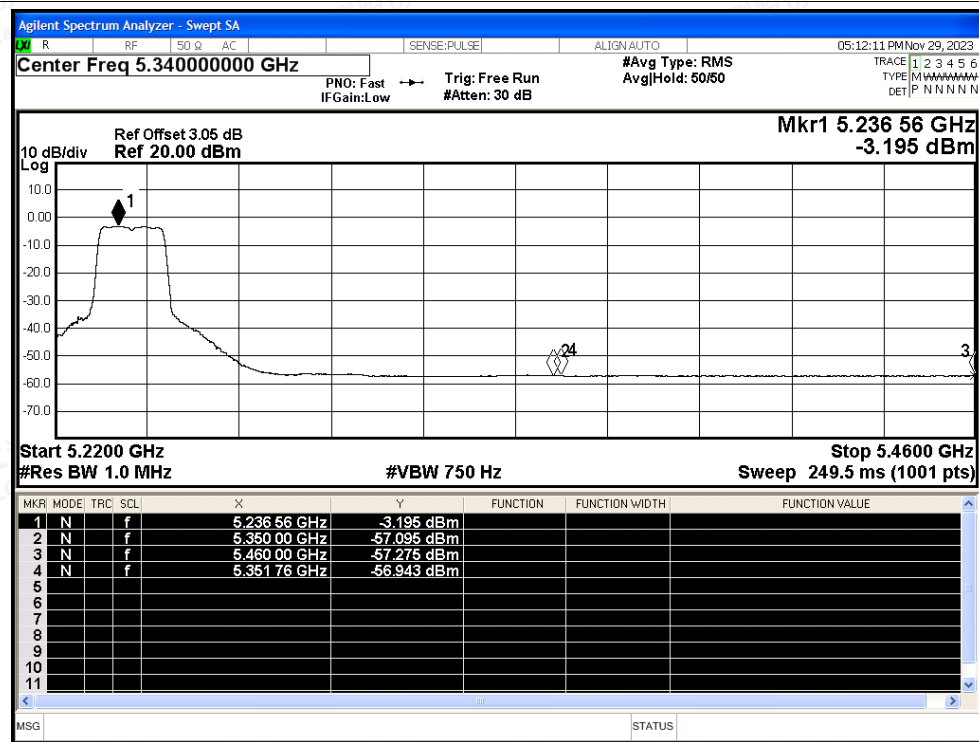




Restrict Band NVNT n20 5180MHz Ant1 Peak

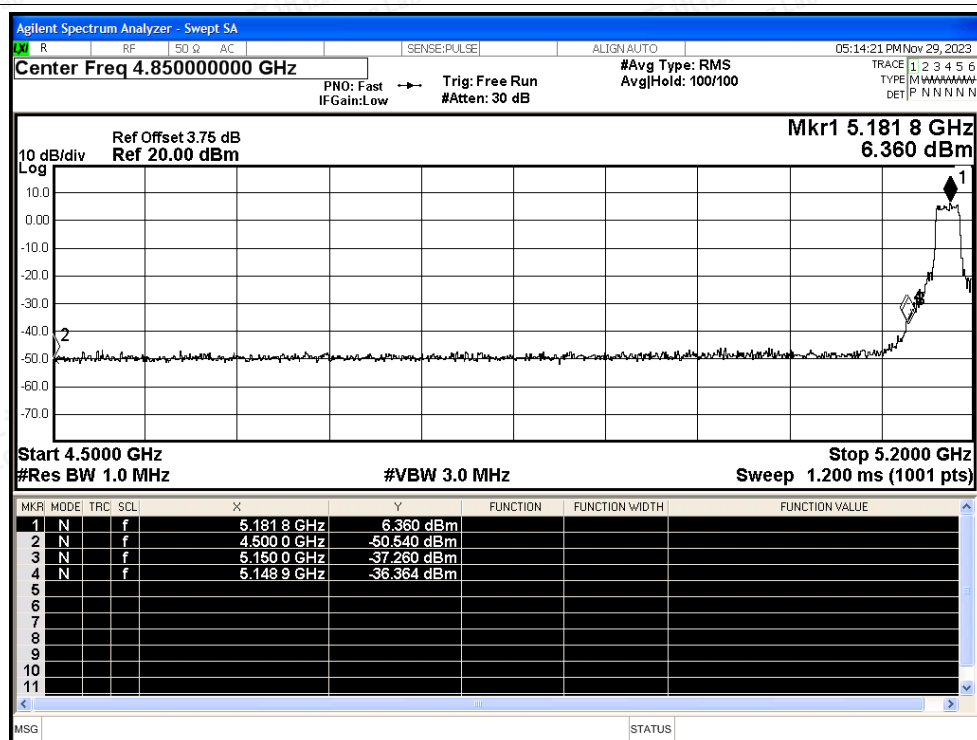


Restrict Band NVNT n20 5180MHz Ant1 Average

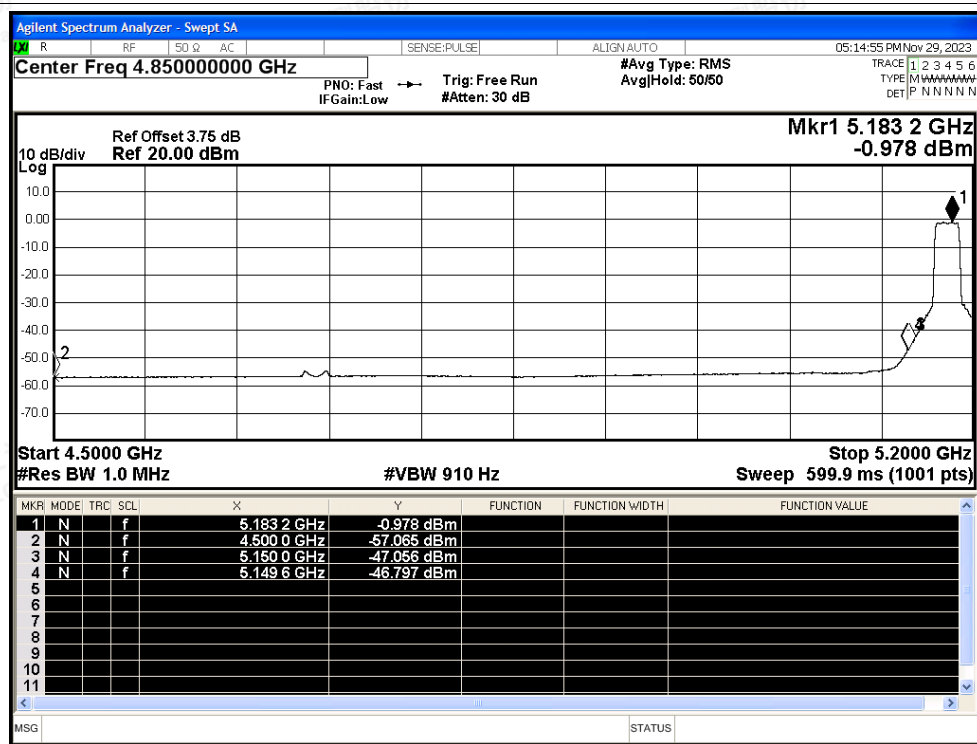




Restrict Band NVNT n20 5240MHz Ant1 Peak

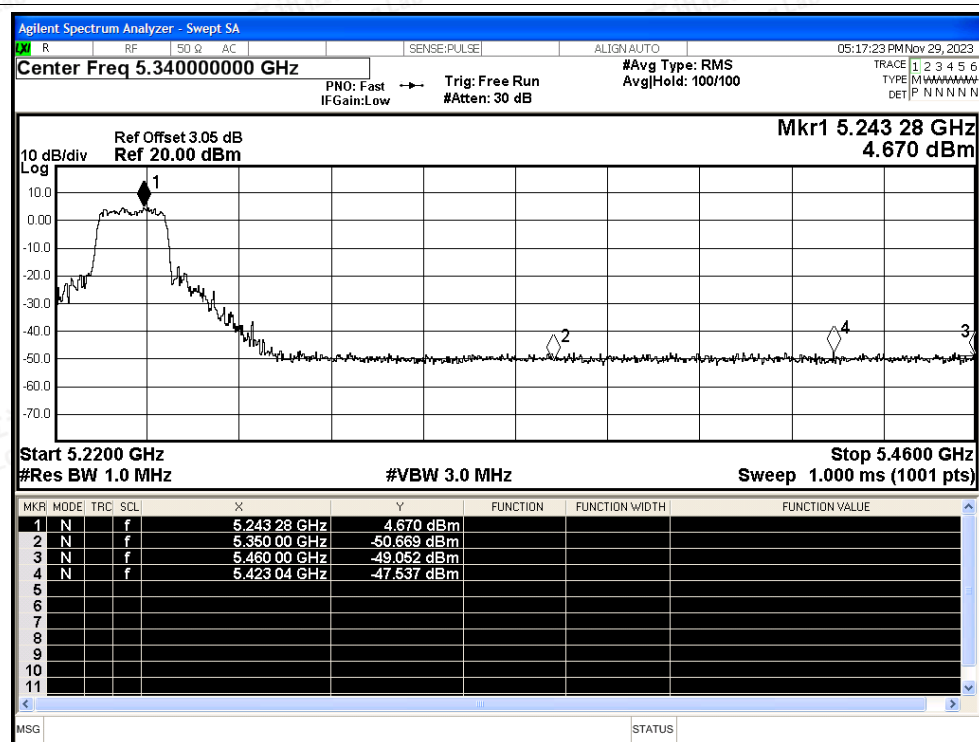


Restrict Band NVNT n20 5240MHz Ant1 Average

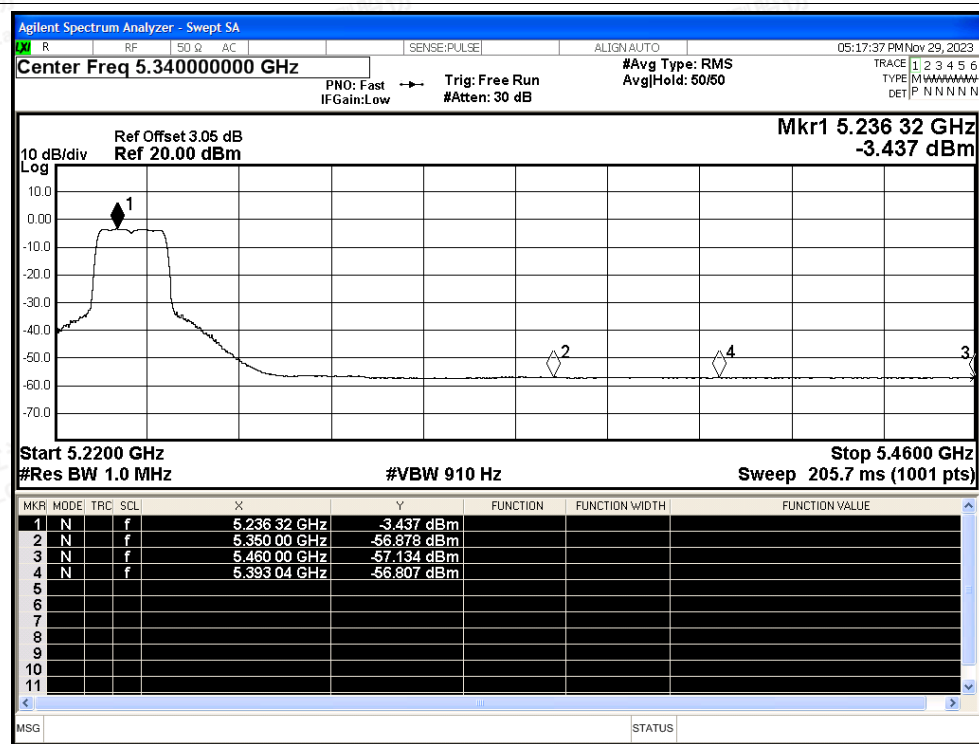




Restrict Band NVNT ac20 5180MHz Ant1 Peak

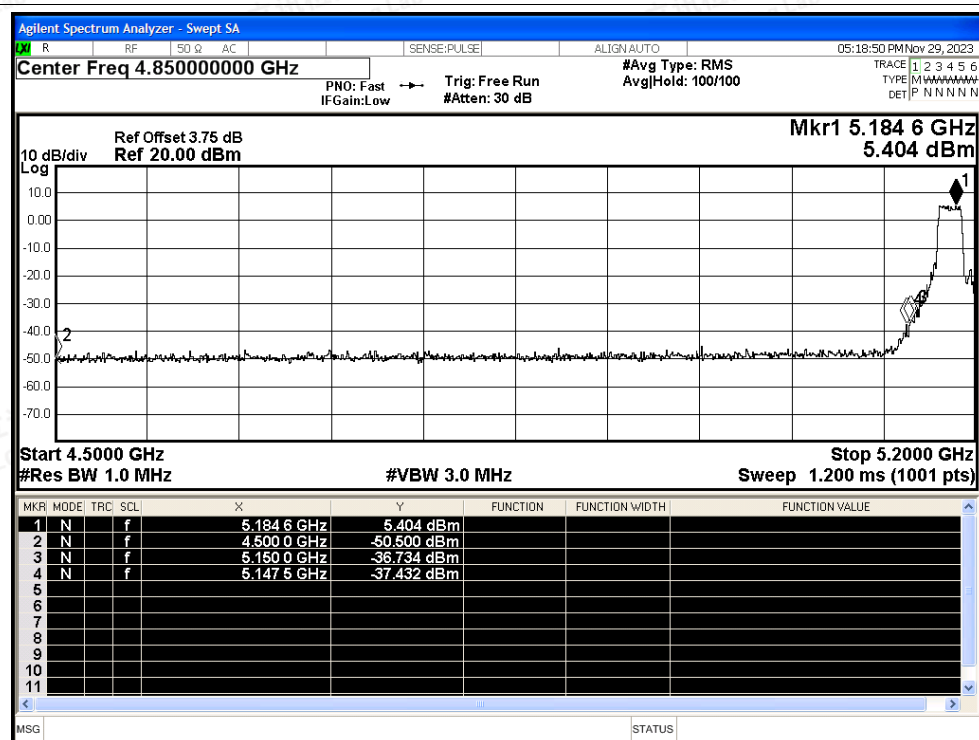


Restrict Band NVNT ac20 5180MHz Ant1 Average

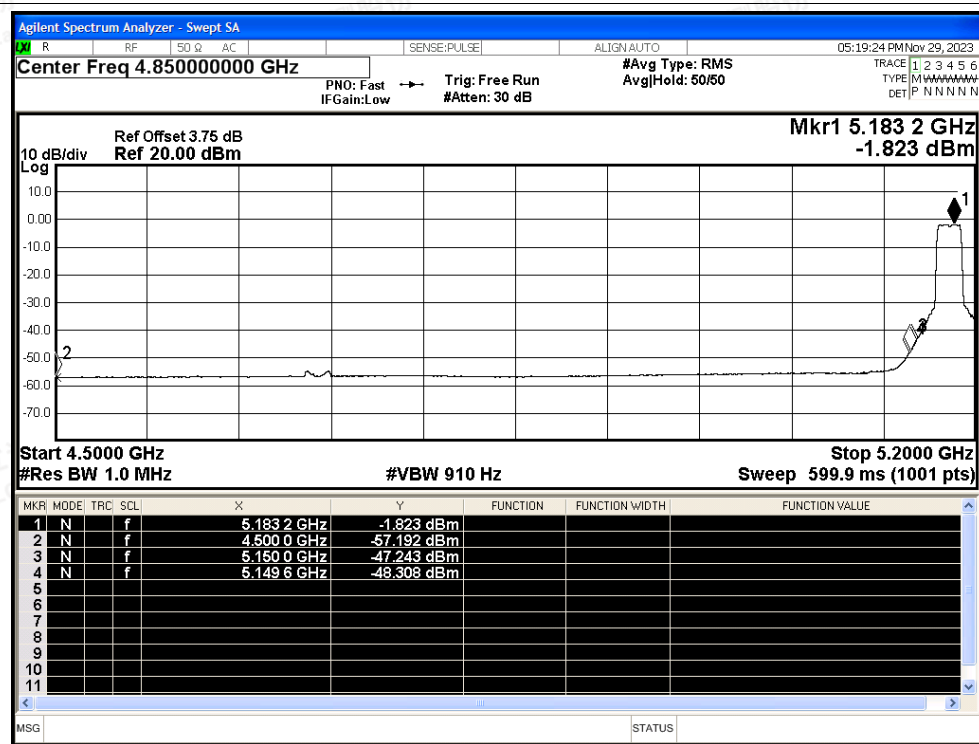




Restrict Band NVNT ac20 5240MHz Ant1 Peak

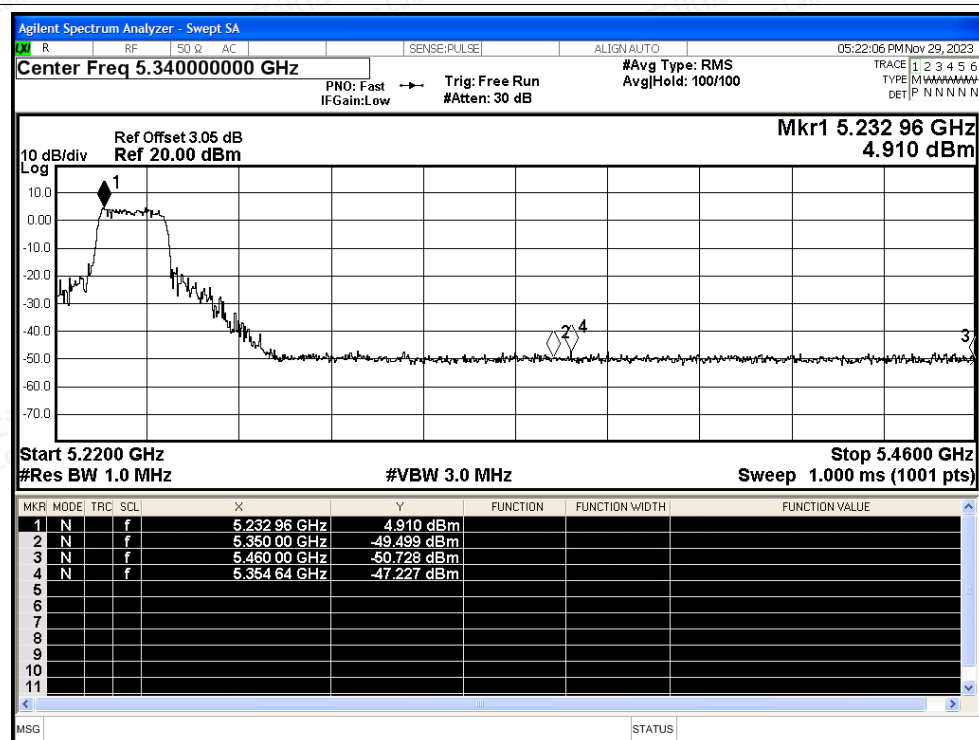

Restrict Band NVNT ac20 5240MHz Ant1 Average

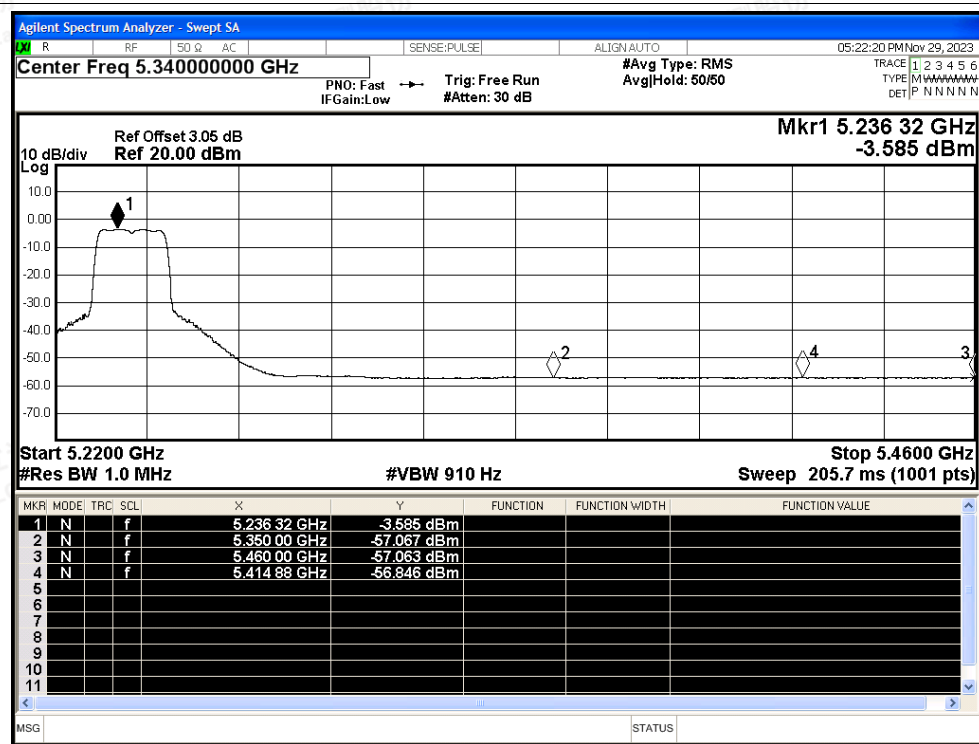



B.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5180	Ant1	5180	0	0	25	Pass
NVNT	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
NVNT	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

Freq. Stability NVNT ac20 5180MHz Ant1

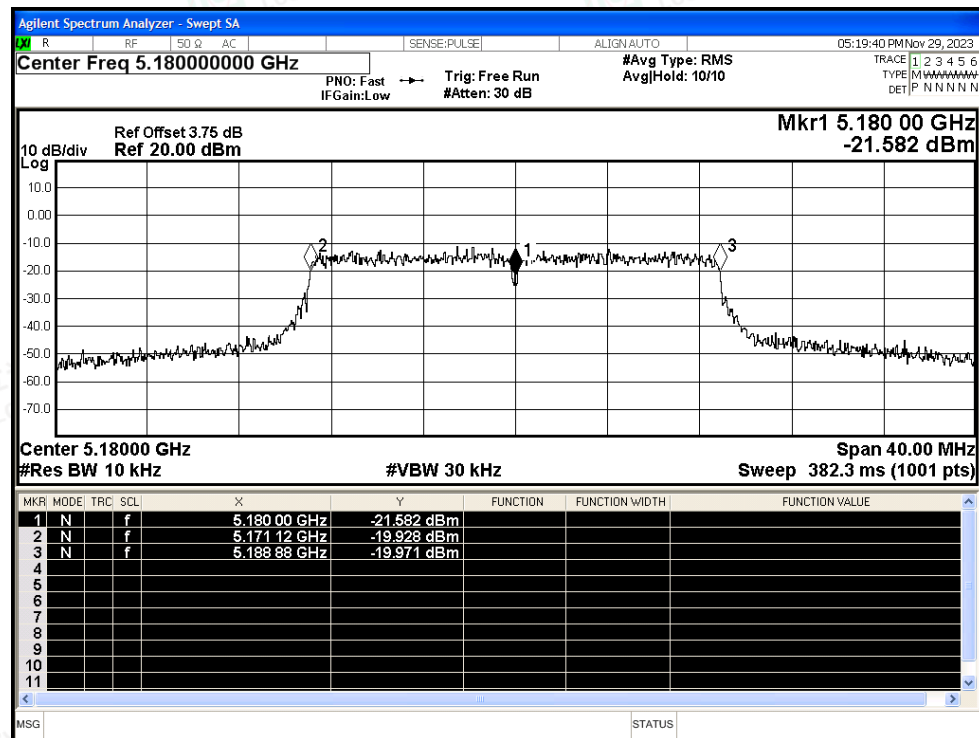

Freq. Stability NVNT ac20 5200MHz Ant1

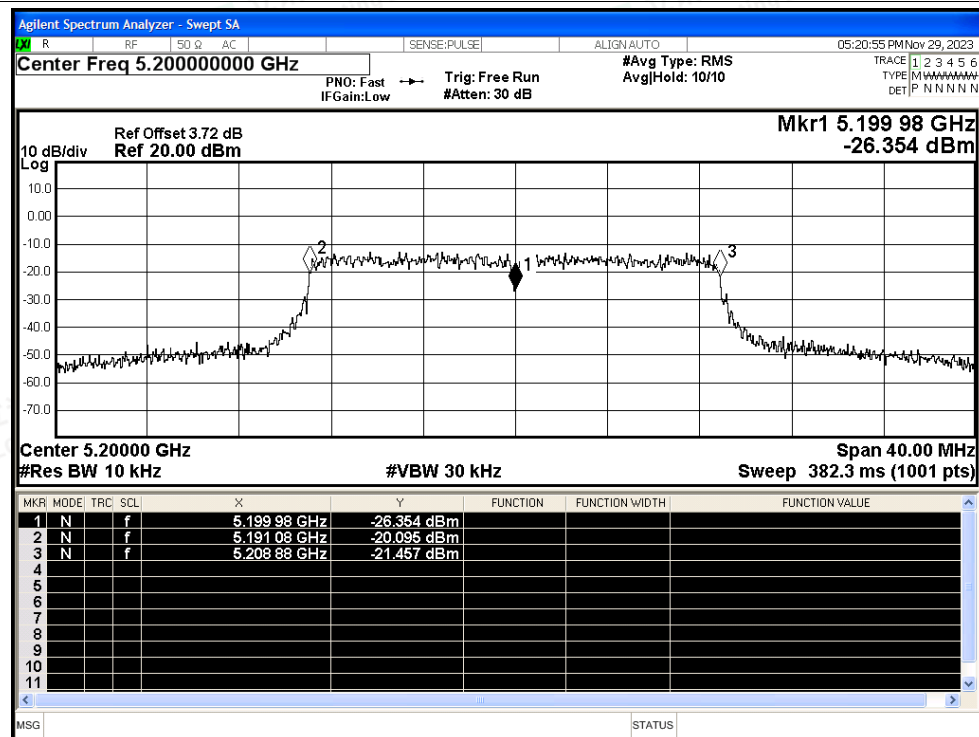

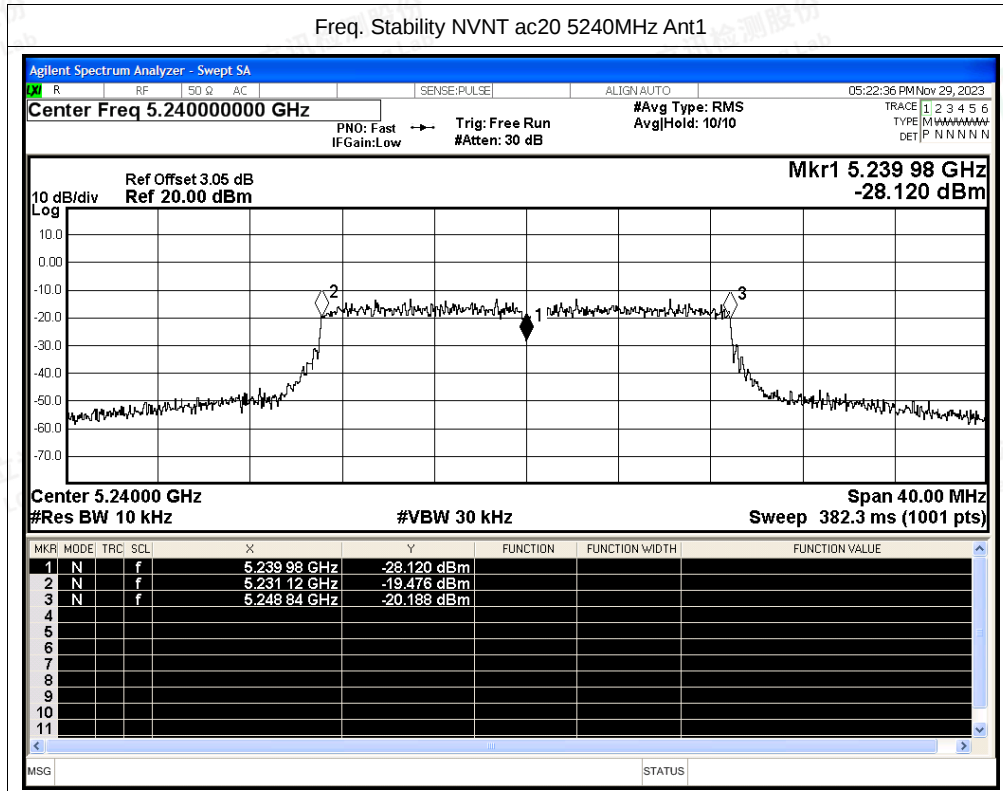



B.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	95.68	0.19	0.72
NVNT	a	5200	Ant1	95.68	0.19	0.72
NVNT	a	5240	Ant1	95.75	0.19	0.72
NVNT	n20	5180	Ant1	94.94	0.23	0.85
NVNT	n20	5200	Ant1	94.94	0.23	0.85
NVNT	n20	5240	Ant1	94.94	0.23	0.85
NVNT	ac20	5180	Ant1	95.05	0.22	0.84
NVNT	ac20	5200	Ant1	95.04	0.22	0.84
NVNT	ac20	5240	Ant1	95.04	0.22	0.84




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

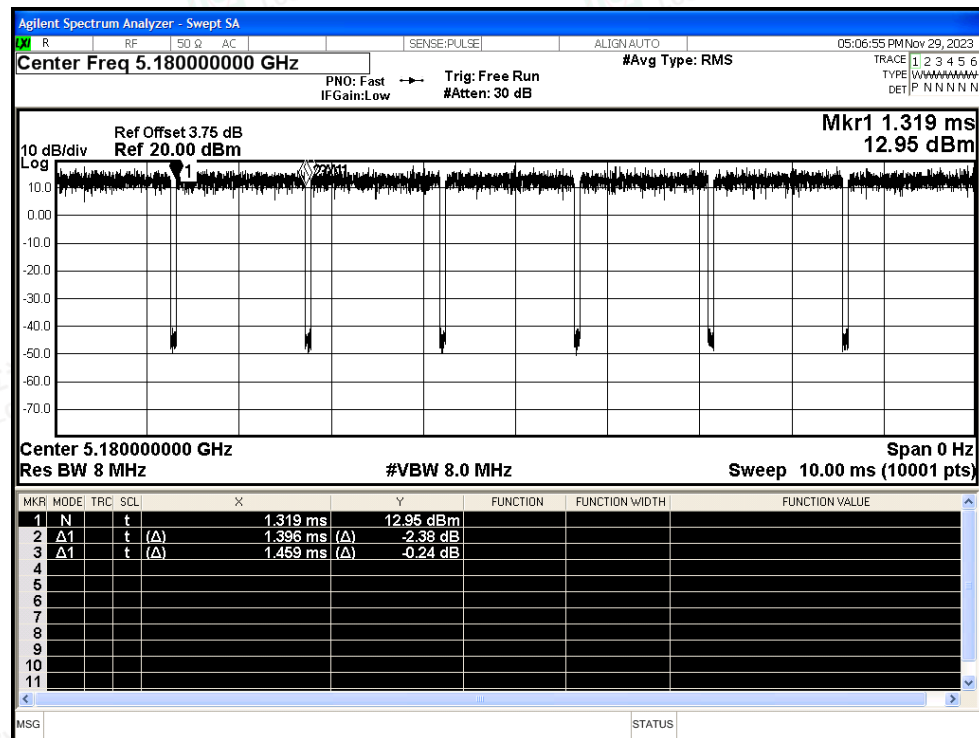


Duty Cycle NVNT a 5200MHz Ant1

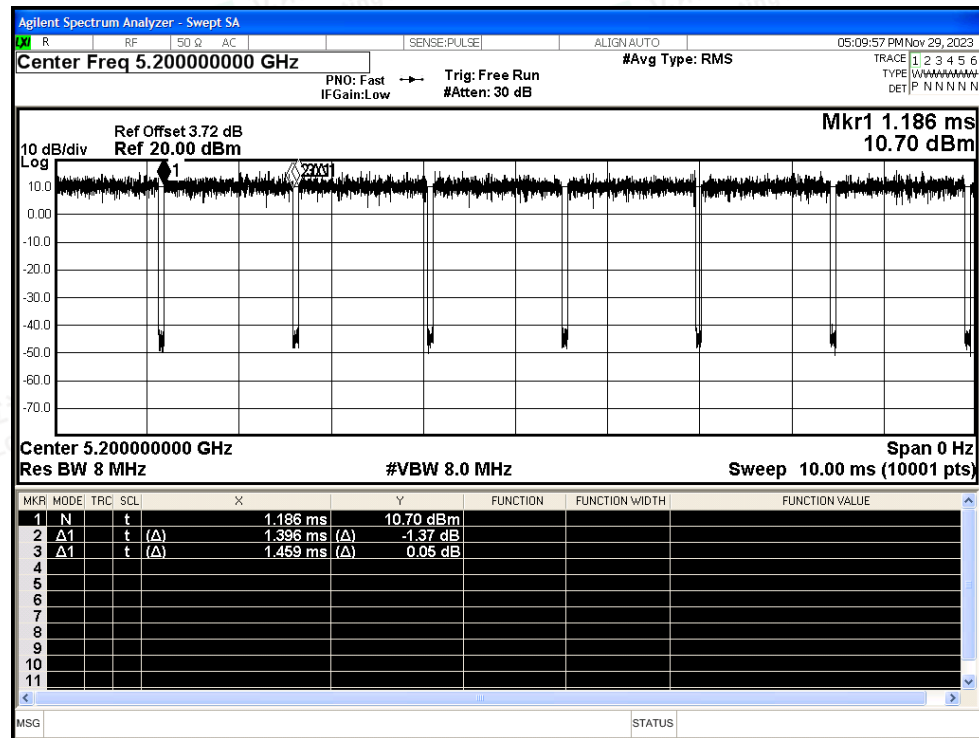




Duty Cycle NVNT a 5240MHz Ant1

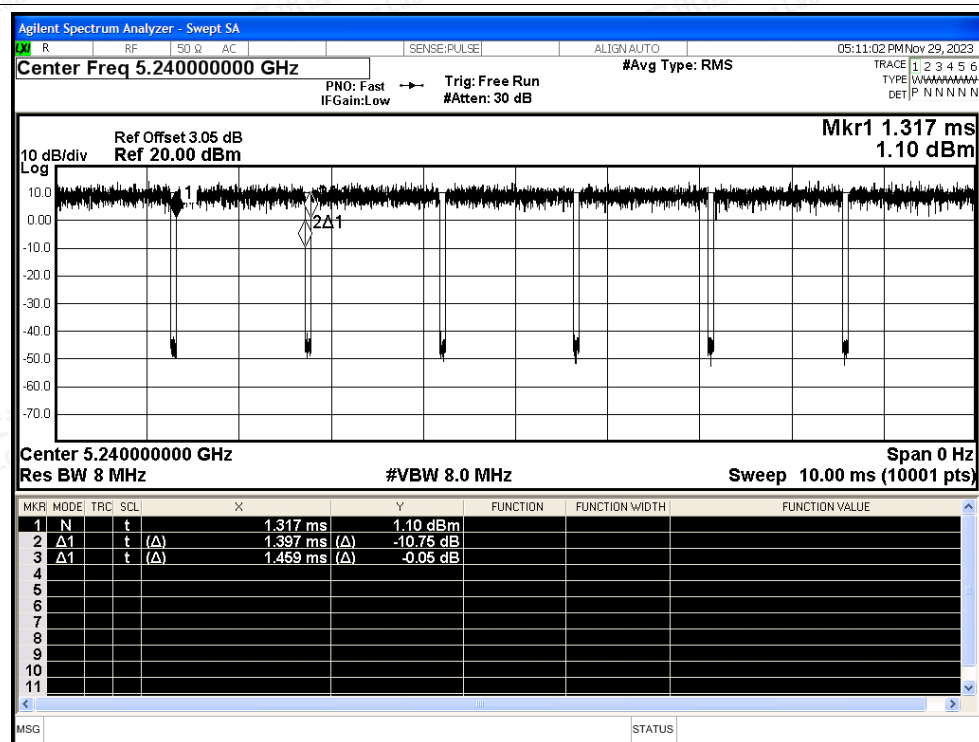


Duty Cycle NVNT n20 5180MHz Ant1

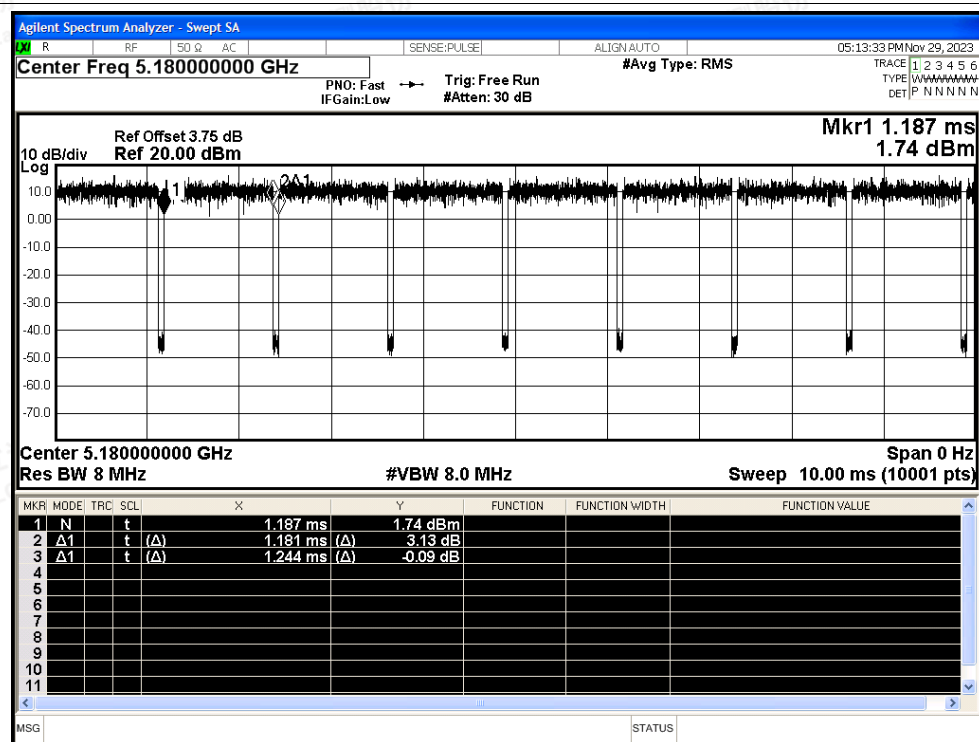




Duty Cycle NVNT n20 5200MHz Ant1

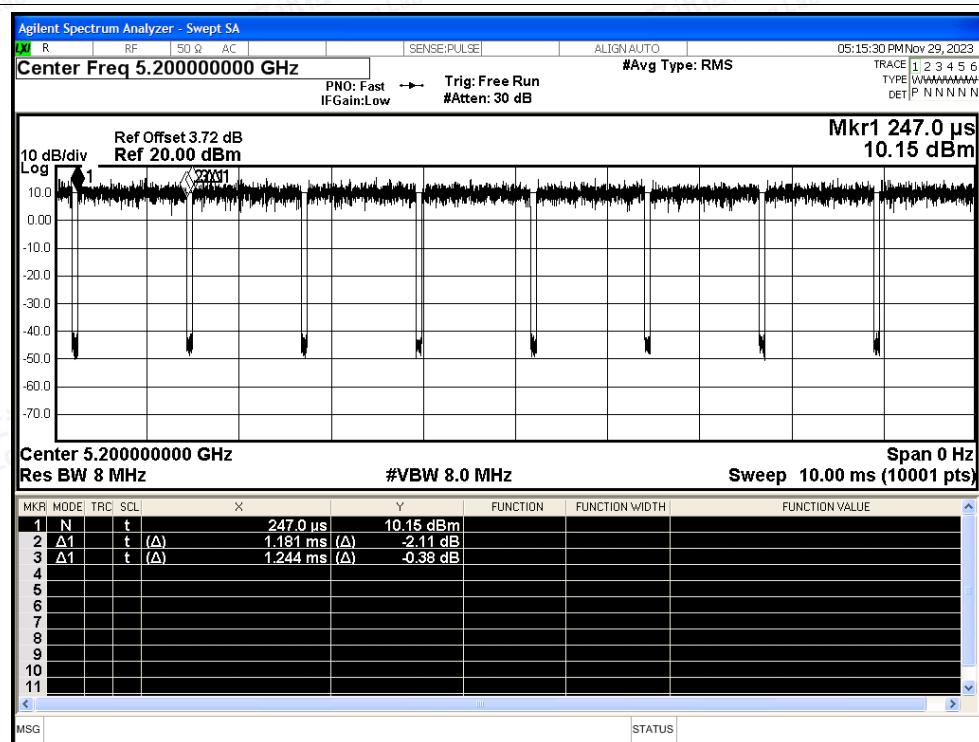


Duty Cycle NVNT n20 5240MHz Ant1

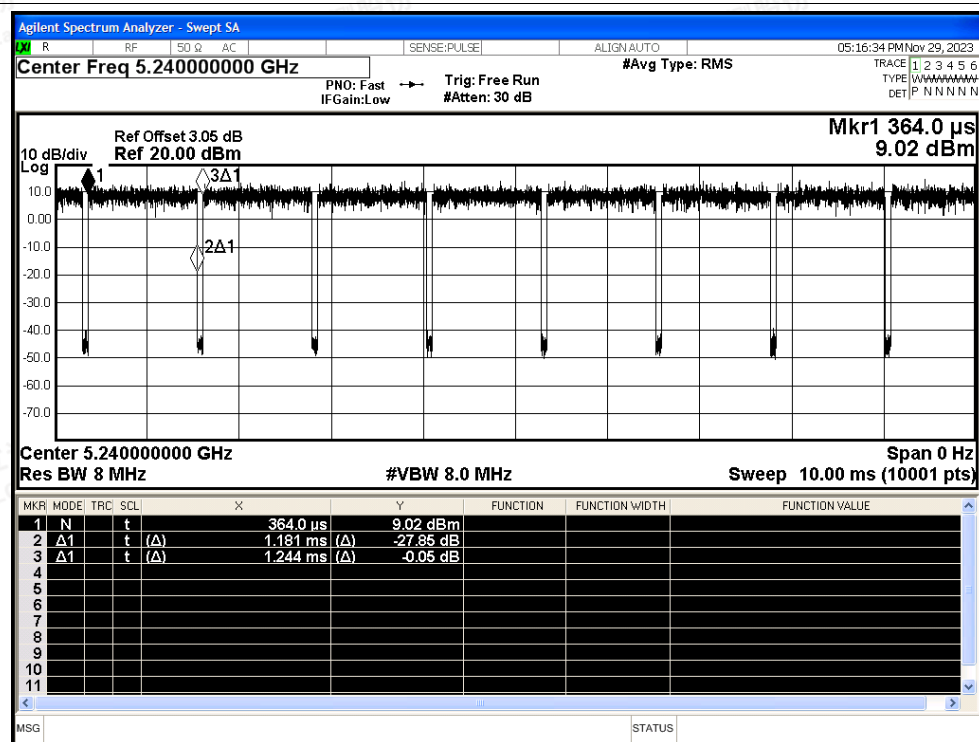



Duty Cycle NVNT ac20 5180MHz Ant1

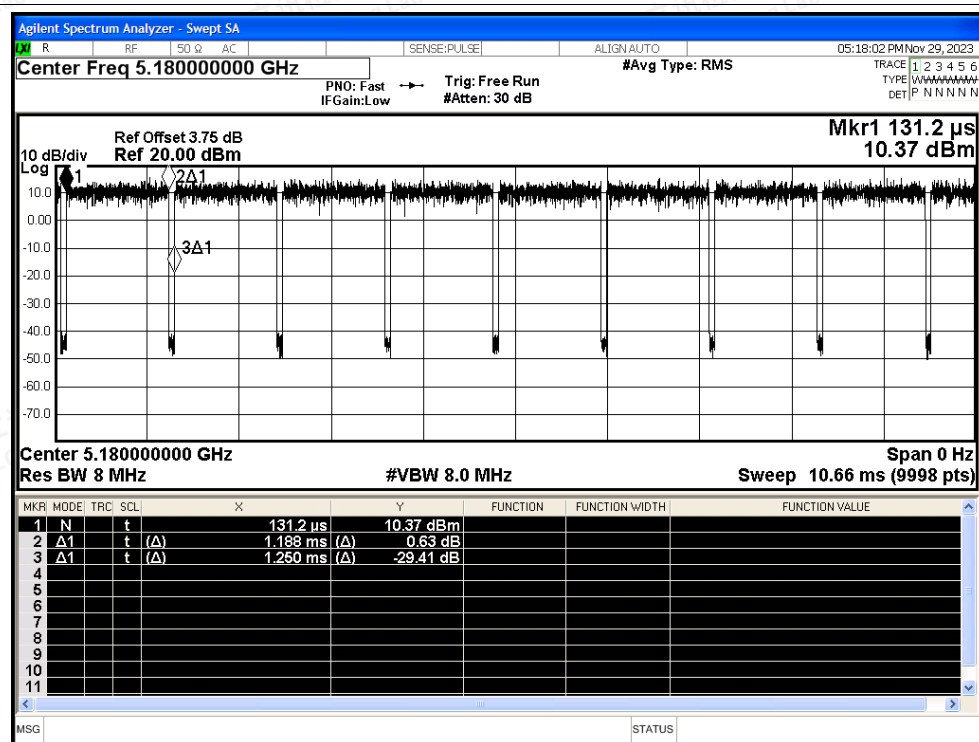

Duty Cycle NVNT ac20 5200MHz Ant1

