



HRI-3622

Sensor Hub Bus Transformer

———Driving third-party Sensor





Document version

| Version | Time | Description | Remark |
|----------|-----------|---------------------|--------|
| Rev. 1.0 | 2023-4-26 | Preliminary version | Aaron |

Copyright Notice

All contents in the files are protected by copyright law, and all copyrights are reserved by Chengdu Heltec Automation Technology Co., Ltd. (hereinafter referred to as Heltec). Without written permission, all commercial use of the files from Heltec are forbidden, such as copy, distribute, reproduce the files, etc., but non-commercial purpose, downloaded or printed by individual are welcome.

Disclaimer

Chengdu Heltec Automation Technology Co., Ltd. reserves the right to change, modify or improve the document and product described herein. Its contents are subject to change without notice. These instructions are intended for you use.



Content

| | |
|--|----|
| <i>HRI-3622</i> | 2 |
| <i>Sensor Hub Bus Transformer</i> | 2 |
| <i>Document version</i> | 3 |
| <i>Copyright Notice</i> | 3 |
| <i>Disclaimer</i> | 3 |
| 1. Description | 5 |
| 1.1 <i>Overview</i> | 5 |
| 1.2 <i>Product features</i> | 6 |
| 2. Specifications | 7 |
| 2.1 <i>General specification</i> | 7 |
| 2.2 <i>Operating conditions</i> | 8 |
| 2.2.1 <i>Power supply range</i> | 8 |
| 2.2.2 <i>Power consumption @3.7V</i> | 8 |
| 2.3 <i>RF characteristics</i> | 8 |
| 2.4 <i>LoRaWAN Frequency</i> | 9 |
| 2.5 <i>RGB indicator light description</i> | 9 |
| 3. Hardware characteristics | 10 |
| 3.1 <i>Physical Dimensions</i> | 10 |
| 3.2 <i>Interface definition</i> | 10 |
| 4. Resource | 11 |
| 4.1 <i>Relevant resource</i> | 11 |
| 4.2 <i>Heltec Contact Information</i> | 11 |



1. Description

1.1 Overview

HRU-3622 is a sub-model of the Sensor Hub for outdoor series that specifically drives third-party sensors. Its interface is a flange seat, with RS-485 interfaces and 4 GPIO interfaces, can be used to connect RS-485 sensors directly.

Sensor Hub for Industry has excellent low power consumption and long transmission distance characteristics, comes with a built-in 1100mAh rechargeable battery. The stainless-steel shell and high-strength plastic provide an IP66 protection level, allowing it to perform stably and excellently in complex industrial environments.

HRI-3622 are available in 3 product variants:


Table 1.1 Product variants

| No. | Model | Description |
|-----|--------------|--|
| 1 | HRI-3622-470 | 470~510MHz working LoRa frequency, used for China mainland (CN470) LPW band |
| 2 | HRI-3622-868 | 863~870MHz working LoRa frequency, used for EU868, IN865 LPW bands. |
| 3 | HRI-3622-915 | 902~923MHz working frequency, used for AS923, US915, AU915, KR920 LPW bands. |



1.2 Product features

- Industrial grade protection structure, IP66 protection grade.
- Ultra-low power consumption design, built-in 1000mAh 18350 rechargeable battery.
- Compatible with wall fixing or cylinder fixing.
- Wireless data transmission communication radius up to 3km (no occlusion).
- Working temperature¹: --20~60°C, Working humidity: ≤90% (non-condensing).
- Power supply mode: built-in battery or external 5V DC power supply.
- Can register by scanning the QR code through the APP, or easily register through the device WiFi.

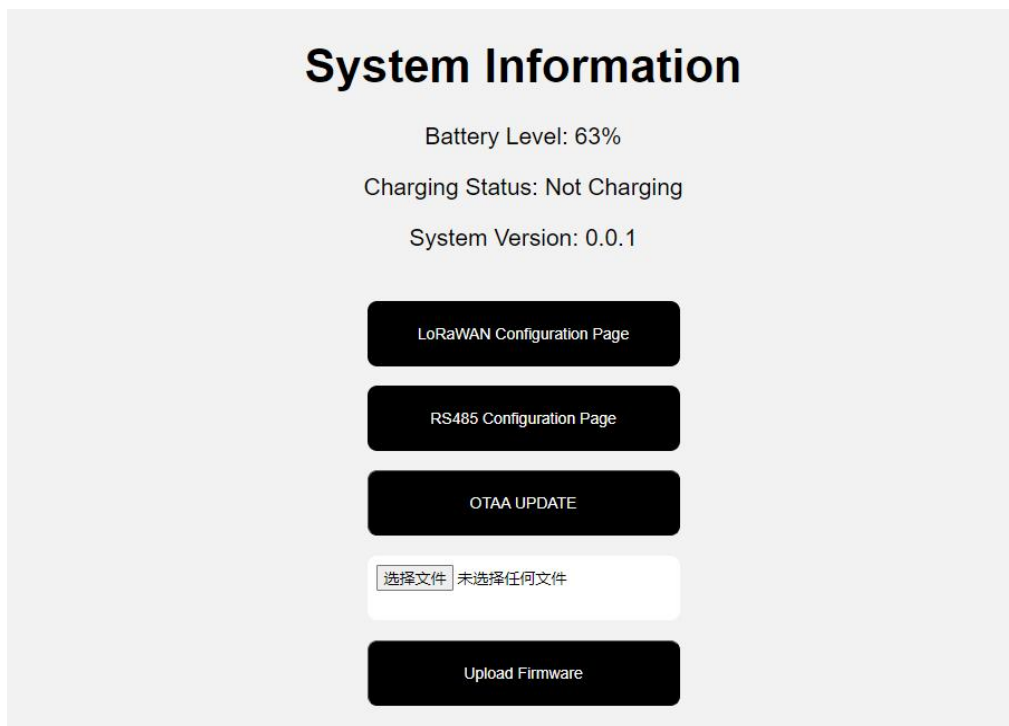

¹ This refers to the operating temperature and humidity of the circuit and battery, not the sensor.



2. Specifications

2.1 General specification

Table 2.1 General specification

| Parameters | Description |
|---------------------------------|--|
| Recommended operating condition | -20~ 60°C, 10 ~ 90(no condensing) RH% |
| Interface | Flange Seat(see 3.2) |
| Input format | RS-485; 4~20mA ² |
| Microcontroller | Heltec Wireless Shell |
| Sensor module | Custom |
| LoRaWAN Channel Plan | EU868/US915/AU915/ AS923/KR920/RU864/CN470 |
| Max. Receiving Sensitivity | -136dBm@SF12 BW=125KHz |
| Max. TX Power | +20 ± 2 dBm |
| Communication Distance | 2 to 6km (depending on gateway antenna and environments) |
| IP Rating | IP66 |
| Operating Temperature | -20 ~ 60 °C |
| Operating Humidity | 10% ~ 100%, no-condensing |
| Battery Capacity | 1100mAh |
| Battery Type | 18350 |

² Through the [Junction Box](#)

<https://heltec.org>

2.2 Operating conditions

2.2.1 Power supply range

Table 2.2: Power supply range

| Parameter | Min. | Typical | Max. | Unit |
|-------------------|------|---------|------|------|
| Operating voltage | 2.7 | 3.7 | 5 | V |
| Charging voltage | | 5 | | V |

2.2.2 Power consumption @3.7V

Table 2.2.1: Working current

| Mode | Condition | Min. ^① | Max. ^② |
|------------------|--------------------------------|-------------------|-------------------|
| Active-Mode (TX) | TX power is 22dBm @3.7 supply. | 200mA | 235mA |
| Active-Mode (RX) | TX disabled; RX enabled. | 35mA | 42mA |
| Sleep | | 25μA | 40μA |

2.3 RF characteristics

The following table gives typically sensitivity level of the Sensor Hub.

Table 2.4: LoRa RF characteristics

| Signal Bandwidth/[KHz] | Spreading Factor | Sensitivity/[dBm] |
|------------------------|------------------|-------------------|
| 125 | SF12 | -134 |
| 125 | SF11 | -132 |
| 125 | SF10 | -130 |
| 125 | SF9 | -127 |
| 125 | SF8 | -124 |
| 125 | SF7 | -122 |



2.4 LoRaWAN Frequency

Note: **No Frequency limitation.** EU868 can be switched to RU864, US915 can be switched to AU915/AS923/KR920.

Table2.4: LoRaWAN frequency

| NO | Frequency band | Common band |
|----|----------------|-------------|
| 1 | EU863-870 | EU868 |
| 2 | US902-928 | US915 |
| 3 | AU915-928 | AU915 |
| 4 | AS923_1 | As923 |
| 5 | AS923_2 | As923 |
| 6 | KR920-923 | KR920 |
| 7 | RU864-867 | RU864 |
| 8 | CN470-510 | CN470 |

2.5 RGB indicator light description


Table2.5: RGB description

| RGB Color | Condition | Description |
|-----------|-----------|---|
| White | Steady on | Long press the button, the white light means to enter the working mode, release and then go out |
| Yellow | Steady on | Long press the button, the yellow light means to enter the configuration mode |
| Blue | Blink | The button flashes, wakes up the device, and sends a message once |
| Green | Blink | Flash once after successful transmission |
| Purple | Blink | Flash once after successful reception |
| Red | Blink | Charge in working mode, press the button once flashing red light; The charging red light is always on in configuration mode |




3. Hardware characteristics

3.1 Physical Dimensions

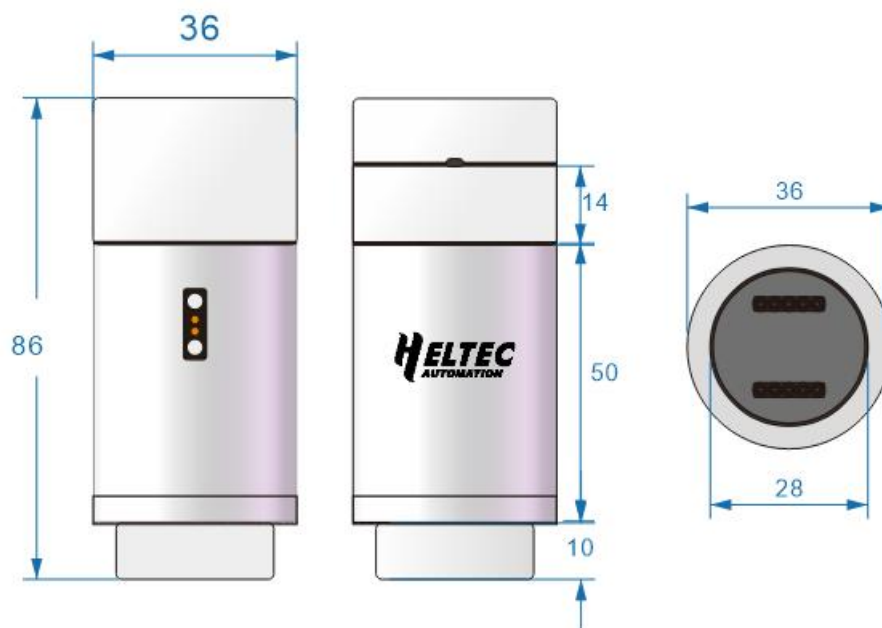

3.2 Interface definition

Flange seat B

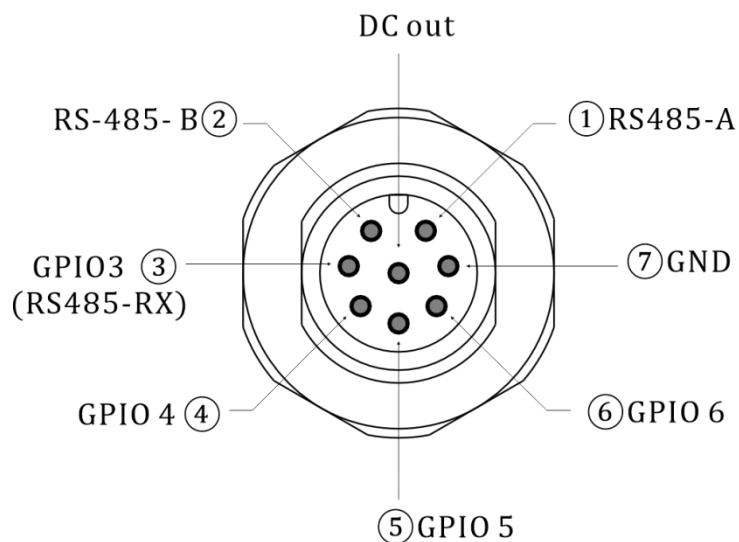

4.Resource

4.1 Relevant resource

- [User's manual](#)
- [Related Downloads](#)
- [Heltec LoRaWAN test server based on TTS V3](#)

4.2 Heltec Contact Information

Heltec Automation Technology Co., Ltd Chengdu,

Sichuan, China

Email: support@heltec.cn

Phone: +86-028-62374838

<https://heltec.org>

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.