

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 23-07-12_09.42.43 .

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060039-01#02

REmission Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

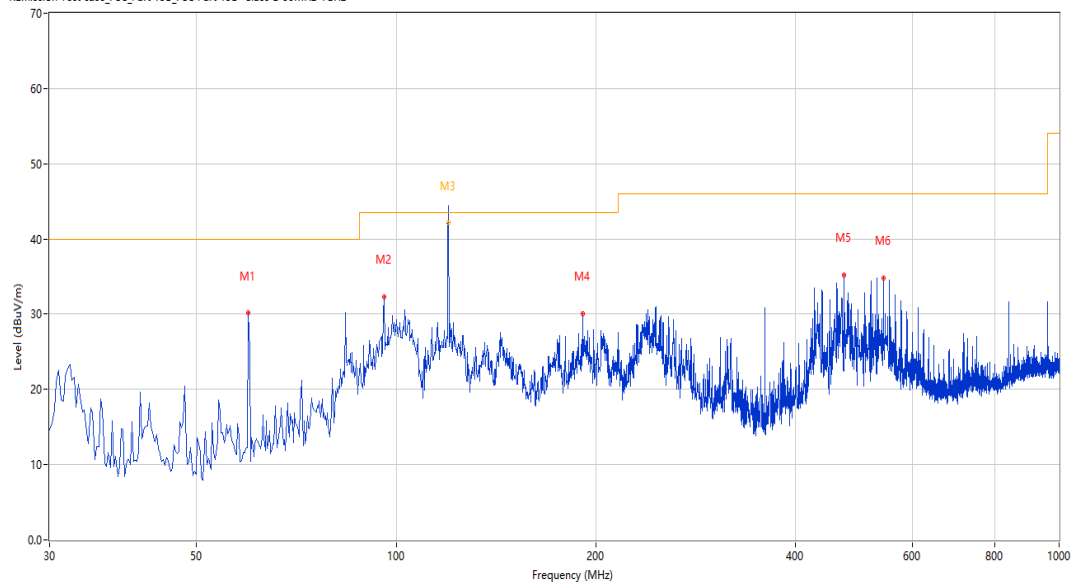

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.820	30.13	-26.24	40.0	9.87	Peak	26.50	200	Horizontal	Pass
2	95.944	32.33	-27.17	43.5	11.17	Peak	207.70	200	Horizontal	Pass
3	119.945	44.37	-28.31	43.5	-0.87	Peak	183.80	200	Horizontal	N/A
3*	119.945	42.22	-28.31	43.5	1.28	QP	183.80	200	Horizontal	Pass
4	190.980	30.08	-26.86	43.5	13.42	Peak	182.60	100	Horizontal	Pass
5	473.907	35.16	-19.49	46.0	10.84	Peak	308.10	200	Horizontal	Pass
6	543.002	34.82	-17.59	46.0	11.18	Peak	39.30	100	Horizontal	Pass

BLE-Vertical-TX

Test result

Project Number: Certification

Test Time: 23-07-12_09.47.32 .

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060039-01#02

R Emission Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

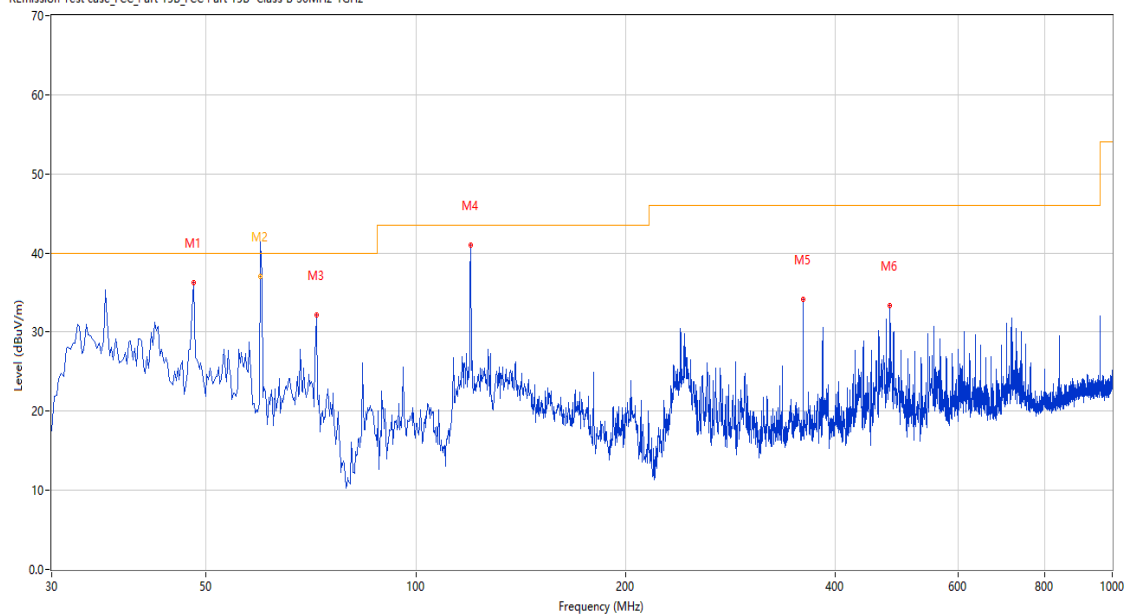

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.941	36.27	-25.11	40.0	3.73	Peak	85.10	100	Vertical	Pass
2	59.820	41.37	-26.24	40.0	-1.37	Peak	97.00	100	Vertical	N/A
2*	59.820	37.09	-26.24	40.0	2.91	QP	97.00	100	Vertical	Pass
3	71.942	32.22	-30.08	40.0	7.78	Peak	207.90	100	Vertical	Pass
4	119.945	40.98	-28.31	43.5	2.52	Peak	172.90	100	Vertical	Pass
5	359.960	34.09	-22.28	46.0	11.91	Peak	166.90	100	Vertical	Pass
6	479.725	33.41	-19.28	46.0	12.59	Peak	194.50	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_17.48.25

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060039-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

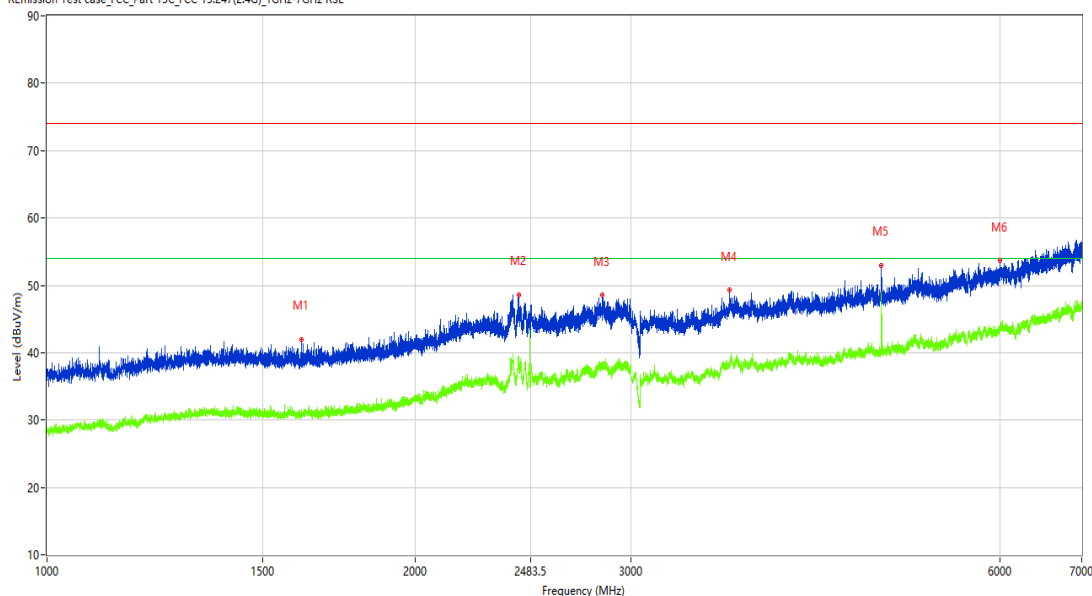

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1615.000	41.99	-13.01	74.0	32.01	Peak	0.00	100	Horizontal	Pass
1**	1615.000	30.81	-13.01	54.0	23.19	AV	0.00	100	Horizontal	Pass
2	2429.000	48.64	-5.25	74.0	25.36	Peak	3.30	100	Horizontal	Pass
2**	2429.000	38.38	-5.25	54.0	15.62	AV	3.30	100	Horizontal	Pass
3	2840.000	48.56	-4.36	74.0	25.44	Peak	350.30	100	Horizontal	Pass
3**	2840.000	37.86	-4.36	54.0	16.14	AV	350.30	100	Horizontal	Pass
4	3610.500	49.31	-2.61	74.0	24.69	Peak	107.40	100	Horizontal	Pass
4**	3610.500	38.46	-2.61	54.0	15.54	AV	107.40	100	Horizontal	Pass
5	4804.000	53.01	-1.39	74.0	20.99	Peak	265.50	100	Horizontal	Pass
5**	4804.000	48.85	-1.39	54.0	5.15	AV	265.50	100	Horizontal	Pass
6	6002.000	53.65	1.68	74.0	20.35	Peak	307.60	100	Horizontal	Pass
6**	6002.000	43.55	1.68	54.0	10.45	AV	307.60	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-06-30_17.25.06

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060039-01#02

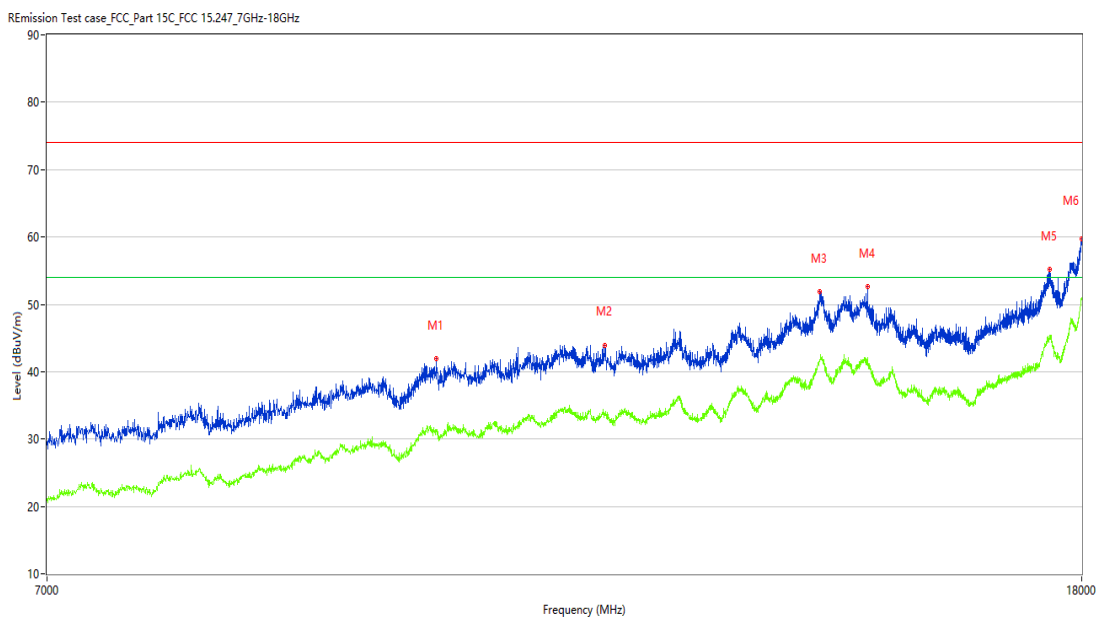

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9986.500	41.90	9.34	74.0	32.10	Peak	178.60	100	Horizontal	Pass
1**	9986.500	31.07	9.34	54.0	22.93	AV	178.60	100	Horizontal	Pass
2	11647.500	43.96	11.17	74.0	30.04	Peak	130.50	100	Horizontal	Pass
2**	11647.500	33.85	11.17	54.0	20.15	AV	130.50	100	Horizontal	Pass
3	14174.750	51.88	19.34	74.0	22.12	Peak	65.00	100	Horizontal	Pass
3**	14174.750	41.71	19.34	54.0	12.29	AV	65.00	100	Horizontal	Pass
4	14801.750	52.62	18.28	74.0	21.38	Peak	360.00	100	Horizontal	Pass
4**	14801.750	42.03	18.28	54.0	11.97	AV	360.00	100	Horizontal	Pass
5	17485.750	55.25	21.52	74.0	18.75	Peak	178.60	100	Horizontal	Pass
5**	17485.750	45.27	21.52	54.0	8.73	AV	178.60	100	Horizontal	Pass
6	17994.500	59.76	27.58	74.0	14.24	Peak	15.20	100	Horizontal	Pass
6**	17994.500	50.61	27.58	54.0	3.39	AV	15.20	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-07-31_09.05.11

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060039-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

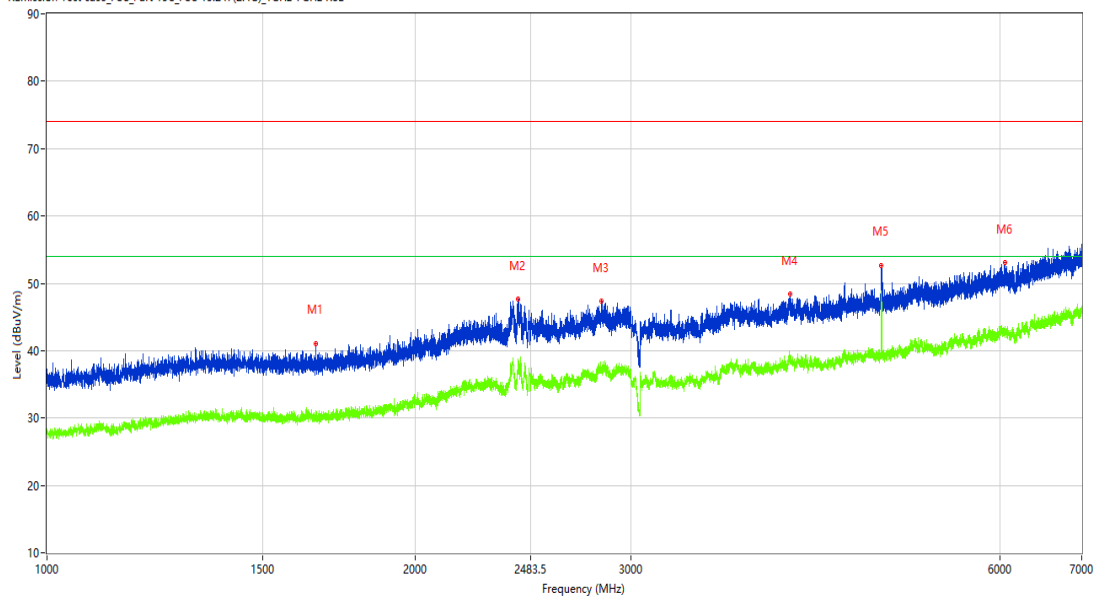

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1658.000	41.10	-12.88	74.0	32.90	Peak	162.10	100	Vertical	Pass
1**	1658.000	29.88	-12.88	54.0	24.12	AV	162.10	100	Vertical	Pass
2	2426.250	47.66	-5.19	74.0	26.34	Peak	112.60	100	Vertical	Pass
2**	2426.250	38.03	-5.19	54.0	15.97	AV	112.60	100	Vertical	Pass
3	2837.000	47.37	-4.42	74.0	26.63	Peak	0.40	100	Vertical	Pass
3**	2837.000	36.94	-4.42	54.0	17.06	AV	0.40	100	Vertical	Pass
4	4048.000	48.39	-1.52	74.0	25.61	Peak	40.10	100	Vertical	Pass
4**	4048.000	38.29	-1.52	54.0	15.71	AV	40.10	100	Vertical	Pass
5	4803.500	52.69	-1.39	74.0	21.31	Peak	53.50	100	Vertical	Pass
5**	4803.500	48.18	-1.39	54.0	5.82	AV	53.50	100	Vertical	Pass
6	6063.000	53.11	1.91	74.0	20.89	Peak	0.00	100	Vertical	Pass
6**	6063.000	43.32	1.91	54.0	10.68	AV	0.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-06-30_17.20.41

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060039-01#02

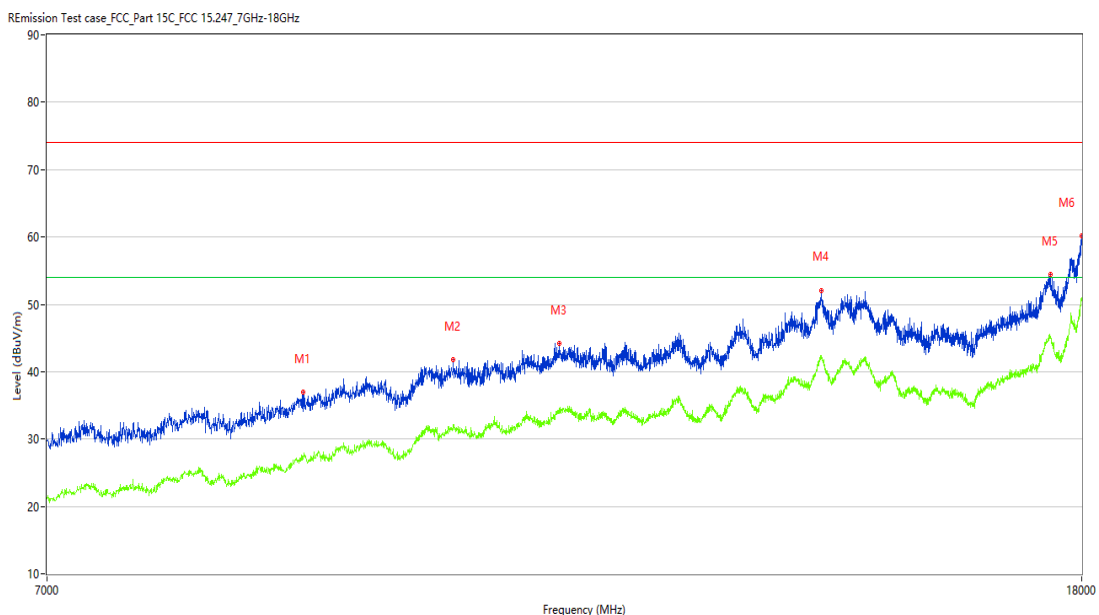

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8842.500	36.95	5.28	74.0	37.05	Peak	359.70	100	Vertical	Pass
1**	8842.500	27.54	5.28	54.0	26.46	AV	359.70	100	Vertical	Pass
2	10140.500	41.82	9.32	74.0	32.18	Peak	359.70	100	Vertical	Pass
2**	10140.500	32.15	9.32	54.0	21.85	AV	359.70	100	Vertical	Pass
3	11174.500	44.22	11.05	74.0	29.78	Peak	288.80	100	Vertical	Pass
3**	11174.500	34.00	11.05	54.0	20.00	AV	288.80	100	Vertical	Pass
4	14194.000	52.10	19.63	74.0	21.90	Peak	211.40	100	Vertical	Pass
4**	14194.000	41.98	19.63	54.0	12.02	AV	211.40	100	Vertical	Pass
5	17494.000	54.42	21.33	74.0	19.58	Peak	352.10	100	Vertical	Pass
5**	17494.000	45.04	21.33	54.0	8.96	AV	352.10	100	Vertical	Pass
6	17994.500	60.20	27.58	74.0	13.80	Peak	143.70	100	Vertical	Pass
6**	17994.500	50.94	27.58	54.0	3.06	AV	143.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-07-29_17.50.19

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060039-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

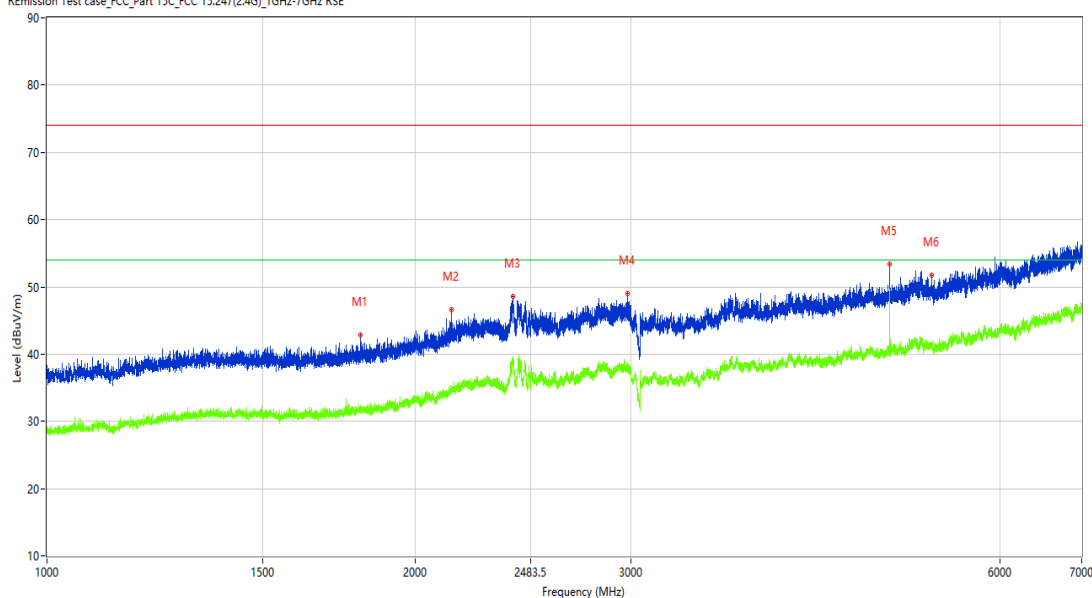

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1802.250	42.78	-12.44	74.0	31.22	Peak	342.40	100	Horizontal	Pass
1**	1802.250	32.31	-12.44	54.0	21.69	AV	342.40	100	Horizontal	Pass
2	2141.250	46.64	-9.09	74.0	27.36	Peak	182.70	100	Horizontal	Pass
2**	2141.250	34.82	-9.09	54.0	19.18	AV	182.70	100	Horizontal	Pass
3	2402.500	48.61	-4.72	74.0	25.39	Peak	353.20	100	Horizontal	Pass
3**	2402.500	38.83	-4.72	54.0	15.17	AV	353.20	100	Horizontal	Pass
4	2981.500	49.02	-3.63	74.0	24.98	Peak	182.70	100	Horizontal	Pass
4**	2981.500	38.47	-3.63	54.0	15.53	AV	182.70	100	Horizontal	Pass
5	4880.000	53.39	-0.83	74.0	20.61	Peak	62.10	100	Horizontal	Pass
5**	4880.000	49.69	-0.83	54.0	4.31	AV	62.10	100	Horizontal	Pass
6	5278.500	51.73	-0.21	74.0	22.27	Peak	51.30	100	Horizontal	Pass
6**	5278.500	41.65	-0.21	54.0	12.35	AV	51.30	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-06-30_17.26.27

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060039-01#02

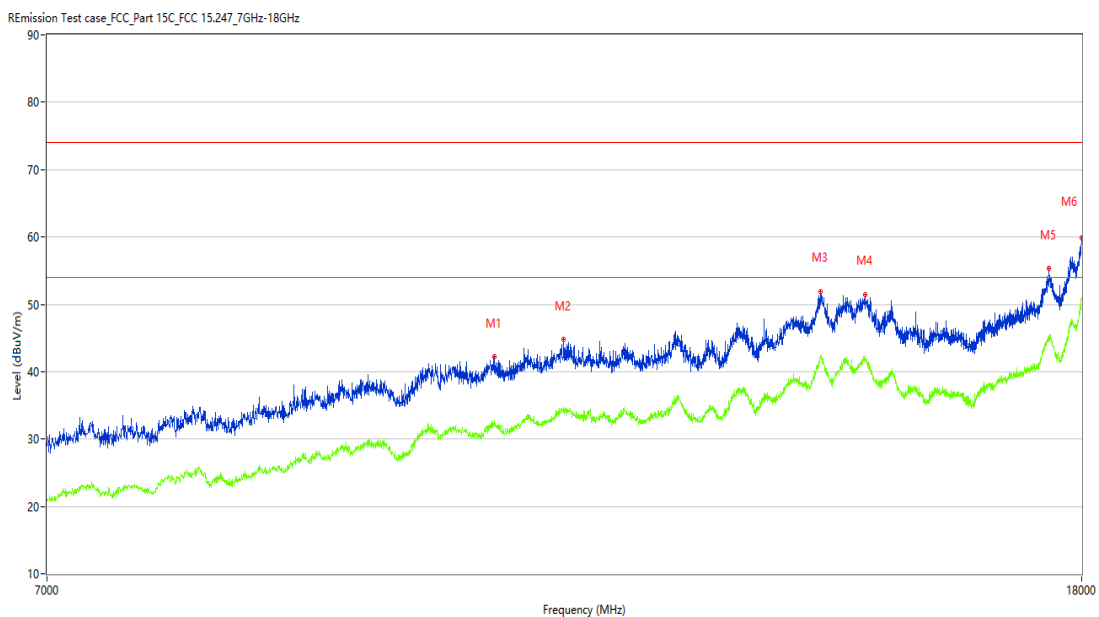

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10531.000	42.25	10.25	74.0	31.75	Peak	360.00	100	Horizontal	Pass
1**	10531.000	32.36	10.25	54.0	21.64	AV	360.00	100	Horizontal	Pass
2	11218.500	44.79	11.48	74.0	29.21	Peak	210.70	100	Horizontal	Pass
2**	11218.500	34.73	11.48	54.0	19.27	AV	210.70	100	Horizontal	Pass
3	14183.000	51.94	19.60	74.0	22.06	Peak	310.80	100	Horizontal	Pass
3**	14183.000	42.15	19.60	54.0	11.85	AV	310.80	100	Horizontal	Pass
4	14766.000	51.50	18.84	74.0	22.50	Peak	0.00	100	Horizontal	Pass
4**	14766.000	42.39	18.84	54.0	11.61	AV	0.00	100	Horizontal	Pass
5	17474.750	55.28	21.34	74.0	18.72	Peak	226.30	100	Horizontal	Pass
5**	17474.750	44.92	21.34	54.0	9.08	AV	226.30	100	Horizontal	Pass
6	17997.251	59.81	27.75	74.0	14.19	Peak	210.70	100	Horizontal	Pass
6**	17997.251	50.91	27.75	54.0	3.09	AV	210.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-07-31_09.09.13

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: RX


Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060039-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

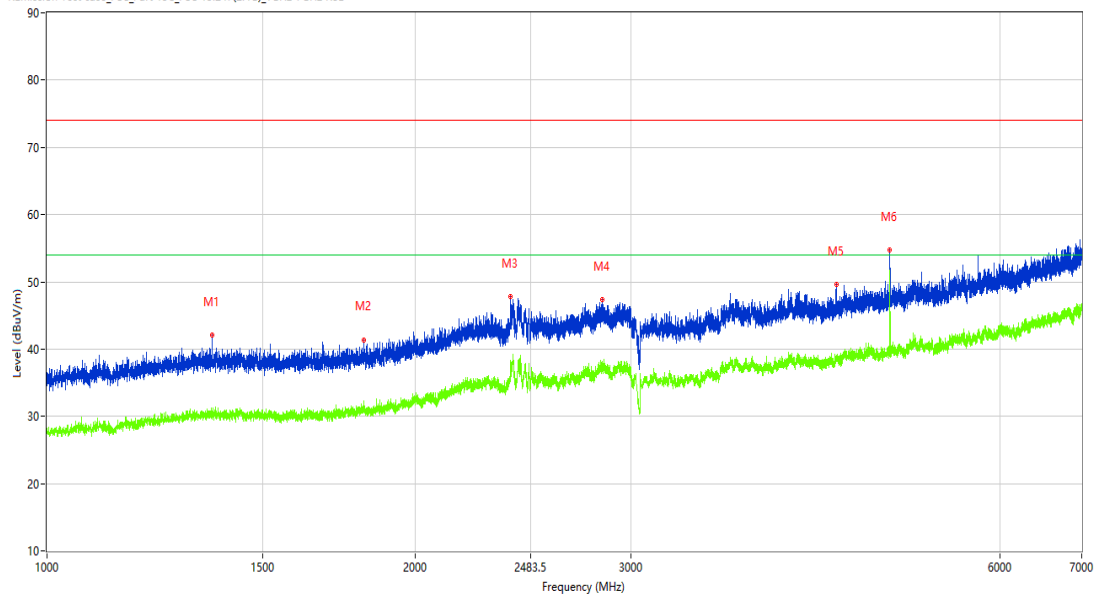

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1365.000	42.12	-12.65	74.0	31.88	Peak	53.70	100	Vertical	Pass
1**	1365.000	30.09	-12.65	54.0	23.91	AV	53.70	100	Vertical	Pass
2	1814.000	41.39	-12.23	74.0	32.61	Peak	38.40	100	Vertical	Pass
2**	1814.000	30.82	-12.23	54.0	23.18	AV	38.40	100	Vertical	Pass
3	2392.000	47.86	-4.45	74.0	26.14	Peak	38.40	100	Vertical	Pass
3**	2392.000	38.33	-4.45	54.0	15.67	AV	38.40	100	Vertical	Pass
4	2842.750	47.35	-4.31	74.0	26.65	Peak	203.30	100	Vertical	Pass
4**	2842.750	37.55	-4.31	54.0	16.45	AV	203.30	100	Vertical	Pass
5	4412.000	49.67	-1.97	74.0	24.33	Peak	0.00	100	Vertical	Pass
5**	4412.000	39.00	-1.97	54.0	15.00	AV	0.00	100	Vertical	Pass
6	4880.500	54.78	-0.83	74.0	19.22	Peak	251.10	100	Vertical	Pass
6**	4880.500	49.95	-0.83	54.0	4.05	AV	251.10	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-06-30_17.22.04

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060039-01#02

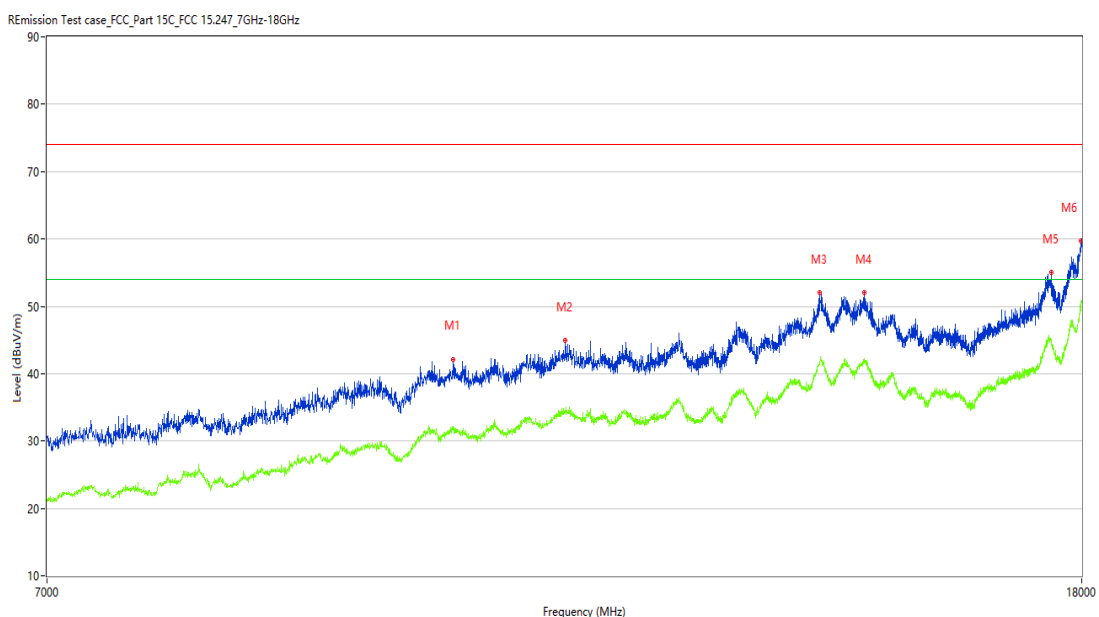

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10143.250	42.14	9.30	74.0	31.86	Peak	118.70	100	Vertical	Pass
1**	10143.250	31.91	9.30	54.0	22.09	AV	118.70	100	Vertical	Pass
2	11237.750	44.89	11.73	74.0	29.11	Peak	118.70	100	Vertical	Pass
2**	11237.750	34.29	11.73	54.0	19.71	AV	118.70	100	Vertical	Pass
3	14166.500	52.06	19.08	74.0	21.94	Peak	22.30	100	Vertical	Pass
3**	14166.500	41.58	19.08	54.0	12.42	AV	22.30	100	Vertical	Pass
4	14763.250	51.98	18.86	74.0	22.02	Peak	118.70	100	Vertical	Pass
4**	14763.250	41.71	18.86	54.0	12.29	AV	118.70	100	Vertical	Pass
5	17513.251	55.11	20.89	74.0	18.89	Peak	212.80	100	Vertical	Pass
5**	17513.251	44.43	20.89	54.0	9.57	AV	212.80	100	Vertical	Pass
6	17988.999	59.76	27.24	74.0	14.24	Peak	212.80	100	Vertical	Pass
6**	17988.999	49.88	27.24	54.0	4.12	AV	212.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-07-29_17.52.22

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060039-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

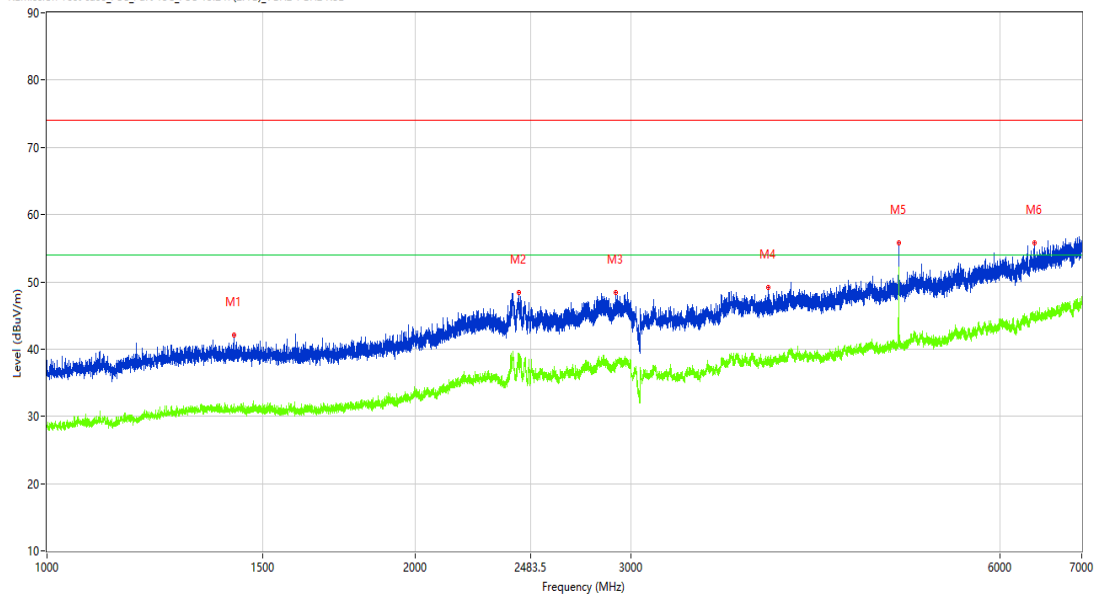

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1420.500	42.04	-12.66	74.0	31.96	Peak	344.30	100	Horizontal	Pass
1**	1420.500	30.85	-12.66	54.0	23.15	AV	344.30	100	Horizontal	Pass
2	2428.000	48.39	-5.23	74.0	25.61	Peak	0.00	100	Horizontal	Pass
2**	2428.000	38.92	-5.23	54.0	15.08	AV	0.00	100	Horizontal	Pass
3	2915.500	48.40	-4.52	74.0	25.60	Peak	312.60	100	Horizontal	Pass
3**	2915.500	37.97	-4.52	54.0	16.03	AV	312.60	100	Horizontal	Pass
4	3880.000	49.15	-2.77	74.0	24.85	Peak	61.70	100	Horizontal	Pass
4**	3880.000	37.29	-2.77	54.0	16.71	AV	61.70	100	Horizontal	Pass
5	4960.000	54.26	-0.63	74.0	19.74	Peak	51.30	100	Horizontal	Pass
5**	4960.000	51.54	-0.63	54.0	2.46	AV	51.30	100	Horizontal	Pass
6	6409.000	55.73	2.74	74.0	18.27	Peak	8.90	100	Horizontal	Pass
6**	6409.000	44.50	2.74	54.0	9.50	AV	8.90	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-06-30_17.27.46

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060039-01#02

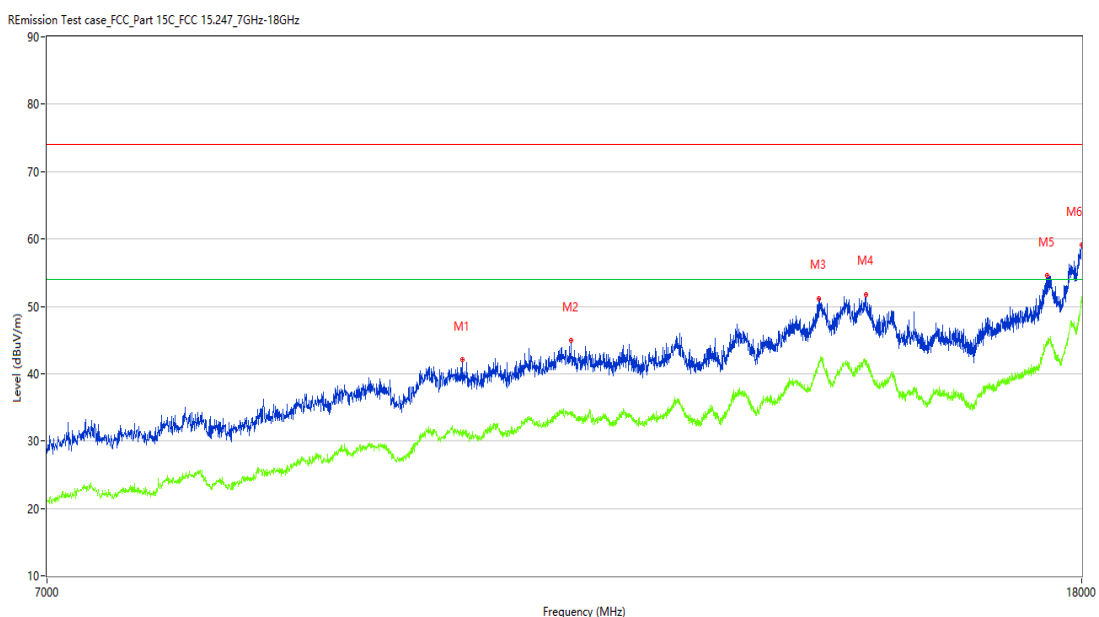

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10225.750	42.09	9.18	74.0	31.91	Peak	1.40	100	Horizontal	Pass
1**	10225.750	31.51	9.18	54.0	22.49	AV	1.40	100	Horizontal	Pass
2	11292.750	44.90	12.30	74.0	29.10	Peak	1.40	100	Horizontal	Pass
2**	11292.750	33.96	12.30	54.0	20.04	AV	1.40	100	Horizontal	Pass
3	14163.750	51.15	18.99	74.0	22.85	Peak	317.10	100	Horizontal	Pass
3**	14163.750	41.72	18.99	54.0	12.28	AV	317.10	100	Horizontal	Pass
4	14779.750	51.79	18.62	74.0	22.21	Peak	173.80	100	Horizontal	Pass
4**	14779.750	41.96	18.62	54.0	12.04	AV	173.80	100	Horizontal	Pass
5	17441.749	54.52	20.72	74.0	19.48	Peak	317.10	100	Horizontal	Pass
5**	17441.749	44.81	20.72	54.0	9.19	AV	317.10	100	Horizontal	Pass
6	17997.251	59.15	27.75	74.0	14.85	Peak	254.50	100	Horizontal	Pass
6**	17997.251	50.80	27.75	54.0	3.20	AV	254.50	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-07-31_09.11.48

EUT Name: FCC

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571

Work Addition: TX


Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060039-01#02

R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

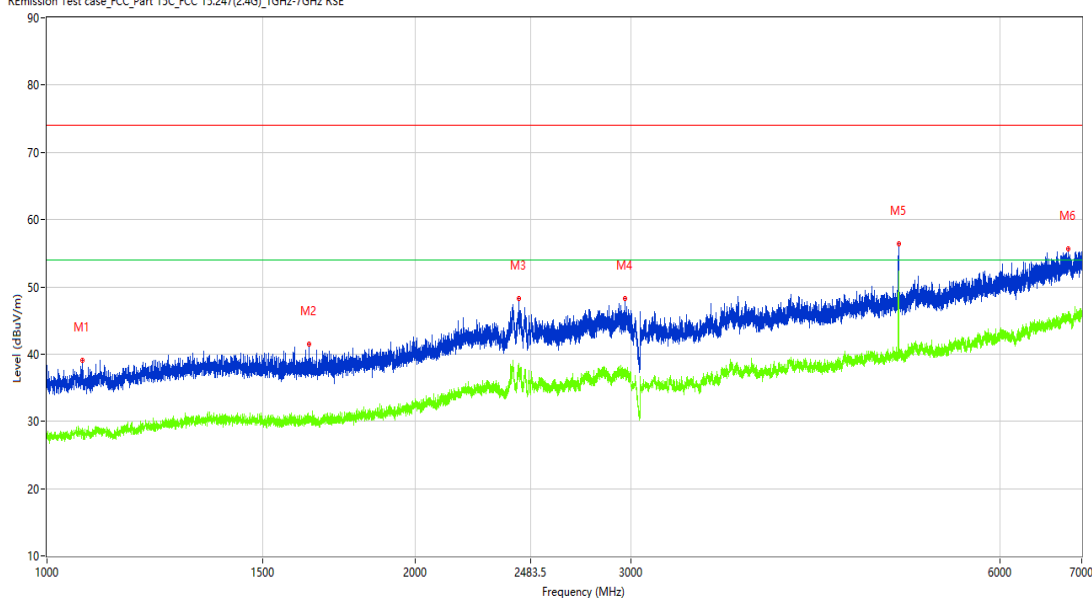

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1068.250	39.08	-14.25	74.0	34.92	Peak	266.40	100	Vertical	Pass
1**	1068.250	27.94	-14.25	54.0	26.06	AV	266.40	100	Vertical	Pass
2	1636.250	41.45	-12.92	74.0	32.55	Peak	109.70	100	Vertical	Pass
2**	1636.250	29.95	-12.92	54.0	24.05	AV	109.70	100	Vertical	Pass
3	2427.500	48.21	-5.22	74.0	25.79	Peak	1.30	100	Vertical	Pass
3**	2427.500	38.59	-5.22	54.0	15.41	AV	1.30	100	Vertical	Pass
4	2966.500	48.21	-3.75	74.0	25.79	Peak	233.70	100	Vertical	Pass
4**	2966.500	36.97	-3.75	54.0	17.03	AV	233.70	100	Vertical	Pass
5	4960.000	56.34	-0.63	74.0	17.66	Peak	50.10	100	Vertical	Pass
5**	4960.000	52.36	-0.63	54.0	1.64	AV	50.10	100	Vertical	Pass
6	6824.000	55.65	4.08	74.0	18.35	Peak	0.00	100	Vertical	Pass
6**	6824.000	45.65	4.08	54.0	8.35	AV	0.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-06-30_17.23.49

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060039-01#02

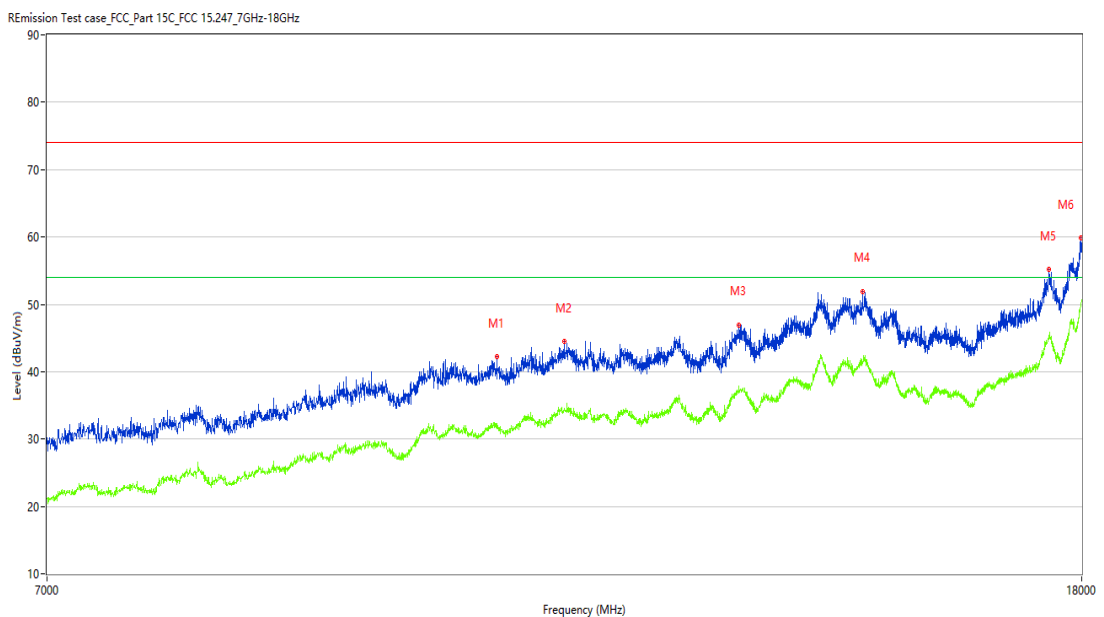

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	10555.750	42.20	10.29	74.0	31.80	Peak	280.20	100	Vertical	Pass
1**	10555.750	31.88	10.29	54.0	22.12	AV	280.20	100	Vertical	Pass
2	11224.001	44.54	11.54	74.0	29.46	Peak	280.20	100	Vertical	Pass
2**	11224.001	34.54	11.54	54.0	19.46	AV	280.20	100	Vertical	Pass
3	13159.999	46.98	13.99	74.0	27.02	Peak	89.70	100	Vertical	Pass
3**	13159.999	37.87	13.99	54.0	16.13	AV	89.70	100	Vertical	Pass
4	14738.500	51.94	18.58	74.0	22.06	Peak	28.70	100	Vertical	Pass
4**	14738.500	41.52	18.58	54.0	12.48	AV	28.70	100	Vertical	Pass
5	17469.250	55.20	21.24	74.0	18.80	Peak	28.70	100	Vertical	Pass
5**	17469.250	45.19	21.24	54.0	8.81	AV	28.70	100	Vertical	Pass
6	17986.251	59.90	27.07	74.0	14.10	Peak	219.50	100	Vertical	Pass
6**	17986.251	50.18	27.07	54.0	3.82	AV	219.50	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2023-07-21_16.37.46

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E23060039-01#02

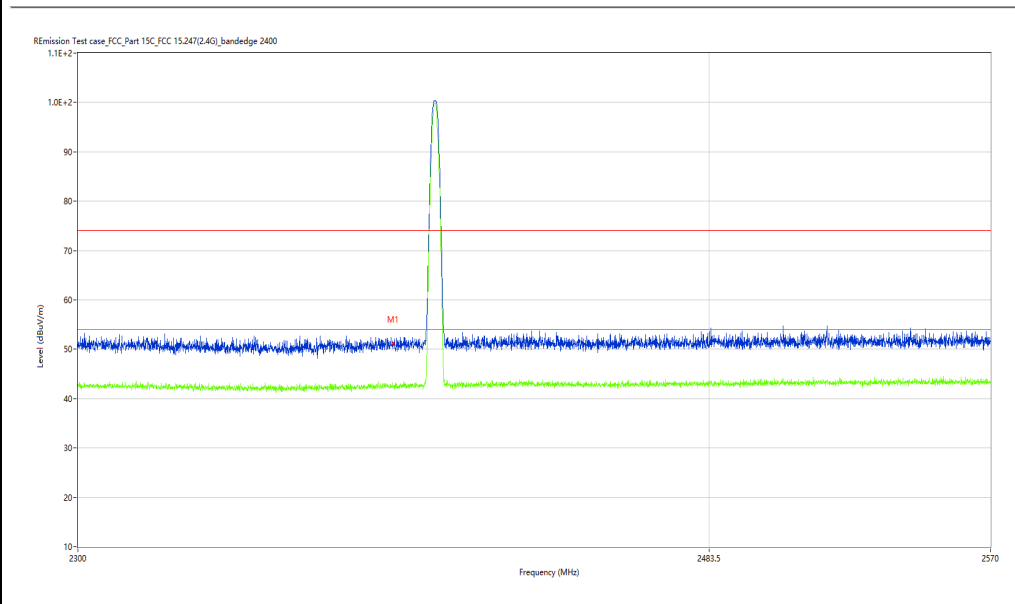

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.23	-9.96	74.0	22.77	Peak	165.68	100	H	Pass
1**	2390.000	42.58	-9.96	54.0	11.42	AV	165.68	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2023-07-21_16.49.40

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E23060039-01#02

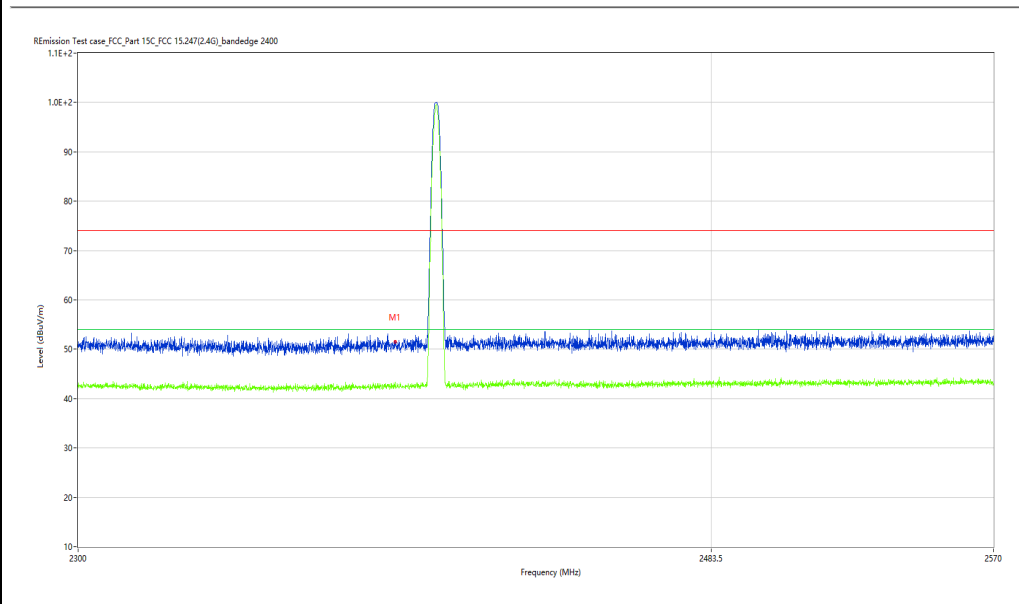

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.34	-9.96	74.0	22.66	Peak	44.81	100	V	Pass
1**	2390.000	42.53	-9.96	54.0	11.47	AV	44.81	100	V	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2023-07-21_16.39.35

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E23060039-01#02

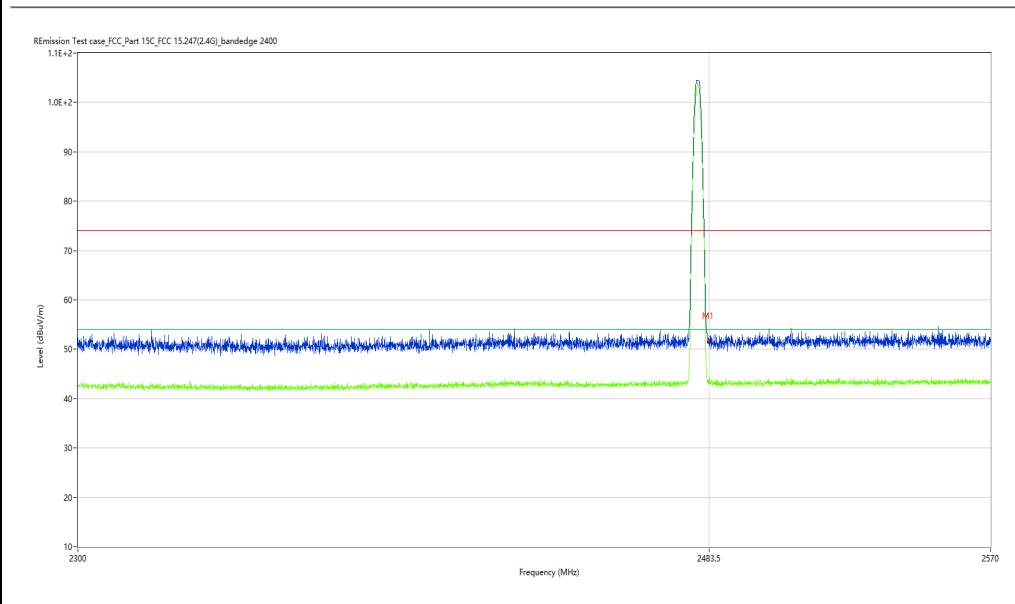

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.74	-9.51	74.0	22.26	Peak	29.97	100	H	Pass
1**	2483.500	43.47	-9.51	54.0	10.53	AV	29.97	100	H	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2023-07-21_16.48.01

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: P571


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 54%

Remark: DR-RSE01-E23060039-01#02

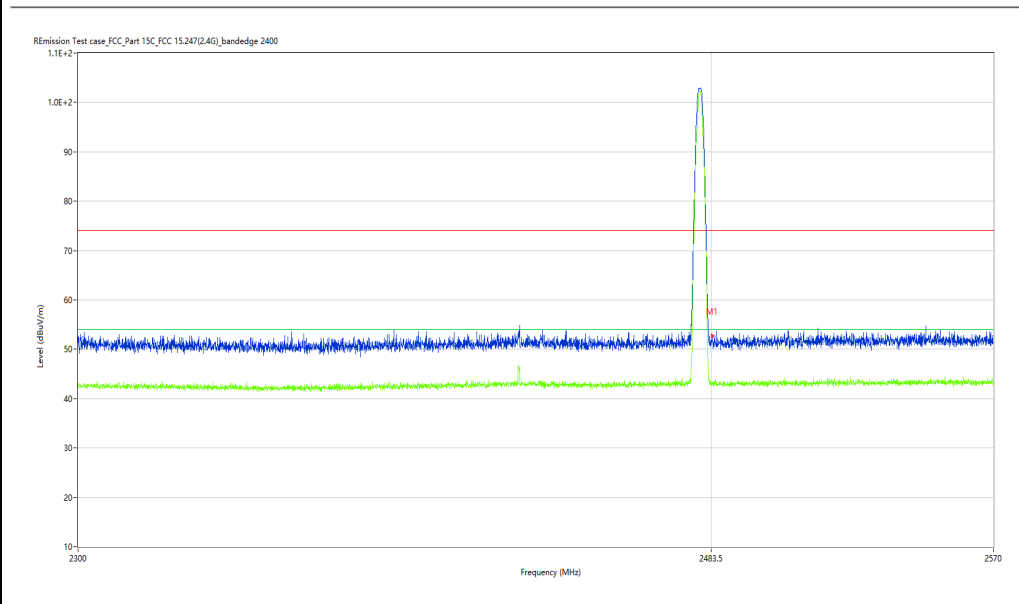

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.72	-9.51	74.0	21.28	Peak	66.84	100	V	Pass
1**	2483.500	43.06	-9.51	54.0	10.94	AV	66.84	100	V	Pass