

13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}})$$

13.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak


13.4 Test Result



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant.A&Ant.B	100	0	0
NVNT	b	2437	Ant.A&Ant.B	100	0	0
NVNT	b	2462	Ant.A&Ant.B	100	0	0
NVNT	g	2412	Ant.A&Ant.B	100	0	0
NVNT	g	2437	Ant.A&Ant.B	100	0	0
NVNT	g	2462	Ant.A&Ant.B	100	0	0
NVNT	n20	2412	Ant.A&Ant.B	100	0	0
NVNT	n20	2437	Ant.A&Ant.B	100	0	0
NVNT	n20	2462	Ant.A&Ant.B	100	0	0
NVNT	n40	2422	Ant.A&Ant.B	100	0	0
NVNT	n40	2437	Ant.A&Ant.B	100	0	0
NVNT	n40	2452	Ant.A&Ant.B	100	0	0

TEST
 TO
 OVER
 検査





Ant.A


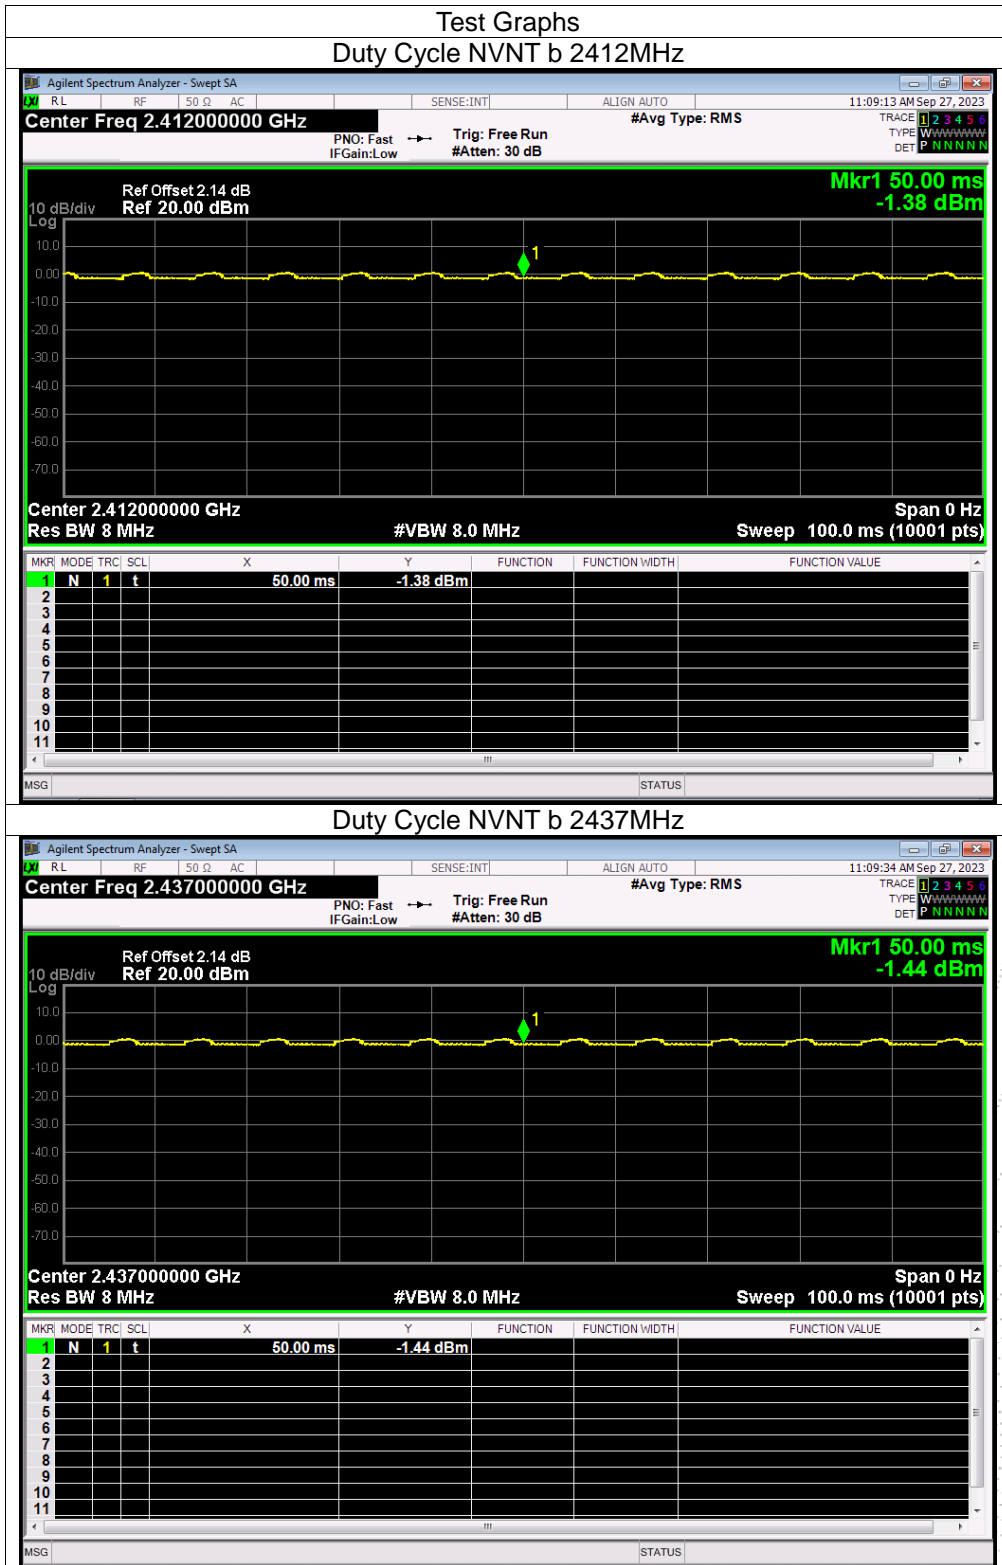


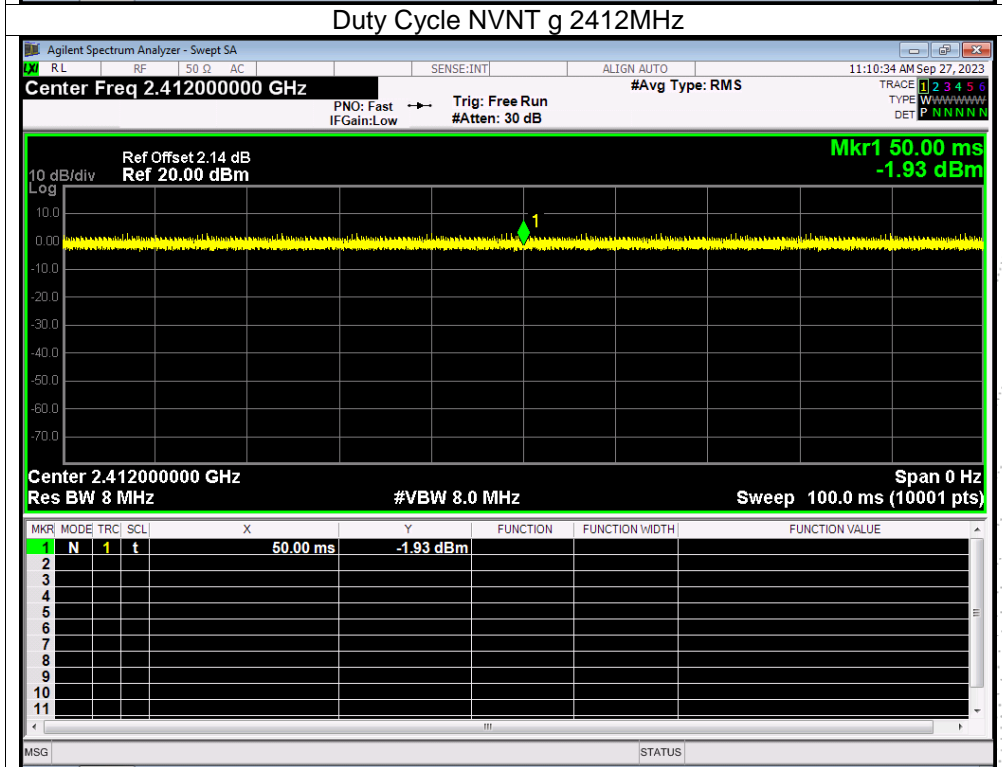
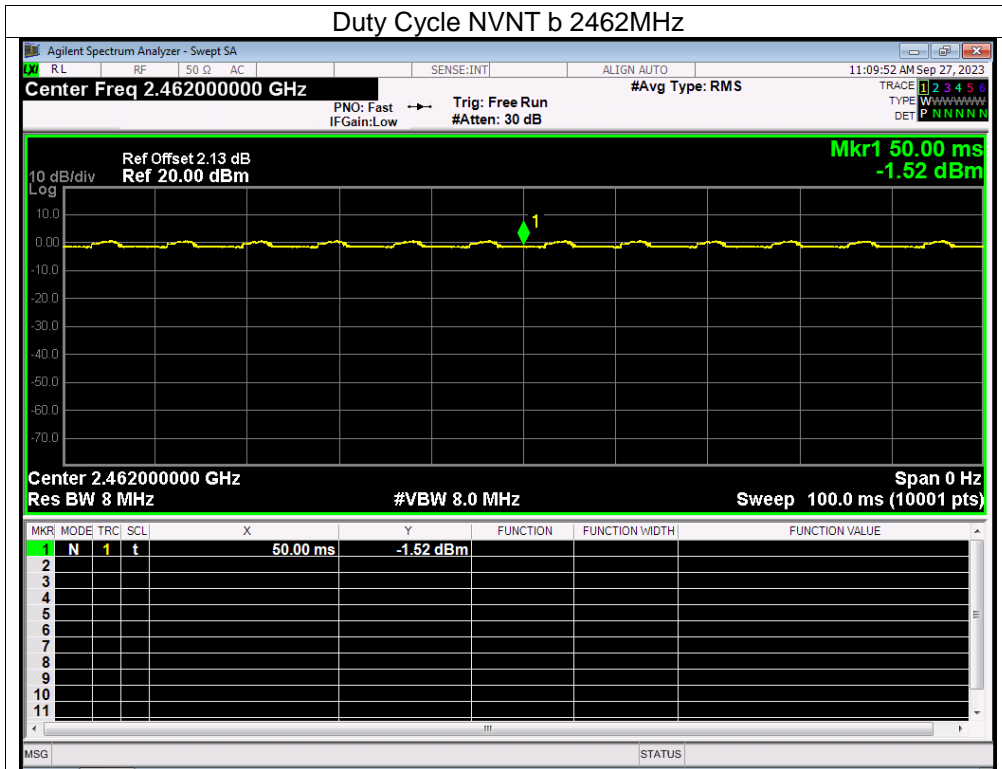


CO., LTD

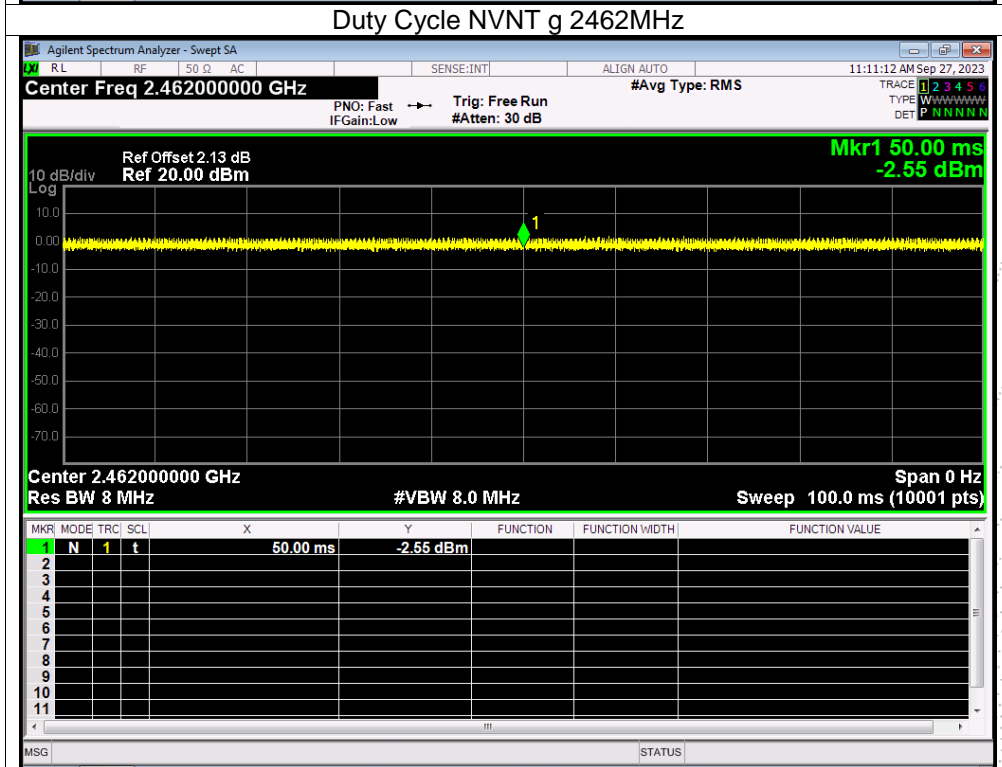
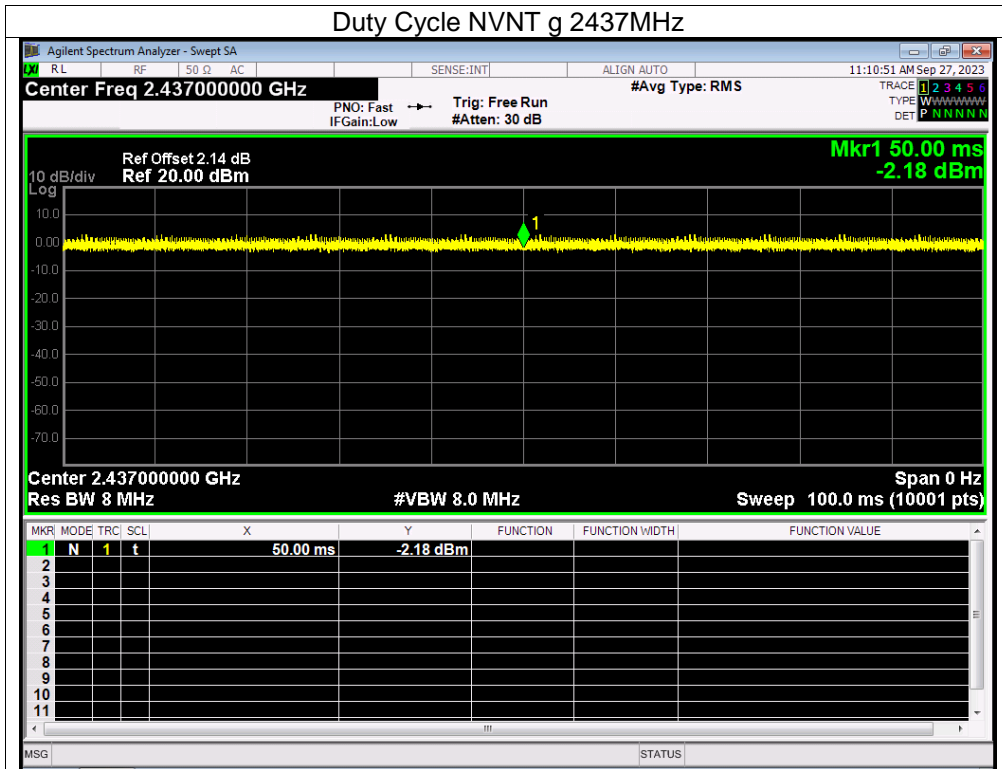


SHENZHEN

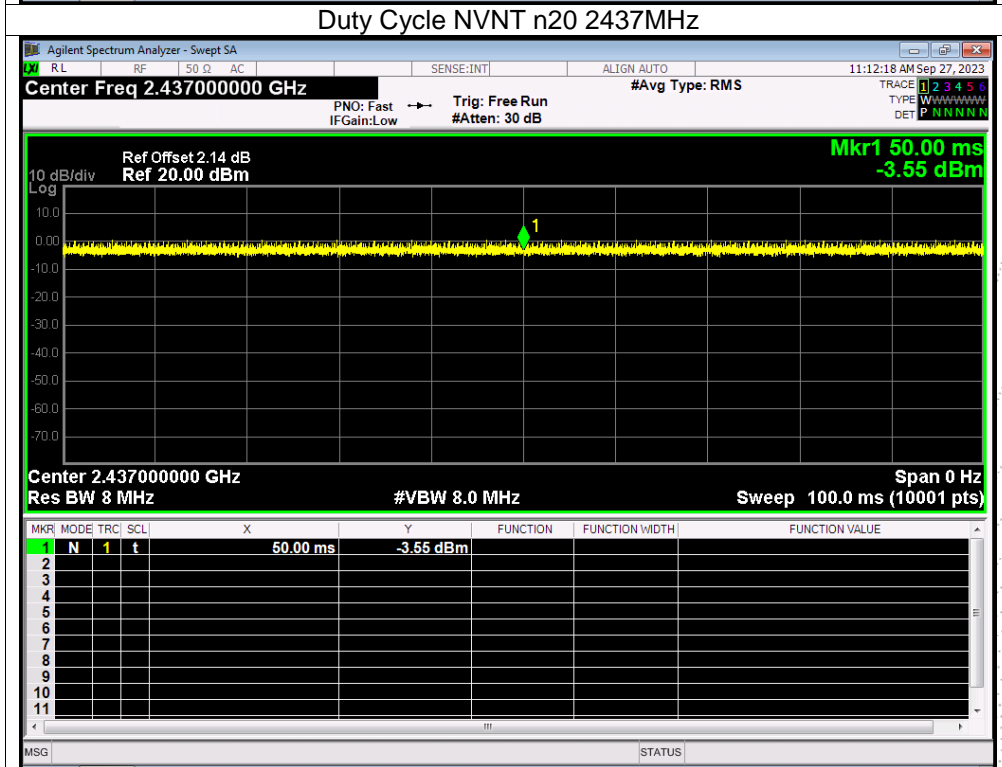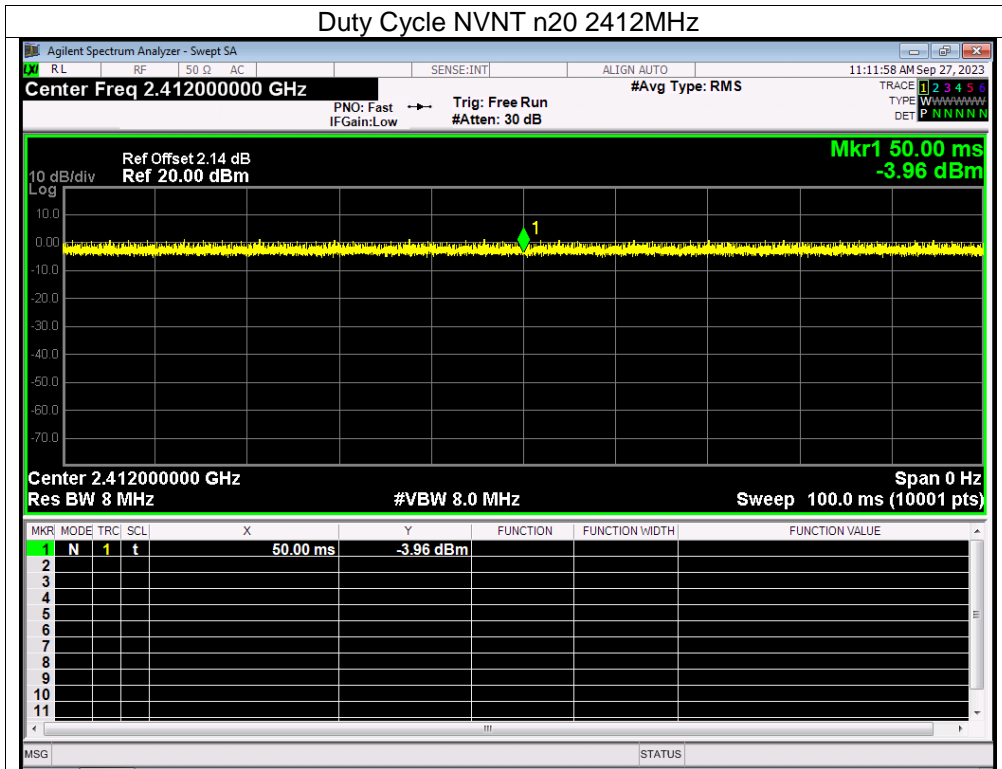

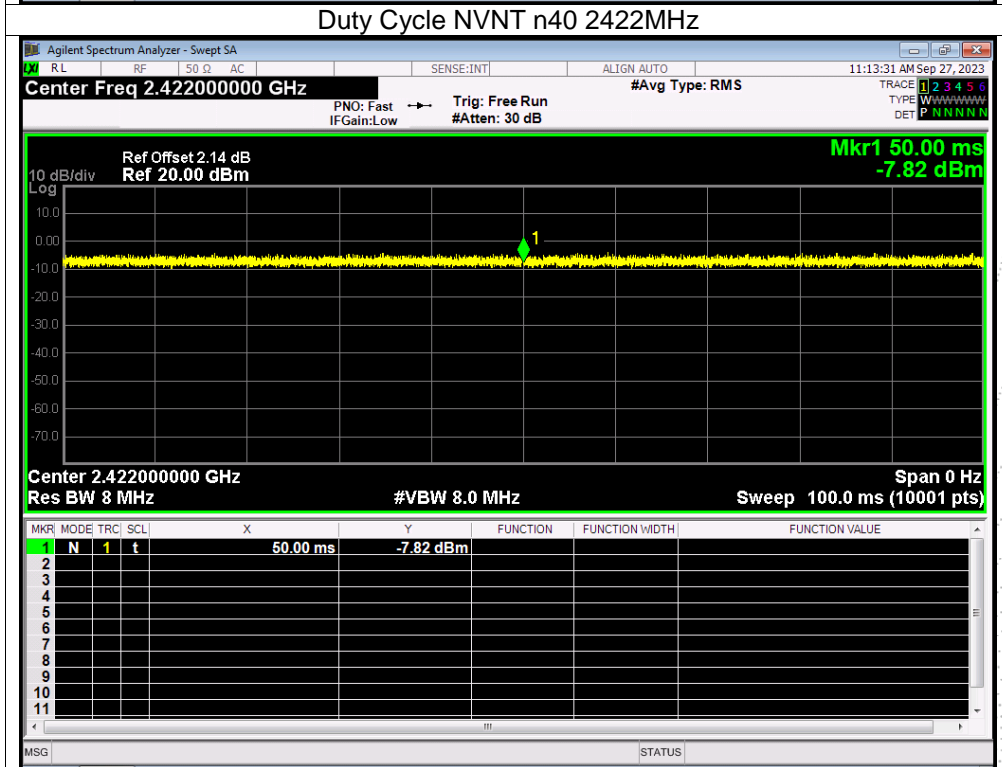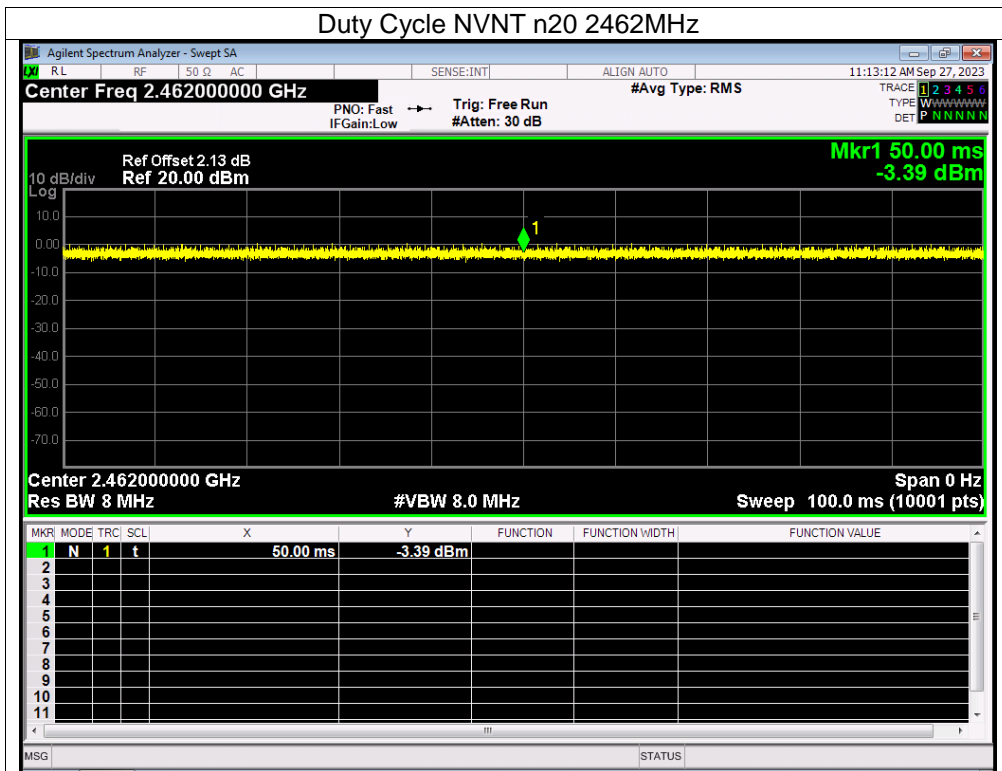




BCTC
 BCTC
 PPR
 检测

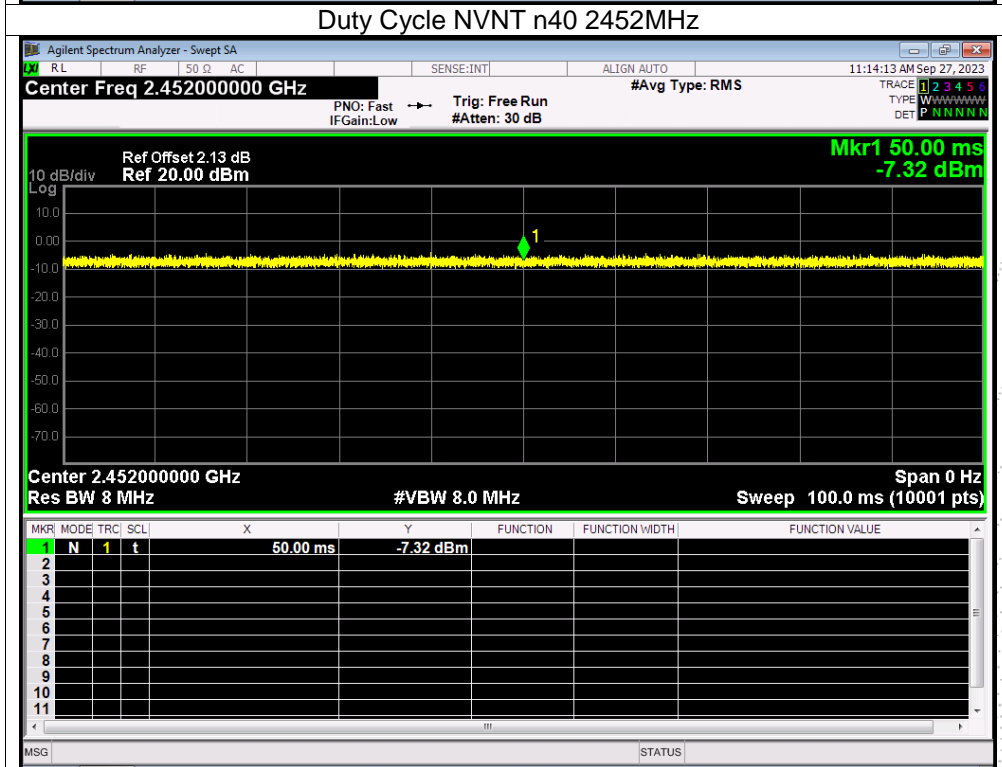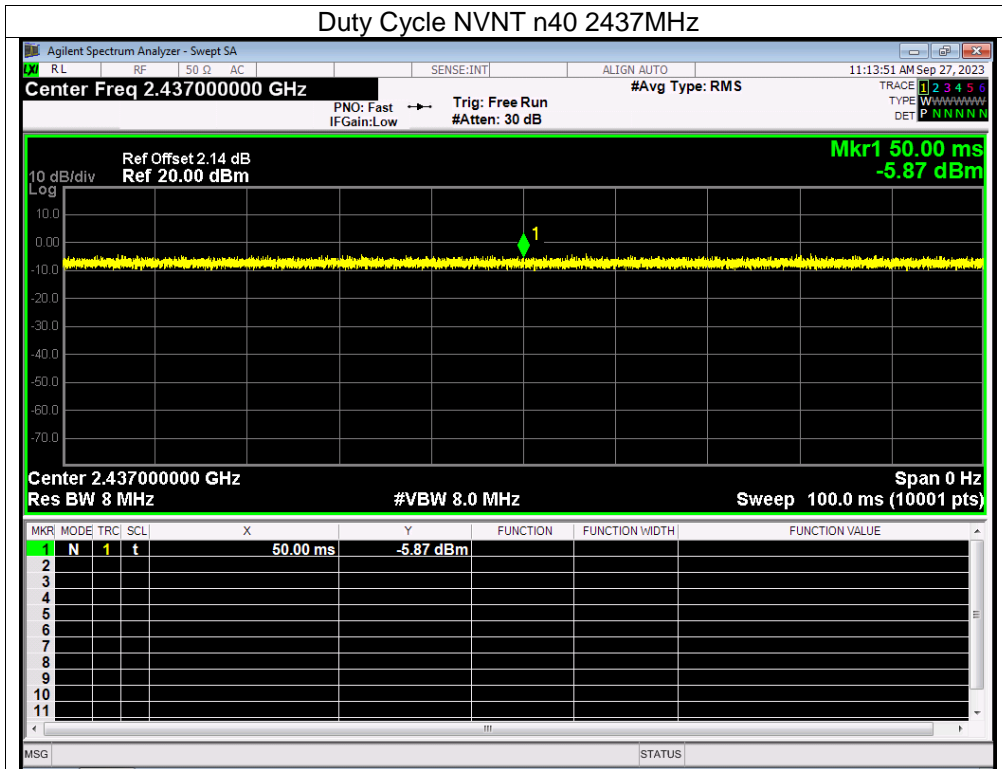







Ant.B

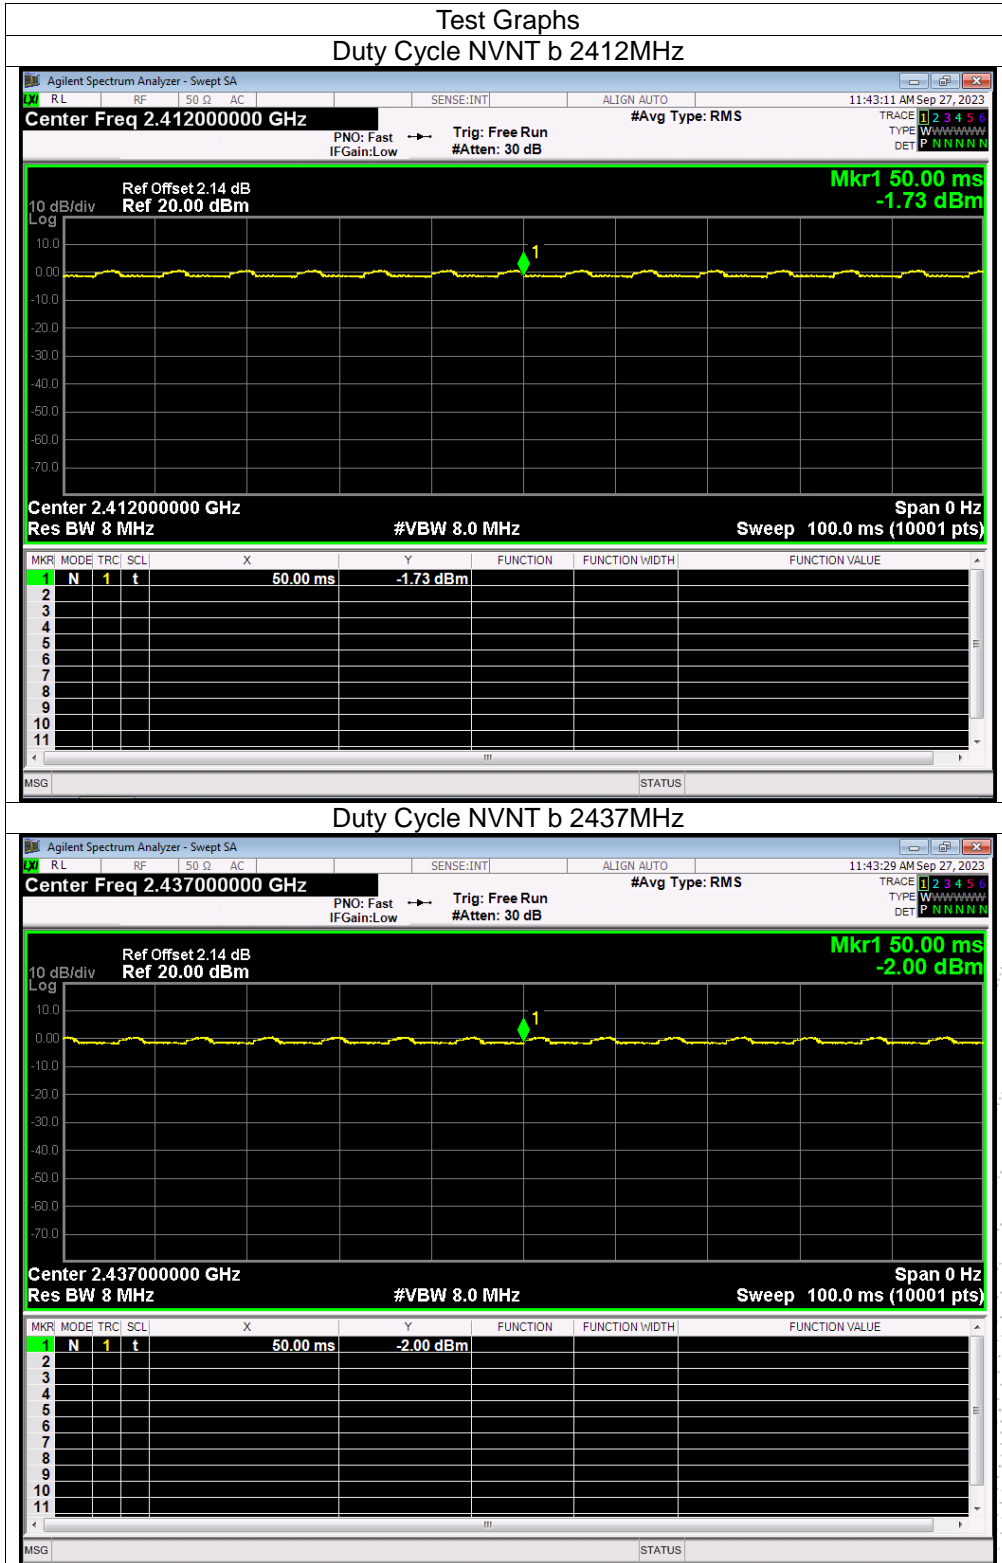

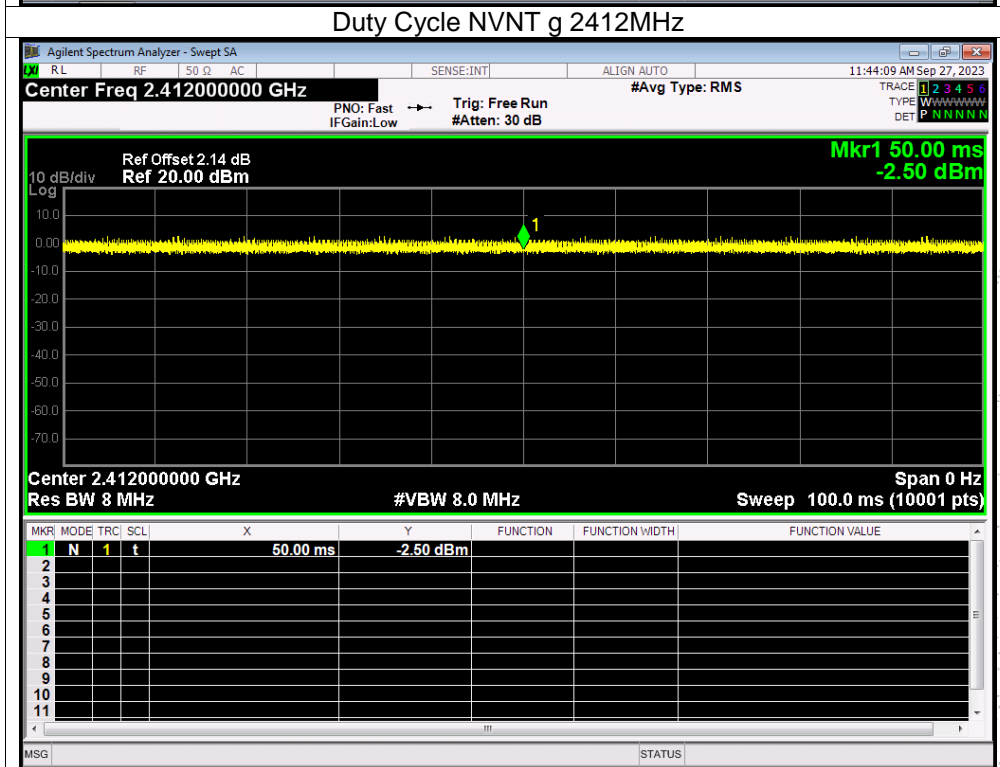
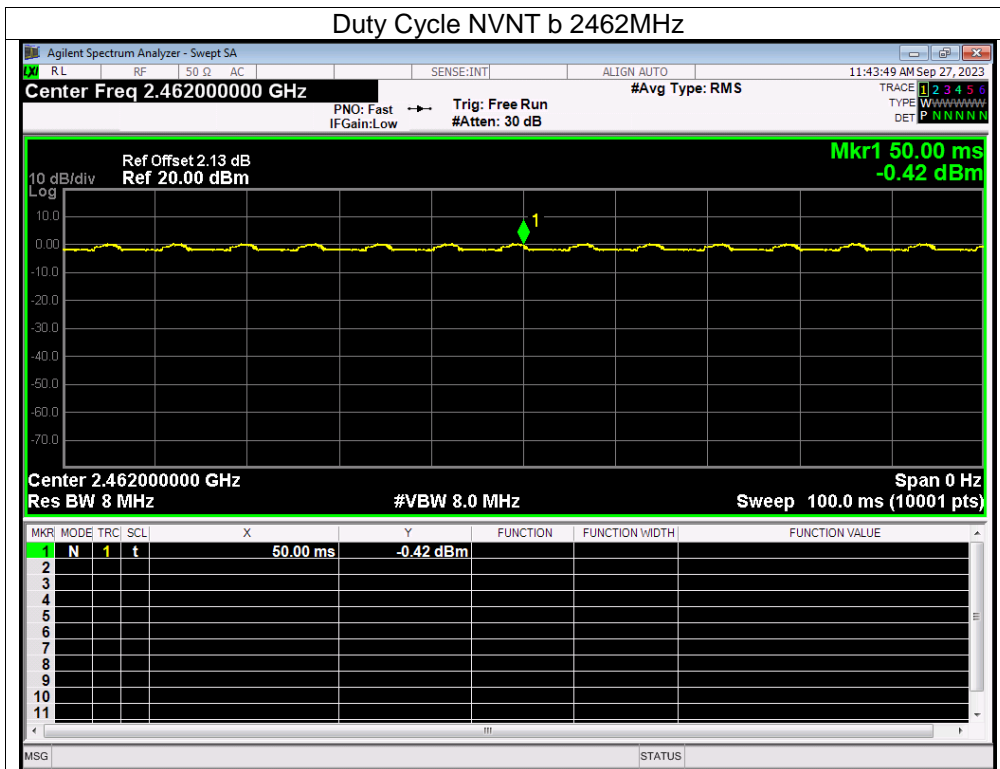




CO., LTD

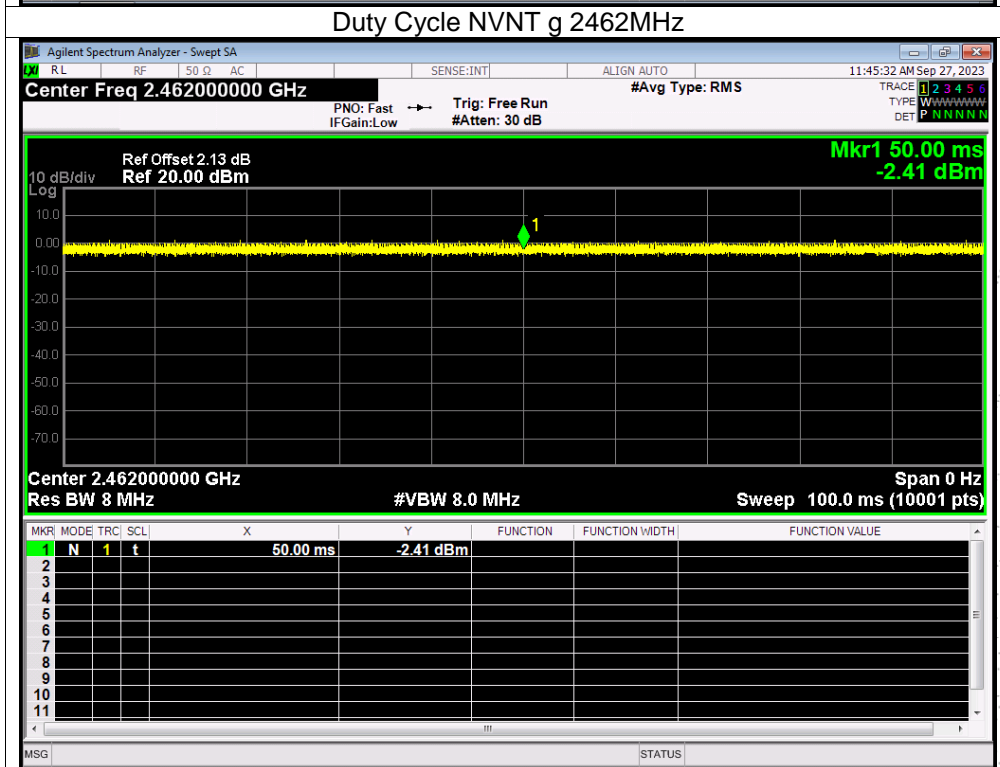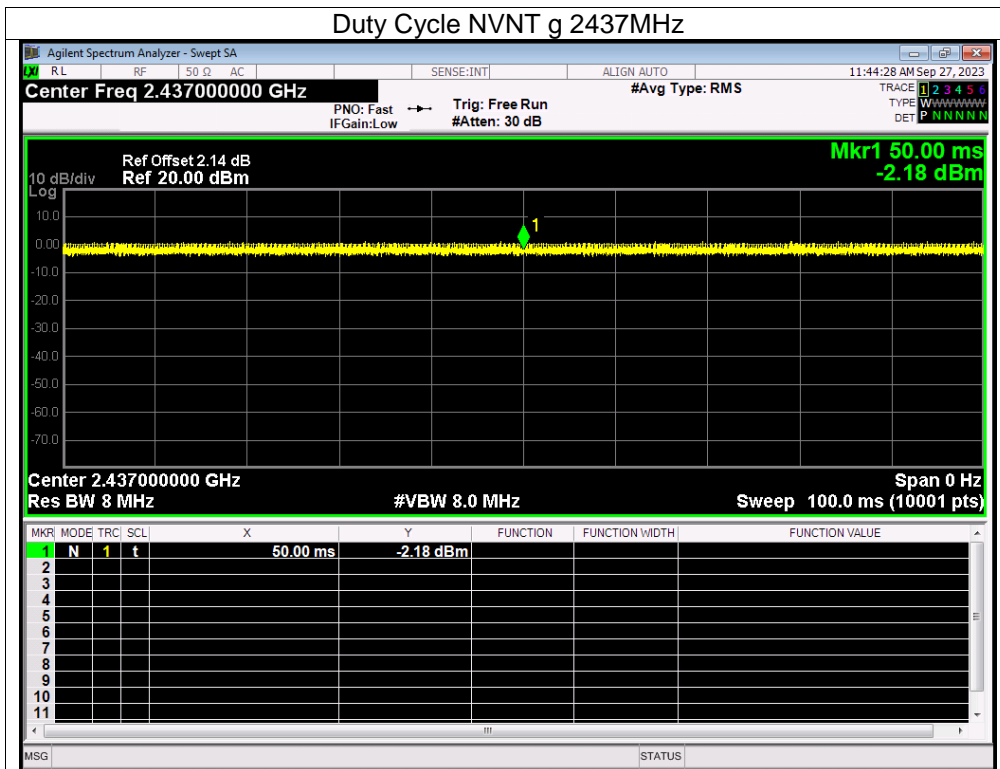

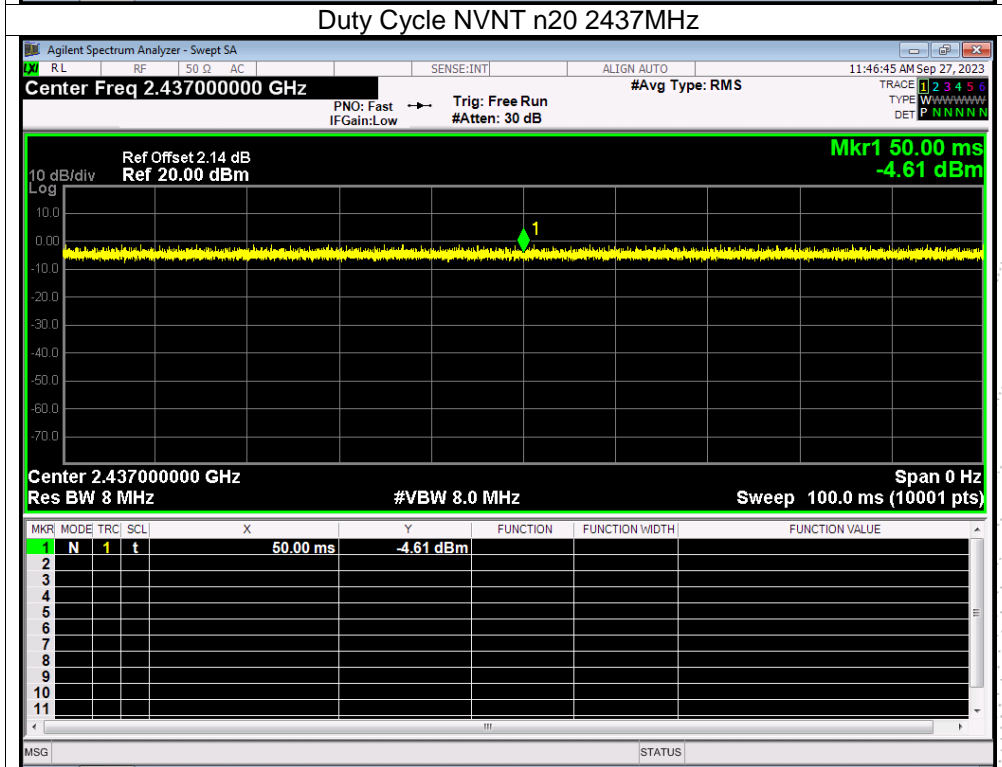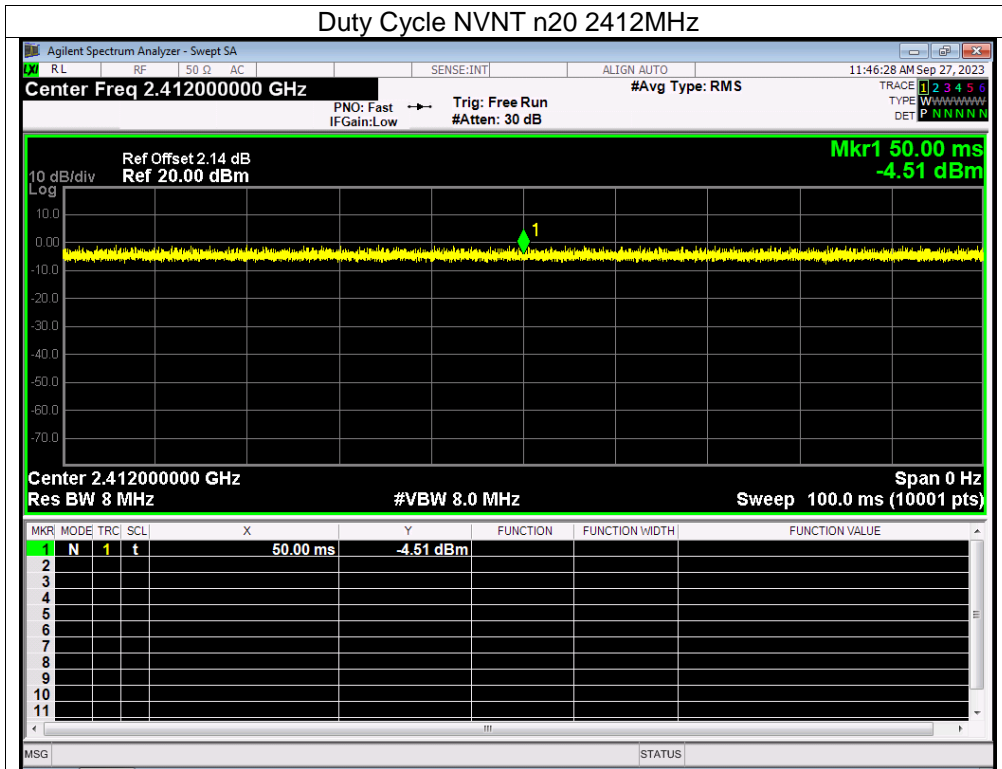

SHEZHEN

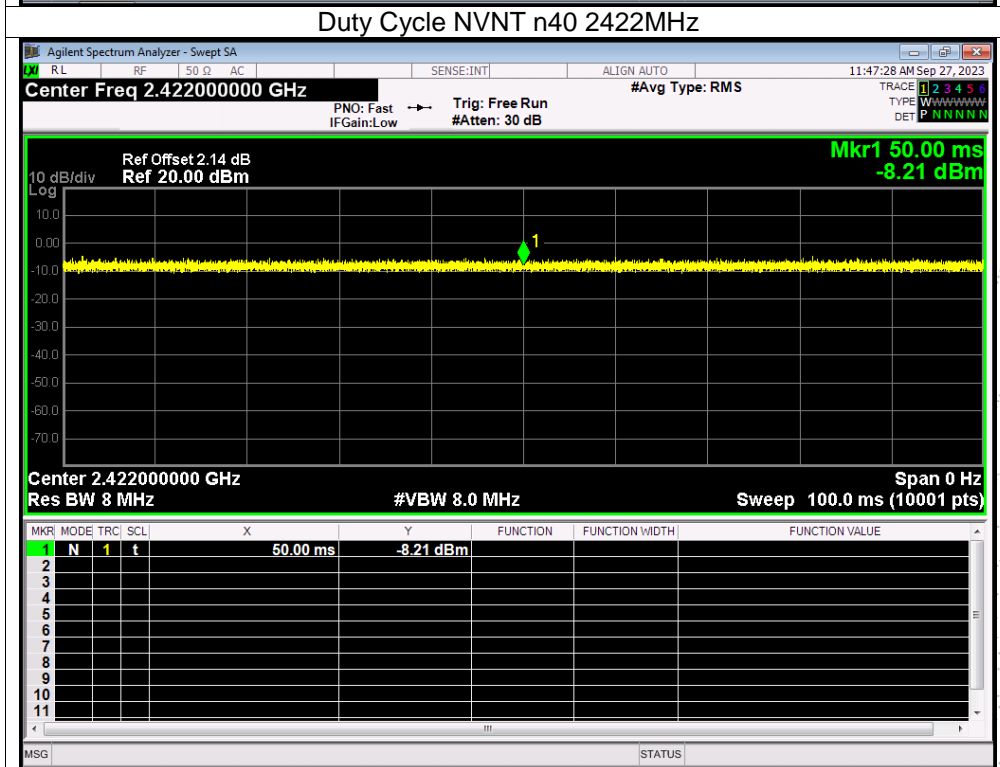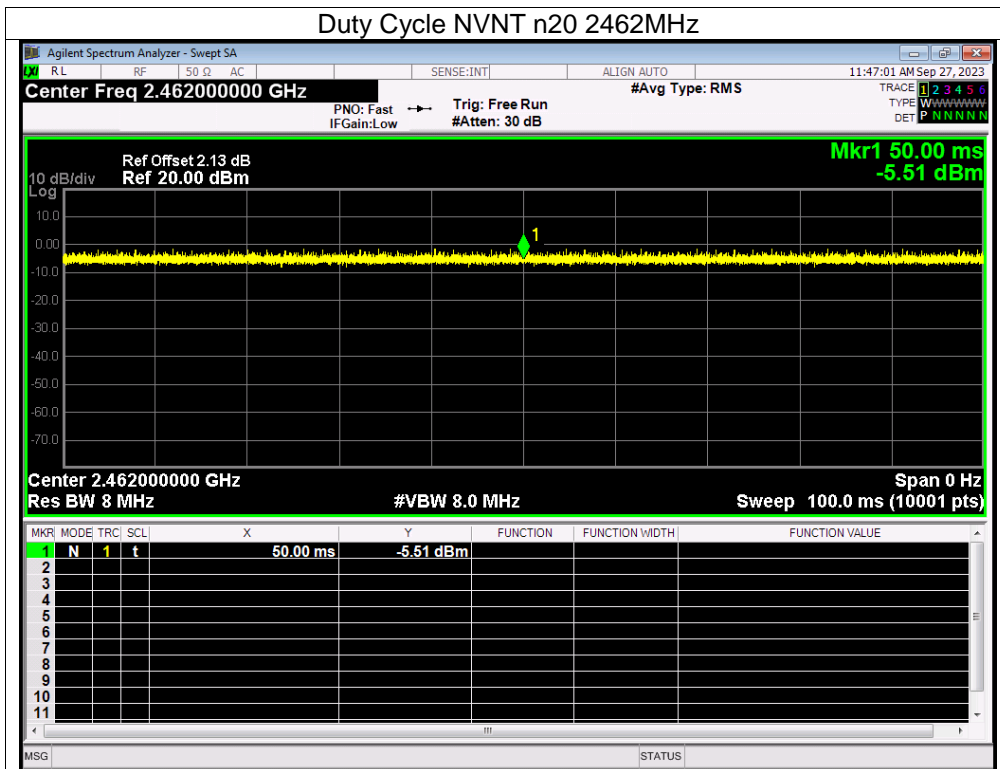

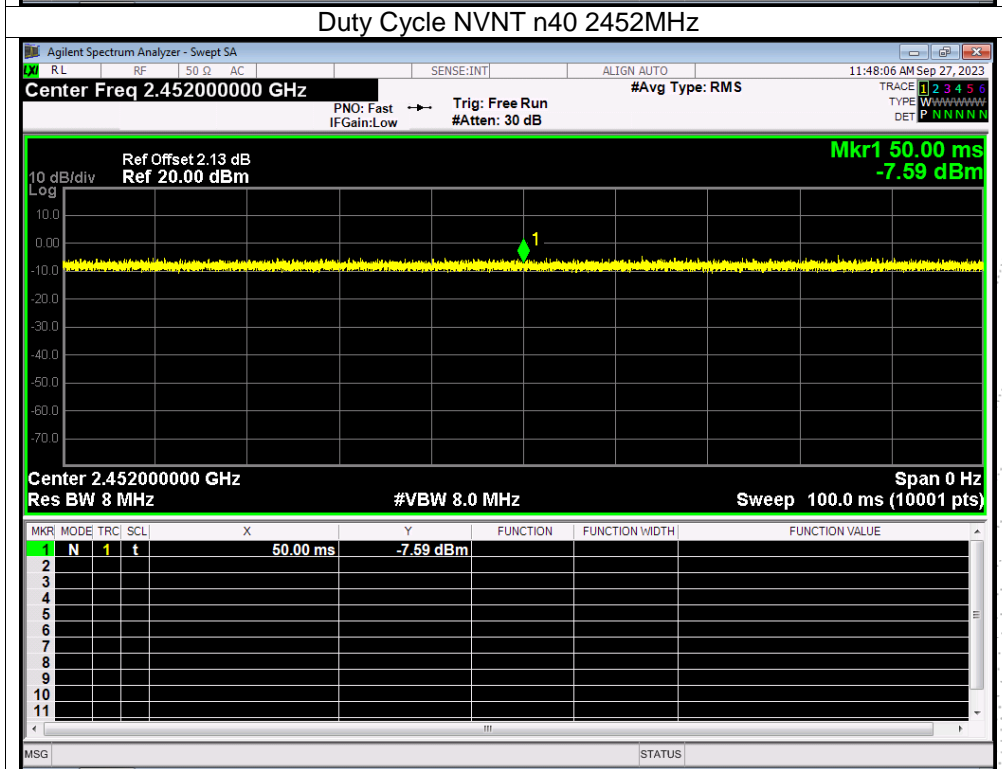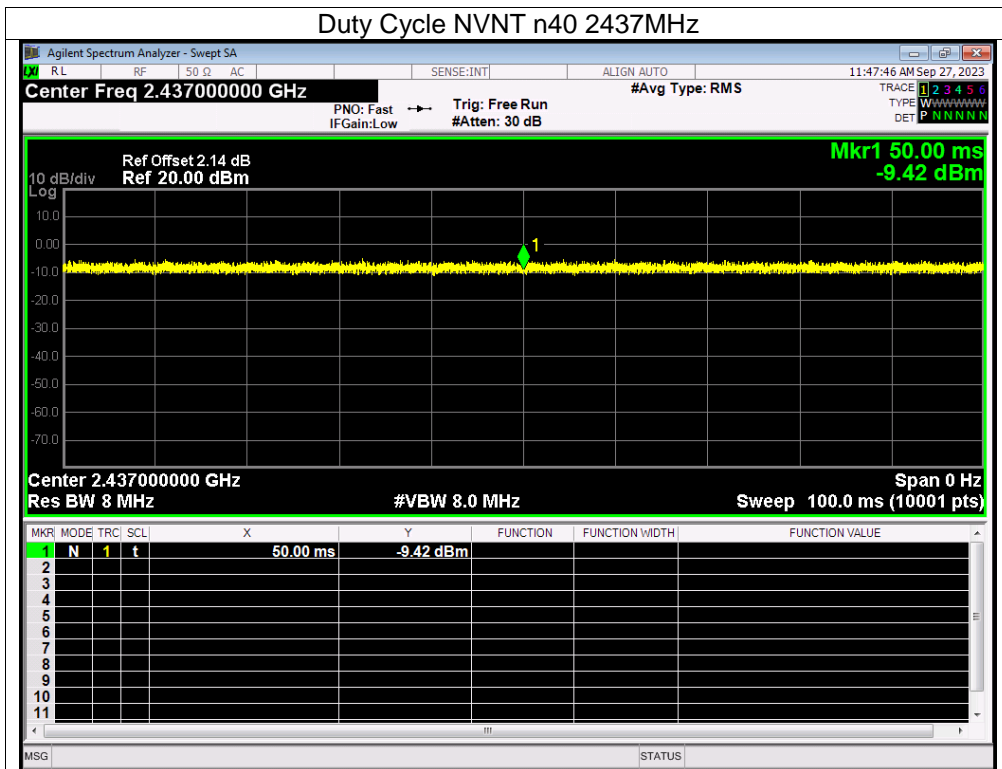

14. Antenna Requirement

14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.1 Test Result

The EUT antenna is Internal antenna, fulfill the requirement of this section.



15. EUT Photographs




Appendix-Photographs Of EUT Constructional Details



16. EUT Test Setup Photographs

Conducted emissions

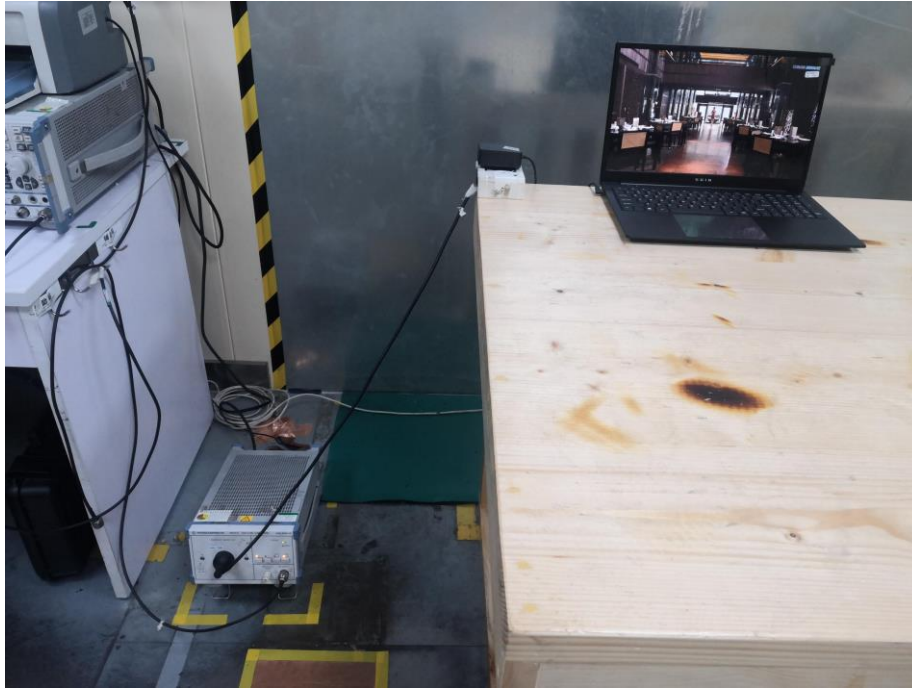

ST
ED

Radiated Measurement Photos



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>E-Mail: bctc@bctc-lab.com.cn

※※※※※ END ※※※※※