


Electric Vehicle AC Charger
JNT-EVM005/2*48AC/01C/BK/RF/WF/4G

此页不印刷

User Manual

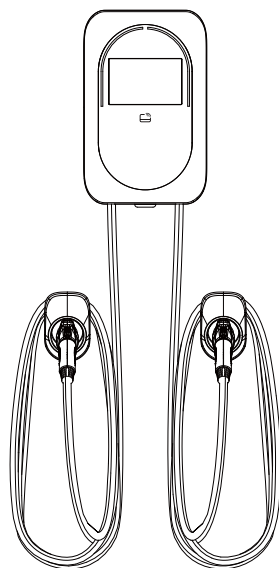

技术要求:

- 1. 成品规格: 142 x 210 mm;
- 2. 印刷方式: 单面印刷; 双面印刷;
- 3. 装订方式: 骑马钉; 单面对折;
- 4. 材质: 70g双胶纸; 108g铜板纸;
- 5. 印刷颜色: 黑色;
- 6. 有条码的话, 刷码等级需达到B级;
- 7. 检验工具: 卷尺, 尺寸单位均为mm

					线条图提供者		设计者		
					排版者		审核者	日期	
					庄妍妍	2024.8.14			
					文件翻译者		批准者	日期	
版本号	修订原因	修订人	修订日期	签名	日期	签名	日期		
变更栏									

说明书				视图/ VIEW	
零件名称					
图纸图号					
产品名称		EVM005 Series (NA)			
产品型号					
比例	单位	版次	次料/REG.%		
1:1	mm				
		厦门佳因特科技有限公司			

Electric Vehicle AC Charger

JNT-EVM005/2*48AC/01C/BK/RF/WF/4G
User Manual

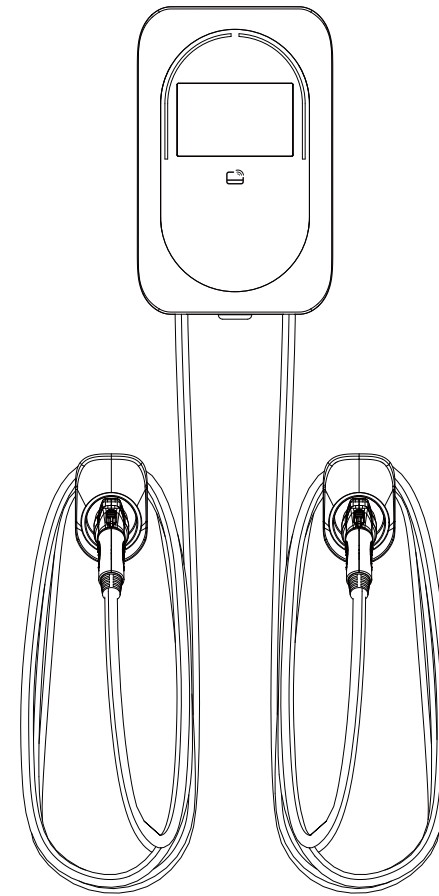


TABLE OF CONTENTS

1. IMPORTANT SAFETY INSTRUCTIONS	1
2. PRODUCT INTRODUCTION	5
3. INSTALLATION PREPARATION	8
4. WALL MOUNTING	10
5. WIRE THE CIRCUIT AND INSTALL 4G CARD.....	12
6. LIGHT CODES	20
7. FCC DECLARATION	21
8. WARRANTY AND MAINTENANCE.....	22

1. Important Safety Instructions

1.1 Overall Warnings & Cautions

Read and follow all warnings and instructions before installing and operating the product.

- ⚠ WARNING:** To avoid fire, injury or death, carefully read and follow the instructions during installation, operation and maintenance.
 - **DO NOT** put fingers into the electric vehicle connector.
 - **DO NOT** use this product if the flexible power cord or EV cable is frayed, insulation-broken, or any other signs of damage.
 - **DO NOT** remove cover or attempt to open the enclosure because of risk of electric shock.
 - **DO NOT** install the product near flammable, explosive, or combustible materials.
- ⚠ WARNING:** The product should be supervised when used around children.
- ⚠ WARNING:** The product must be grounded.
- ⚠ WARNING:** To avoid a risk of fire or electric shock, do not use this device with an extension cord.
- ⚠ WARNING:** To reduce the risk of fire, connect only to a circuit provided branch circuit over-current protection in accordance with the CSA C22.1–15 Canadian Electrical Code, Part 1 (Canada) or NOM-001-SEDE Electrical installations (utility) (Mexico) or ANSI / NFPA 70 National Electrical Code (USA).

Circuit Breaker Options table

Output Amperage (A)		32A*2	40A*2	48A*2
Circuit Breaker Options (A)	Method 1	40A*2	50A*2	60A*2
Circuit Breaker Options (A)	Method 2	80A	100A	120A

1.2 Installation Requirements

- ⚠ WARNING:** Disconnect electrical power prior to installing the charging station.
- ⚠ WARNING:** Be sure to preview the user manual and ensure local building and electrical codes are reviewed before installing the DC charger.
- ⚠ WARNING:** The AC charger should be installed by a qualified technician according to the user manual and local safety regulations.
- ⚠ CAUTION:** Use appropriate protection when connecting to the main power distribution cable.
- ⚠ CAUTION:** Type B, C or D breaker with the rating current for table should be installed in the upstream AC distribution box.
- ⚠ CAUTION:** The device shall be mounted at height between 2 feet and 4 feet from ground.
- ⚠ CAUTION:** Please keep the charger in a clean area with low humidity. Not recommended to be installed in coastal environments with high humidity or high dust.

1.3 Daily Maintenance

- ⚠ CAUTION:** Avoid moisture or water in the charger. If there is water or moisture ingress in the charger, it is necessary to immediately power off to avoid immediate danger, and notify the professionals to carry out maintenance before next use.
- ⚠ CAUTION:** Please use the charger properly. Do not hit or press hard on the enclosure. If it is damaged, please contact a professional technician.
- ⚠ CAUTION:** Avoid placing the charger near hot objects and at high temperature locations and away from dangerous substances such as flammable gases and corrosive materials.
- ⚠ CAUTION:** Do not put heavy objects on the charger to avoid danger.

1. Consignes De Sécurité Importantes

1.1 Avertissement & Mise En Garde Généraux

⚠️ AVERTISSEMENT : Pour éviter les risques d'incendie, de blessure ou de mort, il faut lire et suivre soigneusement les instructions pendant l'installation, l'utilisation et l'entretien.

- **Ne mettez pas** les doigts dans le connecteur du véhicule électrique.
- **N'utilisez pas** ce produit si le cordon d'alimentation flexible ou le câble EV est effiloché, isolé ou présentant tout autre signe de dommage.
- **N'utilisez pas** ce produit si le boîtier ou le connecteur EV est cassé, fissuré, ouvert ou montre toute autre indication de dommage.

Ne retirez pas le couvercle et n'essayez pas d'ouvrir le boîtier en raison du risque de choc électrique.

AVERTISSEMENT : Cet appareil doit être surveillé lorsqu'il est utilisé à proximité d'enfants.

⚠️ AVERTISSEMENT : Cet appareil doit être mis à la terre.

⚠️ AVERTISSEMENT : Pour éviter tout risque d'incendie ou de choc électrique, n'utilisez pas cet appareil avec une rallonge électrique.

⚠️ AVERTISSEMENT : L'adéquation de l'utilisation du cordon flexible conformément au code ce, partie i, règle 4-012, doit être déterminée par l'autorité d'inspection locale compétente.

⚠️ AVERTISSEMENT : Pour réduire les risques d'incendie, ne connecter qu'à un circuit protection contre les surintensités des circuits de dérivation conformément à la norme

⚠️ canadienne CSA C22.1-15 Code électrique, partie 1 (Canada) ou NOM-001-SEDE Installations électrique (Mexique) ou ANSI / NFPA 70 National Electrical Code (États-Unis).

Circuit Breaker Options table

Output Amperage (A)		32A*2	40A*2	48A*2
Circuit Breaker Options (A)	Method 1	40A*2	50A*2	60A*2
Circuit Breaker Options (A)	Method 2	80A	100A	120A

1.2 Exigence Avant L'installation

⚠️ AVERTISSEMENT : Assurez-vous de consulter le manuel d'utilisation et assurez-vous que les codes locaux du bâtiment et de l'électricité sont passés en revue avant d'installer le chargeur.

⚠️ AVERTISSEMENT : Débranchez l'alimentation électrique avant d'installer la station de charge.

⚠️ AVERTISSEMENT : Le chargeur CA doit être installé par un technicien qualifié conformément au manuel d'utilisation et aux réglementations de sécurité locales.

⚠️ MISE EN GARDE : Utilisez une protection appropriée lors de la connexion au câble de distribution d'alimentation principal.

⚠️ MISE EN GARDE : Un disjoncteur de type B, C ou D avec le courant nominal indiqué dans le tableau doit être installé dans le boîtier de distribution CA en amont.

⚠️ MISE EN GARDE : Cet appareil doit être monté à une hauteur entre 2 feet and 4 feet du sol.

⚠️ MISE EN GARDE : Veuillez conserver le chargeur dans un endroit propre et peu humide. Il n'est pas recommandé de l'installer dans des environnements côtiers à forte humidité ou à forte poussière.

1.3 Entretien Quotidien

⚠️ MISE EN GARDE : Évitez l'humidité ou l'eau dans le chargeur. En cas d'infiltration d'eau ou d'humidité dans le chargeur, il est nécessaire de l'éteindre immédiatement pour éviter tout danger immédiat et d'avertir le personnel professionnel d'effectuer l'entretien avant la prochaine utilisation.

⚠️ MISE EN GARDE : Veuillez utiliser le chargeur correctement. Ne frappez pas ou n'appuyez pas trop fort sur le boîtier. Si le boîtier est endommagé, veuillez contacter un technicien professionnel.

⚠️ MISE EN GARDE : Évitez de placer le chargeur à proximité d'objets chauds et à des endroits à haute température et loin de substances dangereuses telles que des gaz inflammables et des matériaux corrosifs.


⚠️ MISE EN GARDE : Ne placez pas d'objets lourds sur le chargeur pour éviter tout danger.

2. Product Introduction




CAUTION: Avoid placing the charger near hot objects and at high temperature locations and away from dangerous substances such as flammable gases and corrosive materials.

2.1 Basic Interface

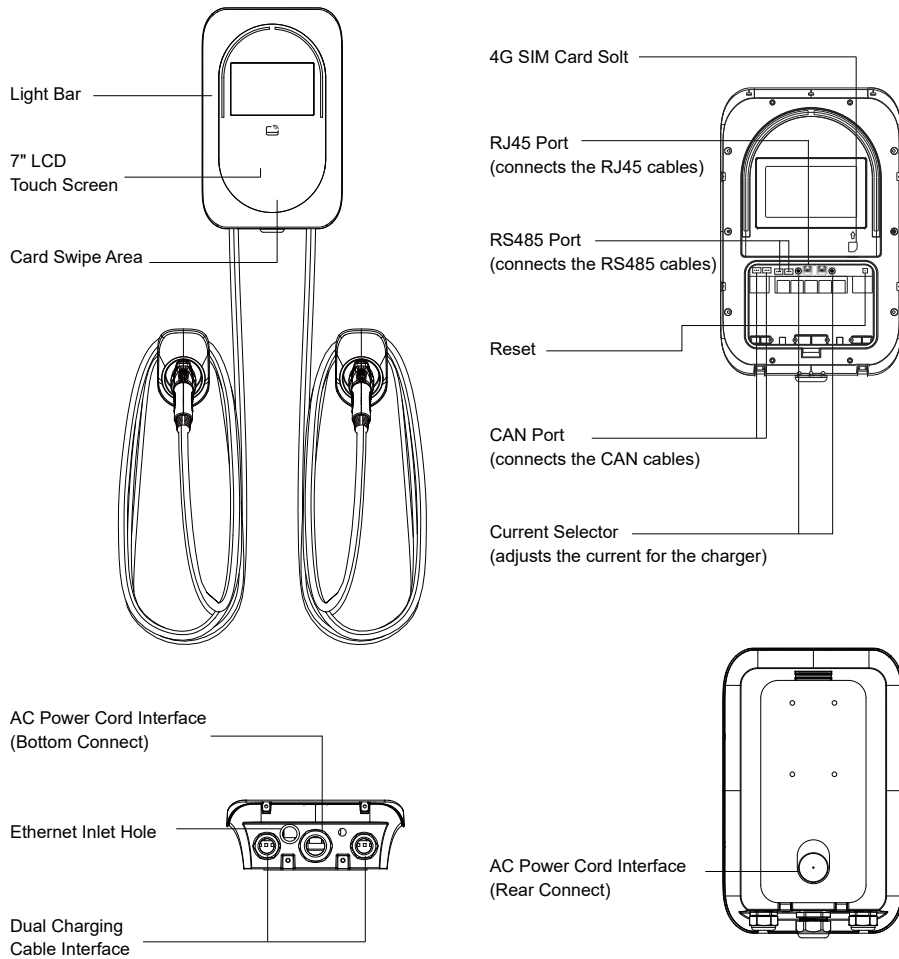


2.2 Basic Dimensions

Enclosure

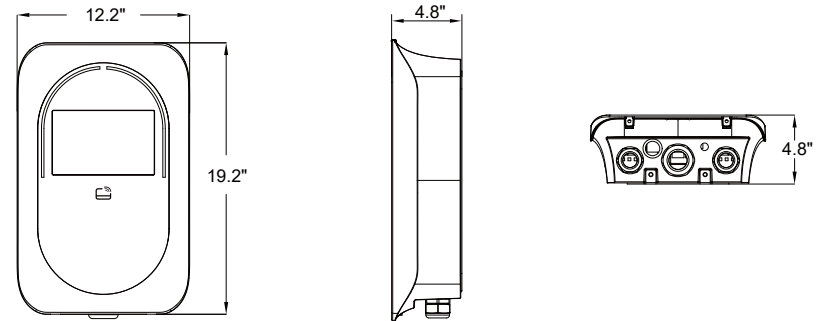

Wall-Mounted Bracket




2.3 Technical specifications

JNT-EVM005/2*48AC/01C/BK/RF/WF/4G	
POWER	
Input Rating	208~240V AC
Output Current	48A*2
Network Type	L1 / L2 / GND
Input Cord	Hard-wire
Mains frequency	50 / 60 Hz
Connector Type	SAE J1772 Type1 18ft / SAE J3400 NACS 18ft (Optional)
Ground Fault Detection	CCID 20
Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection, OCP, OTP, Control Pilot Fault Protection
Meter Accuracy	±1% (CTEP qualified)
USER INTERFACE	
Status Indication	LED indication
Screen	7" touch screen
Language	English / Spanish / French
User Interface	Compatible with multiple CPOs
Connectivity	Bluetooth5.2, Wi-Fi 6 (2.4G / 5G), Ethernet, 4G (optional)
Communication Protocols	OCPP2.0.1 / OCPP 1.6Js self-adaptation
	ISO15118-2/3 (Optional)
Pile Group Management	Dynamic Load Balancing
User Authentication	RFID Card / Credit Card (Optional)
Card Reader	ISO 14443 A/B, ISO / IEC 15693, VAS & Apple, Pay & Google, Pay & More (Optional)
Software Update	OTA
CERTIFICATION & STANDARDS	
Safety & Compliance	UL991, UL1998, UL2231, UL2594, ISO15118 (PnC)
Certification	ETL / FCC / Energy Star
Warranty	36 months
GENERAL	
Dip Switch	0:8A; 1:16A; 2:24A; 3:32A; 4:40A; 5:48A;
Enclosure Rating	NEMA 4 (IP65), IK08
Operating Altitude	< 6561ft (2000m)
Operating Temperature	-40°F ~ +131°F (-40°C ~ +55°C)
Storage Temperature	-40°F ~ +185°F (-40°C ~ +85°C)
Operating Humidity	5~95%
Mounting	Wall mount / Pedestal (optional)
Product Dimensions	12.2"×19.2"×4.8" (310×488×122mm)


3. Installation Preparation

3.1 Verify contents


Check the box to ensure you have the user manual, and these parts:



AC Charger x1



User Manual x1



Wall-Mounted Bracket x1



M4 Anti-Theft Screws x2



M6 Hexagonal Expansion Screws x4



Allen Wrench x1



Cable Ramp x1



ST3.5*16 Screws x2



RFID Card x2



Shorting Terminal Combination (2pcs) x1



Mounting template x1



OT Terminal x6



AD21.2 Conduit Fitting x1



AD42.5 Conduit Fitting x1



M40 Conduit Fitting x1




Plug Holster (Optional) x2



Holster Bracket (Optional) x2



Plug Holster M5*16mm Screws (Optional) x2




Holster Bracket Screws (Optional) x8

3.2 Gather Tools

In addition, you will need the following tools and accessories:

1. Level
2. Drill
3. Gummi hammer
4. Phillips screwdriver
5. Wire stripper
6. Voltmeter or digital multi-meter

(for measuring AC voltage at the installation site)

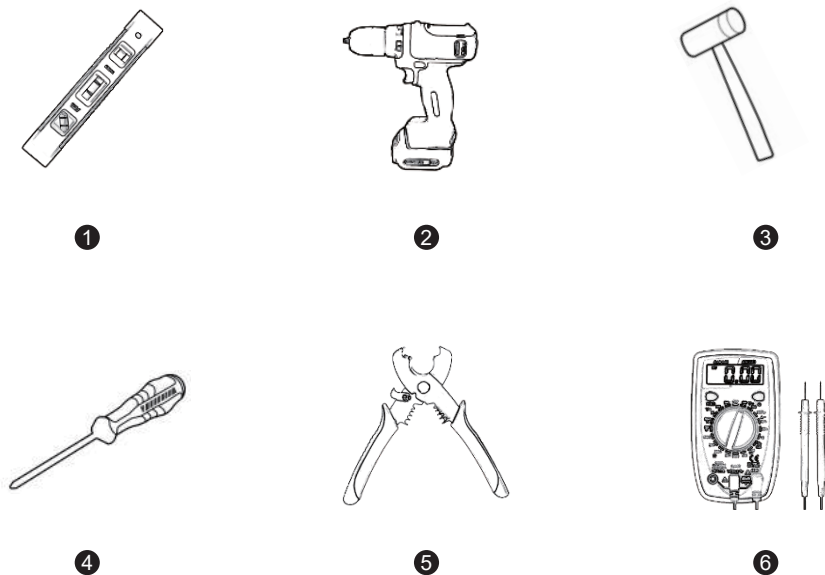

4. Wall mounting




WARNING: This device must be grounded. Disconnect electrical power prior to installing the charging station.

STEP 1

Make sure the installation wall is vertical, and use the Mounting template to drill four screw holes with a diameter of 0.33" (8.5mm) and a depth of 2.17"~2.36" (55mm~60mm) at a height of 47.24"~51.18" (1200-1300mm) from the ground according to the hole positions.


Please drill screw holes in the direction of the template arrow.

Use Gummi hammer to fix the expansion screws into the holes.

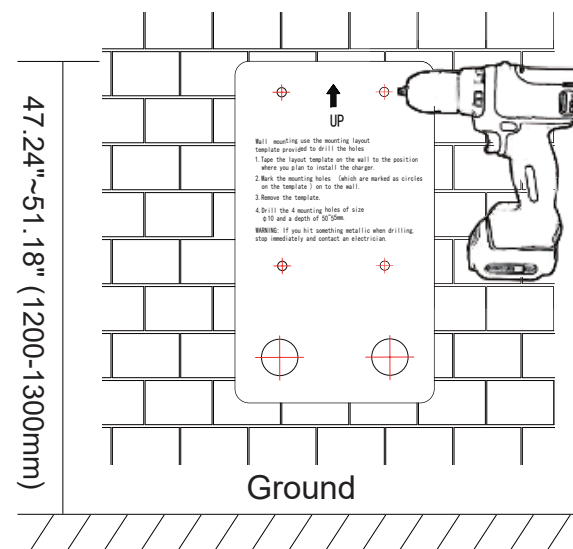


STEP 2


1. Remove the 2 M4 Anti-theft screws from backplate by allen wrench.

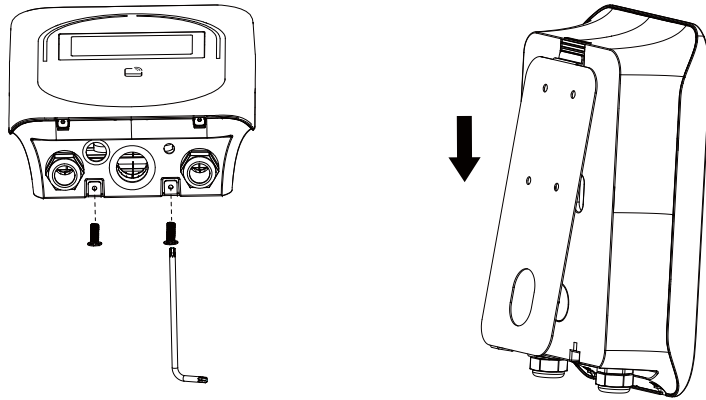

2. Use 4 Hexagonal Expansion Screws to secure the wall-mounted bracket on the wall, Use an wrench to tighten the screw nuts on the expansion screws.

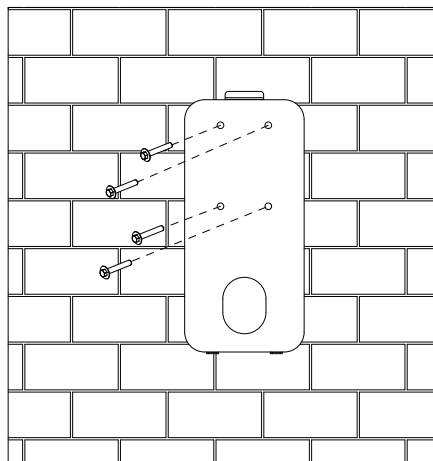


3. Align the rear notch of charger with the wall-mounted bracket and alignment the screw holes at the bottom, and secure it using M4 Anti-Theft Screws.

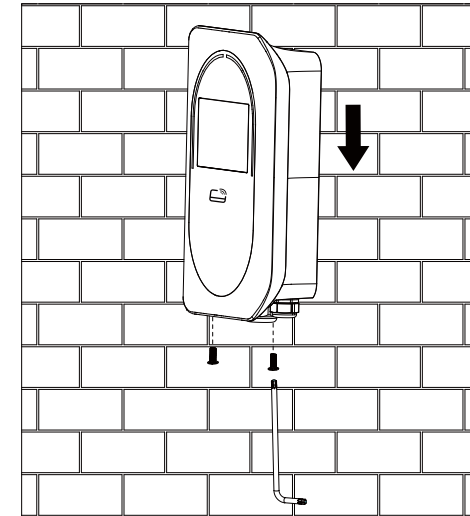

5. Wire The Circuit And Install 4G Card


STEP 1

Use a allen wrench to loosen the two screws located at the bottom of the charging station. Open the buckle on both sides and lift up the front cover to remove it from the charging station.

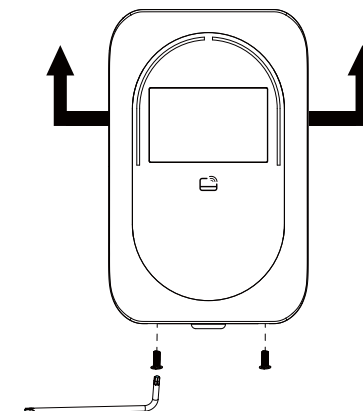

STEP 2

Remove the cover from the charger using the appropriate tools. (such as coin)




STEP 3

Remove the waterproof plug from the charger cable inlet, Connect and Lock the M40 Conduit Fitting Part1 (1) and Part2 (2) (including the washer) to the Inlet as shown below.

Note:

1. You need to bring your own AC input cable.
2. Select the AD42.5 or M40 Conduit Fitting based on the AC input cable type
 - If you choose One AC Power Cord, you can use M40 or AD42.5 Conduit Fitting
 - If you choose Two AC Power Cord, you only use AD42.5 Conduit Fitting
3. If you use AD42.5 Conduit Fitting, perform the same steps as above, and you need to bring your own bellows.

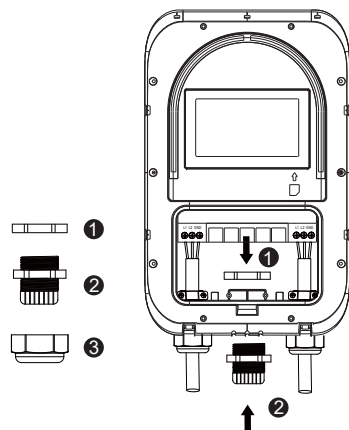


STEP 4

We support two methods of AC Power input, the two methods of wiring will be different, respectively, as follows:


Method 1: Two AC Power Cord and two Charging Cable

Method 2: One AC Power Cord and two Charging Cable

(Using shorting terminals to connect AC1_L1 and AC2_L1, connect AC1_L2 and AC2_L2)

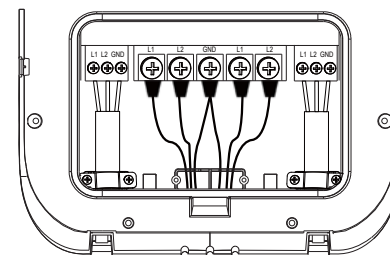

Method 1

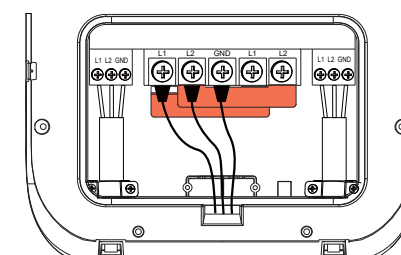


Method 2

Method 1: Two AC Power Cord

Circuit Breaker Options table			
Output Amperage (A)	32A*2	40A*2	48A*2
Circuit Breaker Options (A)	40A*2	50A*2	60A*2


STEP 4-1

Press the wires of AC power cord onto the OT terminals in the accessory kit.



STEP 4-2

First, pass the two AC power cords through the M40 Conduit Fitting Part 3 (Ⓢ), then continue through Part 1 and Part 2. Connect the five terminals according to the following wiring methods image, and connect the two GND together.

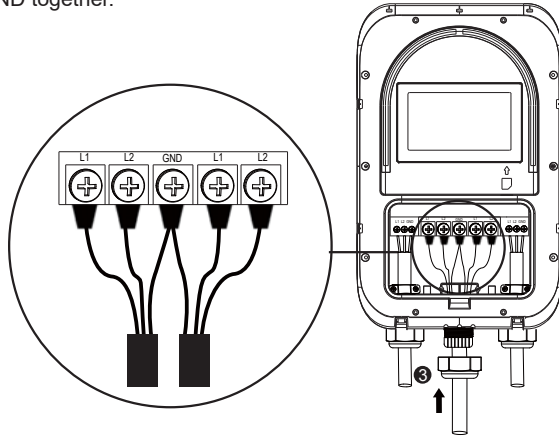


Method 2: One AC Power Cord

Circuit Breaker Options table			
Output Amperage (A)	32A*2	40A*2	48A*2
Circuit Breaker Options (A)	80A	100A	120A


STEP 4-1

Press the wires of AC power cord onto the OT terminals in the accessory kit.




STEP 4-2

Take out the shorting terminals in the accessory package. Connect AC1_L1 and AC2_L1, and connect AC1_L2 and AC2_L2 according to the following wiring methods image.

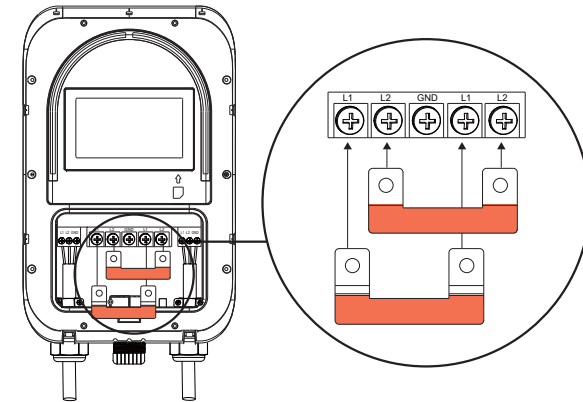


STEP 4-3

First, pass the One AC power cords through the M40 Conduit Fitting Part 3 (Ⓢ), then continue through Part 1 and Part 2. Connect the three terminals according to the following wiring methods L1 is connected to L1, L2 is connected to L2, and GND is connected to GND.

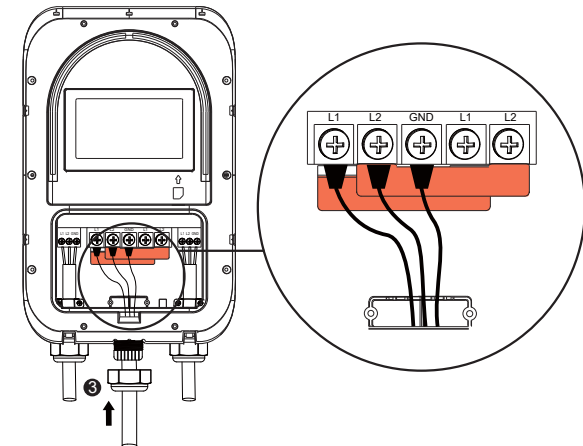

STEP 5


Lock the M40 Conduit Fitting Part 3 (③), Press the AC input cable with cable ramp and secure it with two screws (3.5*16).

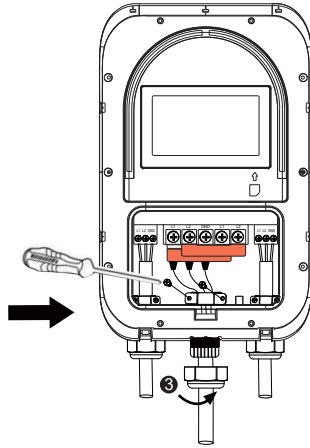

STEP 6

Remove the waterproof plug from the charger cable inlet. Connect and lock the AD21.2 conduit fitting Part1 (①) and Part2 (②) to the inlet. Then, insert the Ethernet cable with the RJ45 plug into the bellows, through the AD21.2 conduit fitting, and plug the cable into the RJ45 port (RS232/RS485 operate in the same mode).

Note: You need to bring your own bellows.

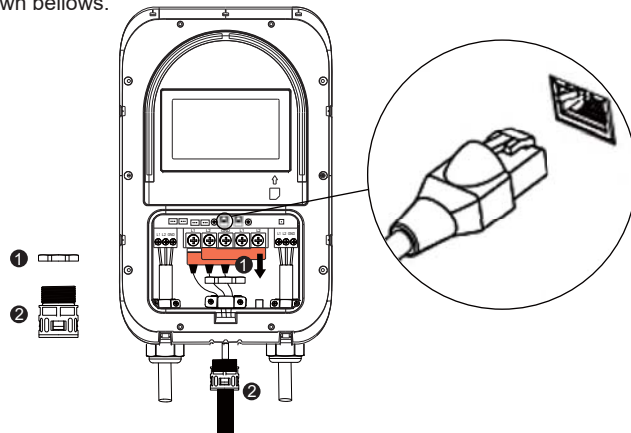


STEP 7

This AC charger is equipped with two current selectors, each corresponding to the left and right connectors, enabling it to support different maximum output currents via the setting rotary switch.

Setting methods are shown below :

- Before setting the rotary switch, make sure the input power is turned OFF.
- Use a non-conductive object to set the rotary switch.

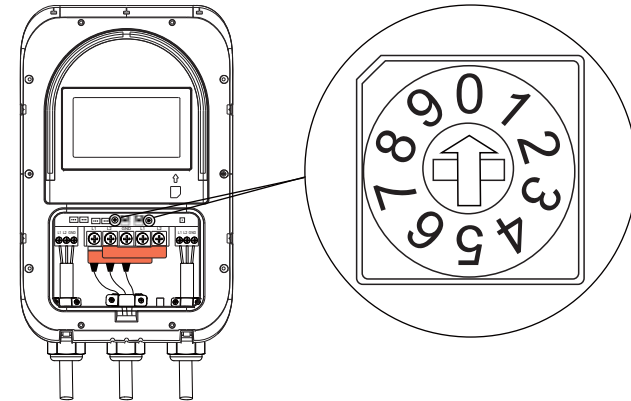


Switch Setting Number	0	1	2	3	4	5-9
Maximum Output Current	8A	16A	24A	32A	40A	48A

STEP 8

Align the cover with its position on the charging station. Secure the cover in place using the appropriate tools (such as coin).


STEP 9

Insert the SIM (MICRO SIM) card according to the picture's instruction (for 4G version, Optional).

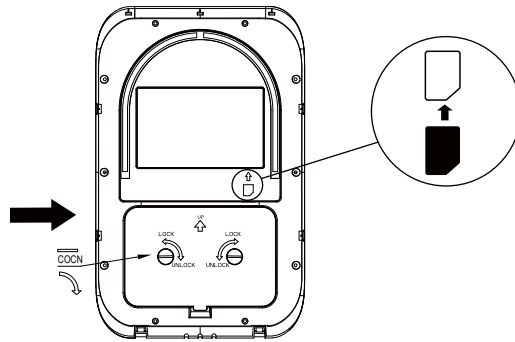

STEP 10

Align the magnetic positions of the cover plate and the middle frame, Fasten both clips and fix the two screws at the bottom.

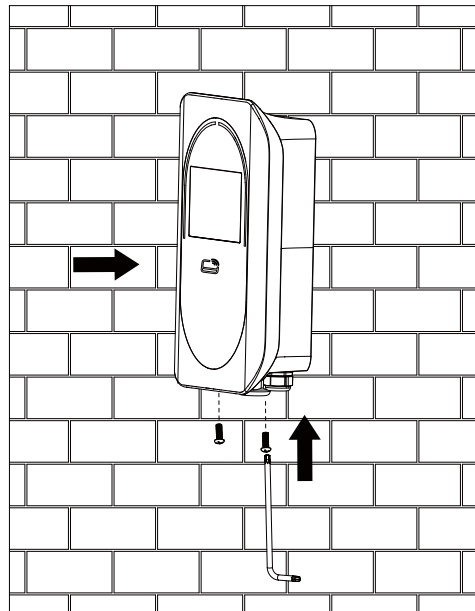

6. Light Codes

6.1 After Start UP

Device Status	Light Codes
Power On	Blue, green and red run clockwise
Standby	Solid Blue
Plug The Charging Connector	Solid Green
Authentication (Swipe Card)	Green Blinking
Charging In Progress	Green Breathing
Finished / Stopped Charging	Solid Green
Reservation Charging	Solid Yellow
Device Unavailable	Yellow Blinking
OTA	Yellow Blinking
Fault	Red

6.2 Error and Warning Messages

No.	Fault Status	Red Light	Remark
1	Meter Fault	1 flash followed by 3 sec pause	Auto Recover
2	CP Fault	2 flashes followed by 3 sec pause	Unplug the Connector to Recover
3	UVP	3 flashes followed by 3 sec pause	Auto Recover
4	OVP	4 flashes followed by 3 sec pause	Auto Recover
5	OTP	5 flashes followed by 3 sec pause	Auto Recover
6	OCP	6 flashes followed by 3 sec pause	Unplug the Connector to Recover
7	Ground Fault	7 flashes followed by 3 sec pause	Unplug the Connector to Recover
8	Relay Fault	8 flashes followed by 3 sec pause	Unplug the Connector to Recover
9	RCD Abnormal	9 flashes followed by 3 sec pause	Unplug the Connector to Recover
10	RCD Self-Test Fault	10 flashes followed by 3 sec pause	Reboot to Recover
11	Relay Self-Test Fault	11 flashes followed by 3 sec pause	Reboot to Recover
12	Sensor Fault	12 flashes followed by 3 sec pause	Check sensor or contact after-sales
13	Cable Fault	13 flashes followed by 3 sec pause	Check cable or contact after-sales

7. FCC Declaration

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

This device may not cause harmful interference, and this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

WiFi module: Containing FCC ID: XMR2023FCS960K

LTE module: Containing FCC ID: XMR202008EC25AFXD

To satisfy FCC RF exposure requirements, a separation distance of 20cm or more should be maintained between the antenna of this device and persons during device operation. To ensure compliance, operations at closer than this distance is not recommended.

8. Warranty and Maintenance

- The warranty period for this charger is three years.
- During the warranty period for any malfunction under normal use according to the User Manual (to be determined by certified maintenance technicians of sellers), the product shall be repaired free of charge. Except for the following situations, the charger shall be subject to the above warranty terms:
 1. The warranty certificate cannot be provided or the contents of the warranty certificate are modified
 - or inconsistent with the label indication of the repaired product.
 2. Those who are unable to provide valid proof of purchase.
 3. Those who exceed the manufacturer's specified warranty period.
 4. Those who damage the product due to not following the product service instruction for use, maintenance and storage.
 5. Damage or malfunction caused by external object entering.
 6. Unauthorized repair, disassembly or modification.
 7. Damage caused by force majeure (such as lightning, excessive voltage, earthquake, fire, flood, etc.).
 8. Malfunction and damage caused by other unavoidable external factors. Malfunction and damage caused by improper use of equipment, such as water or other solutions entering into the equipment.
 9. Malfunction and damage caused by the grid power supply and voltage which is not specified for use with the charger equipment.

The above guarantees shall be made solely, and no other express or implied warranties shall be made (including the implied warranties of merchant ability, particular and applicable reasonableness and adaptability, etc.) whether in the contract, civil negligence, or other aspects, the Company shall not be responsible for any special, incidental or consequential damages.

