

Testing Laborator



FCC Radio Test Report

FCC ID: 2AB9W-PP150XP

Report No. : BTL-FCCP-2-1908T080

Equipment : 3D Printer

Model Name : PartPro150 xP

Brand Name : XYZprinting

Applicant : XYZprinting, Inc.

Address: 10F., No.99, Sec. 5, Nanjing E. Rd., Songshan Dist., Taipei City 10571,

Taiwan (R.O.C.)

Manufacturer : Cal-Comp Electronics (Thailand) Public Company Limited

Address: 138, Moo 4, Phechkasem Road, Sapang, Koawyoi, Petchaburi 76140,

Thailand.

Factory : Cal-Comp Electronics (Thailand) Public Company Limited

Address : 138, Moo 4, Phechkasem Road, Sapang, Koawyoi, Petchaburi 76140,

Thailand.

Radio Function : NFC (13.56 MHz)

FCC Rule Part(s) : FCC Part 15, Subpart C (15.225)

: ANSI C63.4-2014

Measurement

Procedure(s)

Date of Receipt : 2019/9/20

Date of Test : 2019/9/20 ~ 2019/11/14

Issued Date : 2019/12/19

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

Approved by

Peter Chen, Engineer

Scott Hsu , Vice Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com

Project No.: 1908T080 Page 1 of 37 Report Version: R01



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Project No.: 1908T080 Page 2 of 37 Report Version: R01





REPORT ISSUED HISTORY 4 1 SUMMARY OF TEST RESULTS 5 1.1 TEST FACILITY 6 1.2 MEASUREMENT UNCERTAINTY 6 1.3 TEST ENVIRONMENT CONDITIONS 7 2 GENERAL INFORMATION 8 2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST SESULT 9 (Hz ST SEST SESULT			CONTENTS	
1 SUMMARY OF TEST RESULTS 5 1.1 TEST FACILITY 6 1.2 MEASUREMENT UNCERTAINTY 6 1.3 TEST ENVIRONMENT CONDITIONS 7 2 GENERAL INFORMATION 8 2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3. AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SESTUP 11 3.5 TEST RESULT 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST RESULT 9 KHZ TO 30 MHZ TO 40 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT 30 MHZ TO 30 MHZ	REPO	RT ISSUED	HISTORY	4
1.1 TEST FACILITY 6 1.2 MEASUREMENT UNCERTAINTY 6 1.3 TEST ENVIRONMENT CONDITIONS 7 2 GENERAL INFORMATION 8 2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 3.4 SUPPORT UNITS 9 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SESULT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT 9 KHZ TO 30 MHZ FCC PART 15.209				
1.2 MEASUREMENT UNCERTAINTY 6 1.3 TEST ENVIRONMENT CONDITIONS 7 2 GENERAL INFORMATION 8 2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 15 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 50 KHZ TO 30 MHZ – FCC PART 15.209 15 5. FREQU	-			
1.3 TEST ENVIRONMENT CONDITIONS 7 2 GENERAL INFORMATION 8 2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3 ACPOWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4.6 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 50 MHZ TO 1 GHZ – FCC PART 15.209 15 5.1 LIMIT				
2 GENERAL INFORMATION 8 2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 50 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – 50 MHZ TO 1 GHZ – FCC PART 16.209 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS <td></td> <td></td> <td></td> <td></td>				
2.1 DESCRIPTION OF EUT 8 2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SESTUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 9 WHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LI				
2.2 TEST MODES 8 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 9 2.4 SUPPORT UNITS 9 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ- FCC PART 15.209 15 4.7 TEST RESULT - 90 KHZ TO 30 MHZ- FCC PART 15.209 15 4.7 TEST RESULT - 90 KHZ TO 30 MHZ- FCC PART 15.209 15 5. FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 <		DESC	CRIPTION OF EUT	
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 2.4 SUPPORT UNITS 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 4 RADIATED EMISSIONS TEST 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 3.5 DEVIATION FROM TEST STANDARD 11 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ- FCC PART 15.209 15 4.7 TEST RESULT - 30 MHZ TO 1 GHZ - FCC PART 15.209 15 4.8 TEST RESULT - FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 5.2 TEST PROCEDURE 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 6.2 TEST PROCEDURE 6.3 DEVIATION FROM TEST STANDARD 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 6.2 TEST PROCEDURE 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SESULT 17 6.5 EUT OPERATING CONDITIONS 18 6 EUT OPERATING CONDITIONS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ TO 1 GHZ APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 9 CC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34				
2.4 SUPPORT UNITS 9 3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ– FCC PART 15.209 15 4.7 TEST RESULT – 9 KHZ TO 30 MHZ– FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5.5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 6.5 TEST RESULT 17 6.1 LIMIT 17 6.2				
3 AC POWER LINE CONDUCTED EMISSIONS TEST 10 3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 30 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT + FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.5 TEST RESULT 17 6.1 LIMIT 17 </td <td>_</td> <td></td> <td></td> <td></td>	_			
3.1 LIMIT 10 3.2 TEST PROCEDURE 10 3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ-FCC PART 15.209 15 4.7 TEST RESULT - 90 MHZ TO 1 GHZ - FCC PART 15.209 15 4.8 TEST RESULT - FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEV				
3.2 TEST PROCEDURE 3.3 DEVIATION FROM TEST STANDARD 3.4 TEST SETUP 3.5 TEST RESULT 4 RADIATED EMISSIONS TEST 4.1 LIMIT 4.2 TEST PROCEDURE 4.3 DEVIATION FROM TEST STANDARD 3.4 TEST SETUP 4.1 LIMIT 4.2 TEST PROCEDURE 4.3 DEVIATION FROM TEST STANDARD 4.4 TEST SETUP 4.5 EUT OPERATING CONDITIONS 4.6 TEST RESULT – 9 KHZ TO 30 MHZ– FCC PART 15.209 4.7 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 4.8 TEST RESULT – FCC PART 15.225 5 FREQUENCY STABILITY 5 FREQUENCY STABILITY 6 LIMIT 5.2 TEST PROCEDURE 5.3 DEVIATION FROM TEST STANDARD 6.4 EUT OPERATING CONDITIONS 6.6 20 DB BANDWIDTH 6.7 LIMIT 6.1 LIMIT 6.2 TEST RESULT 6.3 DEVIATION FROM TEST STANDARD 6.4 LIMIT 6.5 TEST RESULT 6.6 20 DB BANDWIDTH 6.7 LIMIT 6.8 LIMIT 6.9 LIMIT 6.1 LIMIT 6.1 LIMIT 6.2 TEST PROCEDURE 6.3 DEVIATION FROM TEST STANDARD 6.4 TEST SETUP 6.5 EUT OPERATING CONDITIONS 6.6 TEST RESULT 7 LIST OF MEASURING EQUIPMENTS 8 EUT TEST PHOTO 9 EUT PHOTOS APPENDIX A AC POWER LINE CONDUCTED EMISSIONS APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX E FREQUENCY STABILITY MEASUREMENT 34				
3.3 DEVIATION FROM TEST STANDARD 10 3.4 TEST SETUP 11 3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT − 9 KHZ TO 30 MHZ− FCC PART 15.209 15 4.7 TEST RESULT − 9 KHZ TO 1 GHZ − FCC PART 15.209 15 4.8 TEST RESULT − FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.				. •
3.4 TEST SETUP 3.5 TEST RESULT 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 4.2 TEST PROCEDURE 4.3 DEVIATION FROM TEST STANDARD 4.4 TEST SETUP 4.5 EUT OPERATING CONDITIONS 4.6 TEST RESULT − 9 KHZ TO 30 MHZ − FCC PART 15.209 4.7 TEST RESULT − 30 MHZ TO 1 GHZ − FCC PART 15.209 4.8 TEST RESULT − FCC PART 15.225 5 FREQUENCY STABILITY 16 5.1 LIMIT 5.1 LIMIT 5.1 LIMIT 5.2 TEST PROCEDURE 5.3 DEVIATION FROM TEST STANDARD 16 5.5 TEST RESULT − MTEST STANDARD 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 6.1 LIMIT 6.2 TEST PROCEDURE 6.3 DEVIATION FROM TEST STANDARD 16 6.4 EUT OPERATING CONDITIONS 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST PROCEDURE 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 7 LIST OF MEASURING EQUIPMENTS 8 EUT TEST RESULT 7 LIST OF MEASURING EQUIPMENTS 8 EUT TEST PHOTO 9 EUT PHOTOS 20 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34				
3.5 TEST RESULT 11 4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ-FCC PART 15.209 15 4.7 TEST RESULT - 9 KHZ TO 30 MHZ-FCC PART 15.209 15 4.7 TEST RESULT - FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LI				
4 RADIATED EMISSIONS TEST 12 4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ FCC PART 15.209 15 4.7 TEST RESULT – 30 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 6.5 EUT OPERATING CONDITIONS 17				
4.1 LIMIT 12 4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ- FCC PART 15.209 15 4.7 TEST RESULT - 9 KHZ TO 1 GHZ - FCC PART 15.209 15 4.8 TEST RESULT - FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.		_		
4.2 TEST PROCEDURE 13 4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ- FCC PART 15.209 15 4.7 TEST RESULT - 30 MHZ TO 1 GHZ - FCC PART 15.209 15 4.8 TEST RESULT - FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19	-			
4.3 DEVIATION FROM TEST STANDARD 13 4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT - 9 KHZ TO 30 MHZ-FCC PART 15.209 15 4.7 TEST RESULT - 30 MHZ TO 1 GHZ - FCC PART 15.209 15 4.8 TEST RESULT - FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 <t< td=""><td></td><td></td><td></td><td></td></t<>				
4.4 TEST SETUP 13 4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 30 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20				_
4.5 EUT OPERATING CONDITIONS 14 4.6 TEST RESULT – 9 KHZ TO 30 MHZ – FCC PART 15.209 15 4.7 TEST RESULT – 30 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ <td></td> <td></td> <td></td> <td></td>				
4.6 TEST RESULT – 9 KHZ TO 30 MHZ– FCC PART 15.209 15 4.7 TEST RESULT – 30 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 9		_		
4.7 TEST RESULT – 30 MHZ TO 1 GHZ – FCC PART 15.209 15 4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC P		_		
4.8 TEST RESULT – FCC PART 15.225 15 5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34		_		
5 FREQUENCY STABILITY 16 5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABIL				
5.1 LIMIT 16 5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34		_		
5.2 TEST PROCEDURE 16 5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 7CC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	_			
5.3 DEVIATION FROM TEST STANDARD 16 5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34				
5.4 EUT OPERATING CONDITIONS 16 5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	_			
5.5 TEST RESULT 16 6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34				
6 20 DB BANDWIDTH 17 6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	_			
6.1 LIMIT 17 6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34		_		
6.2 TEST PROCEDURE 17 6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34		_		
6.3 DEVIATION FROM TEST STANDARD 17 6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34				
6.4 TEST SETUP 17 6.5 EUT OPERATING CONDITIONS 17 6.6 TEST RESULT 17 7 LIST OF MEASURING EQUIPMENTS 18 8 EUT TEST PHOTO 19 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34		_		17
6.5 EUT OPERATING CONDITIONS 6.6 TEST RESULT 7 LIST OF MEASURING EQUIPMENTS 8 EUT TEST PHOTO 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	6.3	DEVI	ATION FROM TEST STANDARD	17
6.6 TEST RESULT 7 LIST OF MEASURING EQUIPMENTS 8 EUT TEST PHOTO 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	6.4	TEST	SETUP	17
7 LIST OF MEASURING EQUIPMENTS 8 EUT TEST PHOTO 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 APPENDIX E FREQUENCY STABILITY MEASUREMENT 18 20 31 34	6.5	EUT (OPERATING CONDITIONS	17
8 EUT TEST PHOTO 9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	6.6	TEST	RESULT	17
9 EUT PHOTOS 19 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	7	LIST OF	MEASURING EQUIPMENTS	18
APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 20 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 23 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 28 APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	8	EUT TE	ST PHOTO	19
APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	9	EUT PH	отоѕ	19
APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	APPE	NDIX A	AC POWER LINE CONDUCTED EMISSIONS	20
APPENDIX D RADIATED EMISSIONS - FCC PART 15.225 31 APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	APPE	NDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	23
APPENDIX E FREQUENCY STABILITY MEASUREMENT 34	APPE	NDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	28
	APPE	NDIX D	RADIATED EMISSIONS - FCC PART 15.225	31
APPENDIX F 20 DB BANDWIDTH 36	APPE	NDIX E	FREQUENCY STABILITY MEASUREMENT	34
	APPE	NDIX F	20 DB BANDWIDTH	36



REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2019/11/22
R01	Revised report to address TCB's comments.	2019/12/19

Project No.: 1908T080 Page 4 of 37 Report Version: R01



1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart C (15.225)							
Standard(s) Section	Description	Test Result	Judgement	Remark			
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass				
15.35 15.205 15.209 15.225	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass				
15.225(e)	Frequency Stability	APPENDIX E	Pass				
15.203	Antenna Requirement		Pass				
15.215(c)	20 dB Bandwidth	APPENDIX F	Pass				

NOTE:

(1)	"N/A"	denotes	test is	not a	applicab	le in	this	Test Re	port.
-----	-------	---------	---------	-------	----------	-------	------	---------	-------

Project No.: 1908T080 Page 5 of 37 Report Version: R01

□ CB16

1.1 TEST FACILITY

The test facilities used to collect the test data in this repor	The test facilities	used to	collect the	test data	in this	report
---	---------------------	---------	-------------	-----------	---------	--------

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 355421 and DN: TW1099.

□ C05 □ CB08 □ CB11 □ CB15

□ CB18 □ SR06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expanded uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k} = \mathbf{2}$, providing a level of confidence of approximately 95 %. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 \mathbf{U}_{cisor} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions below 1 GHz test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
		30MHz ~ 200MHz	V	4.20
CB18 (3m)	CISPR	30MHz ~ 200MHz	Н	3.64
	CISPR	200MHz ~ 1,000MHz	V	4.56
		200MHz ~ 1,000MHz	Н	3.90

C. Conducted test:

4 1001 .				
Test Item	U,(dB)			
Bandwidth	1.13			
Output power	1.06			
Power Spectral Density	1.20			
Conducted Spurious emissions	1.14			
Conducted Band edges	1.13			

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Project No.: 1908T080 Page 6 of 37 Report Version: R01



1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Tested by
AC Power Line Conducted Emissions	25 °C, 45 %	Eric Lee
Radiated emissions (9KHz-30MHz)	23 °C, 59 %	Hunter Chiang
Radiated emissions (30MHz TO 1000MHz)	23 °C, 59 %	John Chuang
Frequency Stability	23.5 °C, 49 %	William Wei
20 dB Bandwidth	23.5 °C, 49 %	William Wei

Project No.: 1908T080 Page 7 of 37 Report Version: R01



2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	3D Printer
Model Name	PartPro150 xP
Brand Name	XYZprinting
Model Difference	N/A
Power Source	DC voltage supplied from AC/DC Adapter. (1) FSP / FSP060-DAAN3 (2) EDAC / EA10681P-240
Power Rating	(1) I/P: 100-240V~, 1.8A 50-60Hz / O/P: 24.0V==2.5A (60E MAX.) (2) I/P: 100-240V~2.0A, 50-60Hz / O/P: 24V==2.5A
Products Covered	1 * USB cable 1 * Power cable 2 * Adapter: (1) FSP / FSP060-DAAN3 (2) EDAC / EA10681P-240
Frequency Range	13.56 MHz
Antenna Designation	LOOP Antenna
Max H-field strength	46.86 dBuV/m
Test Model	PartPro150 xP
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

Channel	Frequency (MHz)
01	13.56

(3) Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Coil	N/A	N/A

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	NFC_Normal	-	-
Radiated emissions (9KHz-30MHz)	Transmit	01	-
Radiated emissions (30MHz TO 1000MHz)	Transmit	01	
Frequency Stability	Transmit	01	-
20 dB Bandwidth	Transmit	01	-

NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) The Adapter EDAC / EA10681P-240 was found to be the worst case and used for final test.


Project No.: 1908T080 Page 8 of 37 Report Version: R01




2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

For 9 kHz to 30 MHz

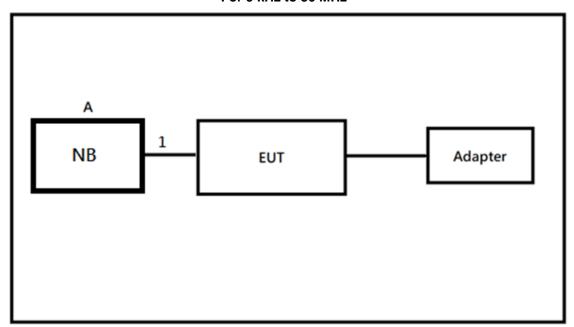

For 30 MHz to 1 GHz

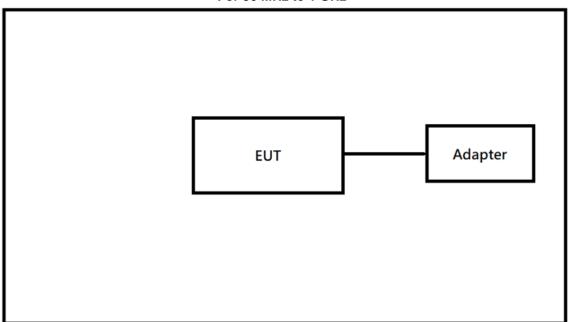

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
Α	NB	HP	TPN-I119	N/A	5cg71818hd

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	2m	Console to USB	-



3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency	Limit (dBμV)			
(MHz)	Quasi-peak	Average		
0.15 - 0.5	66 - 56 *	56 - 46 *		
0.50 - 5.0	56	46		
5.0 - 30.0	60	50		

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 - All other support equipment were powered from an additional LISN(s).
 - The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 - The end of the cable will be terminated, using the correct terminating impedance.
 - The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item EUT TEST PHOTO.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used. BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


3.3 DEVIATION FROM TEST STANDARD

No deviation.

Project No.: 1908T080 Page 10 of 37 Report Version: R01



3.4 TEST SETUP

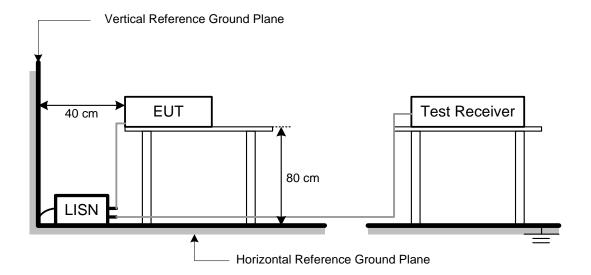

3.5 TEST RESULT

Please refer to the APPENDIX A.



RADIATED EMISSIONS TEST

4.1 LIMIT

FCC Part 15.209						
Frequency	Field Strength Lin	nitation	Field Strength Limitation at 3m Measurement Dist			
(MHz)	(uV/m)	Dist	(uV/m)	(dBuV/m)		
0.009 - 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80		
0.490 - 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40		
1.705 – 30.00	30	30m	100* 30	20log 30 + 40		
30.0 - 88.0	100	3m	100	20log 100		
88.0 – 216.0	150	3m	150	20log 150		
216.0 – 960.0	200	3m	200	20log 200		
Above 960.0	500	3m	500	20log 500		
		FCC P	art 15.225(a)/(b)/(c)			
Frequency	Field Strength Lin	nitation	Field Strength Limitatio	n at 3m Measurement Dist		
(MHz)	(uV/m)	Dist	(uV/m)	(dBuV/m)		
13.553 – 13.567	15,848	30 m	15,848*100	124		
13.567 – 13.710	334	30 m	334*100	90.5		
13.110 – 13.410 13.710 – 14.010	106	30 m	106*100	80.5		

NOTE:

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d_2/d_1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as $L_{d1} =$ $L_1 = 30 \text{uV/m} * (10)^2 = 100 * 30 \text{ uV/m}$ (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

Project No.: 1908T080 Page 12 of 37 Report Version: R01



4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (below 1GHz).
- b. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE: (FCC PART 15.209)

- Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.


NOTE: (FCC PART 15.225)

- a. Spectrum Setting:
 - 9 KHz 150 KHz, RBW= 200Hz, VBW=200Hz, Sweep time = 200 ms.
 - 150 K Hz -30 MHz, RBW= 10 KHz, VBW=10 KHz, Sweep time = 200 ms.
 - 30 MHz 1000 MHz, RBW= 100 KHz, VBW=100 KHz, Sweep time = 200 ms.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- c. The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

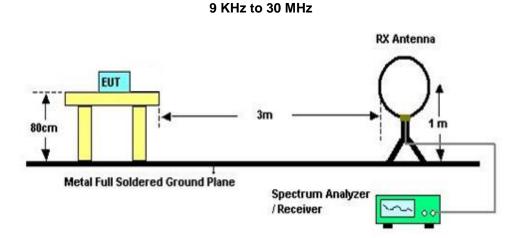



30 MHz to 1 GHz

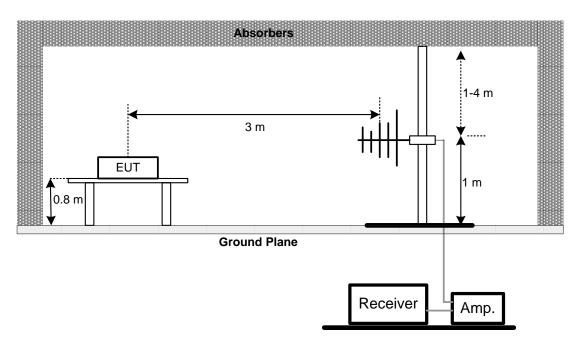

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

Project No.: 1908T080 Page 14 of 37 Report Version: R01





4.6 TEST RESULT - 9 kHZ TO 30 MHZ- FCC PART 15.209

Please refer to the APPENDIX B

4.7 TEST RESULT - 30 MHZ TO 1 GHZ - FCC PART 15.209

Please refer to the APPENDIX C.

4.8 TEST RESULT - FCC PART 15.225

Please refer to the APPENDIX D.

NOTE:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Project No.: 1908T080 Page 15 of 37 Report Version: R01



5 FREQUENCY STABILITY

5.1 LIMIT

FCC Part 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of - 20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests shall be performed using a new battery.

5.2 TEST PROCEDURE

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber.
- b. At room temperature (25±5°C), an external variable AC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 TEST RESULT

Please refer to the APPENDIX E.

Project No.: 1908T080 Page 16 of 37 Report Version: R01

6 20 DB BANDWIDTH

6.1 LIMIT

FCC Part 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through §15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1 kHz, VBW=1 kHz, Sweep time = 20 ms.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

EUT SPECTRUM ANALYZER

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX F.

Project No.: 1908T080 Page 17 of 37 Report Version: R01



7 LIST OF MEASURING EQUIPMENTS

	AC Power Line Conducted Emissions								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until			
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	2019/3/18	2020/3/17			
2	Test Cable	EMCI	EMCCFD300-BM -BMR-6000	170715	2019/8/7	2020/8/6			
3	EMI Test Receiver	R&S	ESR7	101433	2018/12/5	2019/12/4			
4	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A	N/A			

	Radiated Emissions								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until			
1	Preamplifier	EMCI	EMC001340	980555	2019/4/12	2020/4/11			
2	Preamplifier	EMCI	EMC02325B	980217	2019/4/12	2020/4/11			
3	Test Cable	EMCI	EMC104-SM-SM- 800	150207	2019/4/12	2020/4/11			
4	Test Cable	EMCI	EMC104-SM-SM- 3000	151205	2019/4/12	2020/4/11			
5	Test Cable	EMCI	EMC-SM-SM-700 0	180408	2019/4/12	2020/4/11			
6	MXE EMI Receiver	Agilent	N9038A	MY55420127	2019/3/26	2020/3/25			
7	Loop Ant	EMCO	EMCI-LPA600	274	2019/5/31	2020/5/30			
8	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	000992	2019/5/29	2020/5/28			
9	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0508	2019/5/29	2020/5/28			

	Frequency Stability Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until			
1	Spectrum Analyzer	R&S	FSP40	100129	2019/5/23	2020/5/22			
2	Thermal Chamber	HOLINK	H-TH-2SP-B	H1/EK04101902	2019/7/26	2020/7/25			

	20 dB Bandwidth Measurement								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until			
1	Spectrum Analyzer	R&S	FSP40	100129	2019/5/23	2020/5/22			

Remark: "N/A" denotes no model name, no serial no. or no calibration specified. All calibration period of equipment list is one year.

Project No.: 1908T080 Page 18 of 37 Report Version: R01



8 EUT TEST PHOTO									
Please refer to document Appendix No.: TP-1908T080-FCCP-2 (APPENDIX-TEST PHOTOS).									
9 EUT PHOTOS									
Please refer to document Appendix No.: EP-1908T080-1 (APPENDIX-EUT PHOTOS).									

Project No.: 1908T080 Page 19 of 37 Report Version: R01






APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS

Project No.: 1908T080 Page 20 of 37 Report Version: R01



Test Mode	NFC_Normal	Tested Date	2019/11/8
Test Voltage	AC 120V/60Hz	Phase	Line

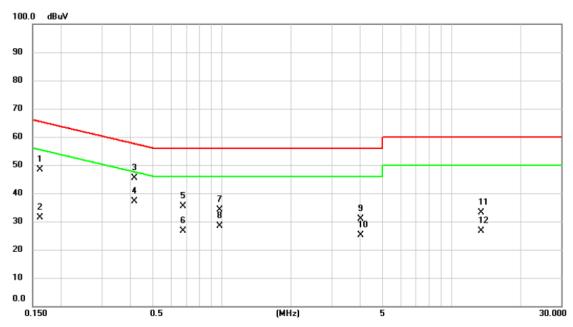


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1613	38.72	9.57	48.29	65.40	-17.11	QP	
2		0.1613	21.82	9.57	31.39	55.40	-24.01	AVG	
3		0.4177	35.84	9.62	45.46	57.49	-12.03	QP	
4	*	0.4177	27.59	9.62	37.21	47.49	-10.28	AVG	
5		0.6765	25.85	9.64	35.49	56.00	-20.51	QP	
6		0.6765	16.89	9.64	26.53	46.00	-19.47	AVG	
7		0.9780	24.39	9.64	34.03	56.00	-21.97	QP	
8		0.9780	18.84	9.64	28.48	46.00	-17.52	AVG	
9		4.0110	21.16	9.73	30.89	56.00	-25.11	QP	
10		4.0110	15.50	9.73	25.23	46.00	-20.77	AVG	
11		13.4700	23.21	9.90	33.11	60.00	-26.89	QP	
12		13.4700	16.79	9.90	26.69	50.00	-23.31	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



ı				
	Test Mode	NFC_Normal	Tested Date	2019/11/8
	Test Voltage	AC 120V/60Hz	Phase	Neutral

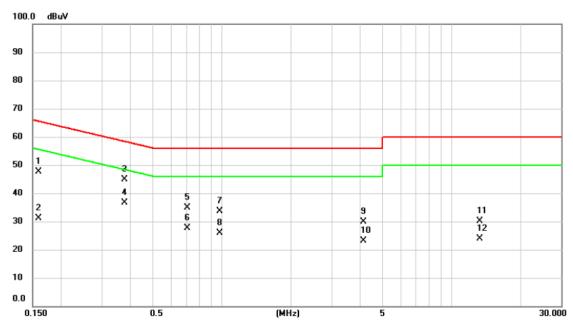

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1590	38.06	9.57	47.63	65.52	-17.89	QP	
2		0.1590	21.52	9.57	31.09	55.52	-24.43	AVG	
3		0.3772	35.19	9.62	44.81	58.34	-13.53	QP	
4	*	0.3772	26.90	9.62	36.52	48.34	-11.82	AVG	
5		0.7080	25.24	9.65	34.89	56.00	-21.11	QP	
6		0.7080	17.92	9.65	27.57	46.00	-18.43	AVG	
7		0.9757	24.05	9.64	33.69	56.00	-22.31	QP	
- 8		0.9757	16.36	9.64	26.00	46.00	-20.00	AVG	
9		4.1438	20.18	9.73	29.91	56.00	-26.09	QP	
10		4.1438	13.51	9.73	23.24	46.00	-22.76	AVG	
11		13.2878	20.13	9.89	30.02	60.00	-29.98	QP	
12		13.2878	13.87	9.89	23.76	50.00	-26.24	AVG	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.




APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Project No.: 1908T080 Page 23 of 37 Report Version: R01



Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz	Azimuth Angle	90°

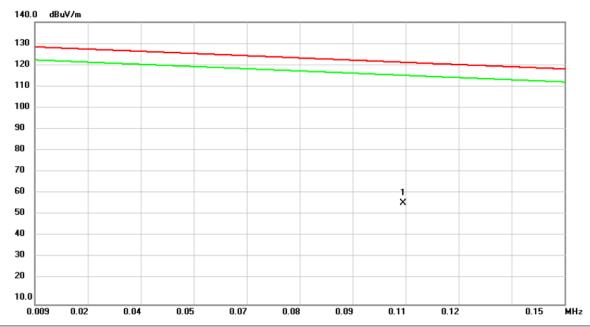


	No.	Mk.	Freq.	Reading Level		Measure ment	- Limit	Margin			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	1	*	0.1071	40.43	16.20	56.63	121.43	-64.80	AVG		

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.




ı				
	Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
	Test Voltage	AC 120V/60Hz	Azimuth Angle	90°

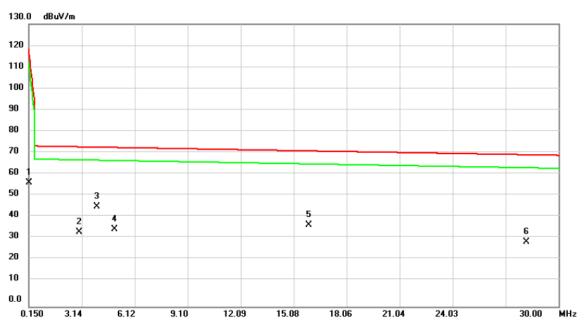

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	ı	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1500	43.24	13.75	56.99	118.34	-61.35	QP	
2	2.9857	37.24	-3.11	34.13	73.44	-39.31	QP	
3 *	4.0007	49.29	-3.34	45.95	73.29	-27.34	QP	
4	4.9856	39.15	-3.55	35.60	73.15	-37.55	QP	
5	15.9108	41.74	-4.26	37.48	71.57	-34.09	QP	
6	28.1791	35.52	-5.73	29.79	69.80	-40.01	QP	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz	Azimuth Angle	0°

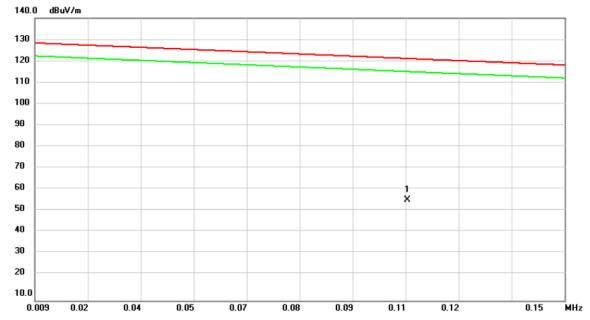


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.1082	40.31	16.13	56.44	121.35	-64.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Project No.: 1908T080 Page 26 of 37 Report Version: R01

Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz	Azimuth Angle	0°

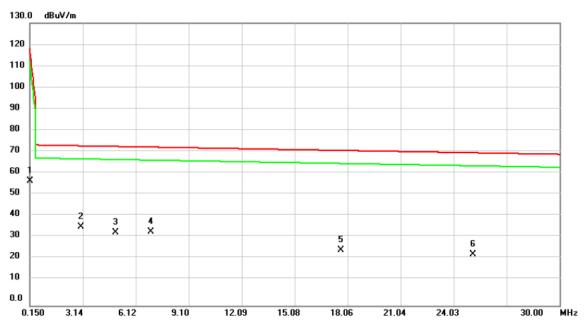

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	ı	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.1500	43.76	13.75	57.51	118.34	-60.83	QP	
2 *	3.0156	39.48	-3.12	36.36	73.44	-37.08	QP	
3	4.9856	37.06	-3.55	33.51	73.15	-39.64	QP	
4	6.9856	37.65	-3.64	34.01	72.86	-38.85	QP	
5	17.7018	30.30	-4.95	25.35	71.32	-45.97	QP	
6	25.1345	31.17	-7.51	23.66	70.24	-46.58	QP	


- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Project No.: 1908T080 Page 28 of 37 Report Version: R01


Ш				
	Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
	Test Voltage	AC 120V/60Hz	Polarization	Vertical

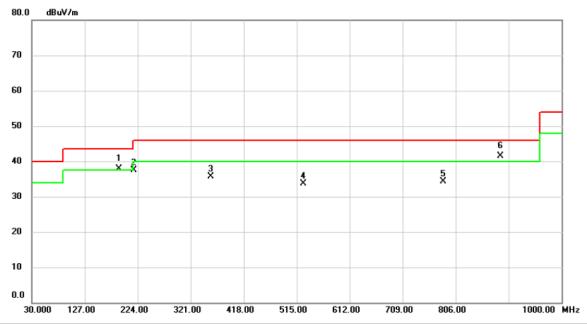

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	ļ	189.0800	51.57	-13.65	37.92	43.50	-5.58	QP	
2		216.2400	52.25	-14.80	37.45	46.00	-8.55	peak	
3		357.8600	45.20	-9.57	35.63	46.00	-10.37	peak	
4		526.6400	39.35	-5.68	33.67	46.00	-12.33	peak	
5		782.7200	35.27	-1.01	34.26	46.00	-11.74	peak	
6	*	888.4500	41.32	0.16	41.48	46.00	-4.52	QP	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.

Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz	Polarization	Horizontal

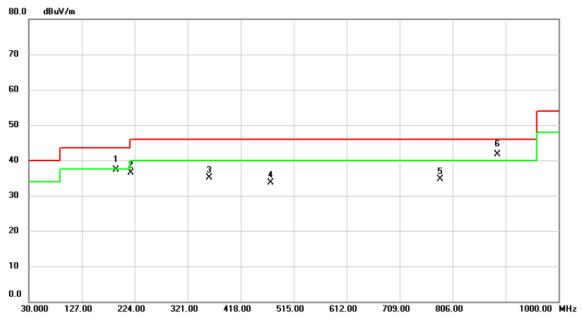

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		189.0800	50.86	-13.65	37.21	43.50	-6.29	QP	
2		216.2400	51.21	-14.80	36.41	46.00	-9.59	peak	
3		360.7700	44.56	-9.48	35.08	46.00	-10.92	peak	
4		472.3200	40.46	-6.66	33.80	46.00	-12.20	peak	
5		782.7200	35.77	-1.01	34.76	46.00	-11.24	peak	
6	*	888.4500	41.61	0.16	41.77	46.00	-4.23	QP	


- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



APPENDIX D	RADIATED EMISSIONS - FCC PART 15.225

Project No.: 1908T080 Page 31 of 37 Report Version: R01


Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz	Polarization	Vertical

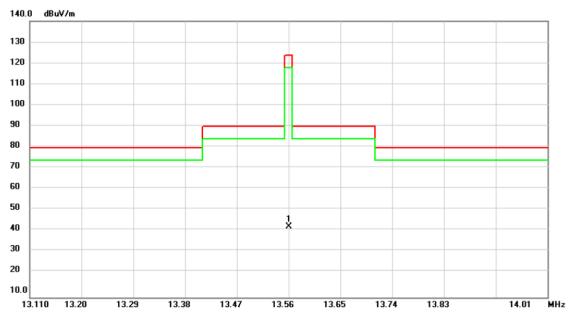

No. Mk.	Freq.			Measure- ment		Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	13.5600	47.18	-3.94	43.24	123.99	-80.75	peak	

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz	Polarization	Horizontal

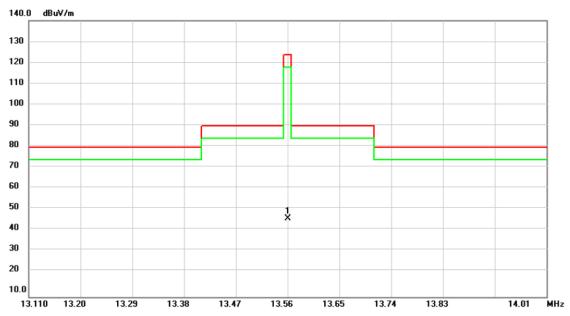

No. Mk.	Freq.		Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	13.5600	50.80	-3.94	46.86	123.99	-77.13	peak	

- (1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value Limit Value.



APPENDIX E	FREQUENCY STABILITY MEASUREMENT

Project No.: 1908T080 Page 34 of 37 Report Version: R01



Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz		

Condition			Frequency Error (ppm)									
Temperature	Modulation Mode	Test Freq.	0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min	Limit (ppm)	Result
							Normal					
T _{20°C} V max	CW	13.56	13.559600	13.559600	13.559600	13.559600	-29.50	-29.50	-29.50	-29.50	100	Pass
T _{20°C} V min	CW	13.56	13.559600	13.559600	13.559600	13.559600	-29.50	-29.50	-29.50	-29.50	100	Pass
							Extreme					
T85 _{°C} Vnom	CW	13.56	13.559560	13.559560	13.559560	13.559560	-32.45	-32.45	-32.45	-32.45		Pass
T80 _{°C} Vnom	CW	13.56	13.559520	13.559520	13.559520	13.559520	-35.40	-35.40	-35.40	-35.40		Pass
T _{70°C} Vnom	CW	13.56	13.559520	13.559520	13.559520	13.559520	-35.40	-35.40	-35.40	-35.40		Pass
T60 _{°C} V nom	CW	13.56	13.559560	13.559560	13.559560	13.559560	-32.45	-32.45	-32.45	-32.45		Pass
T _{50°C} Vnom	CW	13.56	13.559600	13.559600	13.559600	13.559600	-29.50	-29.50	-29.50	-29.50		Pass
T _{40°C} Vnom	CW	13.56	13.559560	13.559560	13.559560	13.559560	-32.45	-32.45	-32.45	-32.45	1	Pass
T _{30°C} Vnom	CW	13.56	13.559520	13.559520	13.559520	13.559520	-35.40	-35.40	-35.40	-35.40	100	Pass
T _{20°C} Vnom	CW	13.56	13.559520	13.559520	13.559520	13.559520	-35.40	-35.40	-35.40	-35.40	100	Pass
T _{10°C} Vnom	CW	13.56	13.559560	13.559560	13.559560	13.559560	-32.45	-32.45	-32.45	-32.45] [Pass
T _{0°C} Vnom	CW	13.56	13.559600	13.559600	13.559600	13.559600	-29.50	-29.50	-29.50	-29.50	1	Pass

NOTE: 0.01 % = 100 ppm.

Project No.: 1908T080 Page 35 of 37 Report Version: R01






APPENDIX F 20 DB BANDWIDTH

Project No.: 1908T080 Page 36 of 37 Report Version: R01



Test Mode	Transmit 13.56MHz	Tested Date	2019/11/12
Test Voltage	AC 120V/60Hz		

Frequency (MHz)	20 dB Bandwidth (kHz)	Operated Frequency Range (MHz)	Designated Frequency Band (MHz)	Result
13.56	2.64	0.002	0.014	Complied

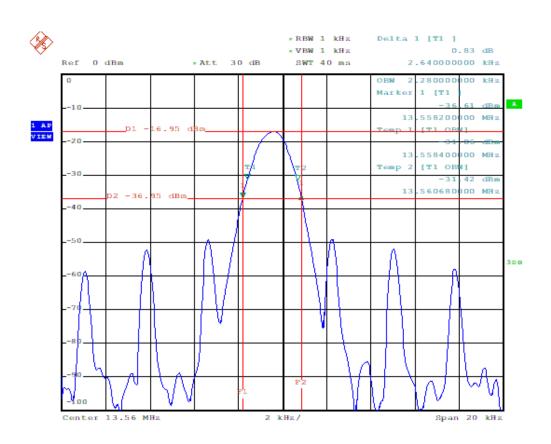

End of Test Report