


产品介绍 Introduction

FBr12 是一款船用接收机，防水等级达到 IPX7，采用 AFHDS3（第三代自动跳频数字系统），外置双天线带回传功能，可输出 PWM/PPM/I-BUS/S.BUS/I-BUS 2 信号，支持 Newport 切换，支持所有 AFHDS3 发射机和高频头。

FBr12 is a marine receiver, and the waterproof level is as high as IPX7, using the AFHDS3 (the third generation automatic frequency hopping digital system). It adopts the external dual antenna with the transfer back function and can output PWM/PPM/I-BUS/S.BUS/I-BUS 2 signals. It supports Newport switching, all AFHDS3 transmitters and RF heads.

接收机概览 Receiver overview

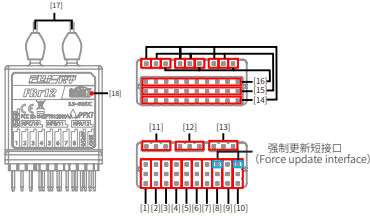

- | | |
|-----------------|--------------------------------------------------|
| [1]-[8] CH1-CH8 | [14] - (电源地 / Connect to battery negative pole) |
| [9] CH9(NPD) | [15] + (电源正极 / Connect to battery positive pole) |
| [10] Bind | [16] S (信号脚 / Signal pin) |
| [11] CH10(NPC) | [17] 天线 (Antenna) |
| [12] CH11(NPB) | [18] LED |
| [13] CH12(NPA) | |

注：本产品泡水后性能有一定程度的下降，在使用过程中请尽量避免泡水情况的发生，如无法规避此种使用情景，可在天线接头处进行打胶处理。

Note: The performance of this product will be degraded to some extent after soaking in water. If the operations in wet environments are unavoidable, seal the antenna connector by using glue.

产品规格 Product specification

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> ● 产品型号: FBr12 ● 适配发射机: 所有支持 AFHDS3 的发射机 (PL18、NB4、NB4 Lite 等) ● 适合机种: 车、船等 ● PWM 通道: 12 ● 无线频率: 2.4G ISM ● 无线协议: AFHDS 3 ● 天线类型: 双天线 ● 输入电源: 3.5 ~ 9V ● 数据输出: PWM/PPM/I-BUS/S.BUS/I-BUS 2 ● 防水等级: IPX7 ● 温度范围: -10°C ~ +60°C ● 湿度范围: 20~95% ● 在线更新: 是 ● 外形尺寸: 17*29*16.6mm ● 机身重量: 14g (不含排针胶套) ● 认证: CE, FCC ID:2A2UNFBR1200 | <ul style="list-style-type: none"> ● Product Model: FBr12 ● Adaptive transmitter: all transmitter supporting AFHDS3 (PL18, NB4, NB4 Lite, etc.) ● Model Type: Car/Boat ect. ● PWM Channels: 12 ● RF: 2.4GHz ISM ● 2.4G Protocol: AFHDS 3 ● Antenna: Dual Antenna ● Input Power: 3.5-9V ● Data Output: PWM/PPM/I-BUS/S.BUS/I-BUS 2 ● Waterproof: IPX7 ● Temperature Range: -10°C ~ +60°C ● Humidity Limit: 20%-95% ● Online Update: Yes ● Dimensions: 17*29*16.6mm ● Weight: 14g (Without pin header) ● Certification: CE, FCC ID:2A2UNFBR1200 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

对码 Binding

1. 将对码线插入 BIND 接口;
 2. 将电源线插入其他任意接口，接收机指示灯快闪表示进入对码状态;
 3. 将发射机进入对码状态; (发射机进入对码状态的方式可能不同，请根据发射机的使用说明书进行操作)
 4. 当接收机指示灯变为常亮时，表示对码成功。将对码线和电源线从接收机取下。
 5. 重新连接电源线至接收机。
 6. 检查发射机、接收机、模型是否正常工作。如需重新对码，请重复以上步骤重新对码。
-
1. Insert the bind cable into the receivers BIND port;
 2. Plug the power cable into any other port, and the receiver's LED will start to flash quickly indicating that it has entered bind mode.
 3. Put the transmitter into bind mode; (See the transmitter's instruction manual for more information)
 4. Binding is successful when the receiver's LED will stop flashing. Remove the power and bind cables from the receiver.
 5. Reconnect the power cable to the receiver.
 6. Check to make sure that the transmitter and receiver are working as expected, if there are any issues or unexpected operation follow the steps above to bind again.

强制更新 Forced update

发射机在更新完后，如无法与接收机对码，需强制更新接收机。

1. 用对码线短接 BIND 和其相隔的信号脚；
2. 接收机上电进入更新状态（LED 灯三闪一灭），拔掉对码线，在发射机端选择强制更新。
3. 接收机 LED 灯由 3 闪 1 灭变为慢闪，更新完成。

After the transmitter is updated, if the code cannot be matched with the receiver, it is necessary to update the receiver.

1. Short circuit bind and its separated signal pins with bind cable;
2. Power on the receiver to enter the update mode (LED light of the receiver changes from 3 flash and 1 off), unplug the bind cable, and select forced update at the transmitter.
3. The LED light of the receiver changes from 3 flash and 1 off to slow flash, the update is completed.

失控保护 Failsafe

失控保护功能用于在接收机失去信号不受控制后，接收机按设置好的失控保护值进行通道输出以保护模型及人员安全。

- 本款接收机共支持三种失控保护模式：“无输出”、“保持”、“固定值”；“无输出”模式指在进入失控保护状态后 PWM、PPM、i-Bus out、i-Bus 2 转换器保持无输出信号通道值，S.BUS、i-Bus2、i-bus 转换器输出最后收到发射机的信号通道值，“保持”模式指在进入失控保护状态后，保持输出最后收到发射机的信号通道值；“固定值”模式指在进入失控保护状态后，保持设置的信号通道值进行输出信号。

The failsafe function is used to output the channel according to the out-of-control protection value set by the user after the receiver loses its signal and is out of control to protect the model and personnel.

- This receiver supports three failsafe modes: "Free", "Hold", and "Fixed value"; "Free" mode refers to PWM, PPM, i-Bus out, i-Bus 2 converter entering the failsafe state keep the channel value of no output signal. The S.BUS, i-Bus2, and i-bus converters output the last received signal channel value of the transmitter. "Hold" mode means that after entering the failsafe state, keep the output of the last transmitter signal; the "Fixed value" mode means that after entering the out-of-control protection state, the set signal channel value is maintained to output the signal.

兼容性 Compatibility

该接收机兼容所有 AFHDS3 的发射机。（目前适用于 PL18 1.0.55、NB4 2.0.93 和 NB4 lite 1.0.10 及之后的版本固件使用的高频率为 3.0 版本的发射机。）

The FBr12 receiver is compatible with all AFHDS 3 transmitters (Note: It is currently applicable to PL18 1.0.55、NB4 2.0.93 and NB4 lite 1.0.10 and later versions. The high-frequency library used by the firmware is version 3.0.)

► 注意事项:

- 使用前必须确保本产品与模型安装正确，否则可能导致模型发生严重损坏。
- 关闭时，请务必先关闭接收机电源，然后关闭发射机。如果关闭发射机电源时接收机仍然在工作，将有可能导致遥控设备失控或者引擎继续工作而引发事故。
- 确保接收机安装在远离电机，电子调速器或电子噪声过多的区域。
- 接收机天线需远离导电材料，例如金属棒和碳物质。为了避免影响正常工作，请确保接收机天线和导电材料之间至少有 1 厘米以上的距离。

► Attention:

- Make sure the product is installed and calibrated correctly, failure to do so may result in serious injury.
- Make sure the receiver's battery is disconnected before turning off the transmitter, failure to do so may lead to unintended operation or loss of control.
- Make sure the receiver is mounted away from motors, electronic speed controllers or any device that emits excessive electrical noise.
- Keep the receiver's antenna at least 1cm away from conductive materials such as carbon or metal.
- Do not power on the receiver during the setup process to prevent loss of control.

认证相关 Certification**FCC Compliance Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

EU DoC Declaration

Hereby, [Flysky Technology co., Ltd] declares that the Radio Equipment [FBr12] is in compliance with RED 2014/53/EU. The full text of the EU DoC is available at the following internet address: www.flysky-cn.com.

RF Exposure Compliance

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Environmentally friendly disposal

Old electrical appliances must not be disposed of together with the residual waste, but have to be disposed of separately. The disposal at the communal collecting point via private persons is for free. The owner of old appliances is responsible to bring the appliances to these collecting points or to similar collection points. With this little personal effort, you contribute to recycle valuable raw materials and the treatment of toxic substances.



FCC ID:2A2UNFBR1200