

TEST REPORT

Applicant: PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP
COMPANY LIMITED
Address: Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road,
Kowloon, Hong Kong

Product Name: Amateur Radio


FCC ID: 2AJGM-UV17H

Standard(s): FCC Part 15B
ANSI C63.4-2014

Report Number: XMTN1240117-04004E-RF-00A

Report Date: 2024/3/13

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Gavin Xu
Title: RF Engineer



Approved By: Ivan Cao
Title: EMC Manager

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China
Tel: +86-769-86858888
Fax: +86-769-86858891
www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★.

CONTENTS

- DOCUMENT REVISION HISTORY..... 3**
- 1. GENERAL INFORMATION 4**
 - 1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST..... 4
 - 1.2 ACCESSORY INFORMATION..... 4
 - 1.3 EQUIPMENT MODIFICATIONS..... 4
- 2. DESCRIPTION OF TEST CONFIGURATION 5**
 - 2.1 OPERATION FREQUENCY AND TEST CHANNEL:..... 5
 - 2.2 DESCRIPTION OF TEST CONFIGURATION..... 5
 - 2.3 EUT EXERCISE SOFTWARE..... 5
 - 2.4 SUPPORT EQUIPMENT LIST AND DETAILS 5
 - 2.5 SUPPORT CABLE LIST AND DETAILS..... 5
 - 2.6 BLOCK DIAGRAM OF TEST SETUP..... 6
 - 2.7 TEST FACILITY 7
 - 2.8 MEASUREMENT UNCERTAINTY 7
- 3. SUMMARY OF TEST RESULTS 8**
- 4. REQUIREMENTS AND TEST RESULTS..... 9**
 - 4.1 AC LINE CONDUCTED EMISSIONS 9
 - 4.1.1 Applicable Standard..... 9
 - 4.1.2 Test System Setup..... 9
 - 4.1.3 EMI Test Receiver Setup 10
 - 4.1.4 Test Procedure..... 10
 - 4.1.5 Corrected Amplitude & Margin Calculation..... 10
 - 4.1.6 Test Data and Result 11
 - 4.2 RADIATION SPURIOUS EMISSIONS 16
 - 4.2.1 Applicable Standard..... 16
 - 4.2.2 Test System Setup..... 16
 - 4.2.3 EMI Test Receiver Setup 17
 - 4.2.4 Test Procedure..... 17
 - 4.2.5 Corrected Result & Margin Calculation..... 18
 - 4.2.6 Test Data and Result 19
 - 4.3 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS..... 62
 - 4.3.1 Applicable Standard..... 62
 - 4.3.2 Test Procedure..... 62
 - 4.3.3 Test Data and Result 63
- APPENDIX A - EUT PHOTOGRAPHS..... 64**
- APPENDIX B - TEST SETUP PHOTOGRAPHS..... 65**

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|---------------------------|-------------------------|------------------|
| 1.0 | XMTN1240117-04004E-RF-00A | Original Report | 2024/3/13 |

1. GENERAL INFORMATION

1.1 General Description Of Equipment Under Test

| | |
|---|---|
| Product Name: | Amateur Radio |
| Test Model: | UV-17H |
| Multiple Models: | UV-17G, BF-17H, BF-17G, GP17H, AR17G |
| Highest Operation Frequency: | 520 MHz |
| Rated Input Voltage: | DC 7.4V from battery or DC 5V from USB port |
| Serial Number: | 2GSG-2 |
| EUT Received Date: | 2024/1/26 |
| EUT Received Status: | Good |
| Note: the Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer. | |

1.2 Accessory Information

| Accessory Description | Manufacturer | Model | Parameters |
|-----------------------|--------------|-------|------------|
| / | / | / | / |

1.3 Equipment Modifications

No modifications are made to the EUT during all test items.

2. DESCRIPTION OF TEST CONFIGURATION

2.1 Operation Frequency And Test Channel:

| Operation Modes | Operation Frequency Range (MHz) | Test Frequency (MHz) |
|-----------------|---------------------------------|-------------------------|
| VHF Receiving | 108-136 | 108.0125, 122, 135.9875 |
| | 136-174 | 136.0125, 155, 173.9875 |
| | 220-260 | 220.0125, 240, 259.9875 |
| UHF Receiving | 350-390 | 350.0125, 370, 389.9875 |
| | 400-520 | 400.0125, 460, 519.9875 |
| Scanning | 108-136 | 108-136 |
| | 136-174 | 136-174 |
| | 220-260 | 220-260 |
| | 350-390 | 350-390 |
| | 400-520 | 400-520 |

2.2 Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user). The following summary table is showing all test modes to demonstrate in compliance with the standard:

| Test Items | Test Mode(s) |
|-------------------------------------|---|
| Radiated Spurious Emission : | Test Mode 1: Scanning Test Mode 2: Receiving |
| AC Line Conducted Emission | Test Mode 1: Scanning Test Mode 2: Receiving |

2.3 EUT Exercise Software

No software was used to test.

2.4 Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|---------------------|-----------------------------|----------------|------------------|
| Agilent | MXG Vector Signal Generator | N5182B | MY51350142 |
| PO FUNG | Earphone | Unknown | 2GSG-5 |
| TIANYIN ELECTRONICS | Adapter | TPA-46050200VU | EMZBUA21110201EN |

2.5 Support Cable List and Details


| Cable Description | Shielding Cable | Ferrite Core | Length (m) | From Port | To |
|-------------------|-----------------|--------------|------------|-----------|--------|
| Coaxial Cable | No | No | 2 | Antenna | N5182B |
| Earphone cable | No | No | 1 | Earphone | EUT |
| USB cable | No | No | 1 | Adapter | EUT |

2.6 Block Diagram of Test Setup

AC Power Lines Conducted Emission:

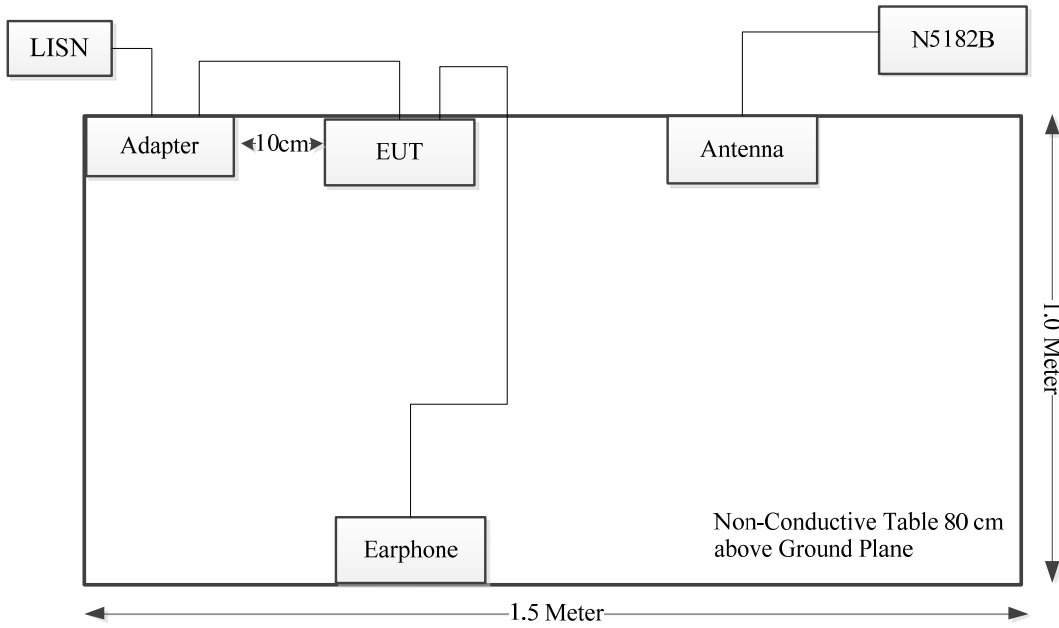

Radiated Spurious Emissions

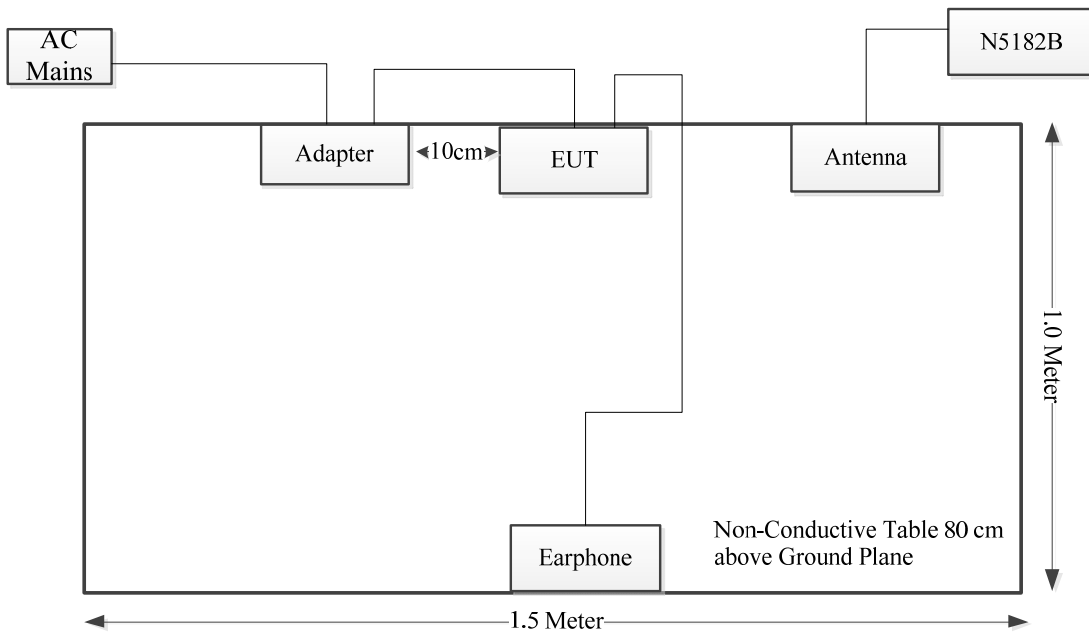

2.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

2.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter | Measurement Uncertainty |
|-----------------------------------|---|
| Unwanted Emissions, radiated | 9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB |
| Unwanted Emissions, conducted | ±2.47 dB |
| Temperature | ±1 °C |
| Humidity | ±5% |
| AC Power Lines Conducted Emission | 3.11 dB (150 kHz to 30 MHz) |

3. SUMMARY OF TEST RESULTS

| Standard Clause | Description of Test | Test Result |
|------------------------|--|--------------------|
| FCC§15.107 | Conducted emissions | Compliant |
| FCC§15.109 | Radiated emissions | Compliant |
| FCC§15.121(b) | Scanning receivers and frequency converters used with scanning receivers | Compliant |

4. REQUIREMENTS AND TEST RESULTS

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard


FCC§15.107

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

4.1.2 Test System Setup

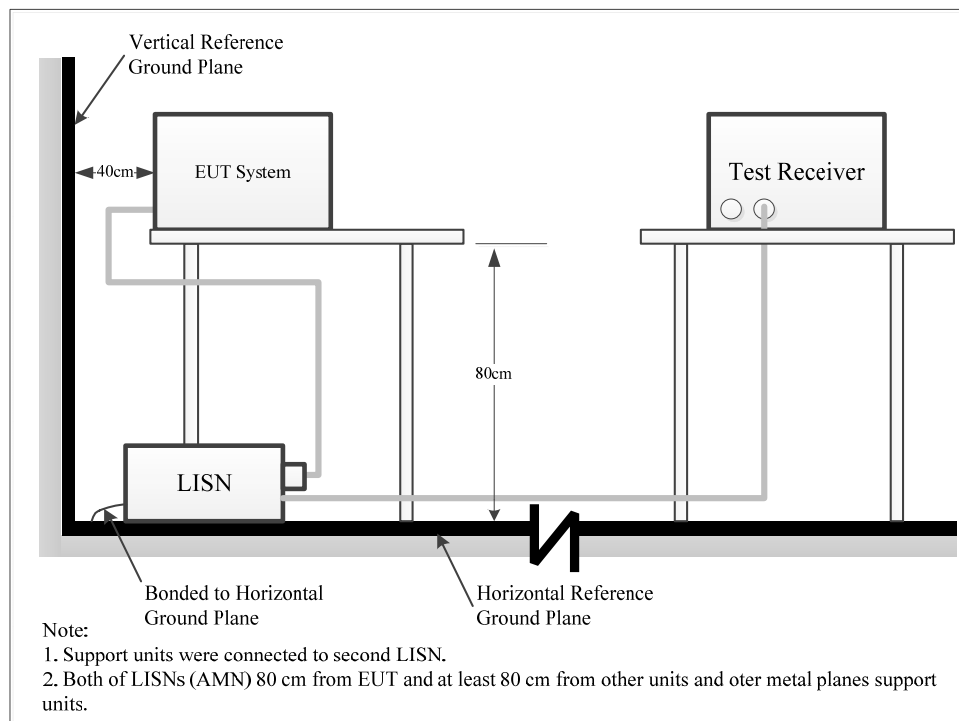

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{attenuation caused by cable loss} + \text{voltage division factor of AMN}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

4.1.6 Test Data and Result

| | | | |
|----------------|------------|--------------|--------------------|
| Serial Number: | 2GSG-2 | Test Date: | 2024/1/30~2024/2/1 |
| Test Site: | CE | Test Mode: | Mode 1, Mode 2 |
| Tester: | Wright Lai | Test Result: | Pass |

Environmental Conditions:

| | | | | | |
|----------------------|-----------|---------------------------|-------|------------------------|-------------|
| Temperature: (°C) | 17.6~21.1 | Relative Humidity: (%) | 64~70 | ATM Pressure: (kPa) | 101.2~101.5 |
|----------------------|-----------|---------------------------|-------|------------------------|-------------|


Test Equipment List and Details:

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-----------|---------------|------------------|----------------------|
| R&S | LISN | ENV216 | 101614 | 2023/10/18 | 2024/10/17 |
| MICRO-COAX | Coaxial Cable | C-NJNJ-50 | C-0200-01 | 2023/9/5 | 2024/9/4 |
| R&S | EMI Test Receiver | ESCI | 100035 | 2023/8/18 | 2024/8/17 |
| R&S | Test Software | EMC32 | V9.10.00 | N/A | N/A |

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Mode 1:


Project No: XMTN1240117-04004E-RF
 Port: L
 Test Engineer: Wright Lai
 Test Date: 2024-1-30
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 350-390MHz was tested

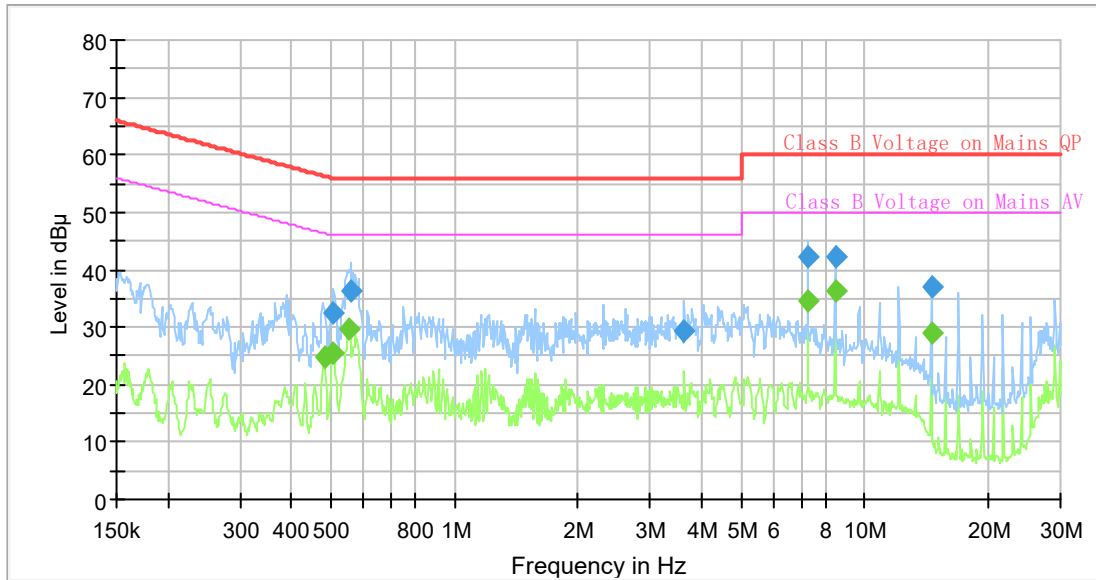

Final Result

| Frequency (MHz) | QuasiPeak (dB μV) | Average (dB μV) | Limit (dB μV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|-----------------|---------------|-------------|-----------------|------|------------|
| 0.481892 | --- | 24.97 | 46.31 | 21.34 | 9.000 | L1 | 10.8 |
| 0.504016 | --- | 25.67 | 46.00 | 20.33 | 9.000 | L1 | 10.8 |
| 0.506536 | 32.52 | --- | 56.00 | 23.48 | 9.000 | L1 | 10.8 |
| 0.554114 | --- | 29.62 | 46.00 | 16.38 | 9.000 | L1 | 10.8 |
| 0.559669 | 36.20 | --- | 56.00 | 19.80 | 9.000 | L1 | 10.8 |
| 3.632492 | 29.23 | --- | 56.00 | 26.77 | 9.000 | L1 | 10.8 |
| 7.265865 | 42.25 | --- | 60.00 | 17.75 | 9.000 | L1 | 10.9 |
| 7.265865 | --- | 34.57 | 50.00 | 15.43 | 9.000 | L1 | 10.9 |
| 8.480769 | 42.17 | --- | 60.00 | 17.83 | 9.000 | L1 | 10.8 |
| 8.480769 | --- | 36.28 | 50.00 | 13.72 | 9.000 | L1 | 10.8 |
| 14.533489 | --- | 29.03 | 50.00 | 20.97 | 9.000 | L1 | 10.9 |
| 14.533489 | 37.11 | --- | 60.00 | 22.89 | 9.000 | L1 | 10.9 |

Project No: XMTN1240117-04004E-RF
 Port: N
 Test Engineer: Wright Lai
 Test Date: 2024-1-30
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 350-390MHz was tested

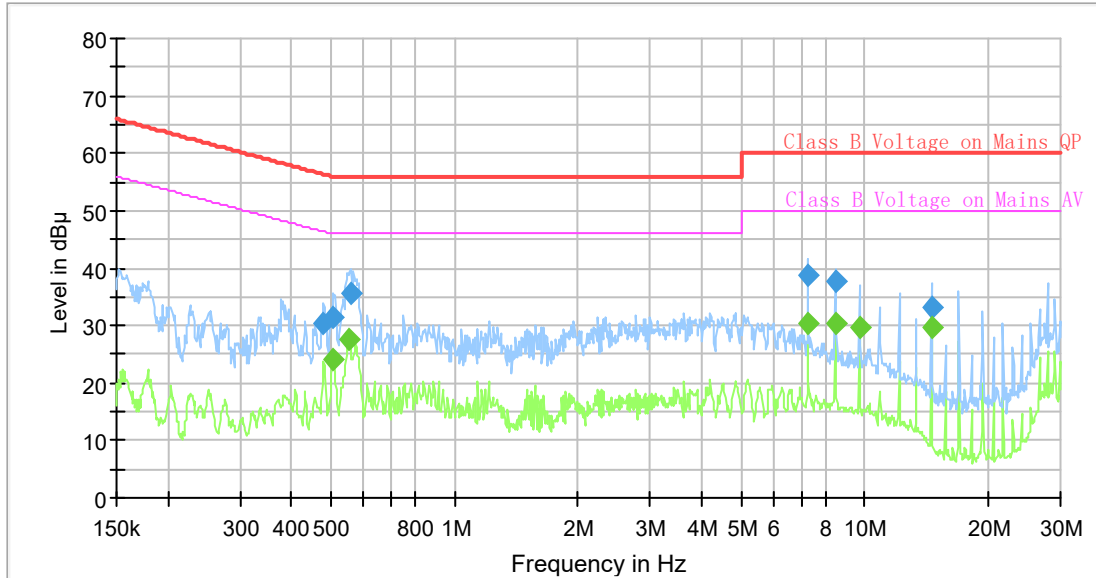


Final Result

| Frequency (MHz) | QuasiPeak (dB µ V) | Average (dB µ V) | Limit (dB µ V) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|------|------------|
| 0.479495 | 30.39 | --- | 56.35 | 25.96 | 9.000 | N | 10.7 |
| 0.506536 | --- | 23.97 | 46.00 | 22.03 | 9.000 | N | 10.7 |
| 0.506536 | 31.42 | --- | 56.00 | 24.58 | 9.000 | N | 10.7 |
| 0.554114 | --- | 27.43 | 46.00 | 18.57 | 9.000 | N | 10.7 |
| 0.556885 | 35.48 | --- | 56.00 | 20.52 | 9.000 | N | 10.7 |
| 7.265865 | --- | 30.48 | 50.00 | 19.52 | 9.000 | N | 10.8 |
| 7.265865 | 38.73 | --- | 60.00 | 21.27 | 9.000 | N | 10.8 |
| 8.480769 | --- | 30.51 | 50.00 | 19.49 | 9.000 | N | 10.8 |
| 8.480769 | 37.90 | --- | 60.00 | 22.10 | 9.000 | N | 10.8 |
| 9.703287 | --- | 29.53 | 50.00 | 20.47 | 9.000 | N | 10.9 |
| 14.533489 | --- | 29.63 | 50.00 | 20.37 | 9.000 | N | 10.9 |
| 14.533489 | 33.07 | --- | 60.00 | 26.93 | 9.000 | N | 10.9 |

Test Mode 2:


Project No: XMTN1240117-04004E-RF
 Line: L
 Test Engineer: Wright Lai
 Test Date: 2024-2-1
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 370MHz was tested

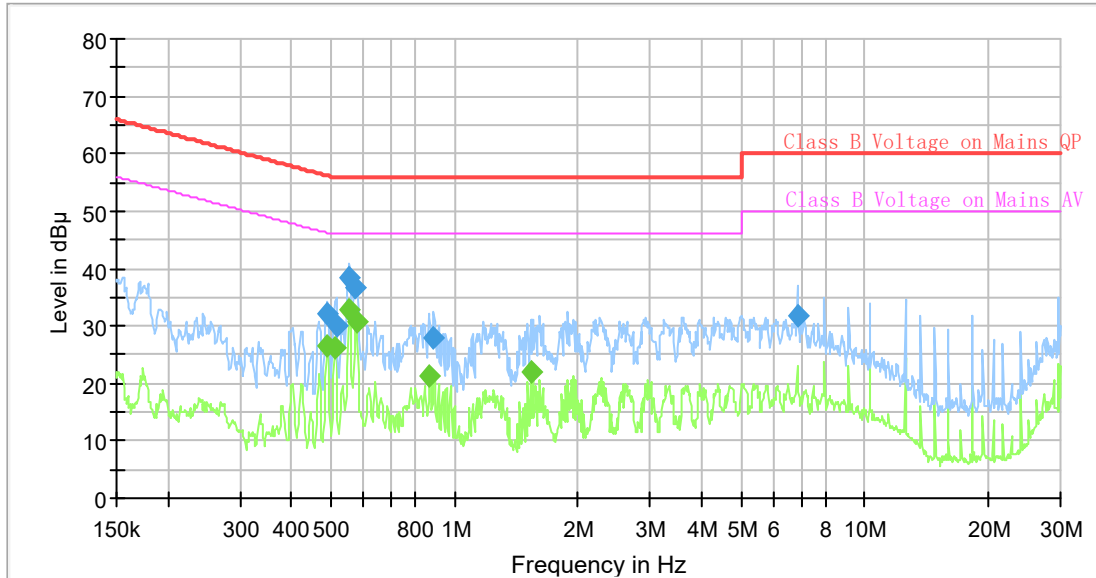

Final Result

| Frequency (MHz) | QuasiPeak (dB µV) | Average (dB µV) | Limit (dB µV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|-----------------|---------------|-------------|-----------------|------|------------|
| 0.489157 | --- | 26.72 | 46.18 | 19.46 | 9.000 | L1 | 10.8 |
| 0.489157 | 32.14 | --- | 56.18 | 24.04 | 9.000 | L1 | 10.8 |
| 0.511614 | --- | 26.35 | 46.00 | 19.65 | 9.000 | L1 | 10.8 |
| 0.514172 | 30.08 | --- | 56.00 | 25.92 | 9.000 | L1 | 10.8 |
| 0.554114 | --- | 32.80 | 46.00 | 13.20 | 9.000 | L1 | 10.8 |
| 0.554114 | 38.59 | --- | 56.00 | 17.41 | 9.000 | L1 | 10.8 |
| 0.573802 | 36.52 | --- | 56.00 | 19.48 | 9.000 | L1 | 10.8 |
| 0.576671 | --- | 30.77 | 46.00 | 15.23 | 9.000 | L1 | 10.8 |
| 0.868051 | --- | 21.48 | 46.00 | 24.52 | 9.000 | L1 | 10.9 |
| 0.889970 | 28.00 | --- | 56.00 | 28.00 | 9.000 | L1 | 10.9 |
| 1.532767 | --- | 21.94 | 46.00 | 24.06 | 9.000 | L1 | 10.8 |
| 6.843757 | 31.96 | --- | 60.00 | 28.04 | 9.000 | L1 | 10.9 |

Project No: XMTN1240117-04004E-RF
 Line: N
 Test Engineer: Wright Lai
 Test Date: 2024-2-1
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 370MHz was tested

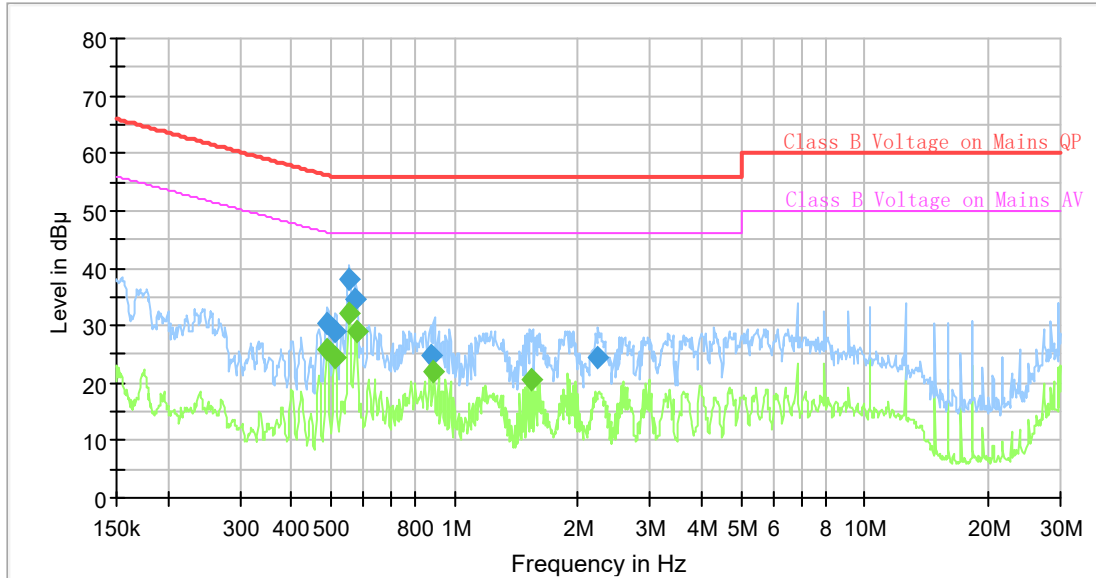

Final Result

| Frequency (MHz) | QuasiPeak (dB µ V) | Average (dB µ V) | Limit (dB µ V) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|--------------------|------------------|----------------|-------------|-----------------|------|------------|
| 0.489157 | 30.40 | --- | 56.18 | 25.78 | 9.000 | N | 10.7 |
| 0.489157 | --- | 25.79 | 46.18 | 20.39 | 9.000 | N | 10.7 |
| 0.511614 | 28.99 | --- | 56.00 | 27.01 | 9.000 | N | 10.7 |
| 0.511614 | --- | 24.35 | 46.00 | 21.65 | 9.000 | N | 10.7 |
| 0.554114 | 38.05 | --- | 56.00 | 17.95 | 9.000 | N | 10.7 |
| 0.554114 | --- | 32.06 | 46.00 | 13.94 | 9.000 | N | 10.7 |
| 0.573802 | 34.62 | --- | 56.00 | 21.38 | 9.000 | N | 10.7 |
| 0.576671 | --- | 29.11 | 46.00 | 16.89 | 9.000 | N | 10.7 |
| 0.872391 | 24.64 | --- | 56.00 | 31.36 | 9.000 | N | 10.8 |
| 0.889970 | --- | 21.99 | 46.00 | 24.01 | 9.000 | N | 10.8 |
| 1.532767 | --- | 20.51 | 46.00 | 25.49 | 9.000 | N | 10.9 |
| 2.239220 | 24.29 | --- | 56.00 | 31.71 | 9.000 | N | 10.9 |

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard


FCC§15.109

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


| Frequency of emission (MHz) | Field strength (microvolts/meter) |
|-----------------------------|-----------------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

4.2.2 Test System Setup

Below 1GHz:

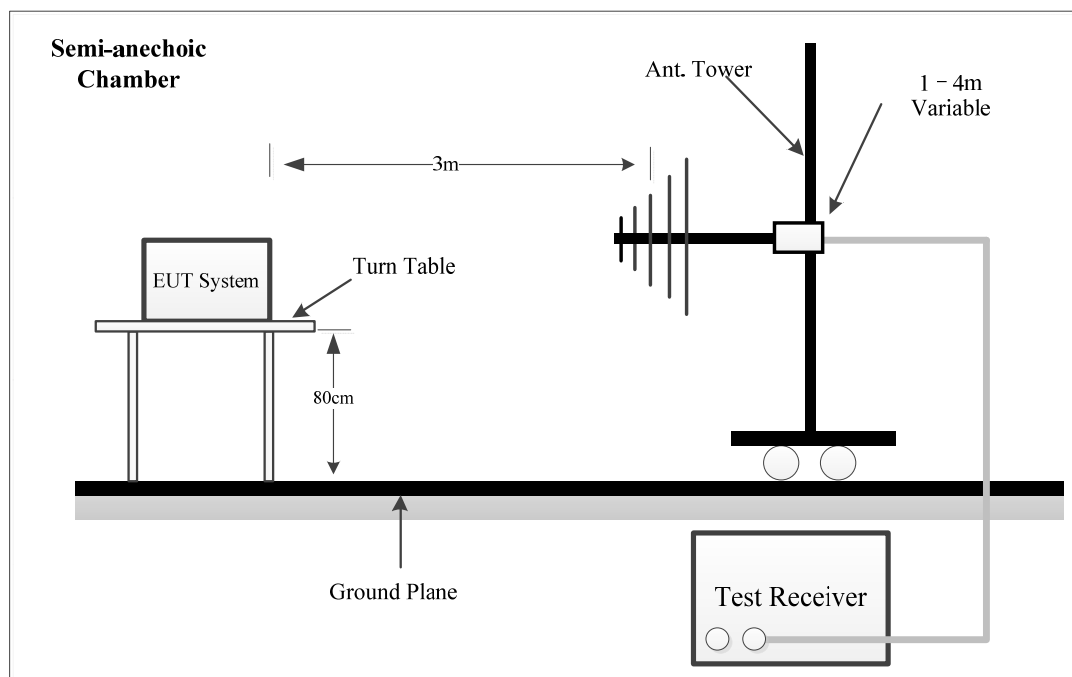

Above 1GHz:

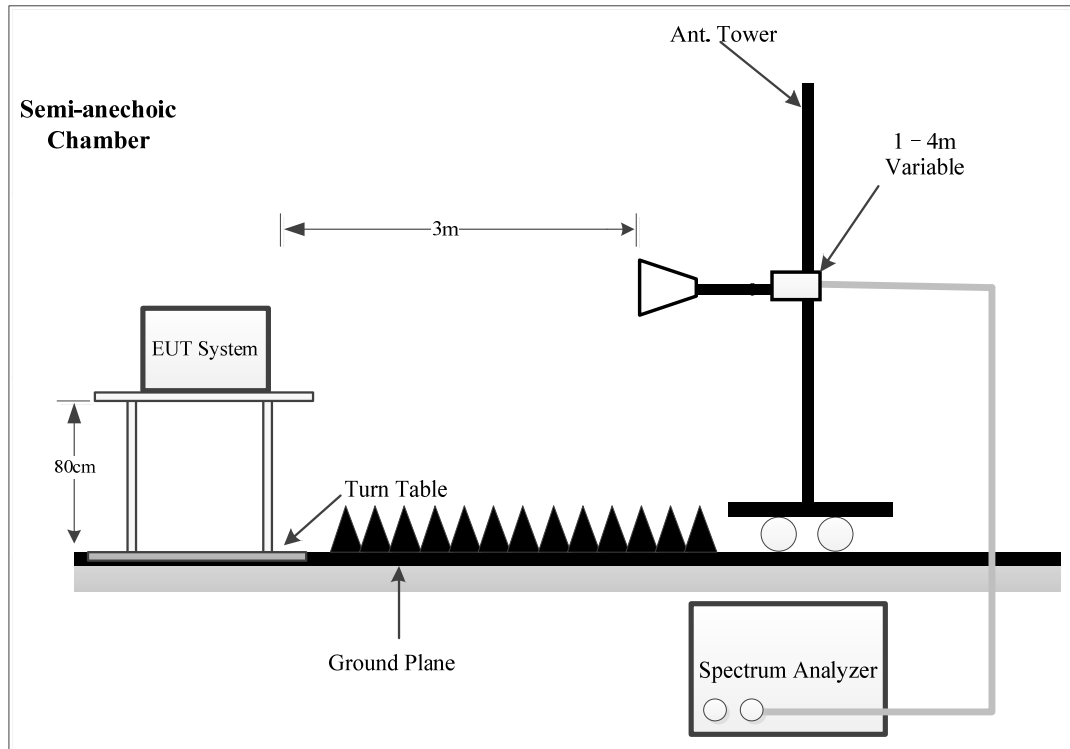

The radiated emission tests were performed at the 3 meters distance, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15B Class B limits.

4.2.3 EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|------------------|---------|-------------------------|--------|-------------|
| 30MHz – 1000 MHz | 100 kHz | 300 kHz | / | Peak |
| | / | / | 120kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | Peak |
| | 1 MHz | Reduced video bandwidth | / | AVG |

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform an QP measurement.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

4.2.6 Test Data and Result

| | | | |
|----------------|----------------------|--------------|--------------------|
| Serial Number: | 2GSG-2 | Test Date: | 2024/1/30~2024/2/1 |
| Test Site: | Chamber A, Chamber B | Test Mode: | Mode 1, Mode 2 |
| Tester: | Zoo Zou, Leo Xiao | Test Result: | Pass |

| Environmental Conditions: | | | | | |
|---------------------------|-----------|---------------------------|-------|------------------------|-------------|
| Temperature: (°C) | 19.8~21.3 | Relative Humidity: (%) | 45~49 | ATM Pressure: (kPa) | 101.2~101.5 |

Test Equipment List and Details:

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|----------------|-------------------|----------------|---------------|------------------|----------------------|
| Sunol Sciences | Hybrid Antenna | JB3 | A060611-1 | 2023/9/6 | 2026/9/5 |
| Narda | Attenuator | 779-6dB | 04269 | 2023/9/6 | 2026/9/5 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-1000-01 | 2023/8/1 | 2024/7/31 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0400-04 | 2023/8/1 | 2024/7/31 |
| Unknown | Coaxial Cable | C-NJNJ-50 | C-0530-01 | 2023/8/1 | 2024/7/31 |
| Sonoma | Amplifier | 310N | 185914 | 2023/8/1 | 2024/7/31 |
| R&S | EMI Test Receiver | ESCI | 100224 | 2023/8/18 | 2024/8/17 |
| Farad | Test Software | EZ-EMC | V1.1.4.2 | N/A | N/A |
| AH | Horn Antenna | SAS-571 | 1394 | 2023/2/22 | 2026/2/22 |
| HUBER+SUHNER | Coaxial Cable | SUCOFLEX 126EA | MY369/26/26EA | 2023/9/6 | 2024/9/5 |
| AH | Preamplifier | PAM-0118P | 530 | 2023/9/1 | 2024/8/31 |
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2023/10/18 | 2024/10/17 |
| Audix | Test Software | E3 | 191218 (V9) | N/A | N/A |

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


1) 30MHz-1GHz:

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 108-136 MHz

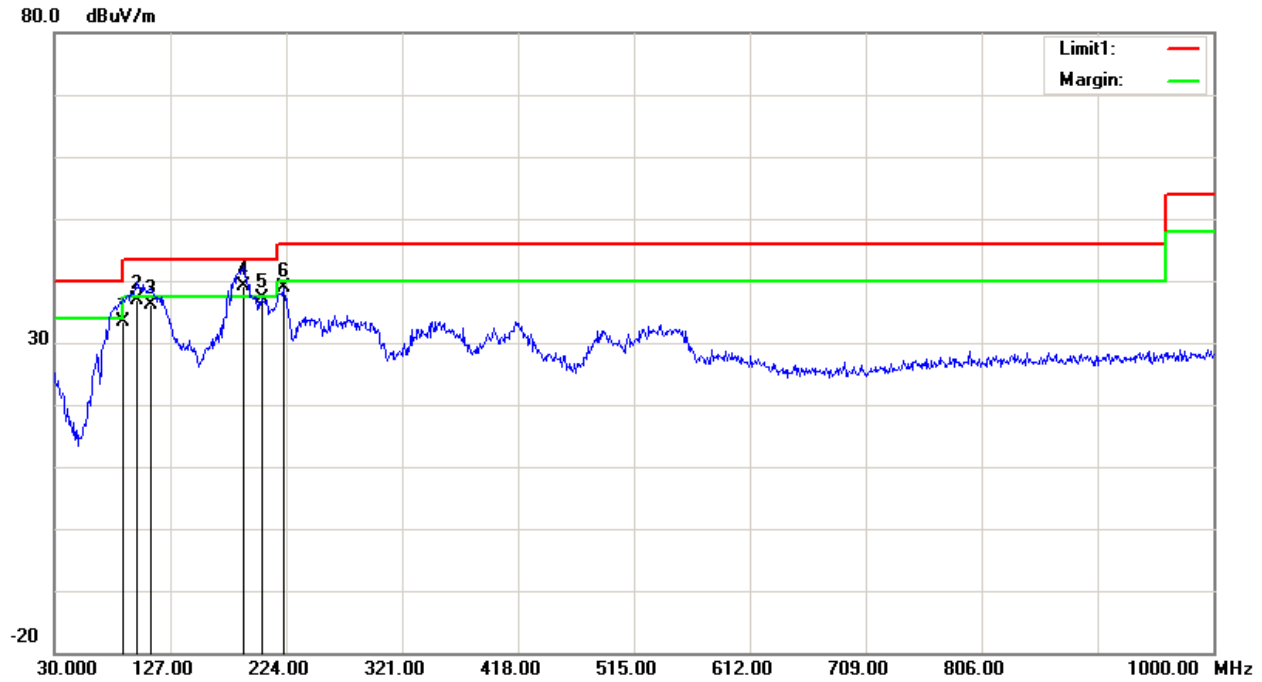


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 87.9000 | 50.19 | QP | -16.79 | 33.40 | 40.00 | 6.60 |
| 2 | 98.8700 | 51.58 | QP | -14.68 | 36.90 | 43.50 | 6.60 |
| 3 | 110.5100 | 47.38 | QP | -11.28 | 36.10 | 43.50 | 7.40 |
| 4 | 188.1100 | 51.44 | QP | -12.24 | 39.20 | 43.50 | 4.30 |
| 5 | 203.6300 | 49.09 | peak | -11.87 | 37.22 | 43.50 | 6.28 |
| 6 | 222.0600 | 51.33 | peak | -12.47 | 38.86 | 46.00 | 7.14 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 108-136 MHz

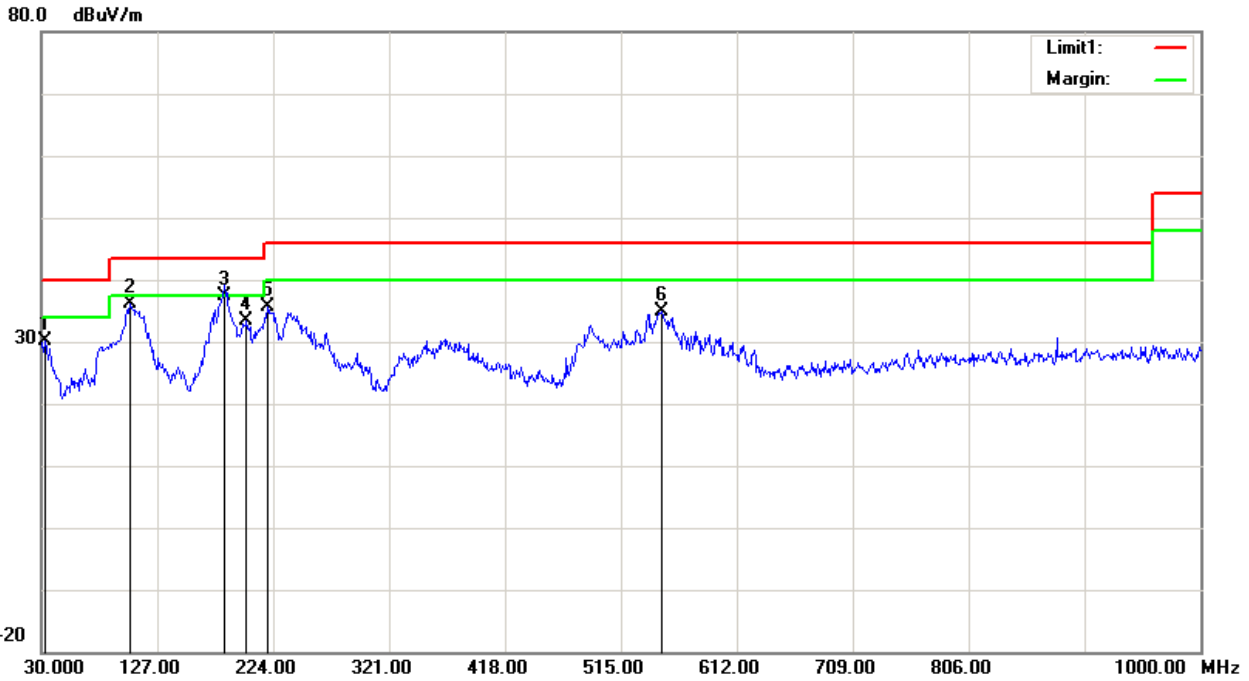


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 32.9100 | 35.60 | peak | -5.47 | 30.13 | 40.00 | 9.87 |
| 2 | 103.7200 | 49.29 | peak | -13.25 | 36.04 | 43.50 | 7.46 |
| 3 | 183.2600 | 49.85 | QP | -12.35 | 37.50 | 43.50 | 6.00 |
| 4 | 201.6900 | 45.13 | peak | -11.69 | 33.44 | 43.50 | 10.06 |
| 5 | 219.1500 | 48.04 | peak | -12.53 | 35.51 | 46.00 | 10.49 |
| 6 | 548.9500 | 38.39 | peak | -3.48 | 34.91 | 46.00 | 11.09 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 136-174 MHz

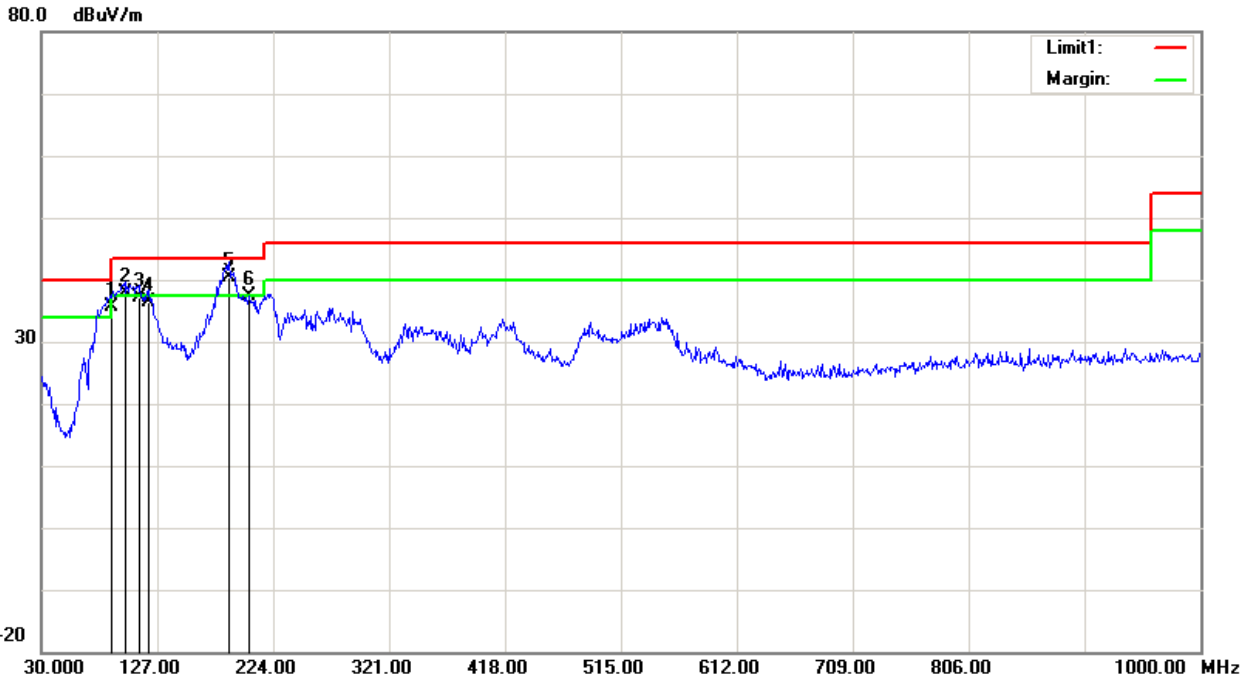


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 87.9000 | 52.49 | QP | -16.79 | 35.70 | 40.00 | 4.30 |
| 2 | 99.8400 | 52.24 | QP | -14.44 | 37.80 | 43.50 | 5.70 |
| 3 | 111.4800 | 48.24 | QP | -11.14 | 37.10 | 43.50 | 6.40 |
| 4 | 119.2400 | 46.38 | QP | -9.98 | 36.40 | 43.50 | 7.10 |
| 5 | 187.1400 | 52.60 | QP | -12.30 | 40.30 | 43.50 | 3.20 |
| 6 | 203.6300 | 49.15 | peak | -11.87 | 37.28 | 43.50 | 6.22 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 136-174 MHz

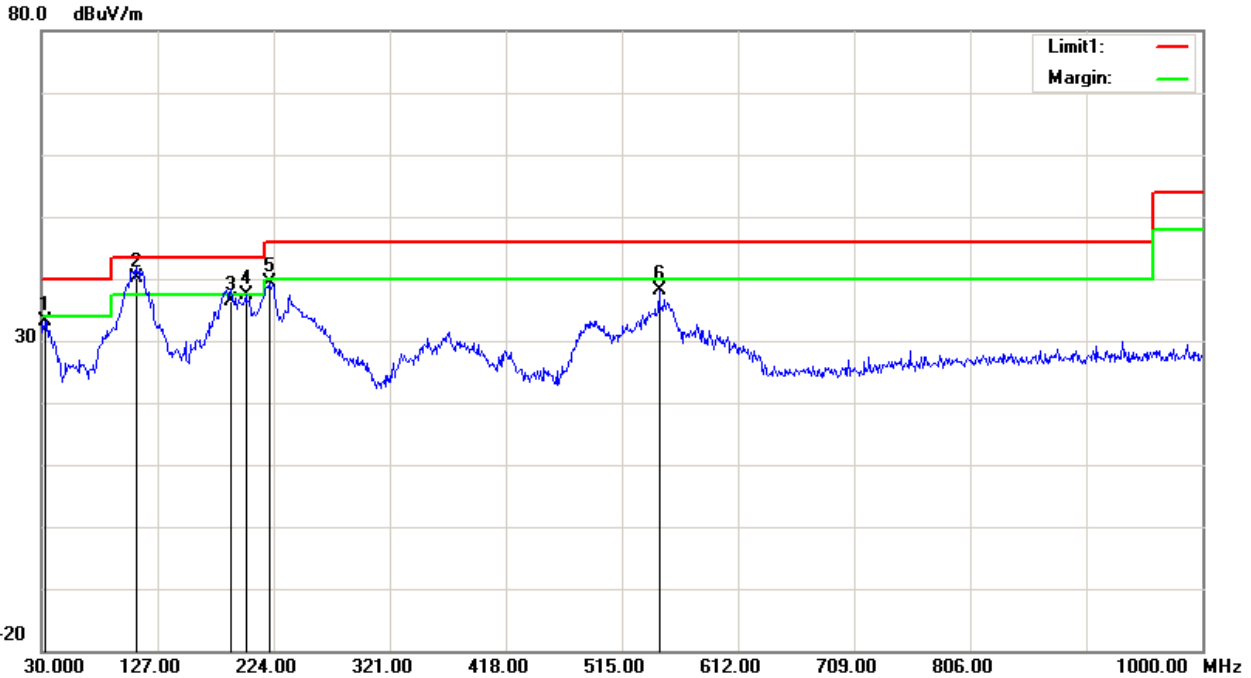


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 32.9100 | 38.71 | peak | -5.47 | 33.24 | 40.00 | 6.76 |
| 2 | 109.5400 | 51.67 | QP | -11.47 | 40.20 | 43.50 | 3.30 |
| 3 | 188.1100 | 48.64 | QP | -12.24 | 36.40 | 43.50 | 7.10 |
| 4 | 200.7200 | 49.06 | peak | -11.59 | 37.47 | 43.50 | 6.03 |
| 5 | 220.1200 | 51.93 | peak | -12.50 | 39.43 | 46.00 | 6.57 |
| 6 | 546.0400 | 41.63 | peak | -3.62 | 38.01 | 46.00 | 7.99 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 220-260 MHz

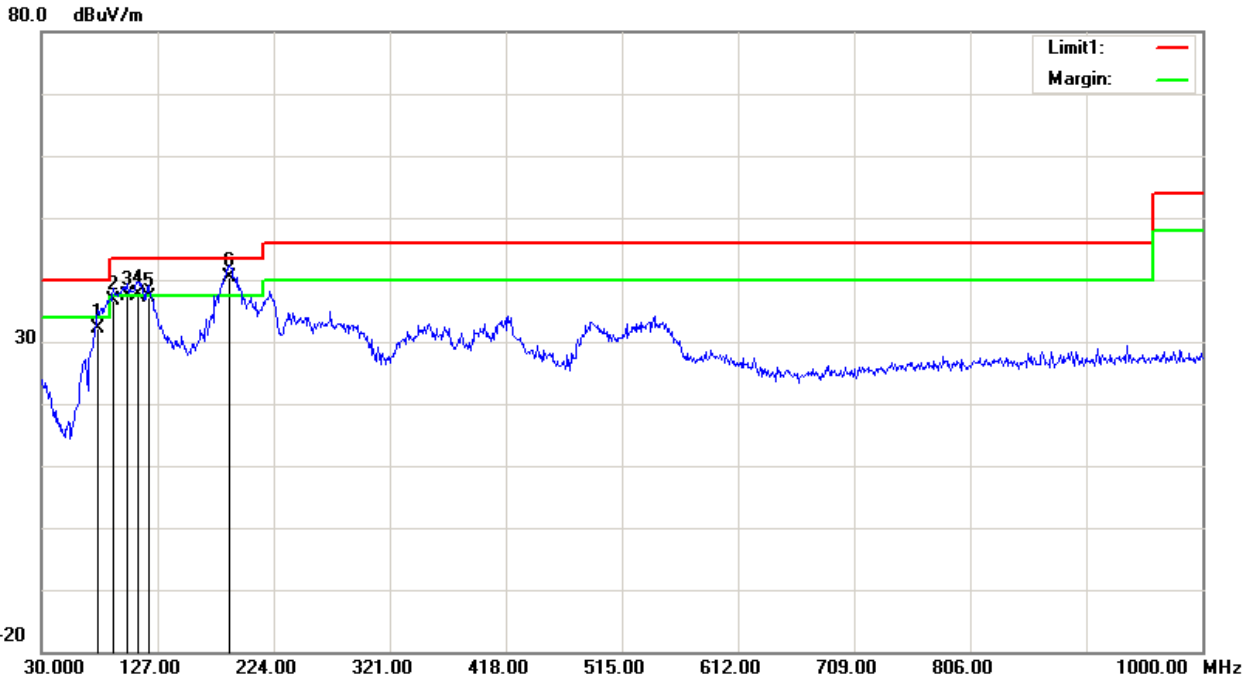


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 77.5300 | 48.39 | QP | -16.29 | 32.10 | 40.00 | 7.90 |
| 2 | 90.1400 | 53.14 | QP | -16.54 | 36.60 | 43.50 | 6.90 |
| 3 | 101.7800 | 51.23 | QP | -13.93 | 37.30 | 43.50 | 6.20 |
| 4 | 110.5100 | 48.98 | QP | -11.28 | 37.70 | 43.50 | 5.80 |
| 5 | 119.2400 | 47.08 | QP | -9.98 | 37.10 | 43.50 | 6.40 |
| 6 | 187.1400 | 52.60 | QP | -12.30 | 40.30 | 43.50 | 3.20 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 220-260 MHz

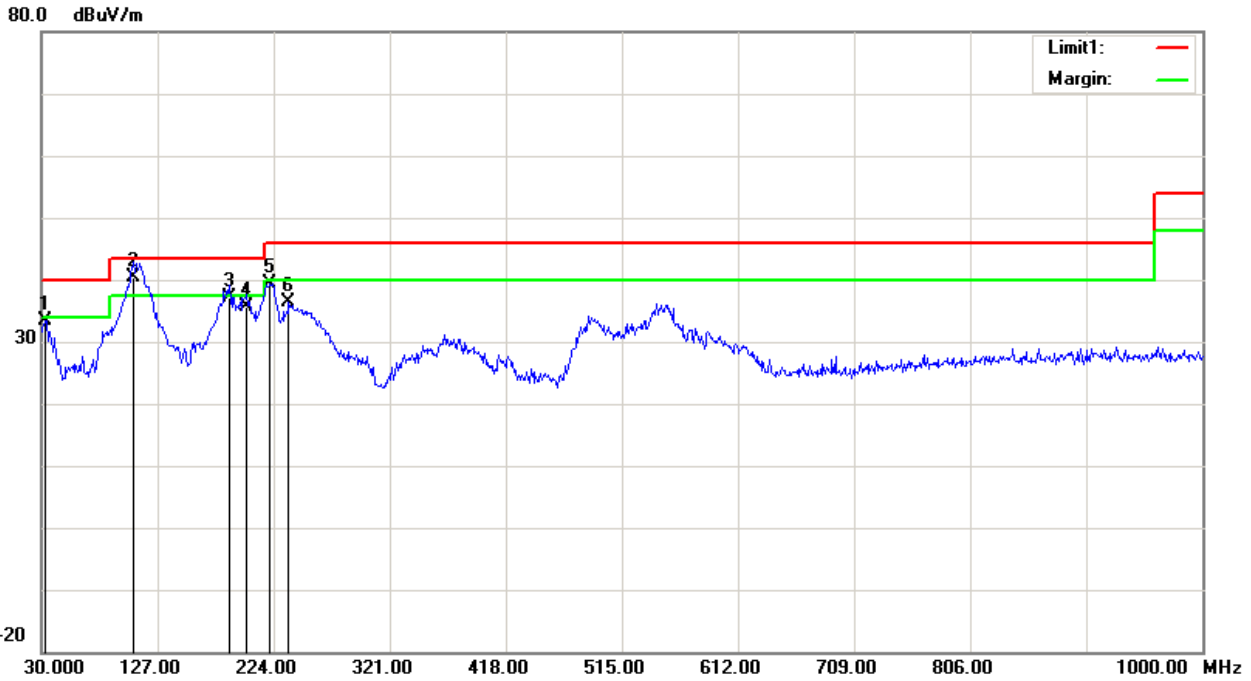


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 32.9100 | 38.85 | peak | -5.47 | 33.38 | 40.00 | 6.62 |
| 2 | 106.6300 | 52.72 | QP | -12.32 | 40.40 | 43.50 | 3.10 |
| 3 | 187.1400 | 49.50 | QP | -12.30 | 37.20 | 43.50 | 6.30 |
| 4 | 201.6900 | 47.29 | QP | -11.69 | 35.60 | 43.50 | 7.90 |
| 5 | 221.0900 | 51.94 | peak | -12.48 | 39.46 | 46.00 | 6.54 |
| 6 | 236.6100 | 48.27 | peak | -11.94 | 36.33 | 46.00 | 9.67 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 350-390 MHz

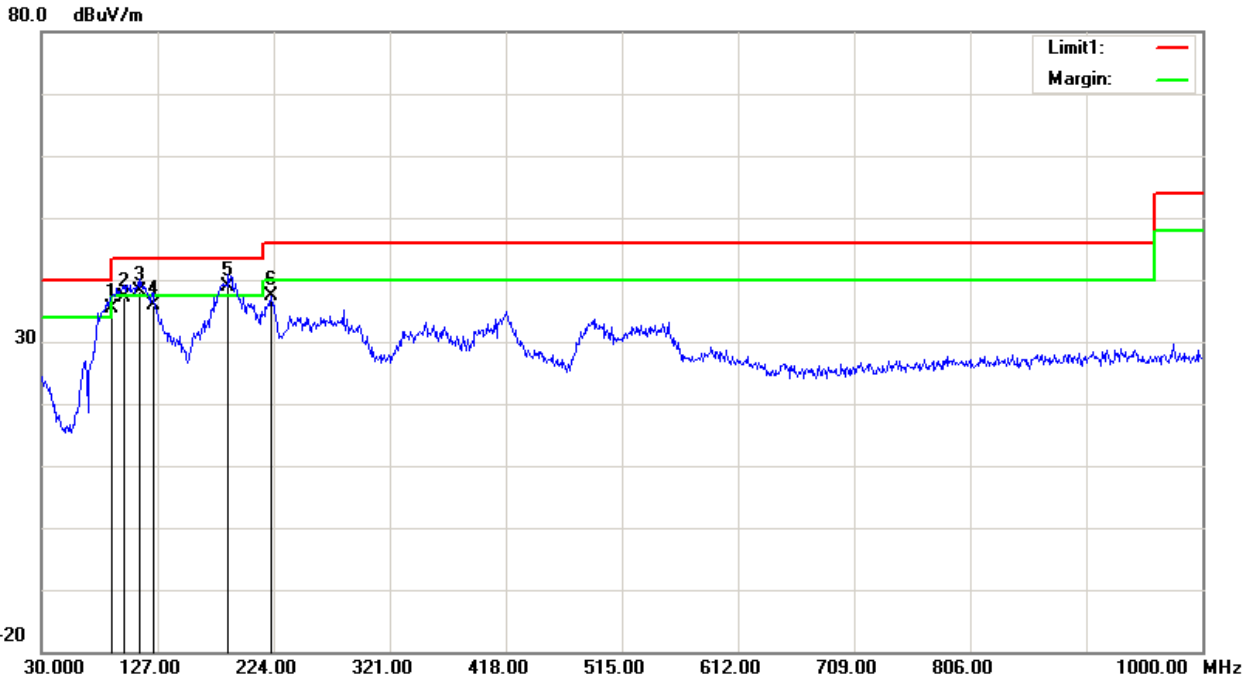


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|------------------|-----------------|----------------|-------------|
| 1 | 87.9000 | 52.09 | QP | -16.79 | 35.30 | 40.00 | 4.70 |
| 2 | 98.8700 | 51.88 | QP | -14.68 | 37.20 | 43.50 | 6.30 |
| 3 | 111.4800 | 49.24 | QP | -11.14 | 38.10 | 43.50 | 5.40 |
| 4 | 123.1200 | 45.47 | QP | -9.67 | 35.80 | 43.50 | 7.70 |
| 5 | 186.1700 | 51.26 | QP | -12.36 | 38.90 | 43.50 | 4.60 |
| 6 | 222.0600 | 49.73 | peak | -12.47 | 37.26 | 46.00 | 8.74 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 350-390 MHz

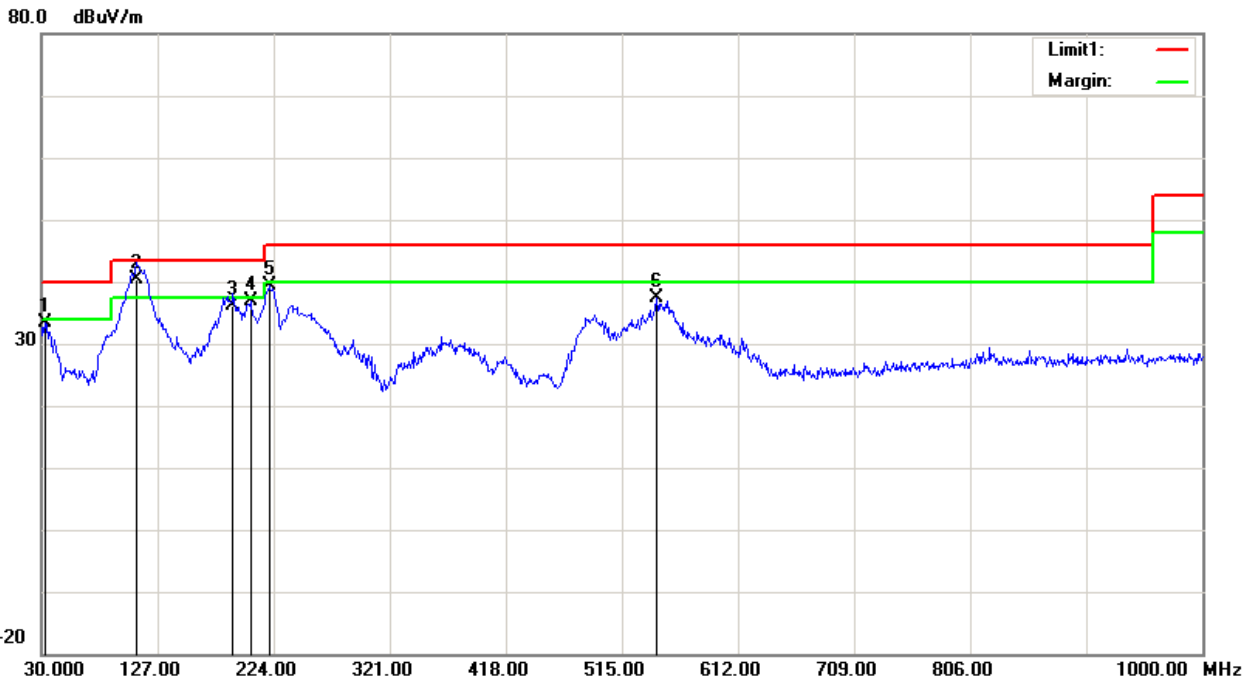


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 32.9100 | 38.83 | peak | -5.47 | 33.36 | 40.00 | 6.64 |
| 2 | 109.5400 | 51.77 | QP | -11.47 | 40.30 | 43.50 | 3.20 |
| 3 | 190.0500 | 48.32 | QP | -12.12 | 36.20 | 43.50 | 7.30 |
| 4 | 204.6000 | 48.84 | peak | -11.96 | 36.88 | 43.50 | 6.62 |
| 5 | 220.1200 | 51.95 | peak | -12.50 | 39.45 | 46.00 | 6.55 |
| 6 | 544.1000 | 41.15 | peak | -3.68 | 37.47 | 46.00 | 8.53 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 400-520 MHz

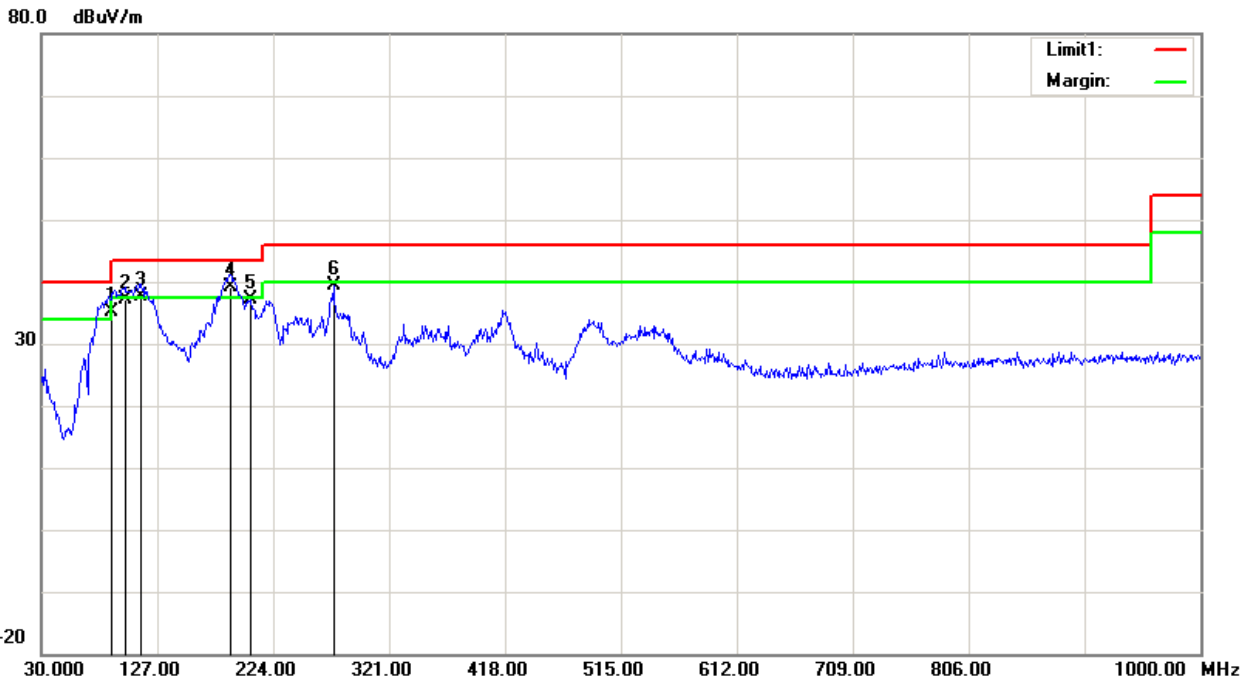


| No. | Frequency (MHz) | Reading (dBuV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 87.9000 | 51.99 | QP | -16.79 | 35.20 | 40.00 | 4.80 |
| 2 | 99.8400 | 51.54 | QP | -14.44 | 37.10 | 43.50 | 6.40 |
| 3 | 113.4200 | 48.47 | QP | -10.77 | 37.70 | 43.50 | 5.80 |
| 4 | 188.1100 | 51.44 | QP | -12.24 | 39.20 | 43.50 | 4.30 |
| 5 | 205.5700 | 49.23 | peak | -12.07 | 37.16 | 43.50 | 6.34 |
| 6 | 274.4400 | 49.29 | peak | -9.92 | 39.37 | 46.00 | 6.63 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Scanning
 Power Source: AC 120V/60Hz
 Note: 400-520 MHz

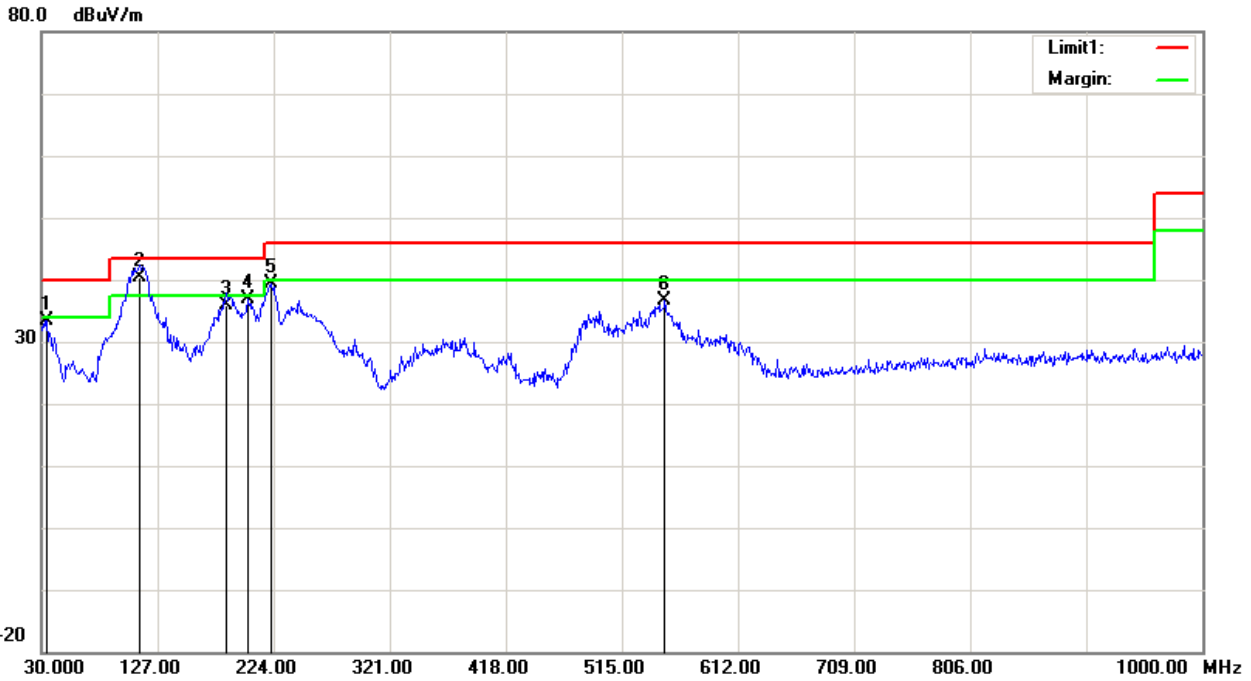


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 34.8500 | 40.18 | peak | -6.83 | 33.35 | 40.00 | 6.65 |
| 2 | 112.4500 | 51.37 | QP | -10.97 | 40.40 | 43.50 | 3.10 |
| 3 | 184.2300 | 48.20 | QP | -12.40 | 35.80 | 43.50 | 7.70 |
| 4 | 202.6600 | 48.62 | peak | -11.78 | 36.84 | 43.50 | 6.66 |
| 5 | 222.0600 | 51.95 | peak | -12.47 | 39.48 | 46.00 | 6.52 |
| 6 | 550.8900 | 40.01 | peak | -3.40 | 36.61 | 46.00 | 9.39 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 108.0125 MHz

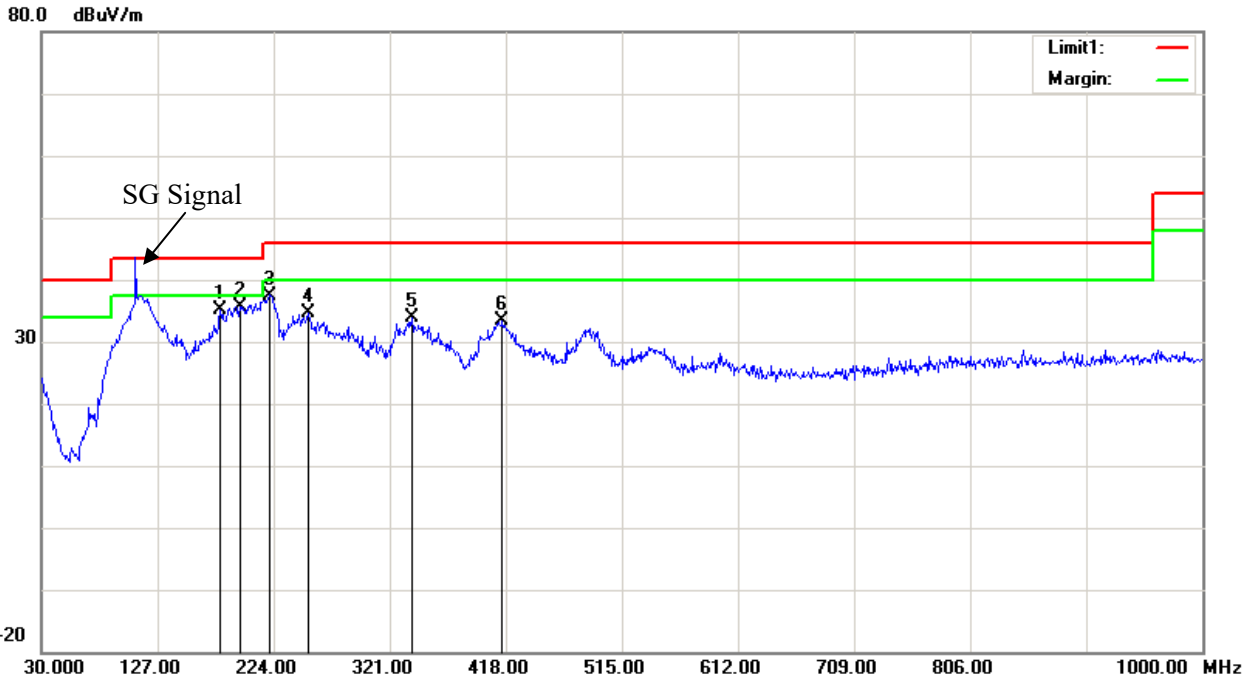


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 179.3800 | 47.42 | peak | -12.30 | 35.12 | 43.50 | 8.38 |
| 2 | 195.8700 | 47.42 | peak | -11.78 | 35.64 | 43.50 | 7.86 |
| 3 | 221.0900 | 49.98 | peak | -12.48 | 37.50 | 46.00 | 8.50 |
| 4 | 253.1000 | 45.98 | peak | -11.40 | 34.58 | 46.00 | 11.42 |
| 5 | 339.4300 | 42.58 | peak | -8.77 | 33.81 | 46.00 | 12.19 |
| 6 | 415.0900 | 39.96 | peak | -6.56 | 33.40 | 46.00 | 12.60 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 108.0125 MHz

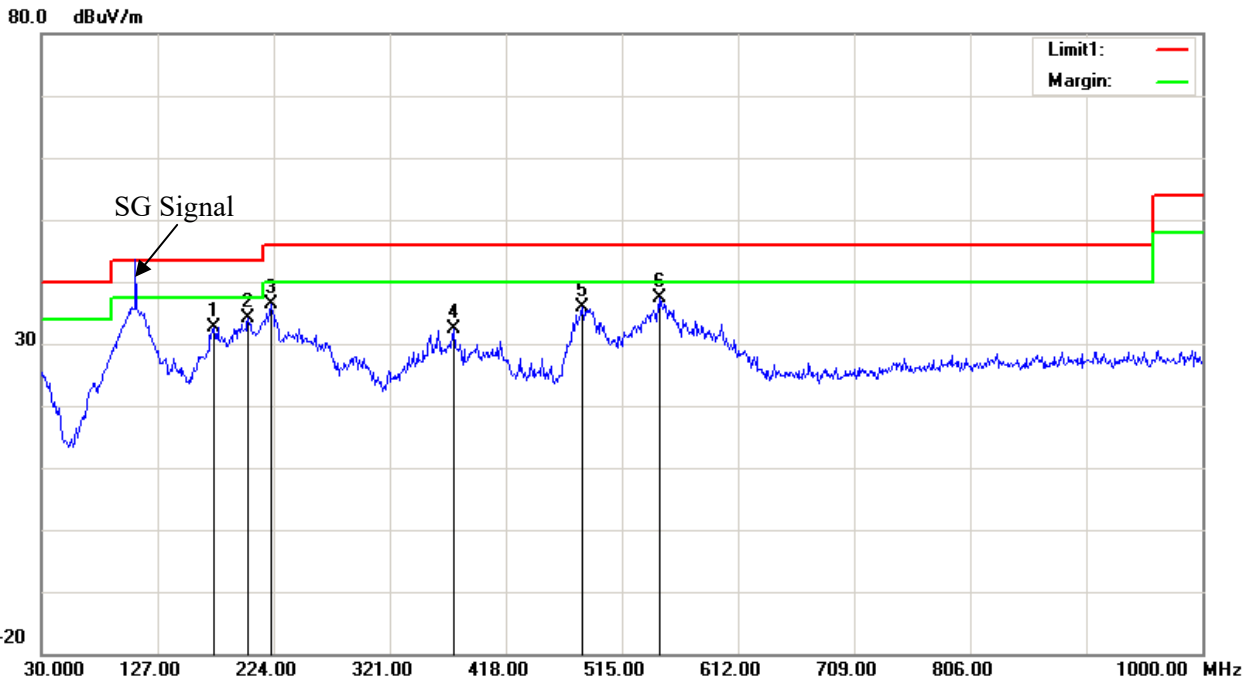


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 174.5300 | 44.45 | peak | -11.82 | 32.63 | 43.50 | 10.87 |
| 2 | 202.6600 | 45.98 | peak | -11.78 | 34.20 | 43.50 | 9.30 |
| 3 | 222.0600 | 48.81 | peak | -12.47 | 36.34 | 46.00 | 9.66 |
| 4 | 374.3500 | 40.35 | peak | -7.91 | 32.44 | 46.00 | 13.56 |
| 5 | 482.0200 | 40.26 | peak | -4.45 | 35.81 | 46.00 | 10.19 |
| 6 | 547.0100 | 41.00 | peak | -3.58 | 37.42 | 46.00 | 8.58 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 122 MHz

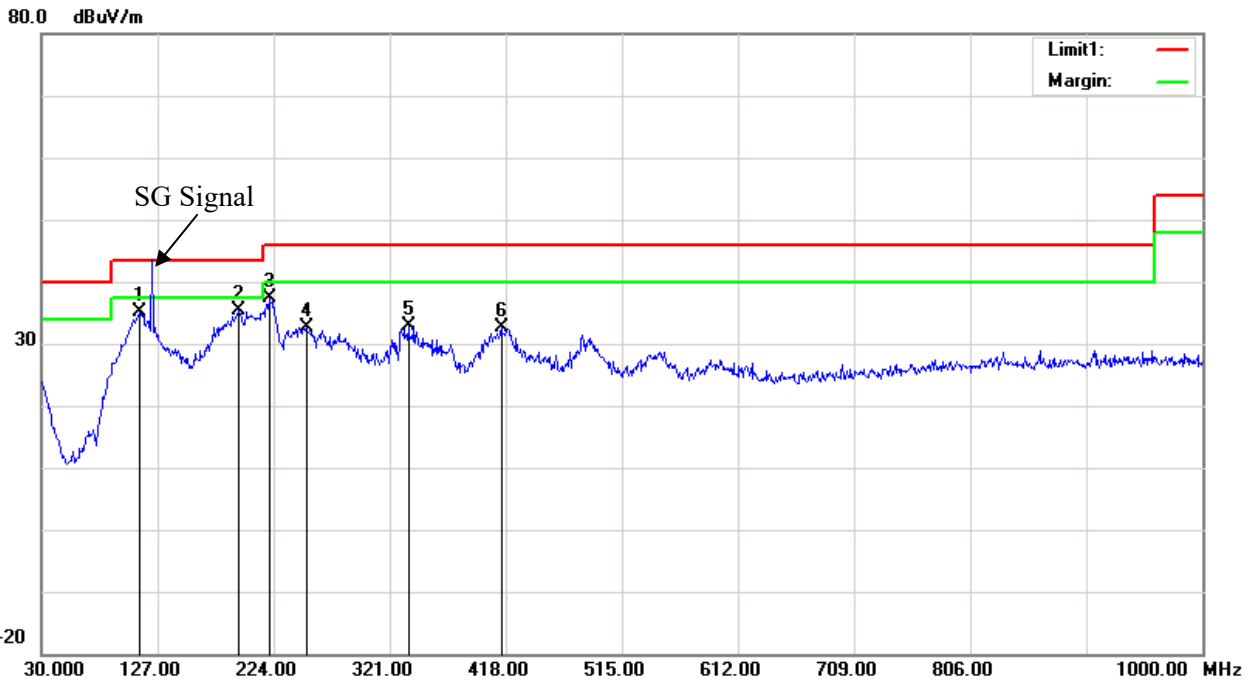


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|------------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 46.24 | peak | -11.14 | 35.10 | 43.50 | 8.40 |
| 2 | 194.9000 | 47.37 | peak | -11.88 | 35.49 | 43.50 | 8.01 |
| 3 | 220.1200 | 49.86 | peak | -12.50 | 37.36 | 46.00 | 8.64 |
| 4 | 251.1600 | 43.97 | peak | -11.43 | 32.54 | 46.00 | 13.46 |
| 5 | 336.5200 | 41.58 | peak | -8.75 | 32.83 | 46.00 | 13.17 |
| 6 | 414.1200 | 39.18 | peak | -6.59 | 32.59 | 46.00 | 13.41 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 122 MHz

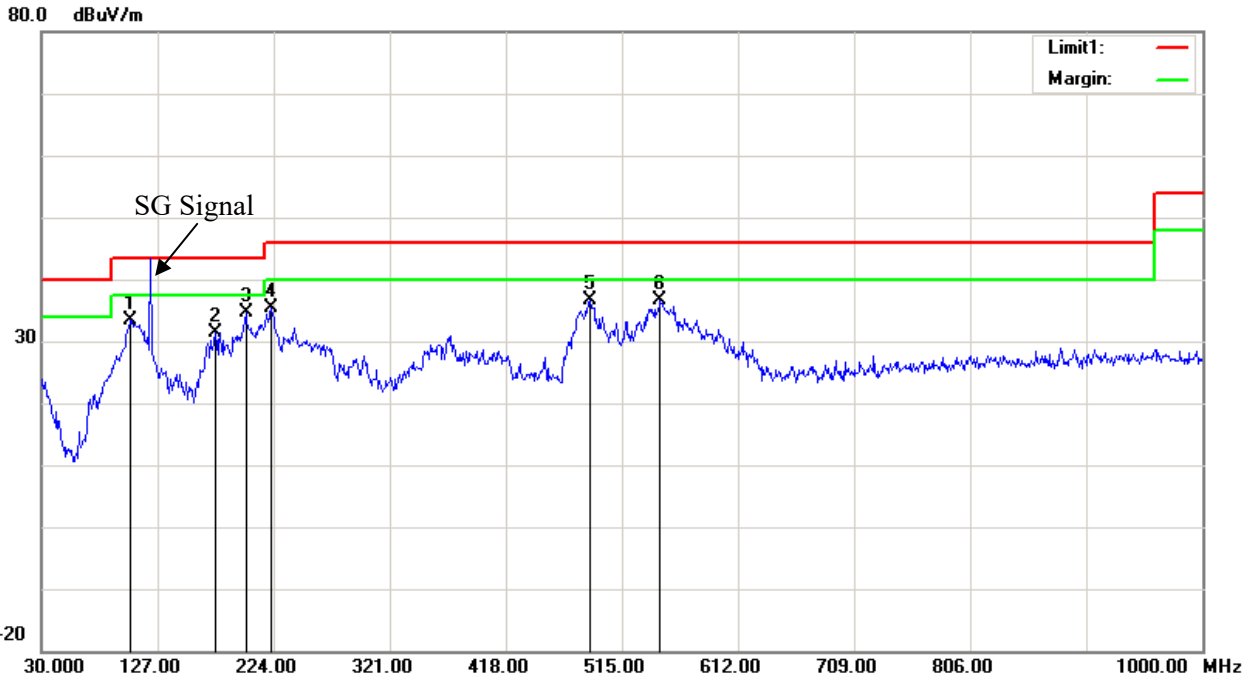


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 103.7200 | 46.62 | peak | -13.25 | 33.37 | 43.50 | 10.13 |
| 2 | 175.5000 | 43.31 | peak | -11.92 | 31.39 | 43.50 | 12.11 |
| 3 | 200.7200 | 46.29 | peak | -11.59 | 34.70 | 43.50 | 8.80 |
| 4 | 222.0600 | 47.75 | peak | -12.47 | 35.28 | 46.00 | 10.72 |
| 5 | 488.8100 | 41.17 | peak | -4.43 | 36.74 | 46.00 | 9.26 |
| 6 | 547.0100 | 40.19 | peak | -3.58 | 36.61 | 46.00 | 9.39 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 135.9875 MHz

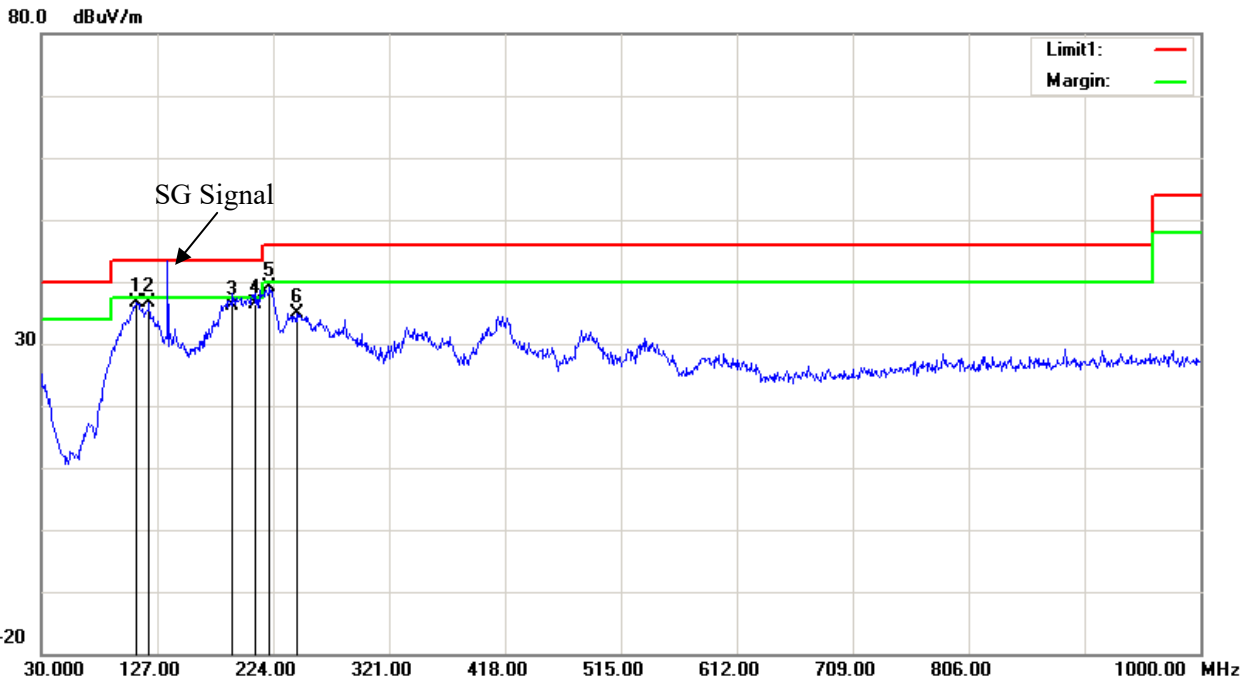


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 109.5400 | 48.21 | peak | -11.47 | 36.74 | 43.50 | 6.76 |
| 2 | 120.2100 | 46.57 | peak | -9.92 | 36.65 | 43.50 | 6.85 |
| 3 | 190.0500 | 48.22 | QP | -12.12 | 36.10 | 43.50 | 7.40 |
| 4 | 209.4500 | 48.79 | QP | -12.49 | 36.30 | 43.50 | 7.20 |
| 5 | 221.0900 | 51.49 | peak | -12.48 | 39.01 | 46.00 | 6.99 |
| 6 | 243.4000 | 46.62 | peak | -11.64 | 34.98 | 46.00 | 11.02 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 135.9875MHz

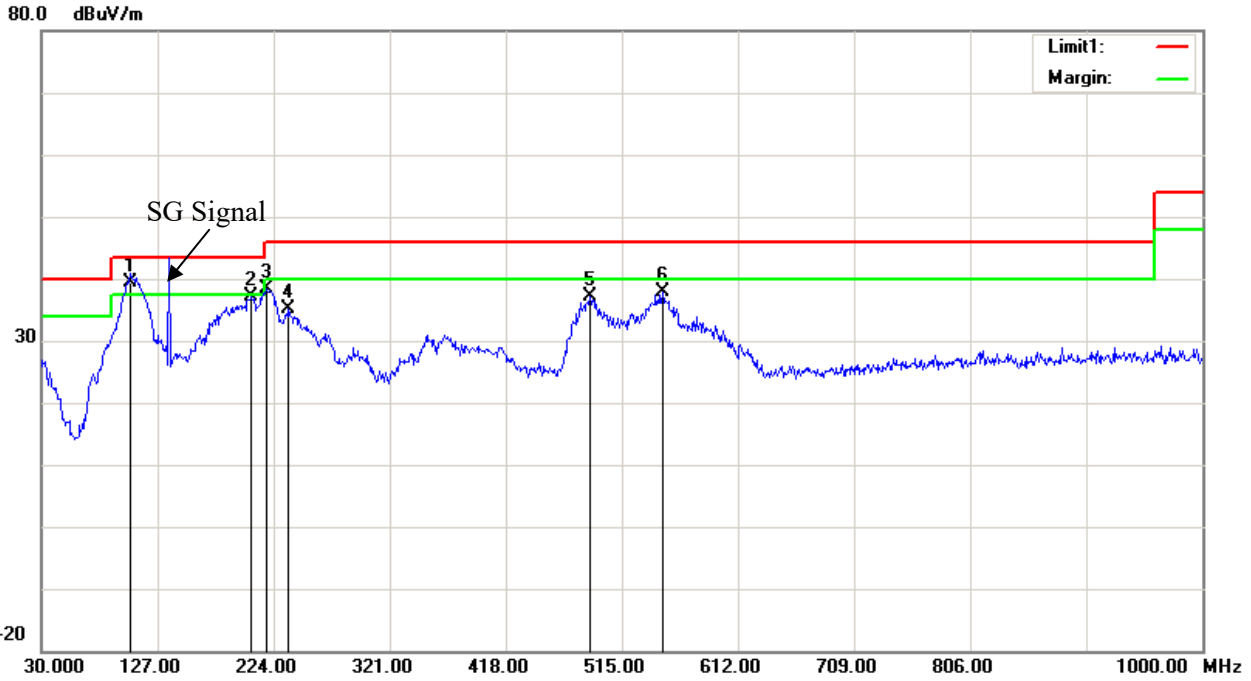


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 103.7200 | 52.75 | QP | -13.25 | 39.50 | 43.50 | 4.00 |
| 2 | 205.5700 | 49.20 | peak | -12.07 | 37.13 | 43.50 | 6.37 |
| 3 | 218.1800 | 50.96 | peak | -12.55 | 38.41 | 46.00 | 7.59 |
| 4 | 236.6100 | 47.12 | peak | -11.94 | 35.18 | 46.00 | 10.82 |
| 5 | 488.8100 | 41.51 | peak | -4.43 | 37.08 | 46.00 | 8.92 |
| 6 | 548.9500 | 41.34 | peak | -3.48 | 37.86 | 46.00 | 8.14 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 136.0125 MHz

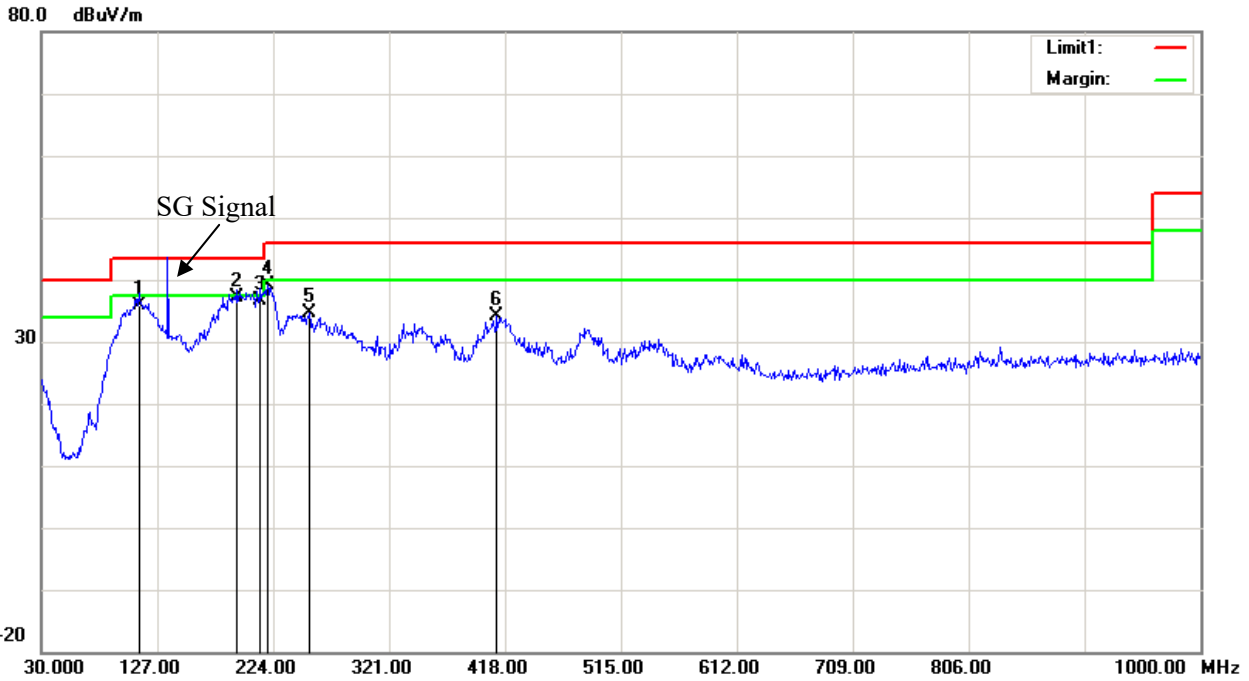


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 47.04 | QP | -11.14 | 35.90 | 43.50 | 7.60 |
| 2 | 193.9300 | 49.08 | QP | -11.98 | 37.10 | 43.50 | 6.40 |
| 3 | 213.3300 | 49.21 | QP | -12.61 | 36.60 | 43.50 | 6.90 |
| 4 | 219.1500 | 51.58 | peak | -12.53 | 39.05 | 46.00 | 6.95 |
| 5 | 254.0700 | 45.96 | peak | -11.39 | 34.57 | 46.00 | 11.43 |
| 6 | 411.2100 | 40.70 | peak | -6.64 | 34.06 | 46.00 | 11.94 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 136.0125 MHz

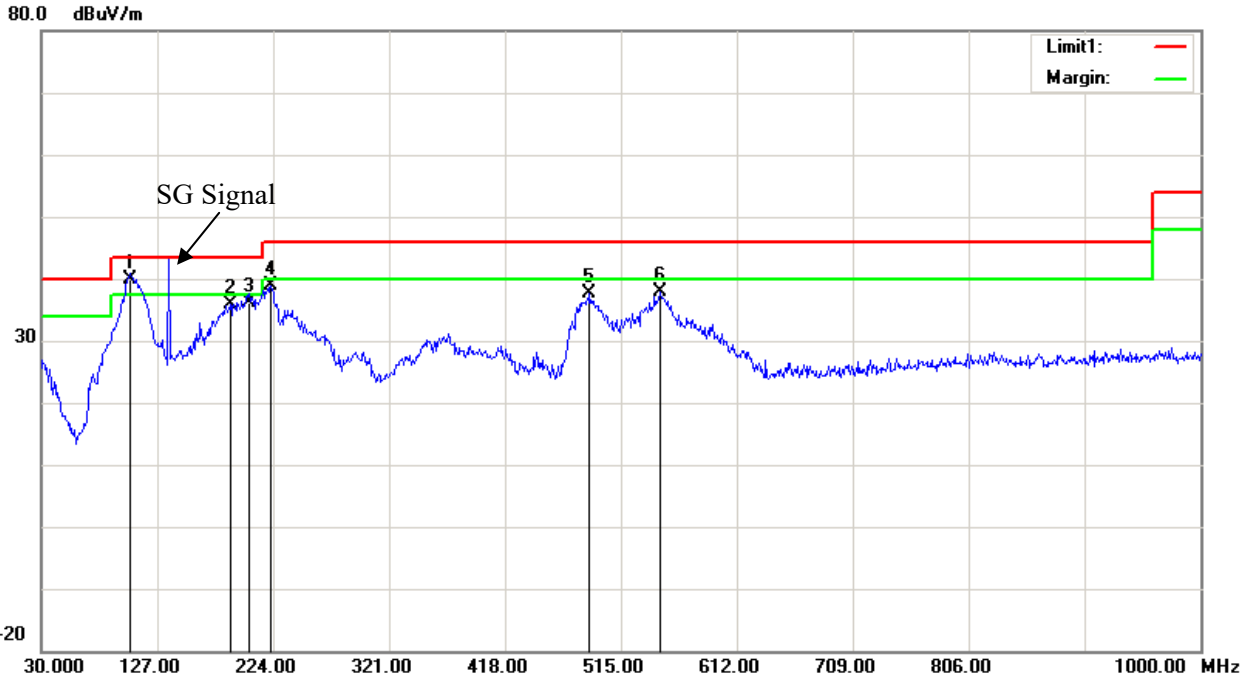


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 103.7200 | 53.05 | QP | -13.25 | 39.80 | 43.50 | 3.70 |
| 2 | 188.1100 | 48.14 | peak | -12.24 | 35.90 | 43.50 | 7.60 |
| 3 | 203.6300 | 48.07 | QP | -11.87 | 36.20 | 43.50 | 7.30 |
| 4 | 222.0600 | 51.40 | peak | -12.47 | 38.93 | 46.00 | 7.07 |
| 5 | 488.8100 | 41.97 | peak | -4.43 | 37.54 | 46.00 | 8.46 |
| 6 | 547.9800 | 41.40 | peak | -3.53 | 37.87 | 46.00 | 8.13 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 155 MHz

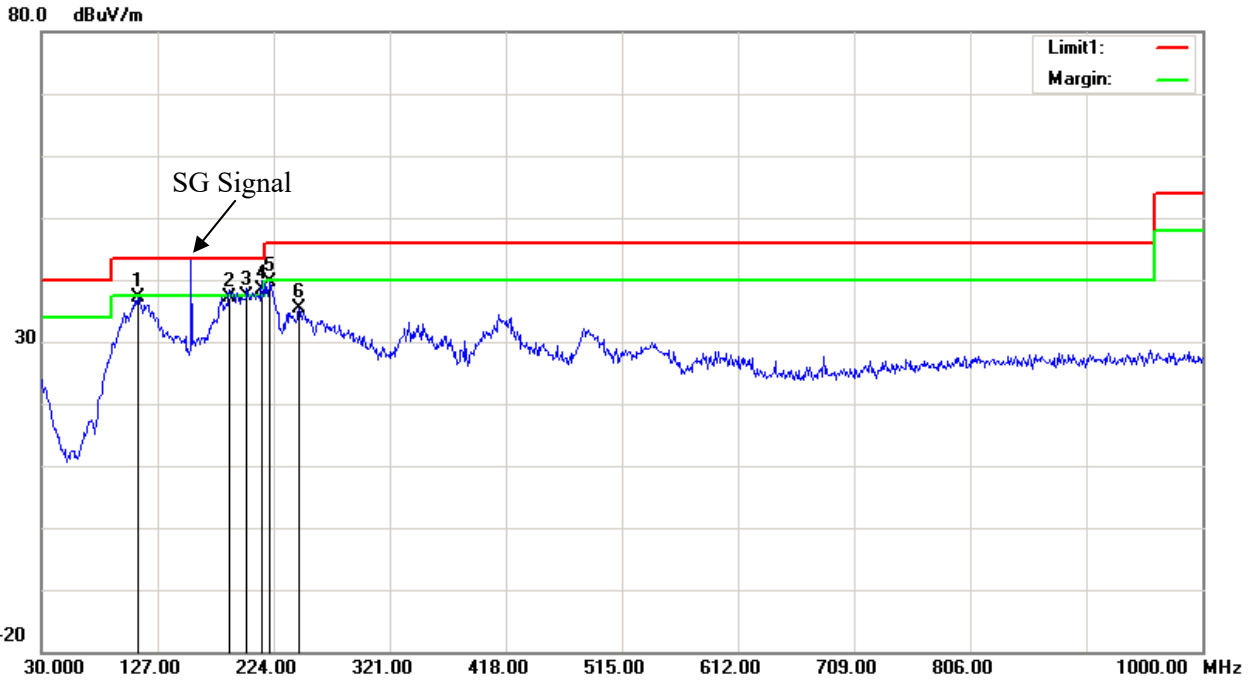


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 110.5100 | 48.30 | peak | -11.28 | 37.02 | 43.50 | 6.48 |
| 2 | 187.1400 | 49.50 | QP | -12.30 | 37.20 | 43.50 | 6.30 |
| 3 | 201.6900 | 49.19 | QP | -11.69 | 37.50 | 43.50 | 6.00 |
| 4 | 214.3000 | 51.03 | QP | -12.63 | 38.40 | 43.50 | 5.10 |
| 5 | 220.1200 | 52.06 | peak | -12.50 | 39.56 | 46.00 | 6.44 |
| 6 | 245.3400 | 46.96 | peak | -11.57 | 35.39 | 46.00 | 10.61 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 155 MHz

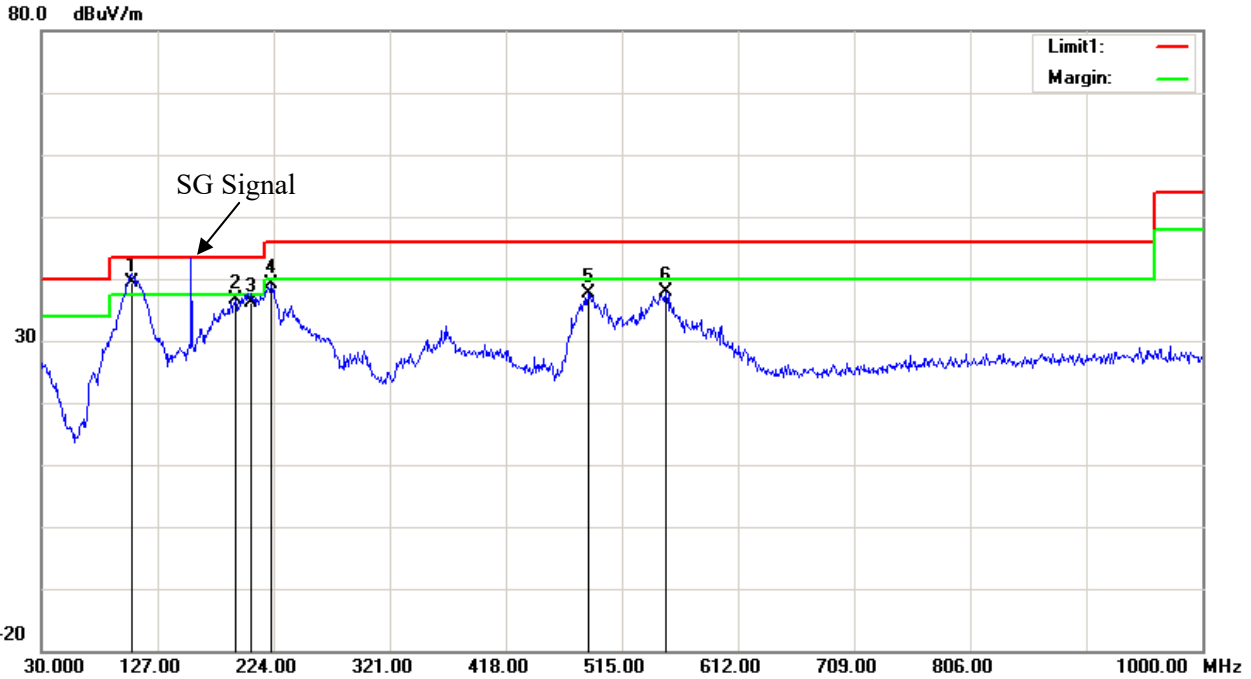


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 105.6600 | 51.92 | QP | -12.62 | 39.30 | 43.50 | 4.20 |
| 2 | 191.9900 | 48.65 | peak | -12.00 | 36.65 | 43.50 | 6.85 |
| 3 | 205.5700 | 48.27 | QP | -12.07 | 36.20 | 43.50 | 7.30 |
| 4 | 222.0600 | 51.55 | peak | -12.47 | 39.08 | 46.00 | 6.92 |
| 5 | 486.8700 | 42.01 | peak | -4.38 | 37.63 | 46.00 | 8.37 |
| 6 | 551.8600 | 41.18 | peak | -3.37 | 37.81 | 46.00 | 8.19 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 173.9875 MHz

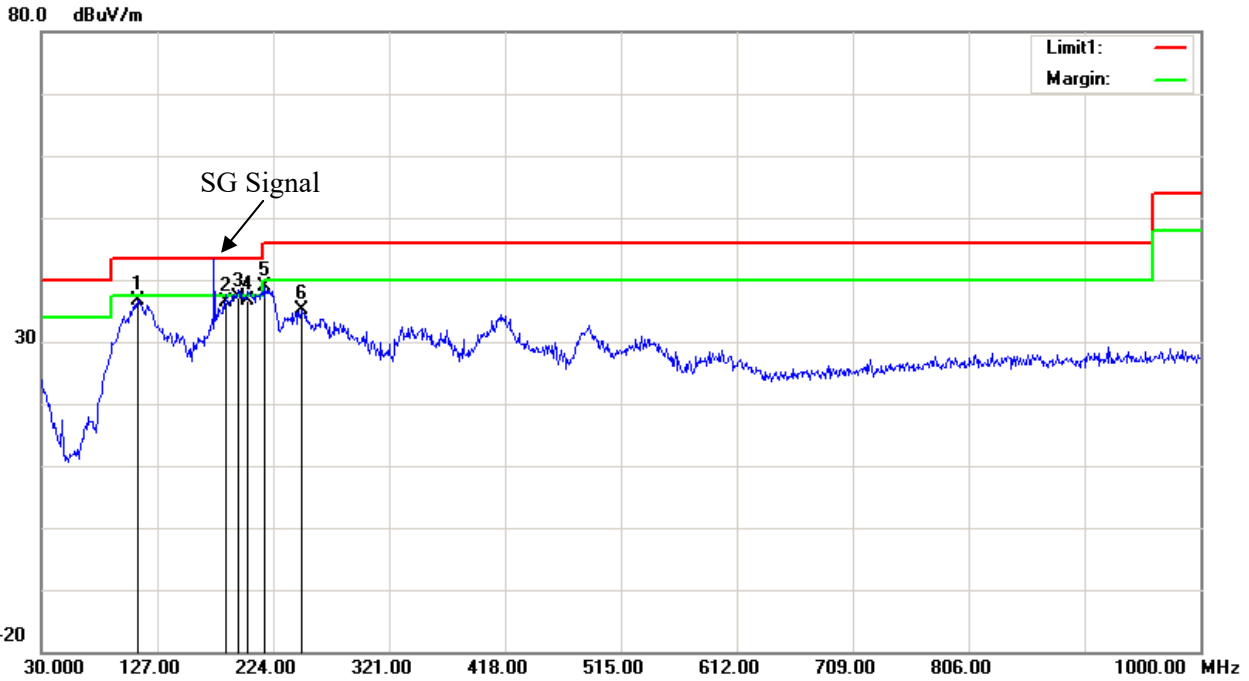


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 110.5100 | 47.87 | peak | -11.28 | 36.59 | 43.50 | 6.91 |
| 2 | 184.2300 | 48.80 | QP | -12.40 | 36.40 | 43.50 | 7.10 |
| 3 | 194.9000 | 48.98 | QP | -11.88 | 37.10 | 43.50 | 6.40 |
| 4 | 202.6600 | 48.38 | QP | -11.78 | 36.60 | 43.50 | 6.90 |
| 5 | 217.2100 | 51.37 | peak | -12.58 | 38.79 | 46.00 | 7.21 |
| 6 | 247.2800 | 46.58 | peak | -11.52 | 35.06 | 46.00 | 10.94 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 173.9875 MHz

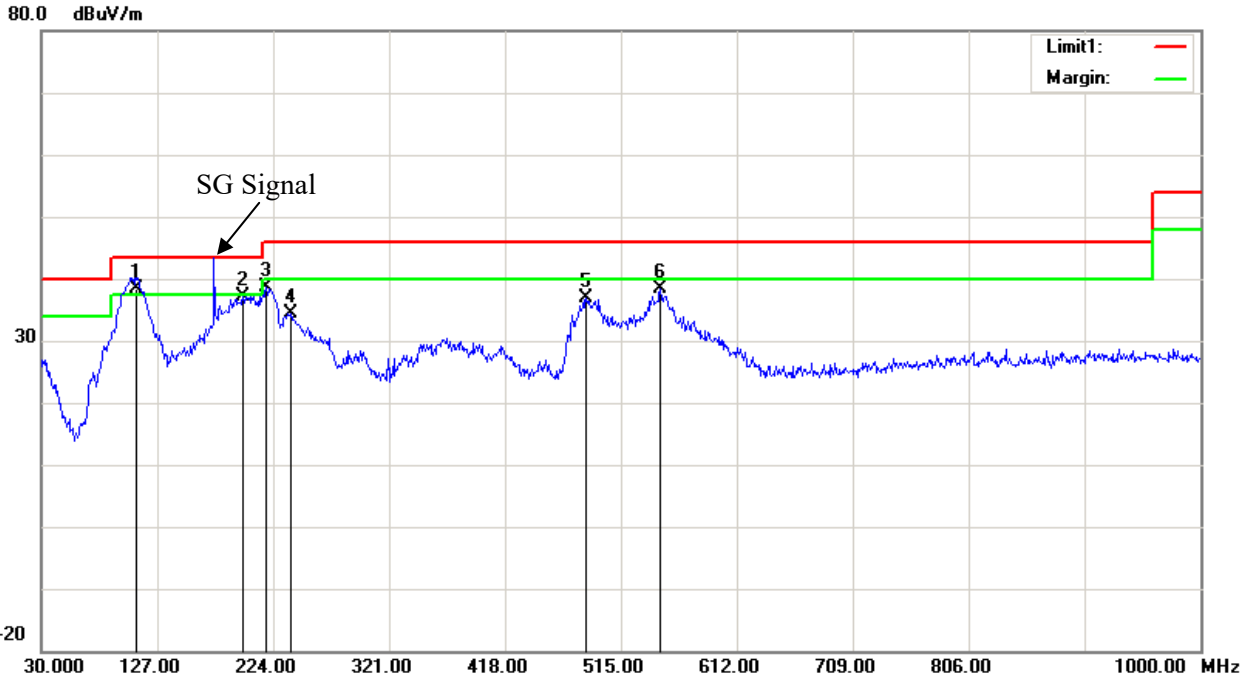


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 109.5400 | 49.87 | QP | -11.47 | 38.40 | 43.50 | 5.10 |
| 2 | 198.7800 | 48.67 | peak | -11.54 | 37.13 | 43.50 | 6.37 |
| 3 | 218.1800 | 51.11 | peak | -12.55 | 38.56 | 46.00 | 7.44 |
| 4 | 238.5500 | 46.21 | peak | -11.84 | 34.37 | 46.00 | 11.63 |
| 5 | 485.9000 | 41.24 | peak | -4.36 | 36.88 | 46.00 | 9.12 |
| 6 | 547.9800 | 41.79 | peak | -3.53 | 38.26 | 46.00 | 7.74 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 220.0125 MHz

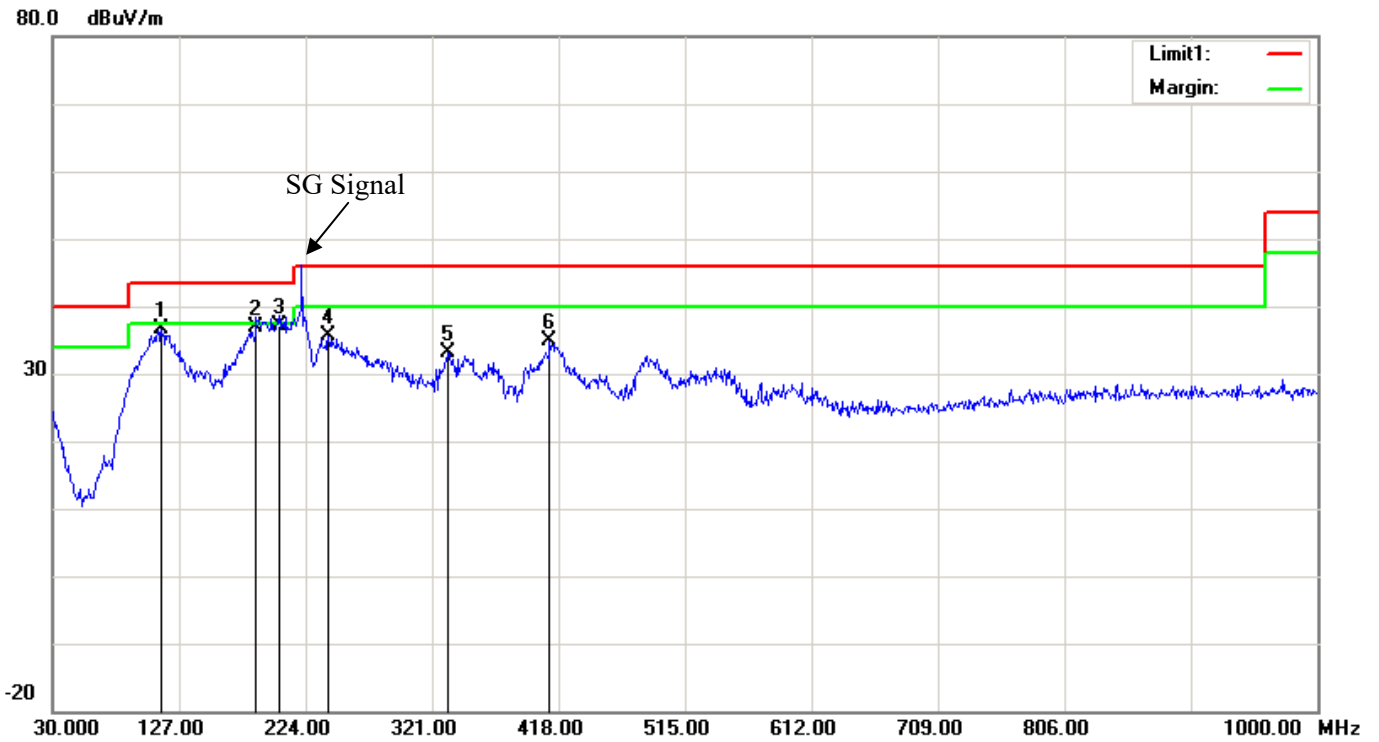


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|------------------|-----------------|----------------|-------------|
| 1 | 113.4200 | 47.48 | peak | -10.77 | 36.71 | 43.50 | 6.79 |
| 2 | 186.1700 | 49.16 | QP | -12.36 | 36.80 | 43.50 | 6.70 |
| 3 | 203.6300 | 48.97 | QP | -11.87 | 37.10 | 43.50 | 6.40 |
| 4 | 241.4600 | 47.35 | peak | -11.71 | 35.64 | 46.00 | 10.36 |
| 5 | 333.6100 | 41.90 | peak | -8.80 | 33.10 | 46.00 | 12.90 |
| 6 | 411.2100 | 41.50 | peak | -6.64 | 34.86 | 46.00 | 11.14 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 220.0125 MHz

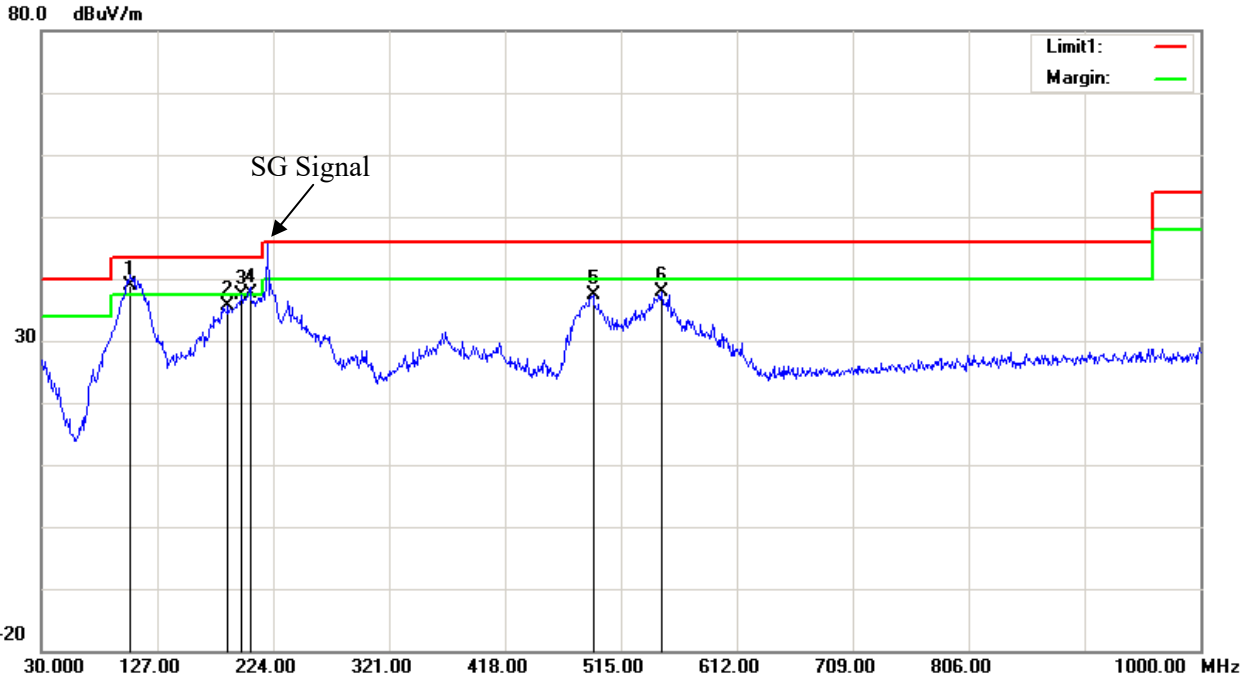


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 104.6900 | 51.82 | QP | -12.92 | 38.90 | 43.50 | 4.60 |
| 2 | 186.1700 | 47.88 | peak | -12.36 | 35.52 | 43.50 | 7.98 |
| 3 | 197.8100 | 49.07 | peak | -11.57 | 37.50 | 43.50 | 6.00 |
| 4 | 204.6000 | 49.66 | QP | -11.96 | 37.70 | 43.50 | 5.80 |
| 5 | 491.7200 | 41.80 | peak | -4.43 | 37.37 | 46.00 | 8.63 |
| 6 | 548.9500 | 41.34 | peak | -3.48 | 37.86 | 46.00 | 8.14 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 240 MHz

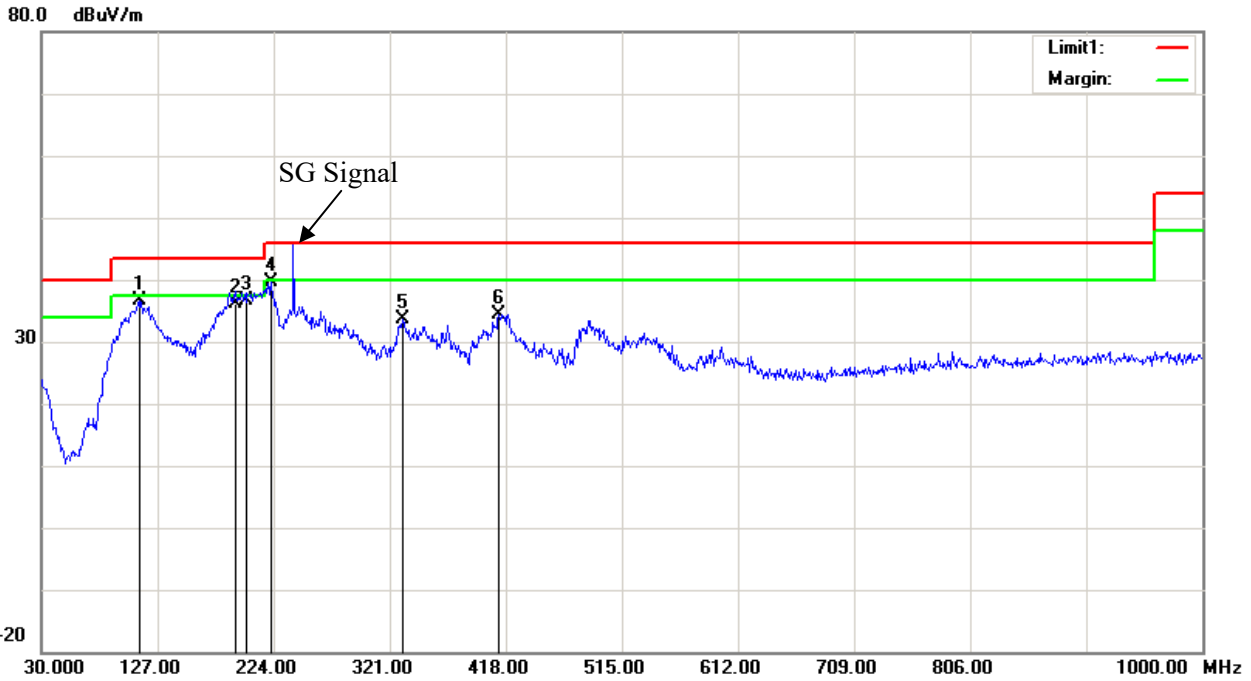


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|------------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 47.70 | peak | -11.14 | 36.56 | 43.50 | 6.94 |
| 2 | 191.9900 | 48.20 | QP | -12.00 | 36.20 | 43.50 | 7.30 |
| 3 | 201.6900 | 48.39 | QP | -11.69 | 36.70 | 43.50 | 6.80 |
| 4 | 222.0600 | 52.03 | peak | -12.47 | 39.56 | 46.00 | 6.44 |
| 5 | 331.6700 | 42.47 | peak | -8.87 | 33.60 | 46.00 | 12.40 |
| 6 | 412.1800 | 41.10 | peak | -6.62 | 34.48 | 46.00 | 11.52 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 240 MHz

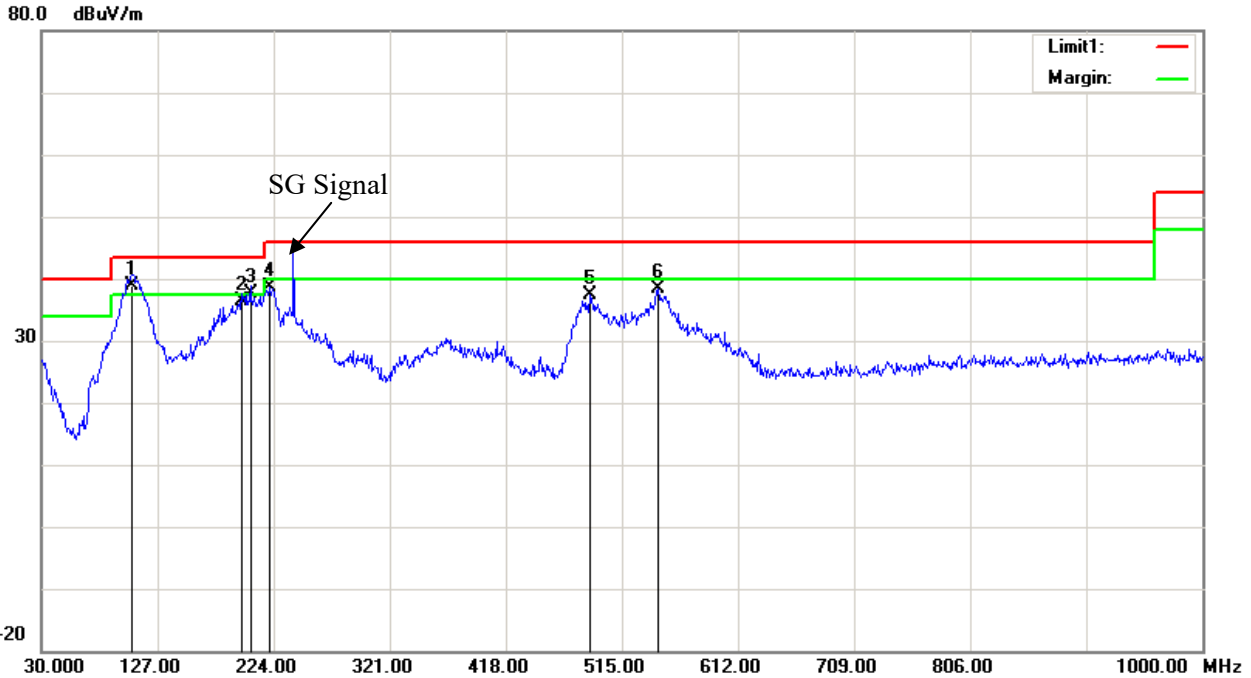


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 105.6600 | 51.52 | QP | -12.62 | 38.90 | 43.50 | 4.60 |
| 2 | 196.8400 | 47.98 | QP | -11.68 | 36.30 | 43.50 | 7.20 |
| 3 | 204.6000 | 49.66 | QP | -11.96 | 37.70 | 43.50 | 5.80 |
| 4 | 220.1200 | 51.11 | peak | -12.50 | 38.61 | 46.00 | 7.39 |
| 5 | 487.8400 | 41.73 | peak | -4.41 | 37.32 | 46.00 | 8.68 |
| 6 | 545.0700 | 42.15 | peak | -3.67 | 38.48 | 46.00 | 7.52 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 259.9875 MHz

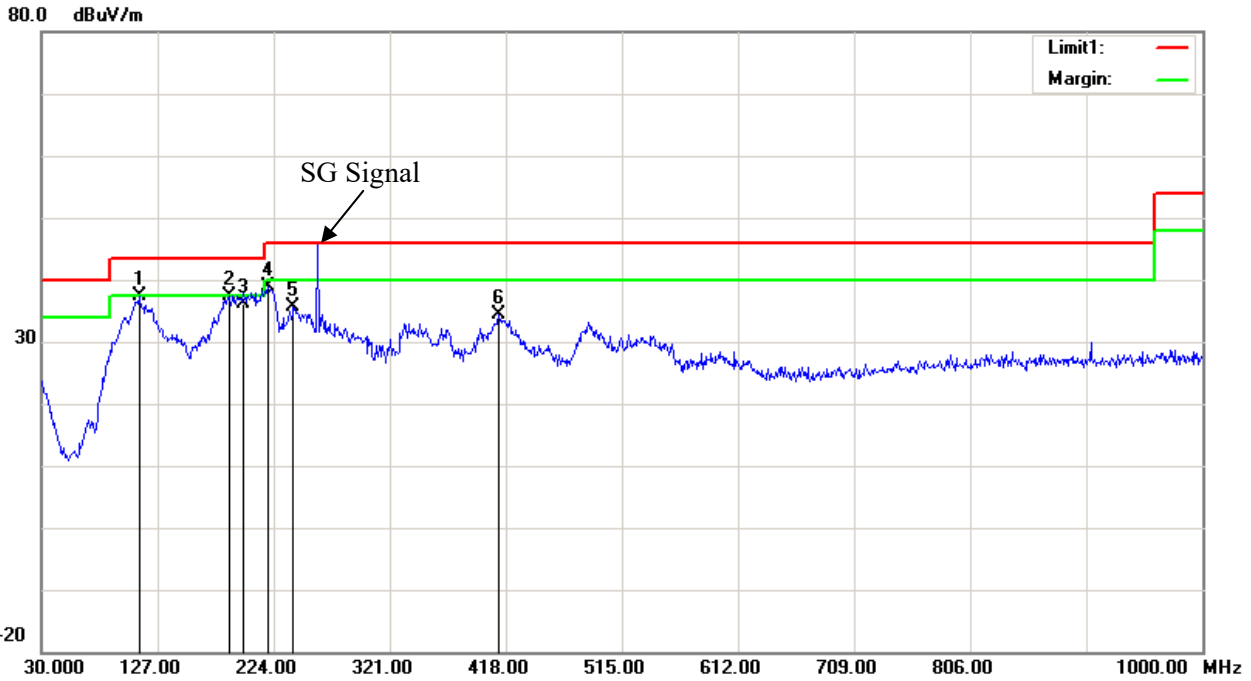


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 48.47 | peak | -11.14 | 37.33 | 43.50 | 6.17 |
| 2 | 187.1400 | 49.78 | peak | -12.30 | 37.48 | 43.50 | 6.02 |
| 3 | 198.7800 | 47.64 | QP | -11.54 | 36.10 | 43.50 | 7.40 |
| 4 | 219.1500 | 51.43 | peak | -12.53 | 38.90 | 46.00 | 7.10 |
| 5 | 240.4900 | 47.27 | peak | -11.74 | 35.53 | 46.00 | 10.47 |
| 6 | 412.1800 | 40.93 | peak | -6.62 | 34.31 | 46.00 | 11.69 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 259.9875 MHz

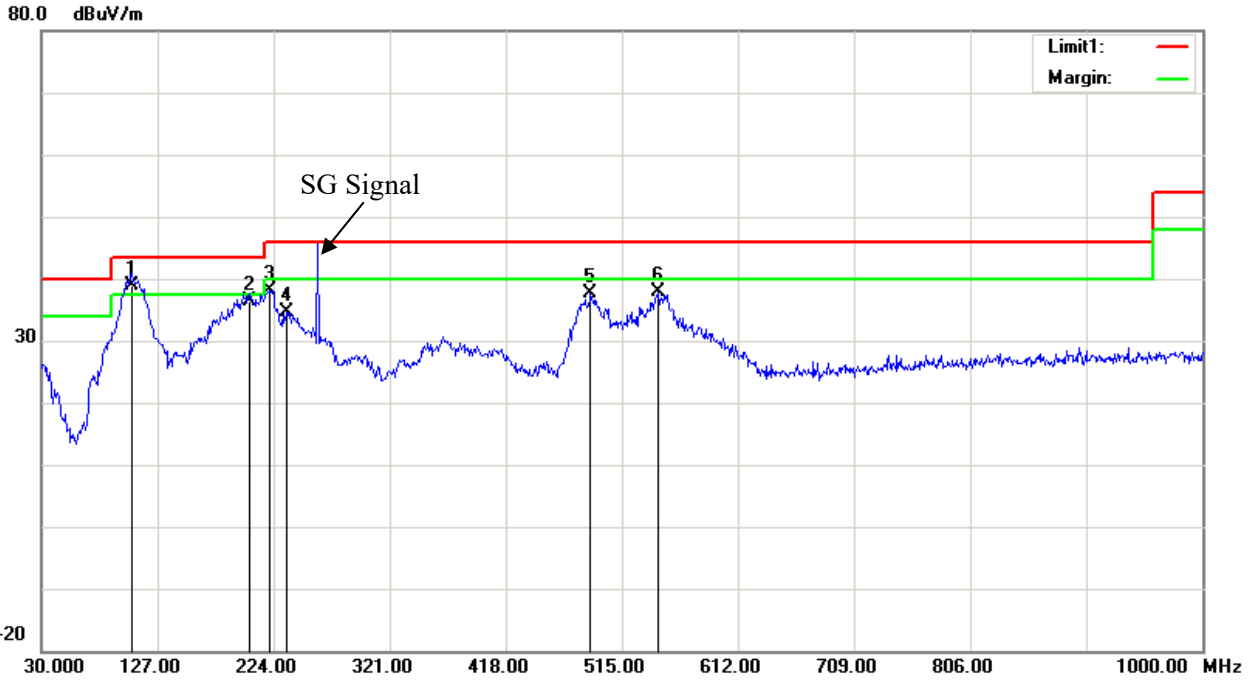


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 105.6600 | 51.52 | QP | -12.62 | 38.90 | 43.50 | 4.60 |
| 2 | 203.6300 | 48.37 | QP | -11.87 | 36.50 | 43.50 | 7.00 |
| 3 | 220.1200 | 50.75 | peak | -12.50 | 38.25 | 46.00 | 7.75 |
| 4 | 234.6700 | 46.58 | peak | -12.05 | 34.53 | 46.00 | 11.47 |
| 5 | 488.8100 | 42.07 | peak | -4.43 | 37.64 | 46.00 | 8.36 |
| 6 | 545.0700 | 41.50 | peak | -3.67 | 37.83 | 46.00 | 8.17 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 350.0125 MHz

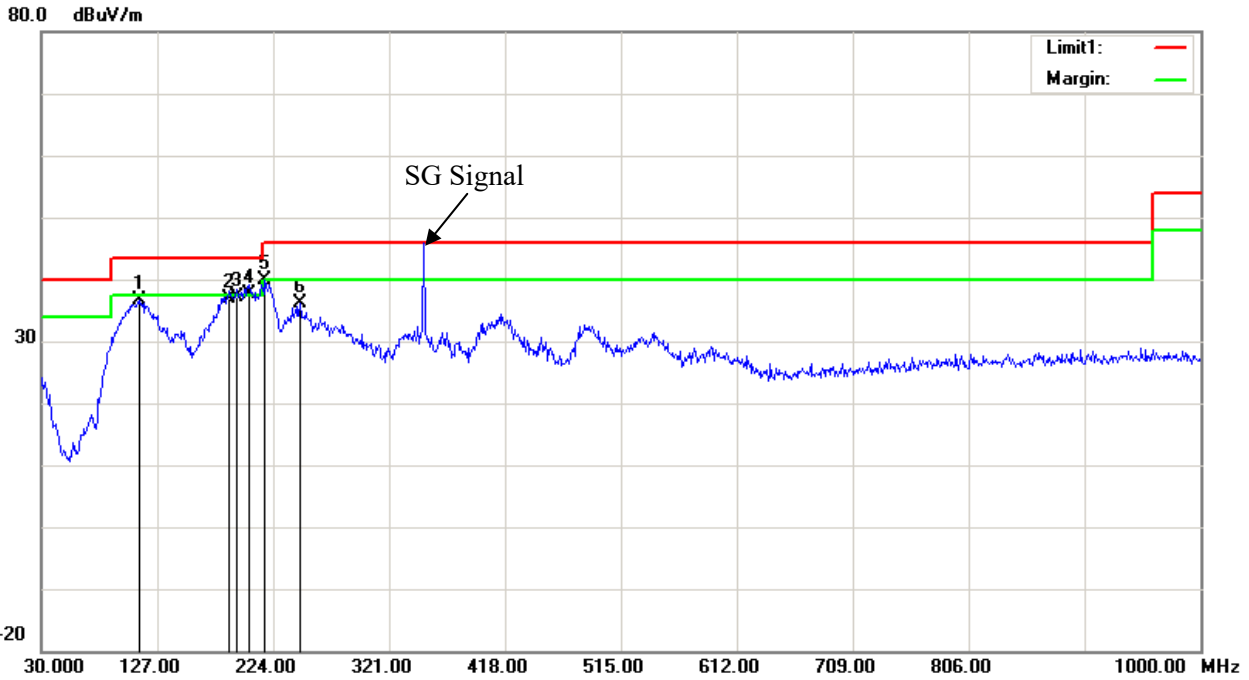


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 112.4500 | 47.52 | peak | -10.97 | 36.55 | 43.50 | 6.95 |
| 2 | 187.1400 | 49.10 | QP | -12.30 | 36.80 | 43.50 | 6.70 |
| 3 | 193.9300 | 49.08 | QP | -11.98 | 37.10 | 43.50 | 6.40 |
| 4 | 203.6300 | 49.47 | QP | -11.87 | 37.60 | 43.50 | 5.90 |
| 5 | 217.2100 | 52.42 | peak | -12.58 | 39.84 | 46.00 | 6.16 |
| 6 | 246.3100 | 47.70 | peak | -11.55 | 36.15 | 46.00 | 9.85 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 350.0125 MHz

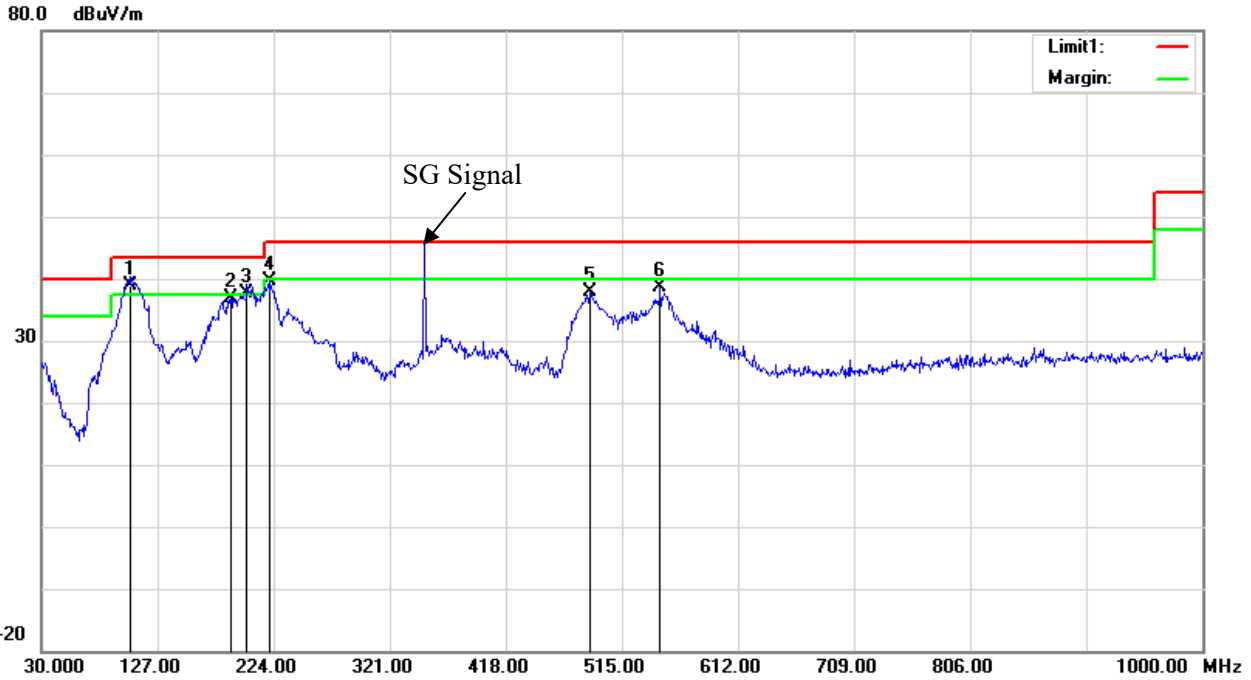


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 103.7200 | 52.15 | QP | -13.25 | 38.90 | 43.50 | 4.60 |
| 2 | 188.1100 | 49.00 | peak | -12.24 | 36.76 | 43.50 | 6.74 |
| 3 | 201.6900 | 49.39 | QP | -11.69 | 37.70 | 43.50 | 5.80 |
| 4 | 220.1200 | 52.04 | peak | -12.50 | 39.54 | 46.00 | 6.46 |
| 5 | 487.8400 | 42.25 | peak | -4.41 | 37.84 | 46.00 | 8.16 |
| 6 | 547.0100 | 42.17 | peak | -3.58 | 38.59 | 46.00 | 7.41 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 370 MHz

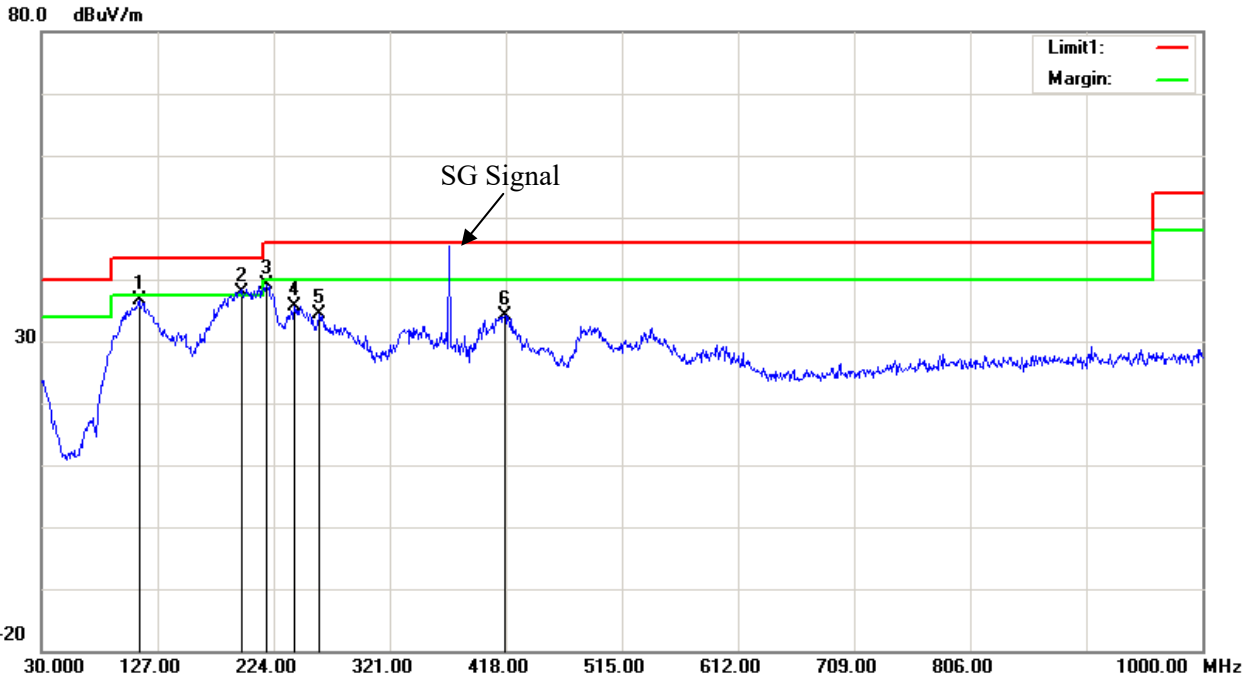


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 47.69 | peak | -11.14 | 36.55 | 43.50 | 6.95 |
| 2 | 196.8400 | 49.48 | QP | -11.68 | 37.80 | 43.50 | 5.70 |
| 3 | 218.1800 | 51.71 | peak | -12.55 | 39.16 | 46.00 | 6.84 |
| 4 | 241.4600 | 47.45 | peak | -11.71 | 35.74 | 46.00 | 10.26 |
| 5 | 261.8300 | 45.21 | peak | -10.87 | 34.34 | 46.00 | 11.66 |
| 6 | 417.0300 | 40.67 | peak | -6.45 | 34.22 | 46.00 | 11.78 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 370 MHz

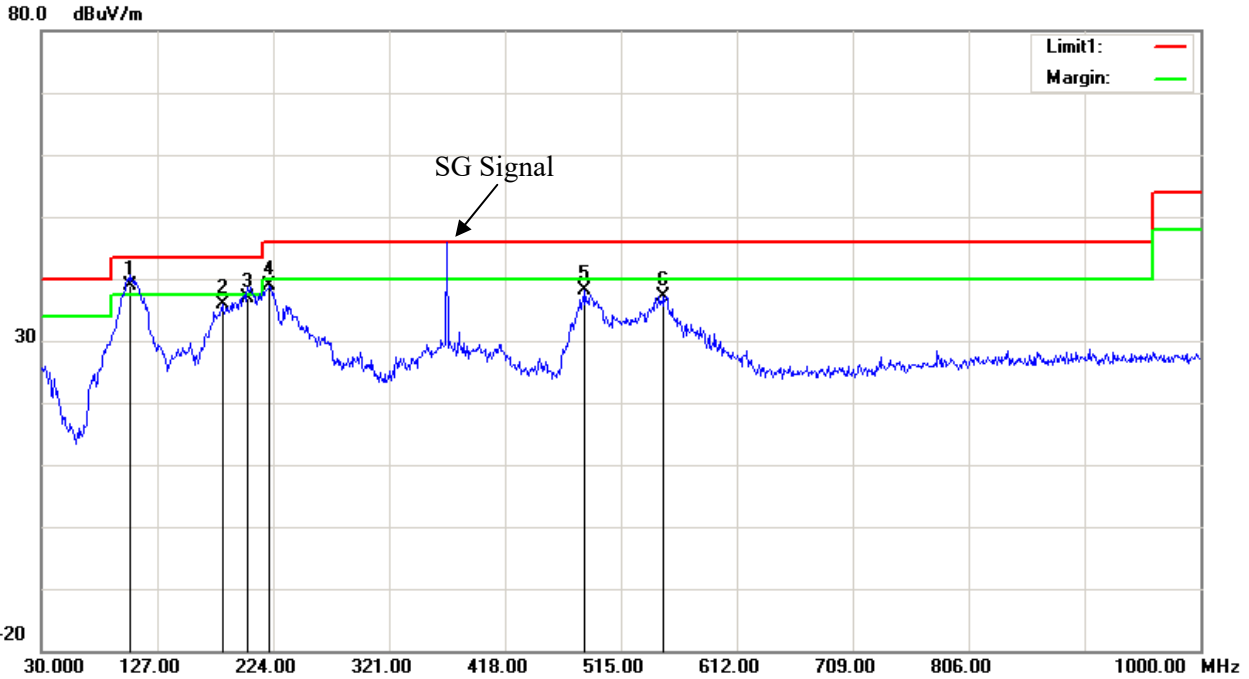


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 104.6900 | 51.72 | QP | -12.92 | 38.80 | 43.50 | 4.70 |
| 2 | 181.3200 | 48.11 | peak | -12.27 | 35.84 | 43.50 | 7.66 |
| 3 | 202.6600 | 48.68 | QP | -11.78 | 36.90 | 43.50 | 6.60 |
| 4 | 221.0900 | 51.44 | peak | -12.48 | 38.96 | 46.00 | 7.04 |
| 5 | 484.9300 | 42.47 | peak | -4.34 | 38.13 | 46.00 | 7.87 |
| 6 | 550.8900 | 40.47 | peak | -3.40 | 37.07 | 46.00 | 8.93 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 389.9875 MHz

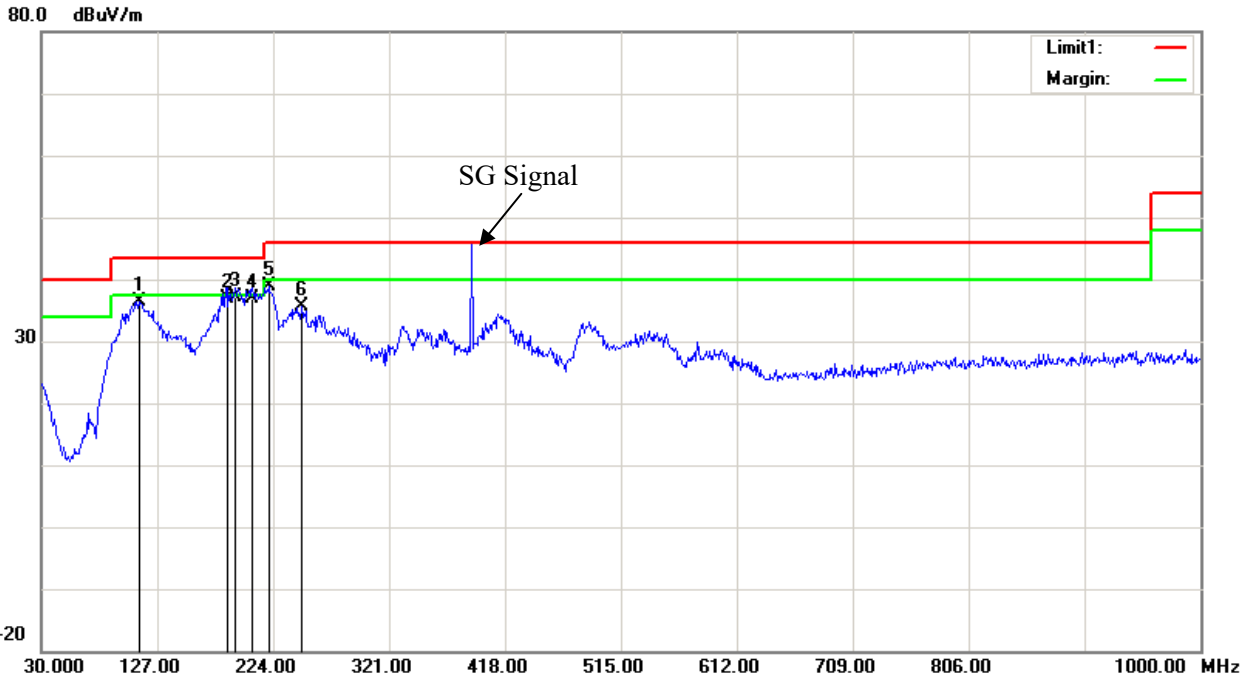


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|------------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 47.62 | peak | -11.14 | 36.48 | 43.50 | 7.02 |
| 2 | 186.1700 | 49.26 | QP | -12.36 | 36.90 | 43.50 | 6.60 |
| 3 | 191.9900 | 49.10 | QP | -12.00 | 37.10 | 43.50 | 6.40 |
| 4 | 206.5400 | 48.97 | QP | -12.17 | 36.80 | 43.50 | 6.70 |
| 5 | 220.1200 | 51.36 | peak | -12.50 | 38.86 | 46.00 | 7.14 |
| 6 | 248.2500 | 47.09 | peak | -11.50 | 35.59 | 46.00 | 10.41 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 389.9875 MHz

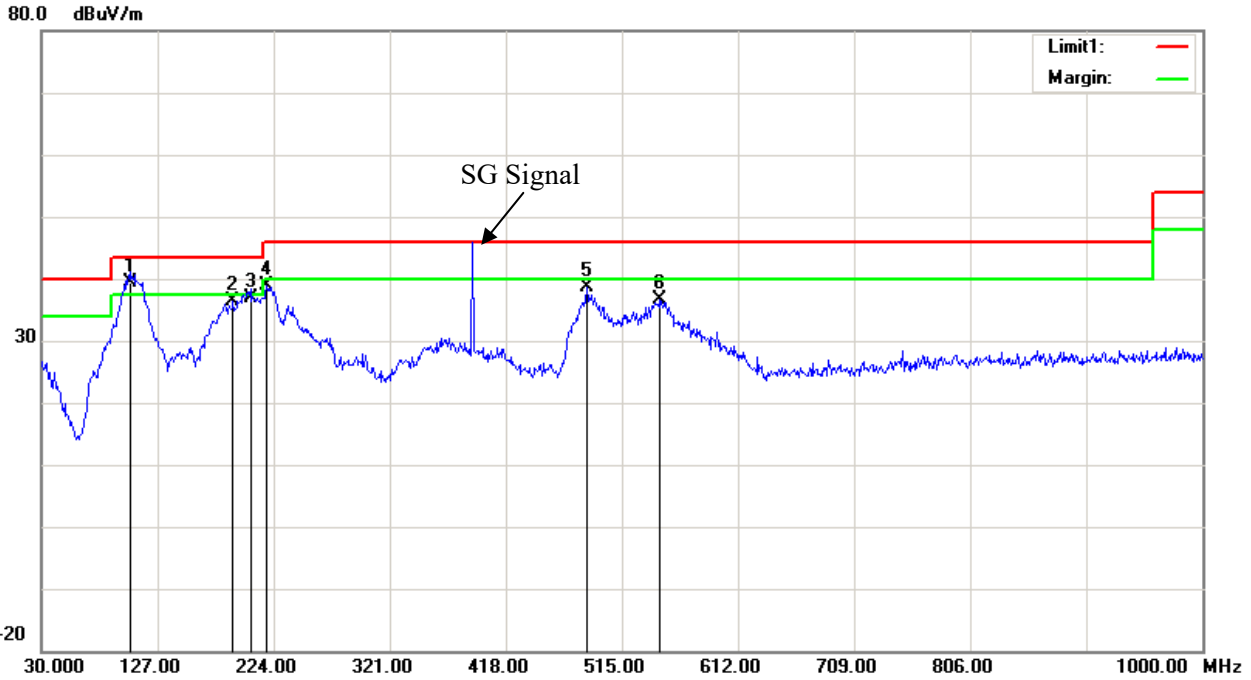


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 103.7200 | 52.65 | QP | -13.25 | 39.40 | 43.50 | 4.10 |
| 2 | 190.0500 | 48.41 | peak | -12.12 | 36.29 | 43.50 | 7.21 |
| 3 | 204.6000 | 48.76 | QP | -11.96 | 36.80 | 43.50 | 6.70 |
| 4 | 218.1800 | 51.46 | peak | -12.55 | 38.91 | 46.00 | 7.09 |
| 5 | 485.9000 | 43.02 | peak | -4.36 | 38.66 | 46.00 | 7.34 |
| 6 | 547.0100 | 40.11 | peak | -3.58 | 36.53 | 46.00 | 9.47 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 400.0125 MHz

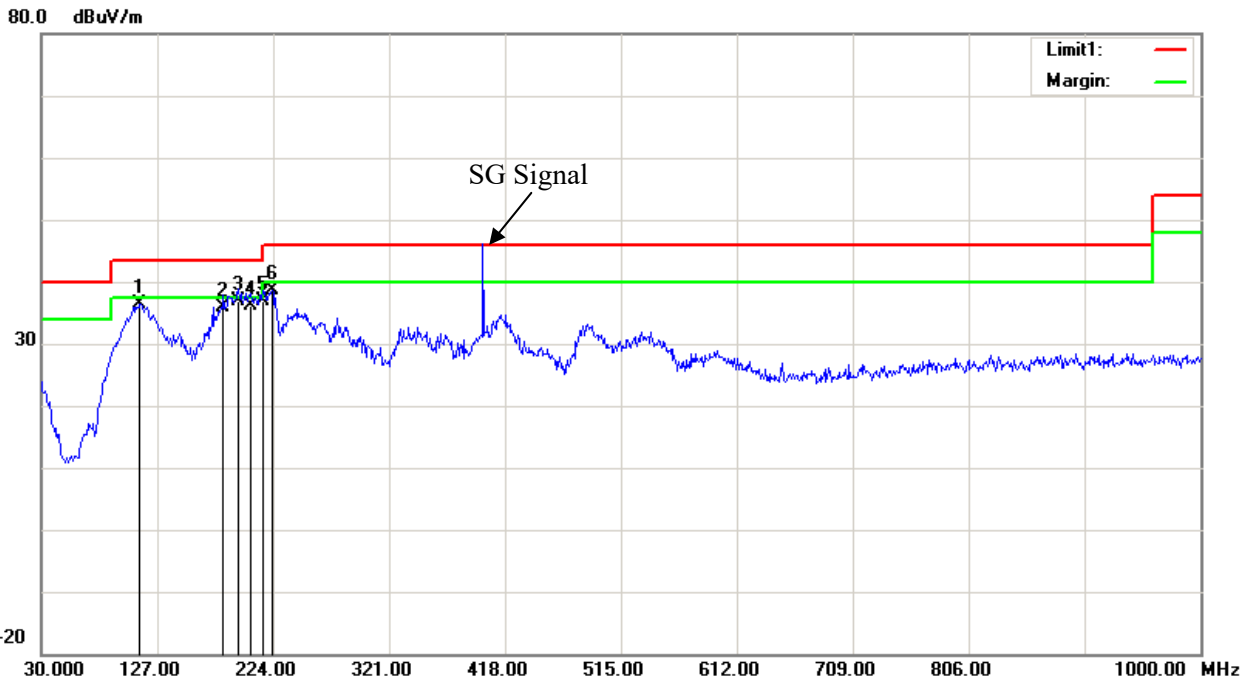


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 112.4500 | 47.43 | peak | -10.97 | 36.46 | 43.50 | 7.04 |
| 2 | 182.2900 | 48.16 | QP | -12.26 | 35.90 | 43.50 | 7.60 |
| 3 | 194.9000 | 48.78 | QP | -11.88 | 36.90 | 43.50 | 6.60 |
| 4 | 205.5700 | 48.27 | QP | -12.07 | 36.20 | 43.50 | 7.30 |
| 5 | 215.2700 | 49.42 | QP | -12.62 | 36.80 | 43.50 | 6.70 |
| 6 | 223.0300 | 51.09 | peak | -12.45 | 38.64 | 46.00 | 7.36 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 400.0125 MHz

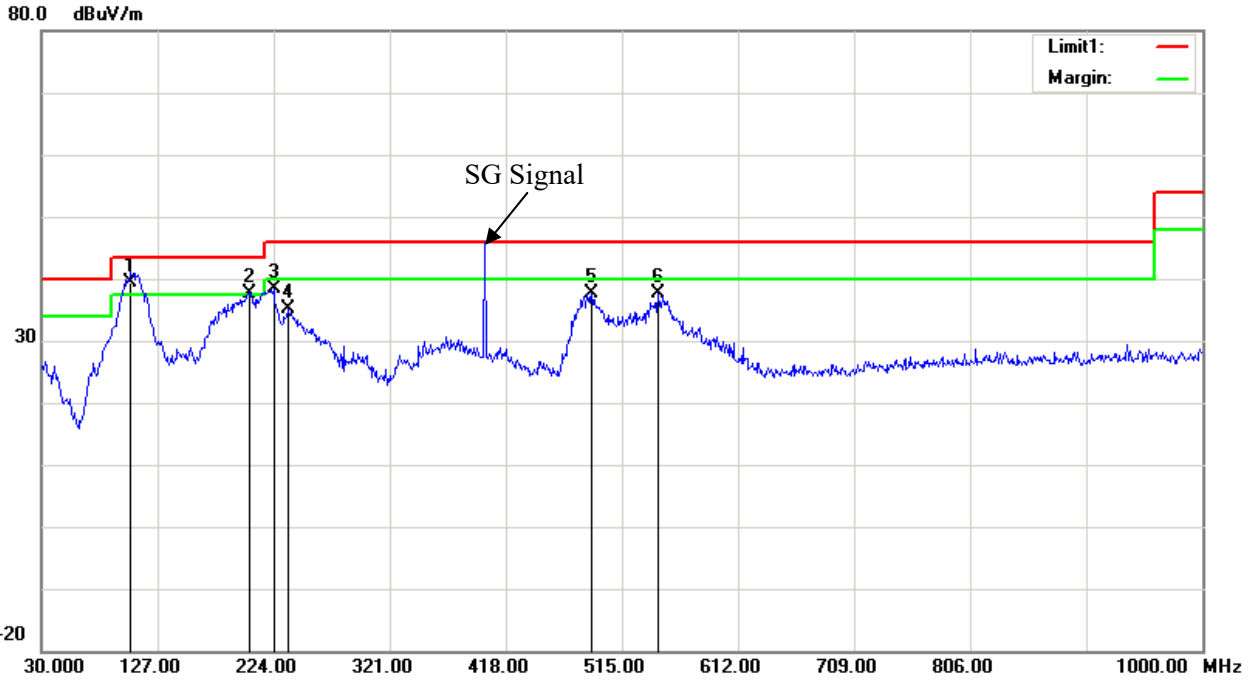


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 104.6900 | 52.32 | QP | -12.92 | 39.40 | 43.50 | 4.10 |
| 2 | 203.6300 | 49.49 | peak | -11.87 | 37.62 | 43.50 | 5.88 |
| 3 | 224.0000 | 50.84 | peak | -12.43 | 38.41 | 46.00 | 7.59 |
| 4 | 236.6100 | 47.12 | peak | -11.94 | 35.18 | 46.00 | 10.82 |
| 5 | 489.7800 | 42.15 | peak | -4.45 | 37.70 | 46.00 | 8.30 |
| 6 | 545.0700 | 41.20 | peak | -3.67 | 37.53 | 46.00 | 8.47 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 460 MHz

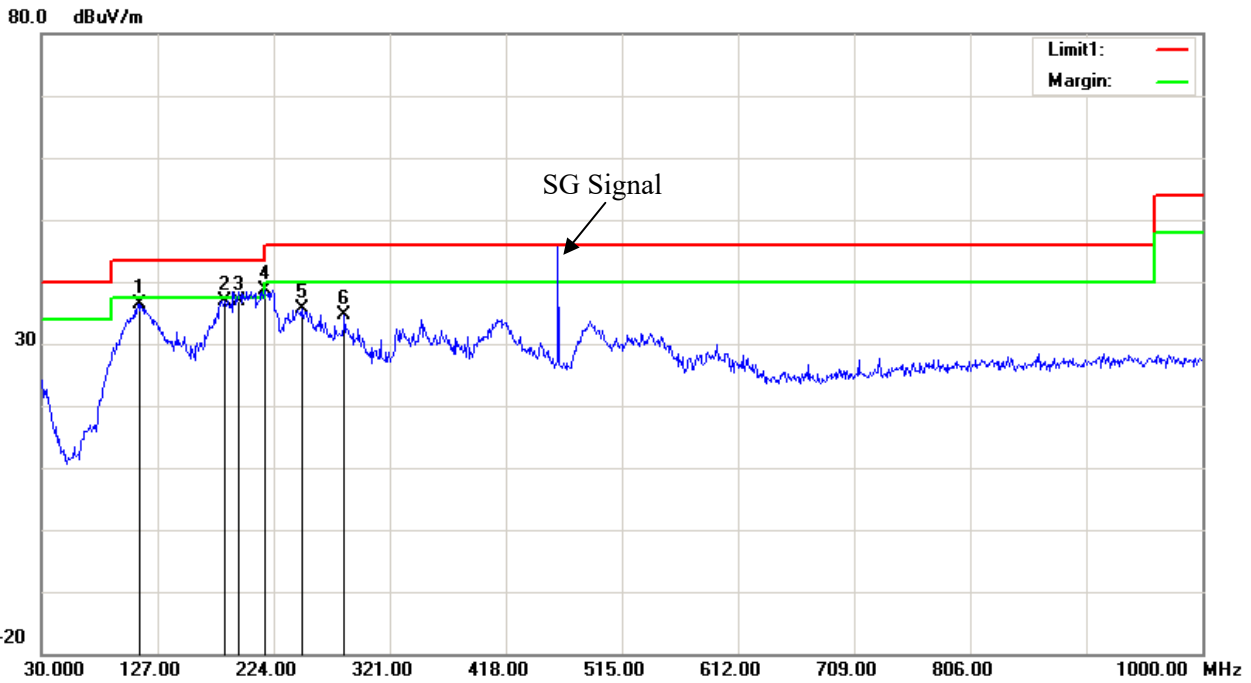


| No. | Frequency (MHz) | Reading (dB μ V) | Detector | Corrected (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------------|----------|------------------|-----------------|----------------|-------------|
| 1 | 111.4800 | 47.60 | peak | -11.14 | 36.46 | 43.50 | 7.04 |
| 2 | 183.2600 | 49.29 | peak | -12.35 | 36.94 | 43.50 | 6.56 |
| 3 | 194.9000 | 48.68 | QP | -11.88 | 36.80 | 43.50 | 6.70 |
| 4 | 216.2400 | 51.33 | peak | -12.60 | 38.73 | 46.00 | 7.27 |
| 5 | 247.2800 | 47.20 | peak | -11.52 | 35.68 | 46.00 | 10.32 |
| 6 | 283.1700 | 44.26 | peak | -9.65 | 34.61 | 46.00 | 11.39 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 460 MHz

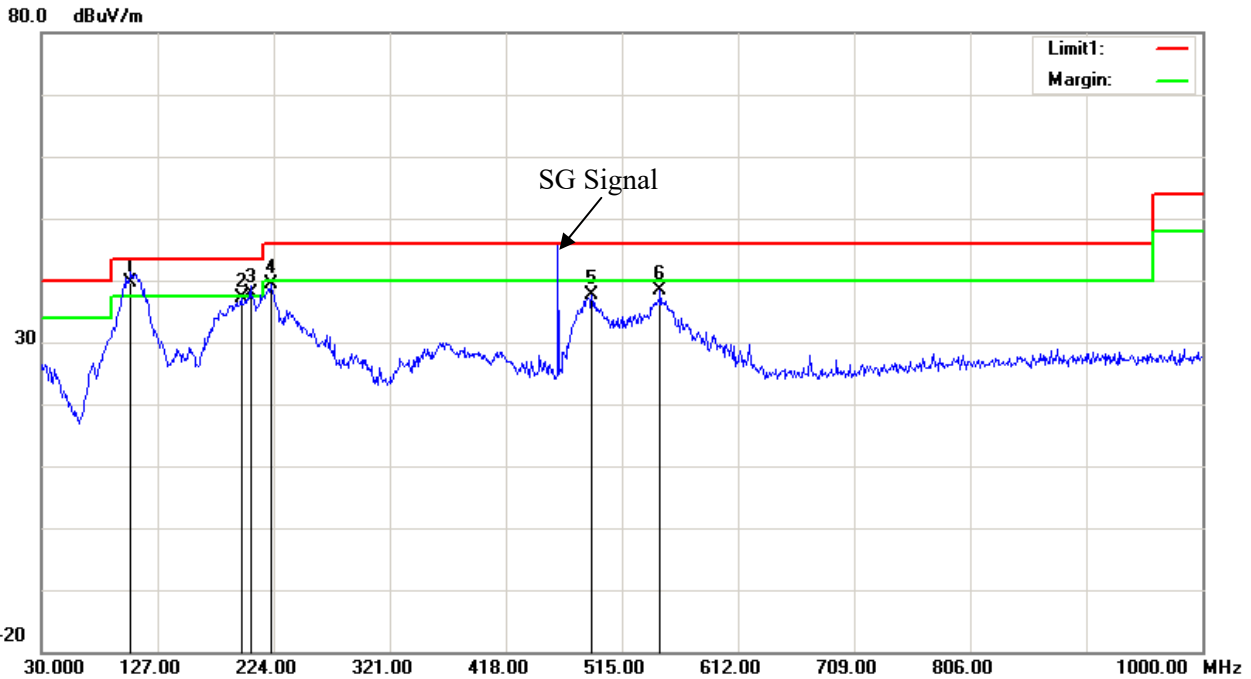


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 104.6900 | 52.62 | QP | -12.92 | 39.70 | 43.50 | 3.80 |
| 2 | 196.8400 | 48.93 | peak | -11.68 | 37.25 | 43.50 | 6.25 |
| 3 | 204.6000 | 49.76 | QP | -11.96 | 37.80 | 43.50 | 5.70 |
| 4 | 222.0600 | 51.75 | peak | -12.47 | 39.28 | 46.00 | 6.72 |
| 5 | 489.7800 | 42.05 | peak | -4.45 | 37.60 | 46.00 | 8.40 |
| 6 | 547.0100 | 41.95 | peak | -3.58 | 38.37 | 46.00 | 7.63 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Horizontal
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 519.9875 MHz

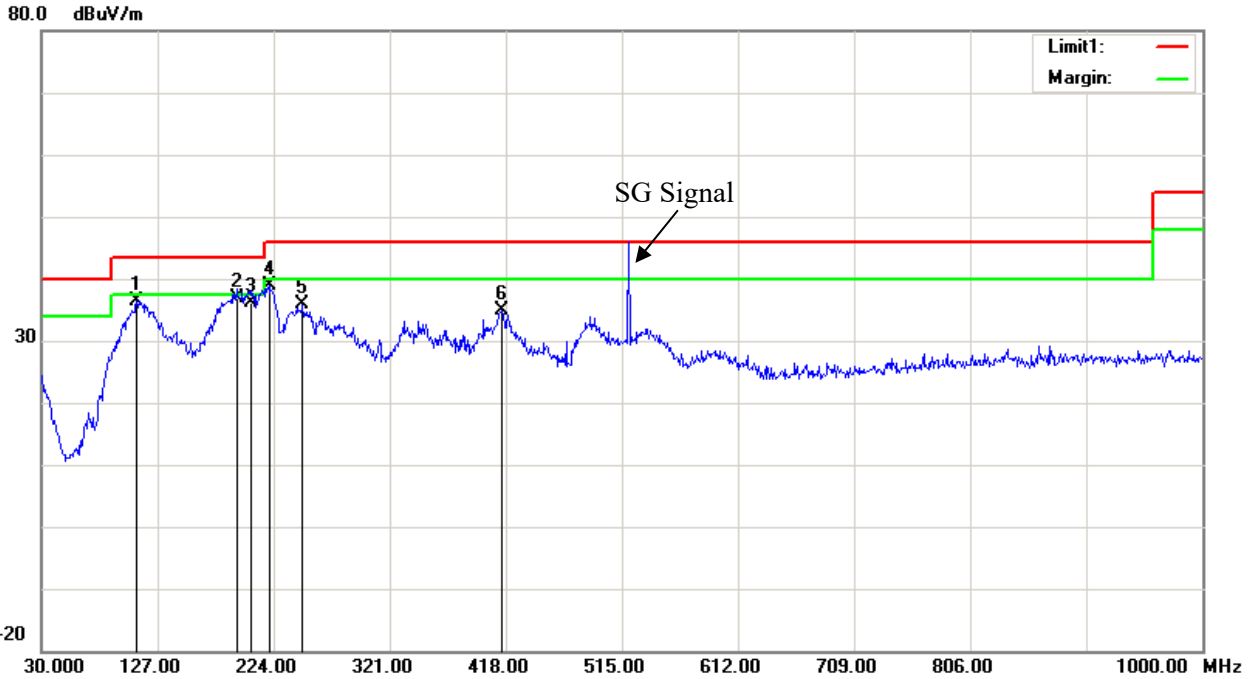


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 109.5400 | 47.91 | peak | -11.47 | 36.44 | 43.50 | 7.06 |
| 2 | 192.9600 | 48.79 | QP | -11.99 | 36.80 | 43.50 | 6.70 |
| 3 | 204.6000 | 48.16 | QP | -11.96 | 36.20 | 43.50 | 7.30 |
| 4 | 220.1200 | 51.44 | peak | -12.50 | 38.94 | 46.00 | 7.06 |
| 5 | 248.2500 | 47.38 | peak | -11.50 | 35.88 | 46.00 | 10.12 |
| 6 | 414.1200 | 41.42 | peak | -6.59 | 34.83 | 46.00 | 11.17 |

Project No: XMTN1240117-04004E-RF
 Test Engineer: Zoo Zou
 Test Date: 2024-1-30
 Polarization: Vertical
 Test Mode: Receiving
 Power Source: AC 120V/60Hz
 Note: 519.9875 MHz


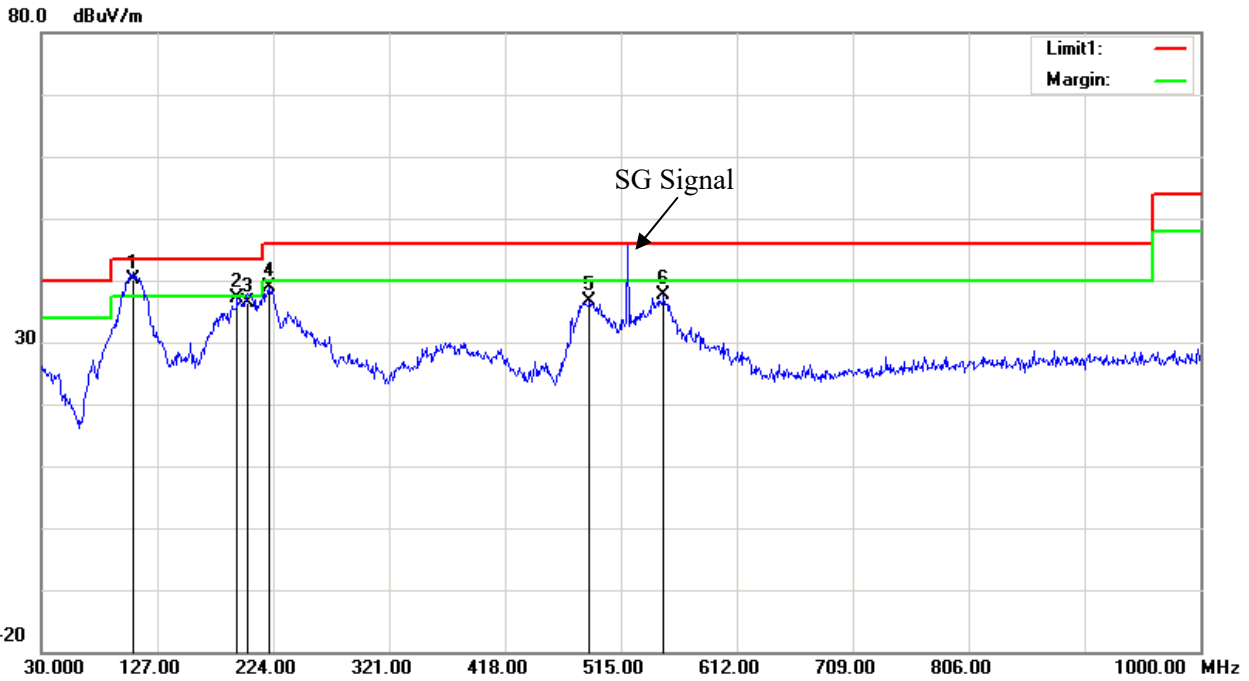


| No. | Frequency (MHz) | Reading (dBμV) | Detector | Corrected dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----|-----------------|----------------|----------|----------------|-----------------|----------------|-------------|
| 1 | 106.6300 | 52.52 | QP | -12.32 | 40.20 | 43.50 | 3.30 |
| 2 | 193.9300 | 49.01 | peak | -11.98 | 37.03 | 43.50 | 6.47 |
| 3 | 202.6600 | 48.08 | QP | -11.78 | 36.30 | 43.50 | 7.20 |
| 4 | 220.1200 | 51.36 | peak | -12.50 | 38.86 | 46.00 | 7.14 |
| 5 | 488.8100 | 41.04 | peak | -4.43 | 36.61 | 46.00 | 9.39 |
| 6 | 550.8900 | 40.94 | peak | -3.40 | 37.54 | 46.00 | 8.46 |

2) 1GHz-5GHz:
Scanning mode (400-520 MHz was the worst)

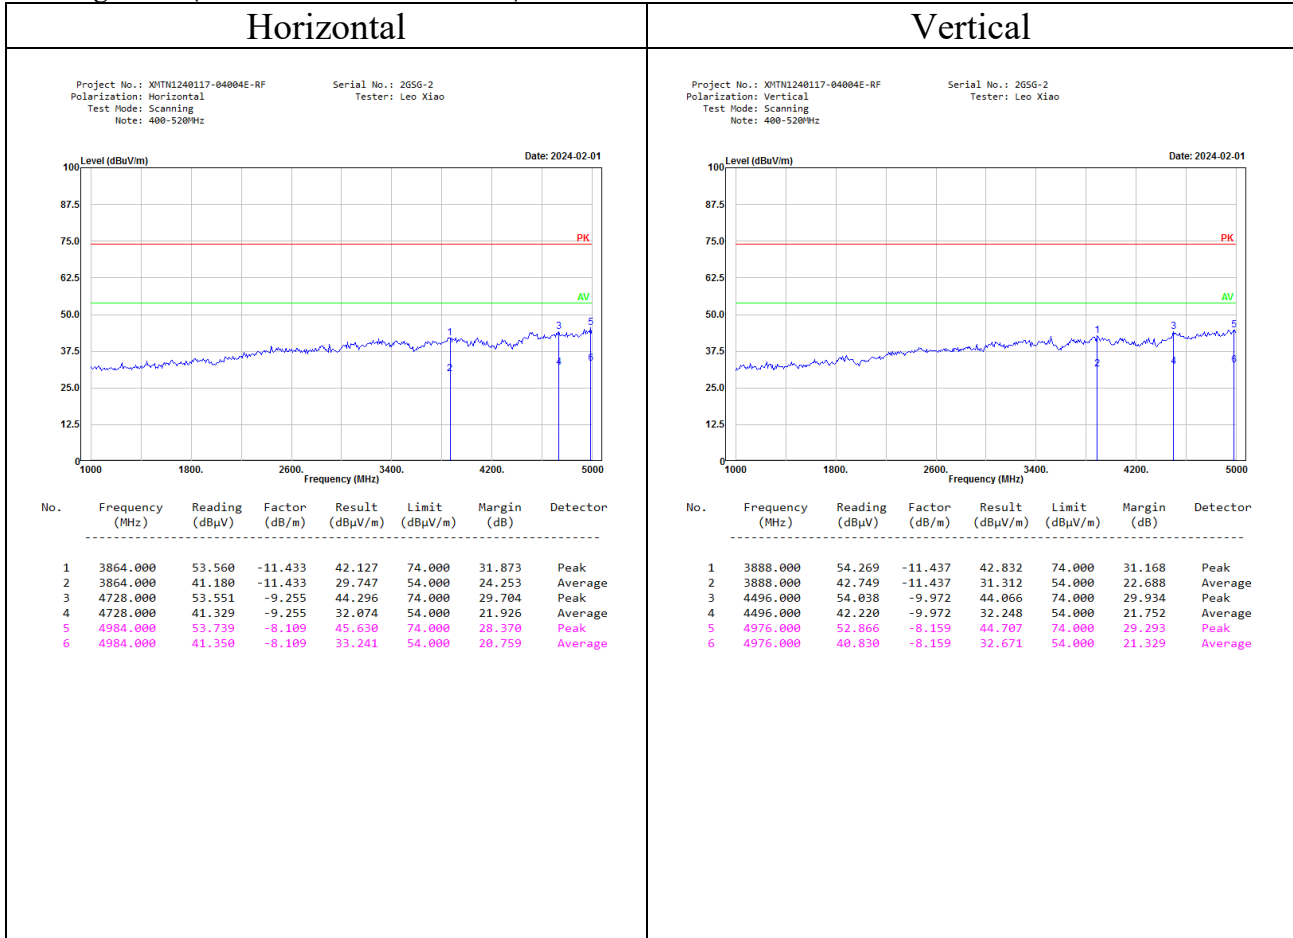

Receiving mode (519.9875 MHz was the worst)

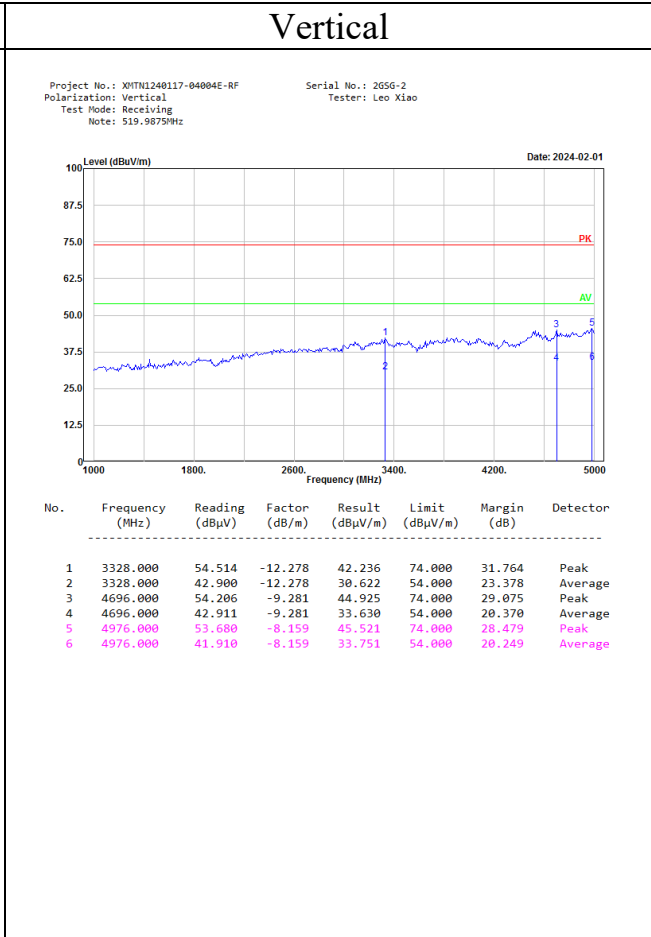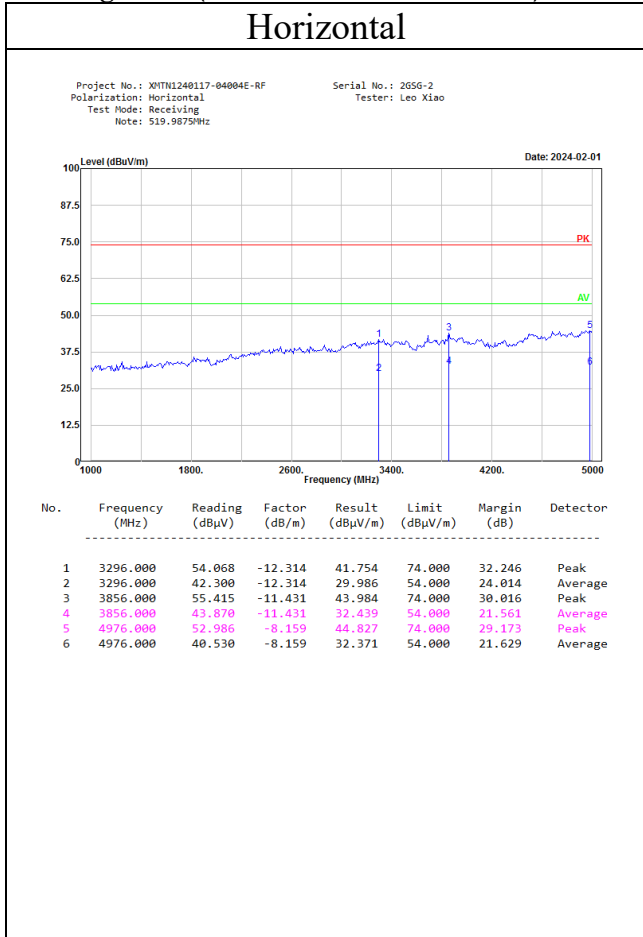

4.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers


4.3.1 Applicable Standard

FCC §15.121(b).

(b) Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

4.3.2 Test Procedure

1. Connected the EUT as the below block diagram;

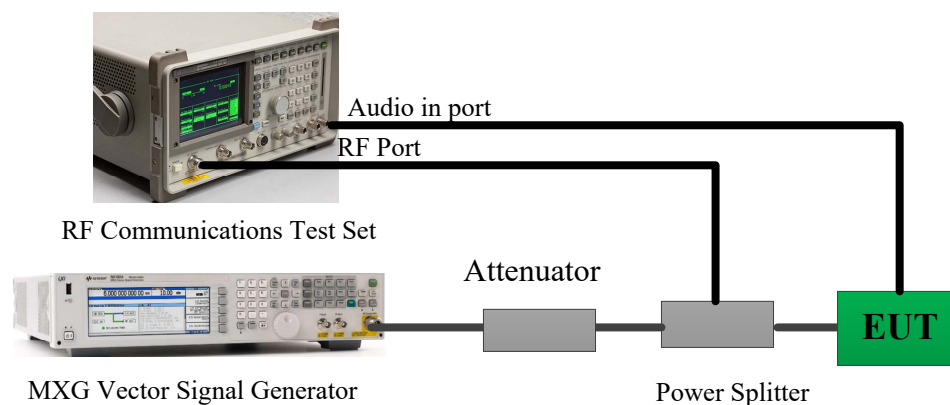

2. Apply a signal to the EUT antenna port at lowest, middle, highest channel frequencies of the operating band;
3. Adjust the audio output level of the EUT to its rated value with the distortion less than 10%;
4. Adjust the 8920 output power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB; These output level of the 8920 at each channel frequency is the sensitivity of the EUT;
5. Select the lowest or worst case sensitivity level for all of the bands as the reference sensitivity;
6. Adjust the Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5 and its frequency to the frequency point in the Cellular Band;
7. Set the EUT squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level;
8. Set the EUT in a scanning mode and allow it to scan through its complete receiving range;
9. If the EUT un-squelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB;
10. Repeat above procedure at the frequencies 824, 836, 849 MHz for the mobile band, and 869, 881.5 and 894 MHz for the Cellular Base Band.

4.3.3 Test Data and Result

| | | | |
|----------------|----------|--------------|----------|
| Serial Number: | 2GSG-1 | Test Date: | 2024/3/2 |
| Test Site: | RF | Test Mode: | Scanning |
| Tester: | Stu Song | Test Result: | Pass |

| Environmental Conditions: | | | | | |
|---------------------------|------|---------------------------|----|------------------------|-------|
| Temperature: (°C) | 18.1 | Relative Humidity: (%) | 39 | ATM Pressure: (kPa) | 101.8 |

Test Equipment List and Details:

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------|------------------------------------|---------------|---------------|------------------|----------------------|
| yzjingcheng | Coaxial Cable | KTRFBU-141-50 | 41010012 | 2023/9/1 | 2024/8/31 |
| yzjingcheng | Coaxial Cable | KTRFBU-141-50 | 41010013 | 2023/9/1 | 2024/8/31 |
| yzjingcheng | Coaxial Cable | KTRFBU-141-50 | 41005011 | 2023/9/1 | 2024/8/31 |
| Weinschel | Coaxial Attenuators | 53-20-34 | LN749 | 2023/9/1 | 2024/8/31 |
| HP | RF Communications Test Set | 8920A | 3438A05201 | 2023/10/18 | 2024/10/17 |
| Agilent | MXG Vector Signal Generator | N5182B | MY51350142 | 2023/9/1 | 2024/8/31 |
| Minl-Circuits | Coaxial Power Splitters & Combiner | ZFRSC-183-S+ | SF448201614 | 2024/2/25 | 2025/2/24 |

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

| Scanning Frequency Range (MHz) | Test Frequency (MHz) | Measurement Result (dB) | Limit (dB) |
|--------------------------------|--------------------------------|-------------------------|------------|
| 108-136 | 824, 836, 849, 869, 881.5, 894 | 48 | >38 |
| 136-174 | 824, 836, 849, 869, 881.5, 894 | 49 | >38 |
| 220-260 | 824, 836, 849, 869, 881.5, 894 | 47 | >38 |
| 350-390 | 824, 836, 849, 869, 881.5, 894 | 48 | >38 |
| 400-520 | 824, 836, 849, 869, 881.5, 894 | 46 | >38 |

APPENDIX A - EUT PHOTOGRAPHS

Please refer to the attachment XMTN1240117-04004E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and XMTN1240117-04004E-RF-INP EUT INTERNAL PHOTOGRAPHS

APPENDIX B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment XMTN1240117-04004E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******