



Appendix E

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: DT50

Test Model: HPPAP22

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu





E.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.109	0.5	Pass
NVNT	a	5785	Ant1	15.23	0.5	Pass
NVNT	a	5825	Ant1	12.465	0.5	Pass
NVNT	n20	5745	Ant1	12.732	0.5	Pass
NVNT	n20	5785	Ant1	16.282	0.5	Pass
NVNT	n20	5825	Ant1	15	0.5	Pass
NVNT	n40	5755	Ant1	31.378	0.5	Pass
NVNT	n40	5795	Ant1	31.337	0.5	Pass
NVNT	ac20	5745	Ant1	14.413	0.5	Pass
NVNT	ac20	5785	Ant1	11.712	0.5	Pass
NVNT	ac20	5825	Ant1	15.27	0.5	Pass
NVNT	ac40	5755	Ant1	31.26	0.5	Pass
NVNT	ac40	5795	Ant1	33.793	0.5	Pass
NVNT	ac80	5775	Ant1	74.224	0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

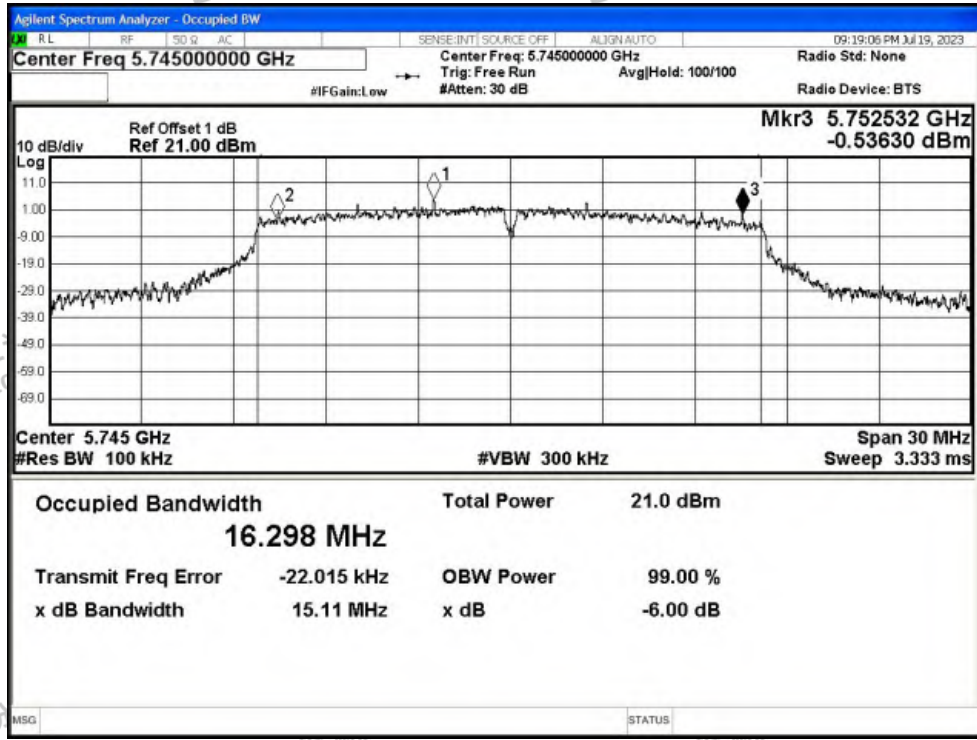


-6dB Bandwidth NVNT a 5785MHz Ant1

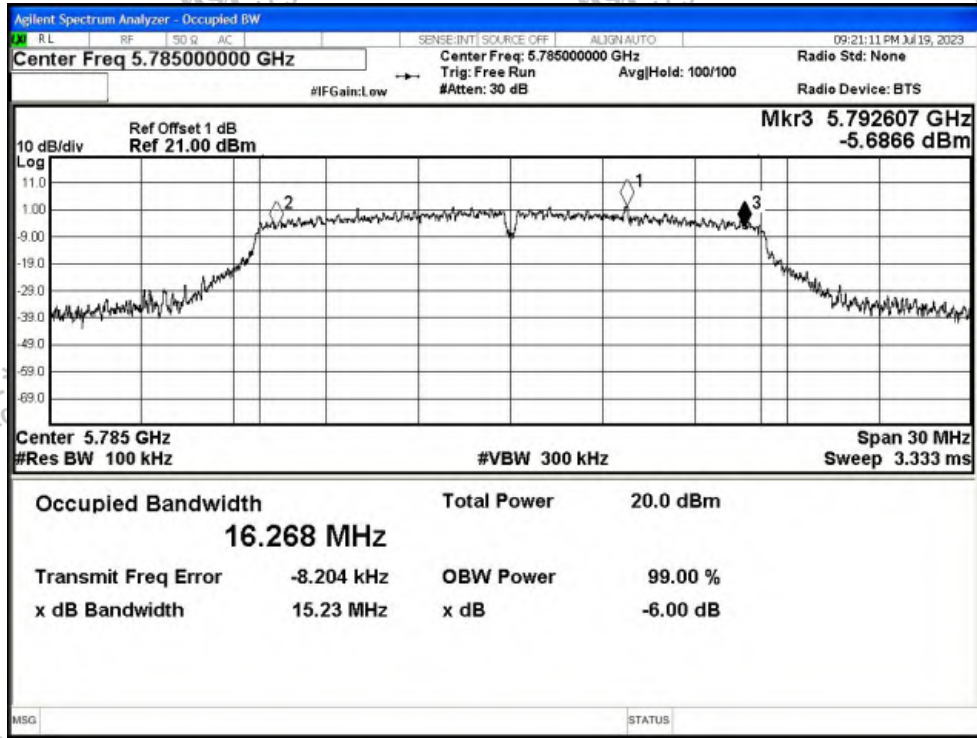




-6dB Bandwidth NVNT a 5825MHz Ant1

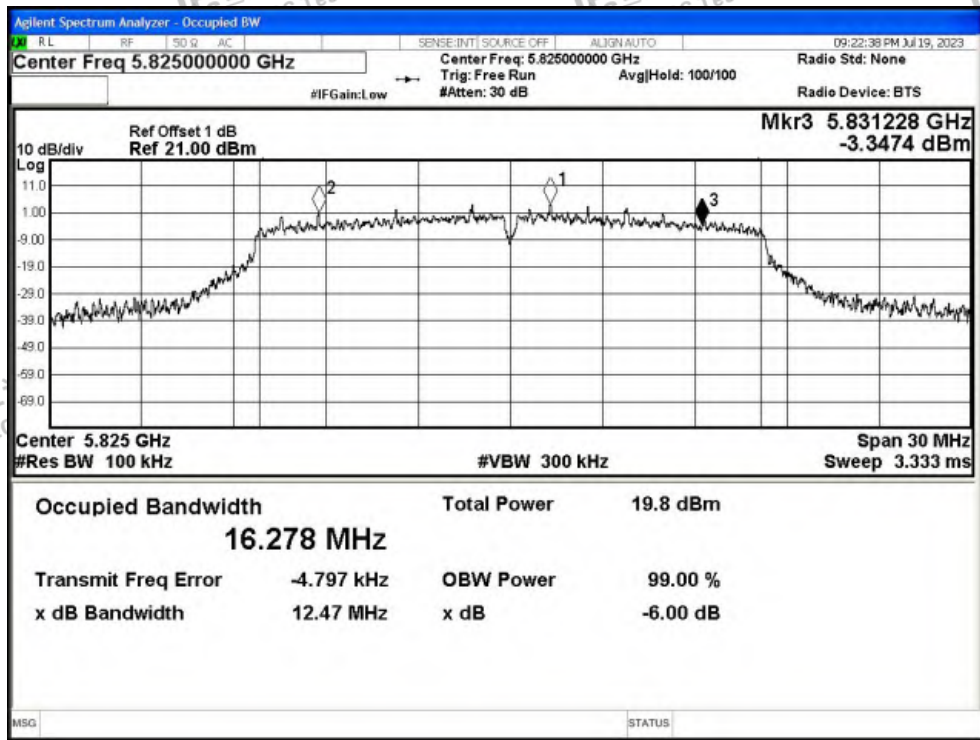


-6dB Bandwidth NVNT n20 5745MHz Ant1

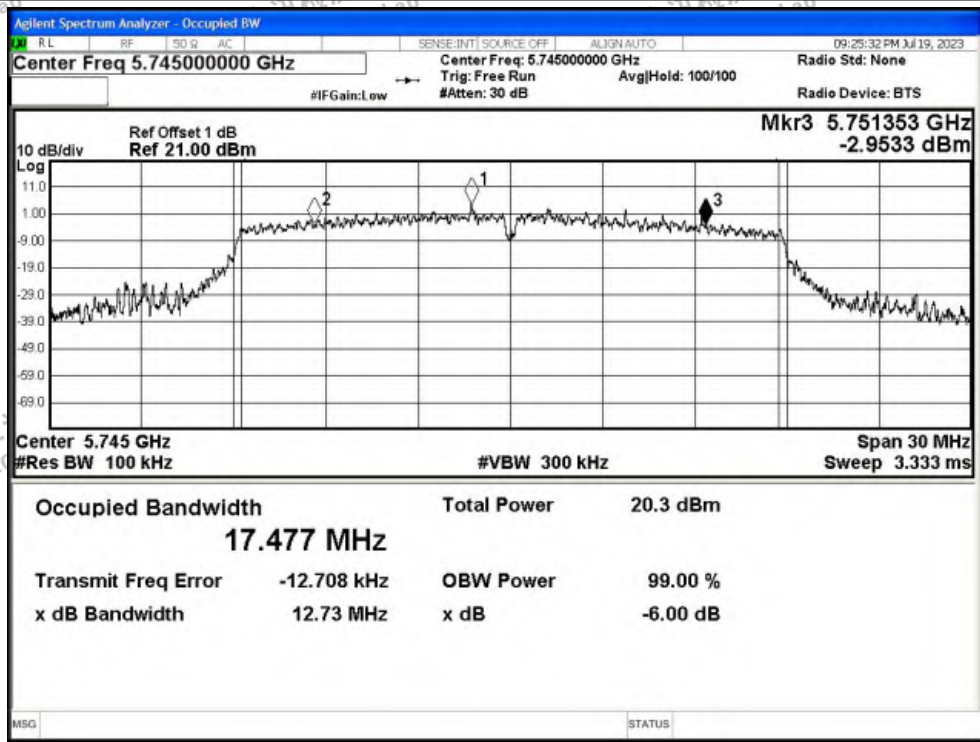




-6dB Bandwidth NVNT n20 5785MHz Ant1

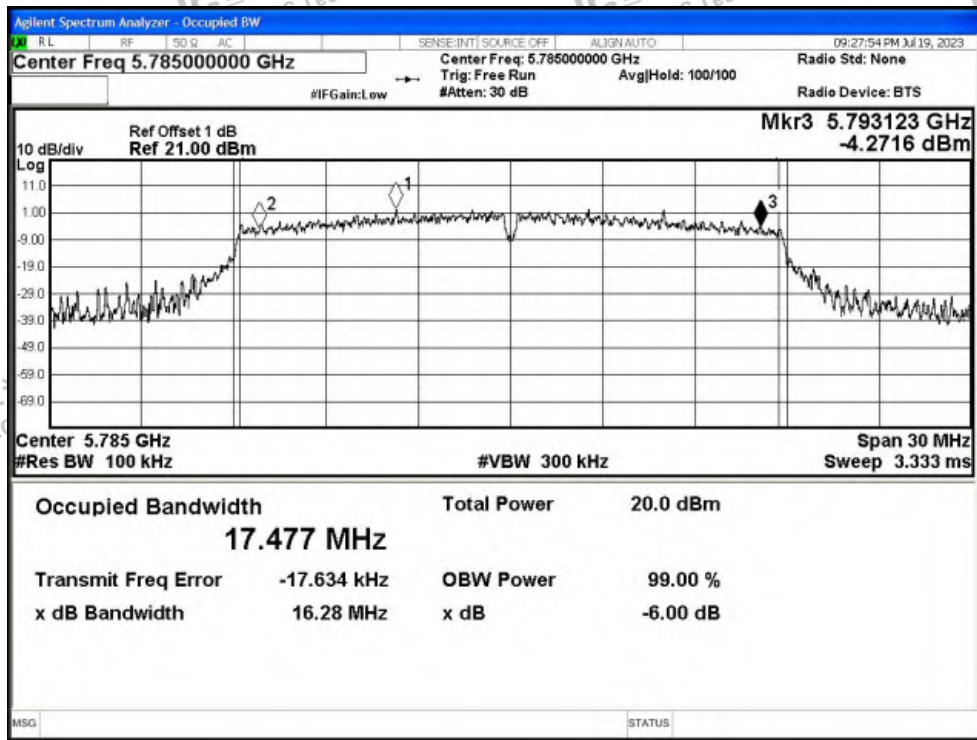


-6dB Bandwidth NVNT n20 5825MHz Ant1

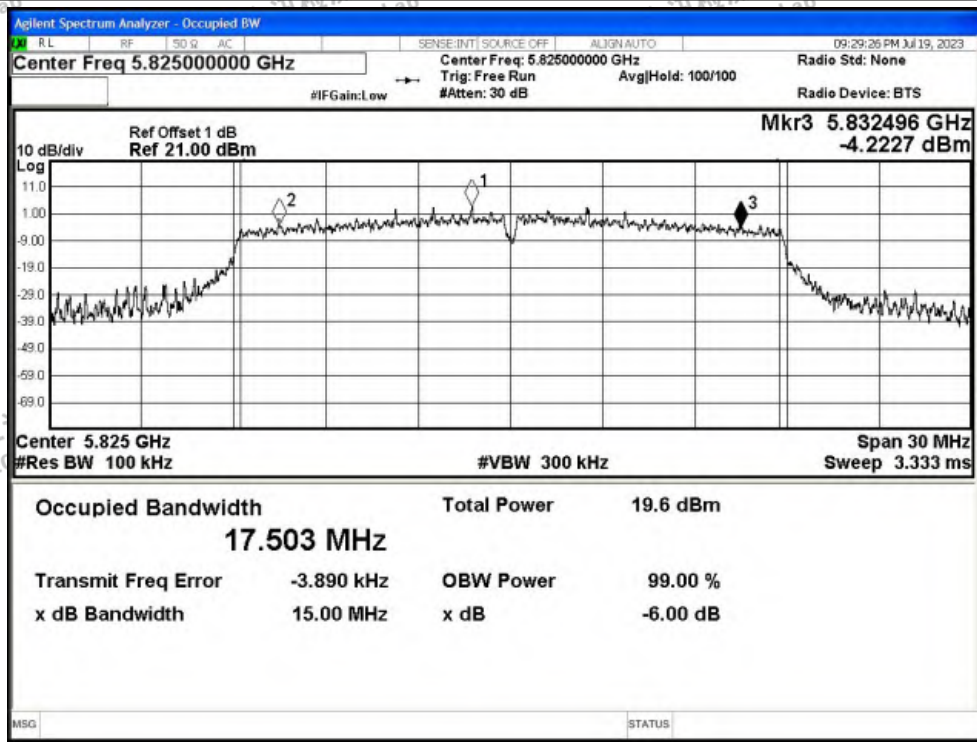




-6dB Bandwidth NVNT n40 5755MHz Ant1

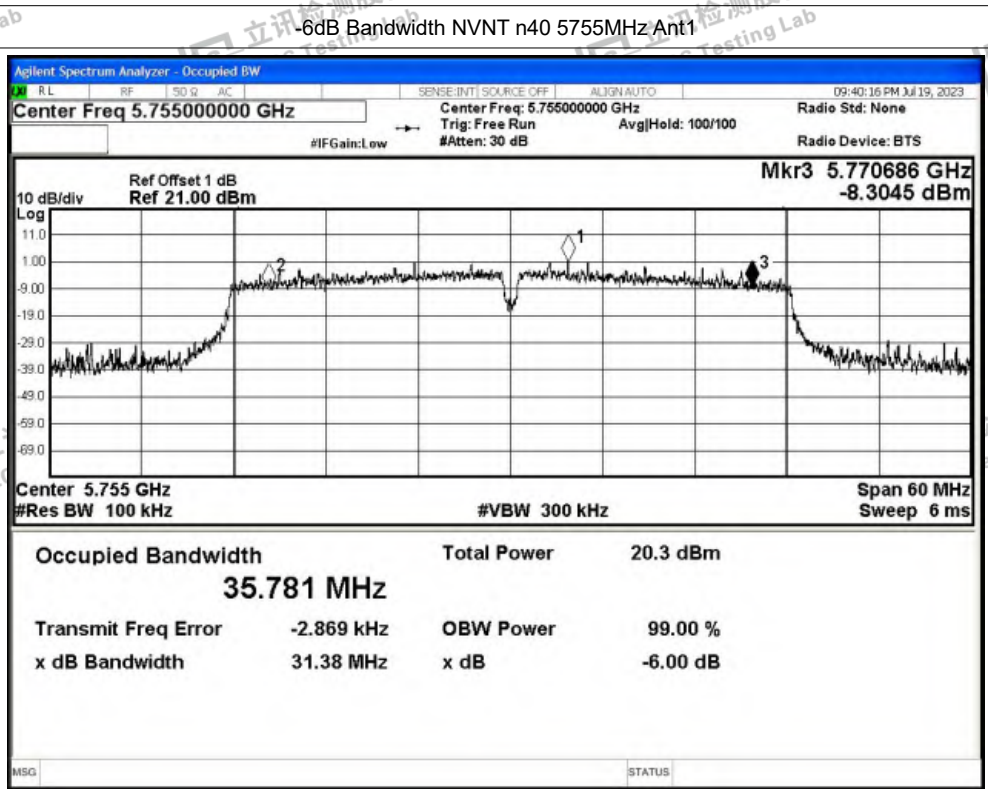


-6dB Bandwidth NVNT n40 5795MHz Ant1

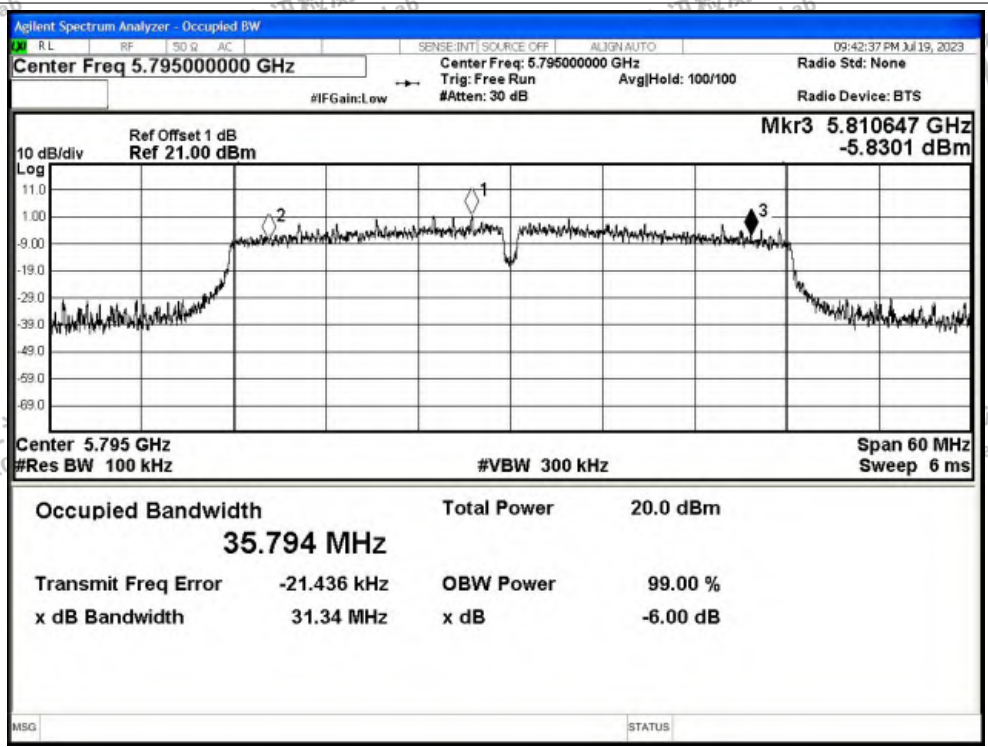




-6dB Bandwidth NVNT ac20 5745MHz Ant1

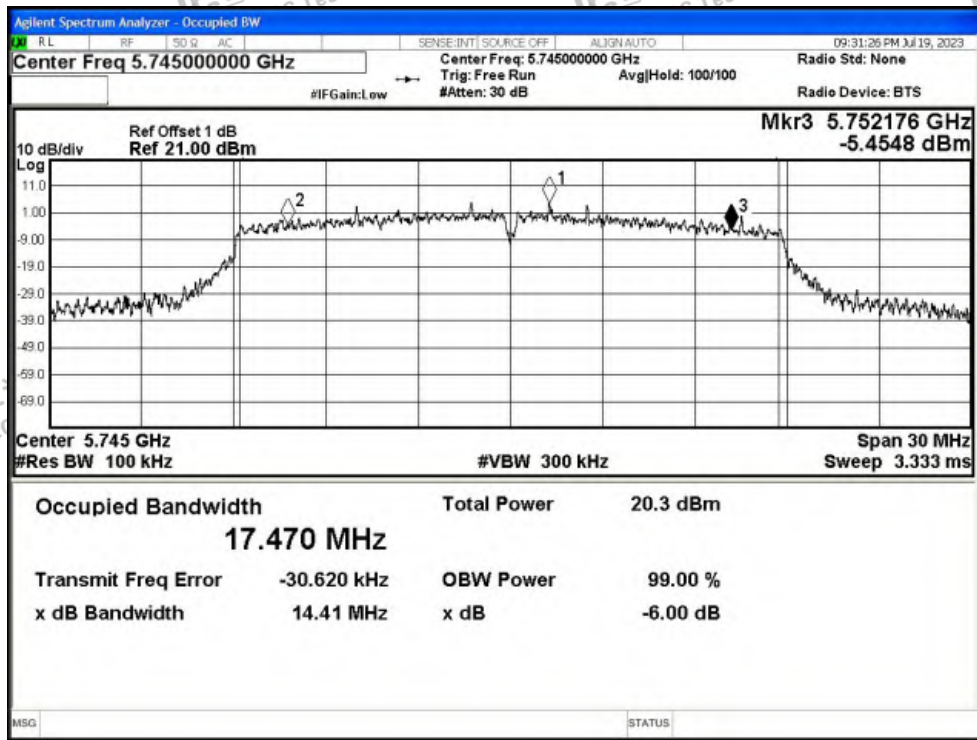


-6dB Bandwidth NVNT ac20 5785MHz Ant1

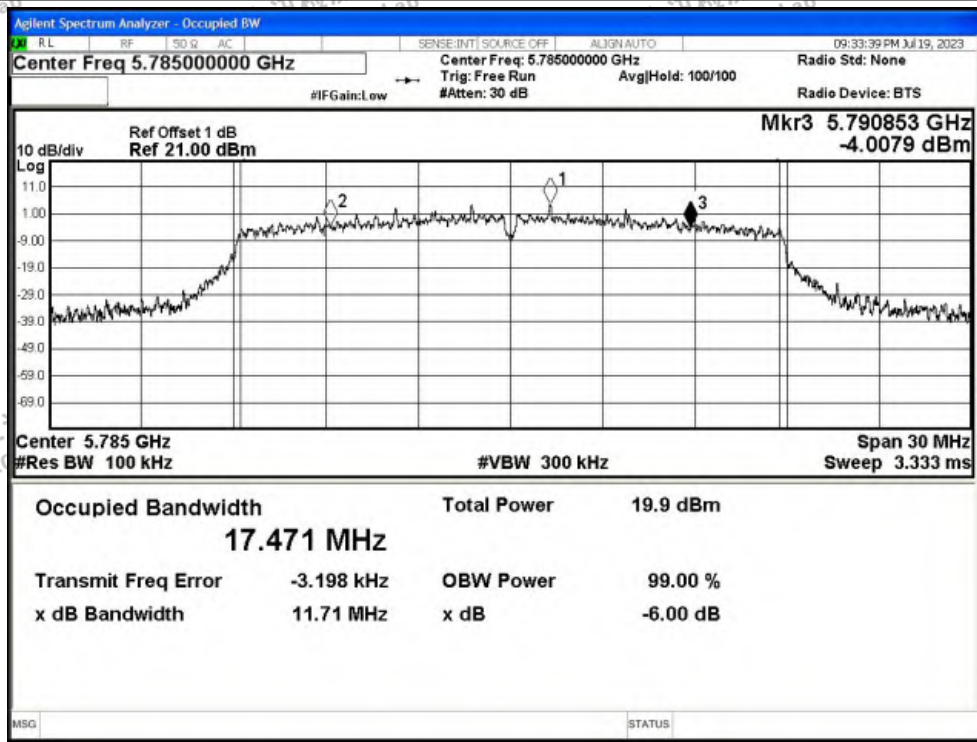




-6dB Bandwidth NVNT ac20 5825MHz Ant1

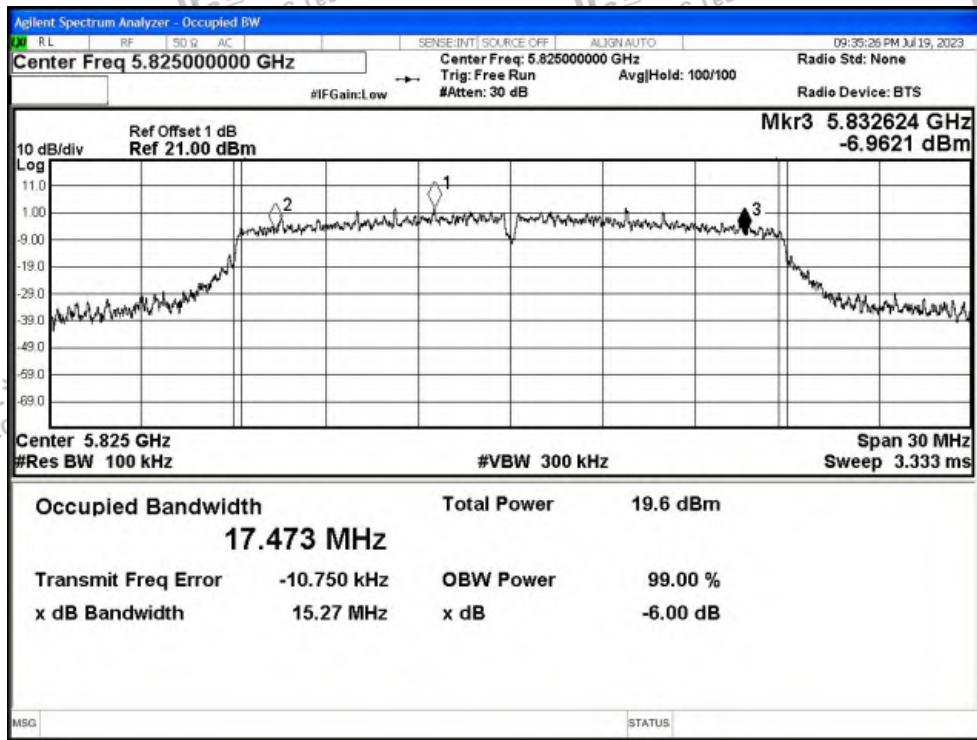


-6dB Bandwidth NVNT ac40 5755MHz Ant1

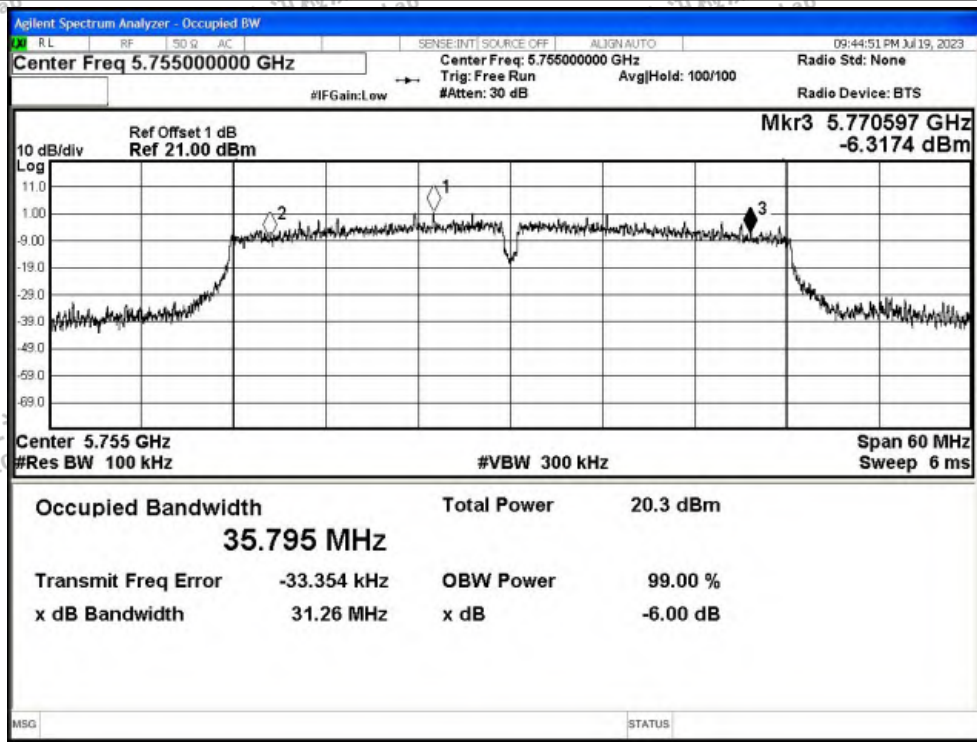




-6dB Bandwidth NVNT ac40 5795MHz Ant1

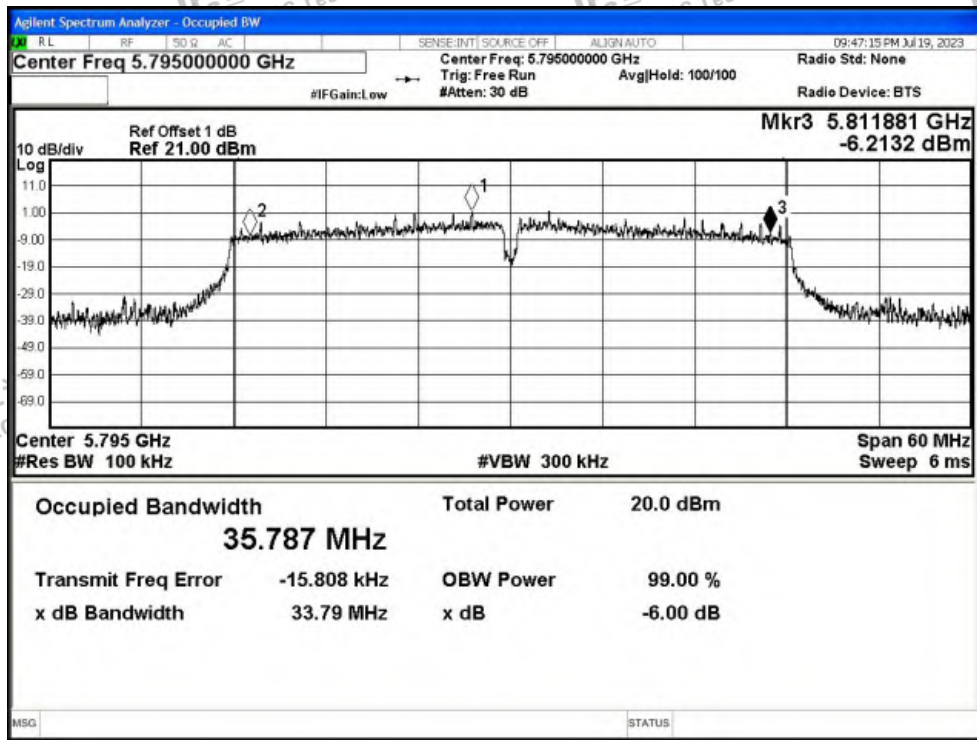

-6dB Bandwidth NVNT ac80 5775MHz Ant1

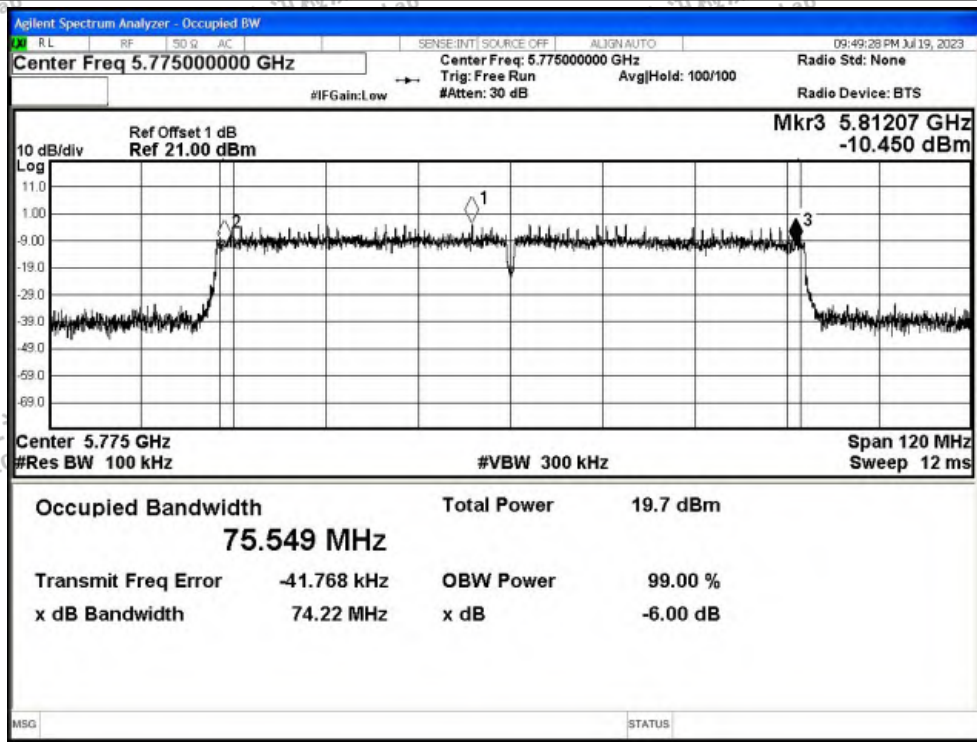



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	13.31	2.35	15.66	30	Pass
NVNT	a	5785	Ant1	12.72	2.35	15.07	30	Pass
NVNT	a	5825	Ant1	11.18	2.33	13.51	30	Pass
NVNT	n20	5745	Ant1	11.83	2.45	14.28	30	Pass
NVNT	n20	5785	Ant1	11.9	2.51	14.41	30	Pass
NVNT	n20	5825	Ant1	11.32	2.86	14.18	30	Pass
NVNT	n40	5755	Ant1	10.4	4.24	14.64	30	Pass
NVNT	n40	5795	Ant1	8.8	4.22	13.02	30	Pass
NVNT	ac20	5745	Ant1	11.82	2.69	14.51	30	Pass
NVNT	ac20	5785	Ant1	11.85	2.46	14.31	30	Pass
NVNT	ac20	5825	Ant1	11.41	2.45	13.86	30	Pass
NVNT	ac40	5755	Ant1	10.38	4.22	14.6	30	Pass
NVNT	ac40	5795	Ant1	10.06	4.03	14.09	30	Pass
NVNT	ac80	5775	Ant1	7.91	6.07	13.98	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-22.67	2.35	-20.32	30	Pass
NVNT	a	5785	Ant1	-19.67	2.35	-17.32	30	Pass
NVNT	a	5825	Ant1	-30.01	2.33	-27.68	30	Pass
NVNT	n20	5745	Ant1	-18.52	2.45	-16.07	30	Pass
NVNT	n20	5785	Ant1	-21.48	2.51	-18.97	30	Pass
NVNT	n20	5825	Ant1	-29.3	2.86	-26.44	30	Pass
NVNT	n40	5755	Ant1	-34.48	4.24	-30.24	30	Pass
NVNT	n40	5795	Ant1	-36.3	4.22	-32.08	30	Pass
NVNT	ac20	5745	Ant1	-26.2	2.69	-23.51	30	Pass
NVNT	ac20	5785	Ant1	-25.32	2.46	-22.86	30	Pass
NVNT	ac20	5825	Ant1	-20	2.45	-17.55	30	Pass
NVNT	ac40	5755	Ant1	-37.08	4.22	-32.86	30	Pass
NVNT	ac40	5795	Ant1	-35.04	4.03	-31.01	30	Pass
NVNT	ac80	5775	Ant1	-42.86	6.07	-36.79	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



立讯检测股份
LCS Testing Lab


立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab


立讯检测股份
LCS Testing Lab

Test Graphs

PSD NVNT a 5745MHz Ant1

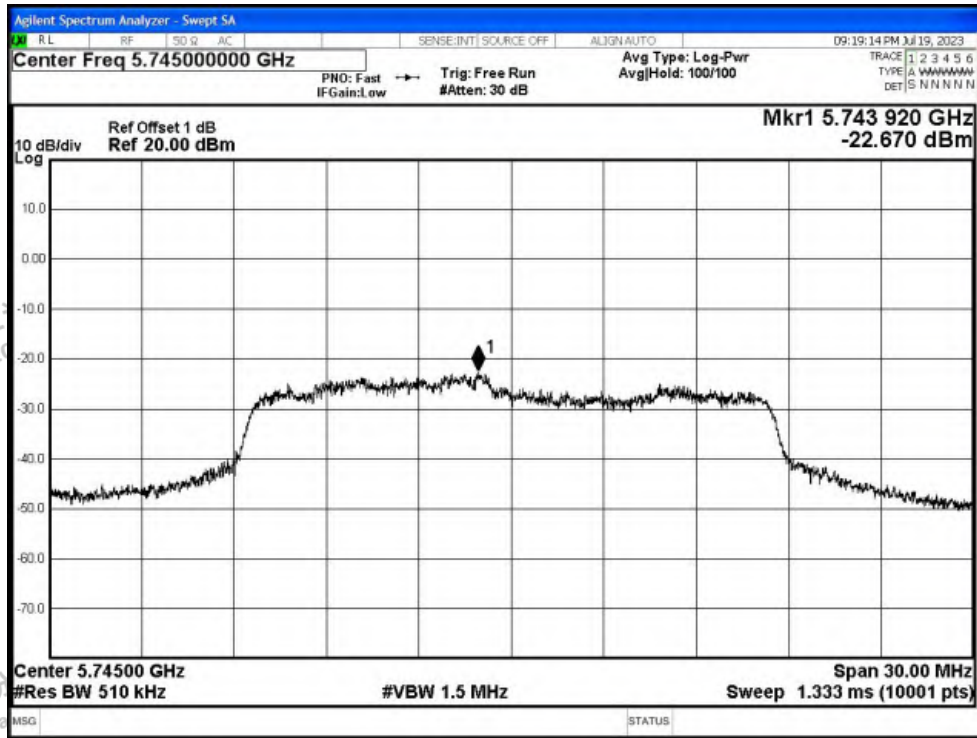

PSD NVNT a 5785MHz Ant1

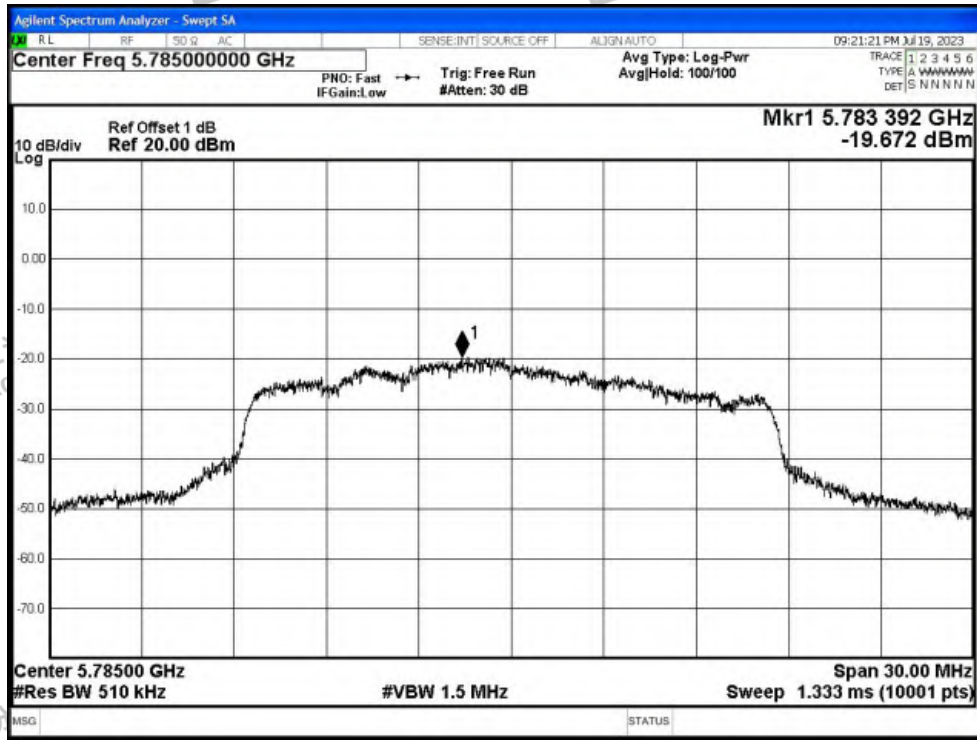

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab


立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab






PSD NVNT a 5825MHz Ant1

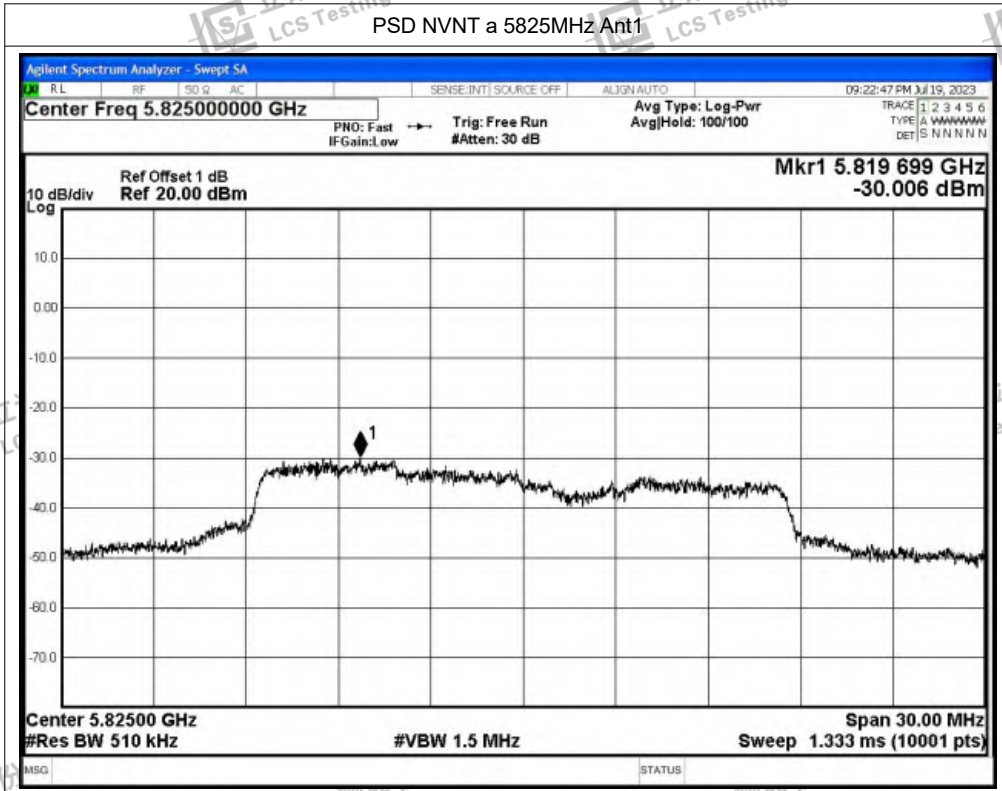


PSD NVNT n20 5745MHz Ant1

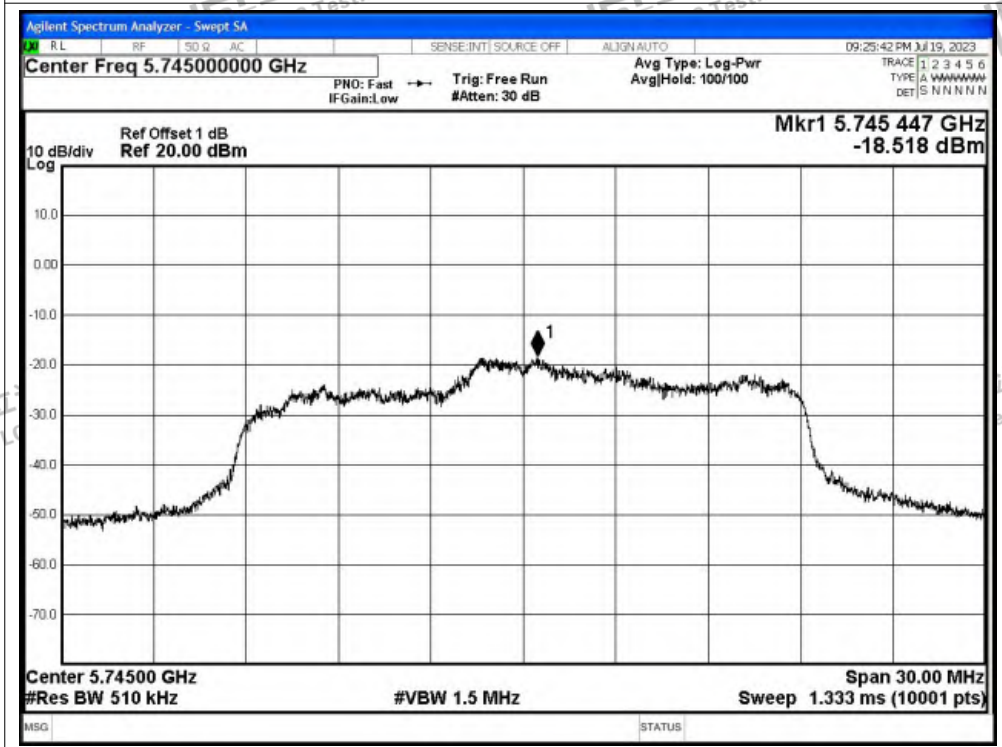




PSD NVNT n20 5785MHz Ant1

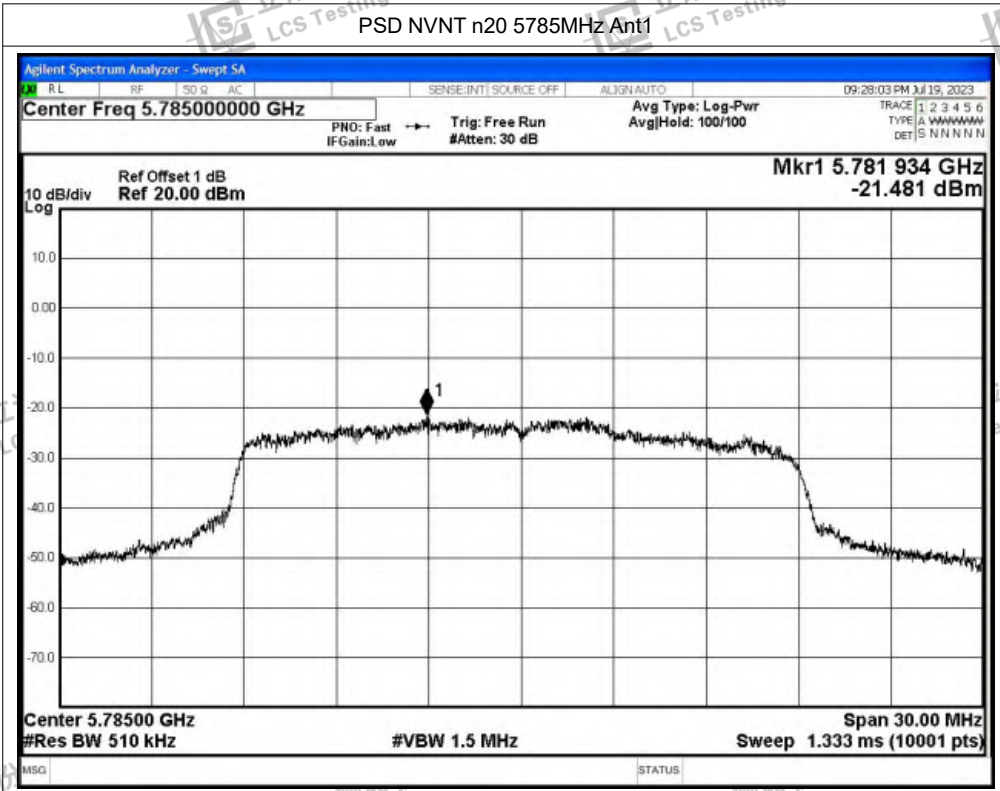


PSD NVNT n20 5825MHz Ant1

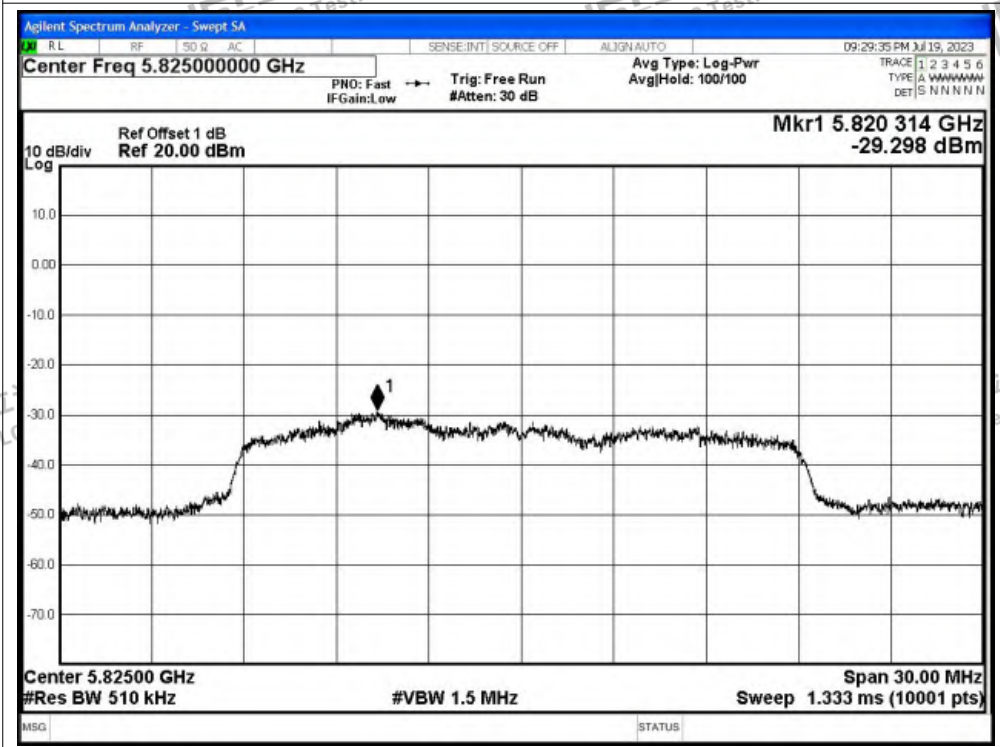




PSD NVNT n40 5755MHz Ant1

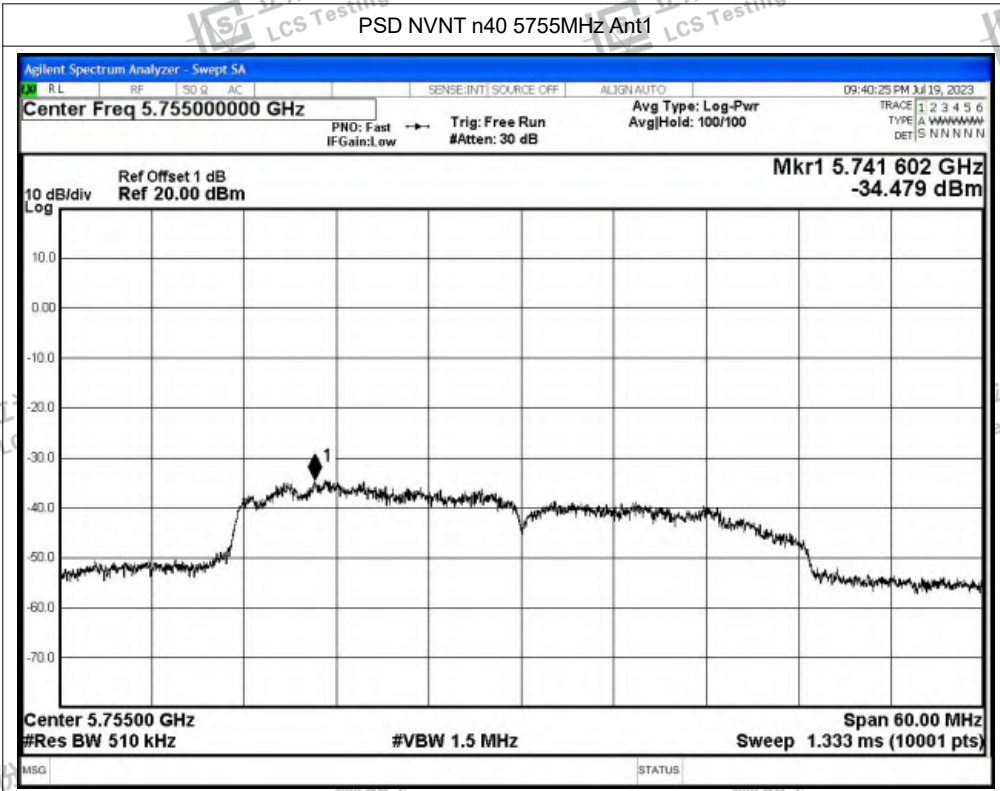

PSD NVNT n40 5795MHz Ant1

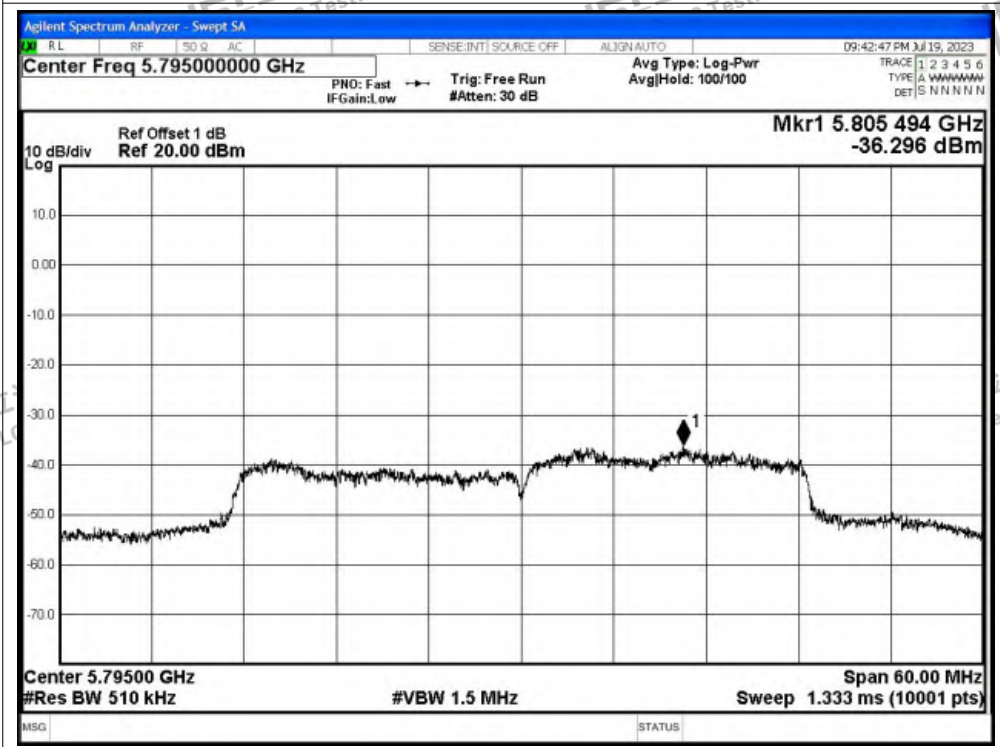




立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

PSD NVNT ac20 5745MHz Ant1

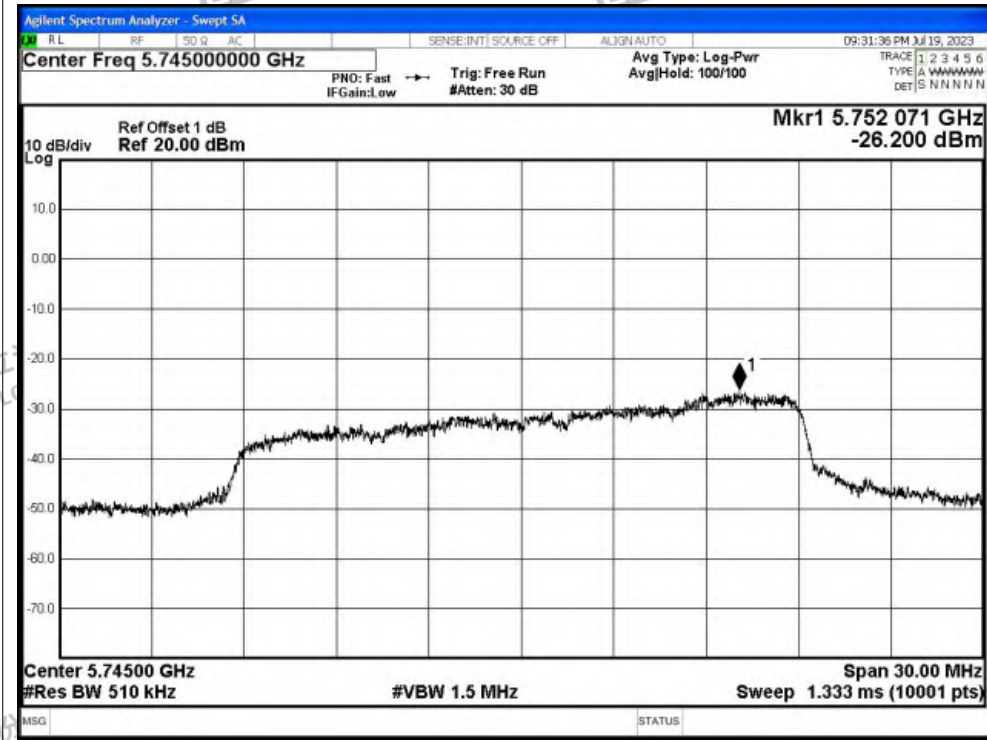


立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

PSD NVNT ac20 5785MHz Ant1

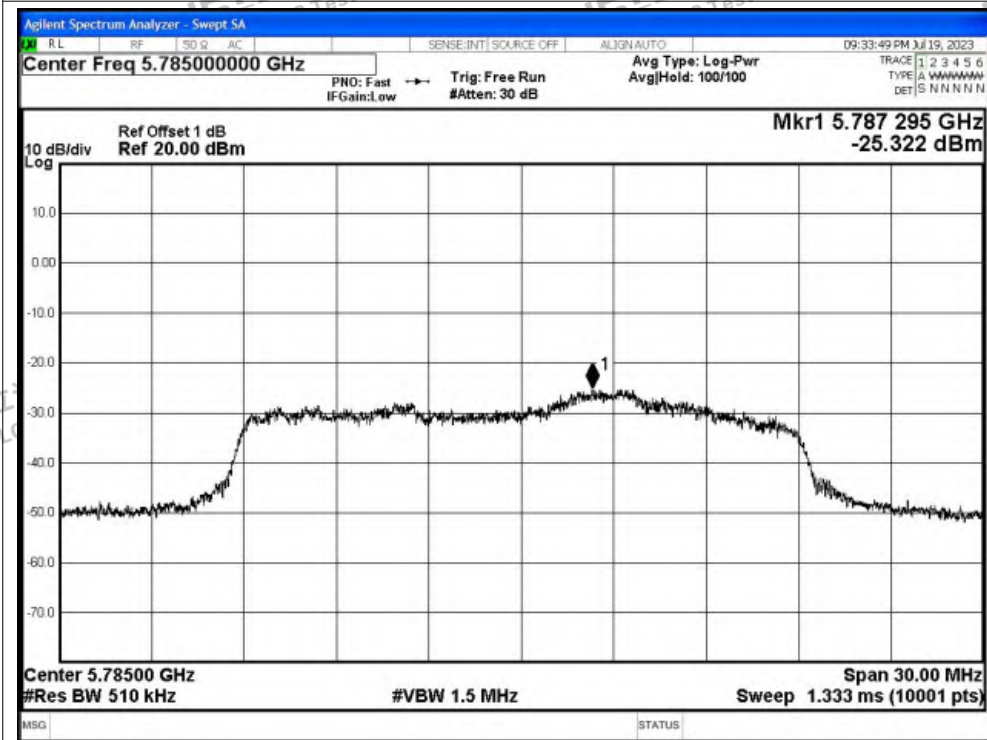

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab






立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

PSD NVNT ac20 5825MHz Ant1

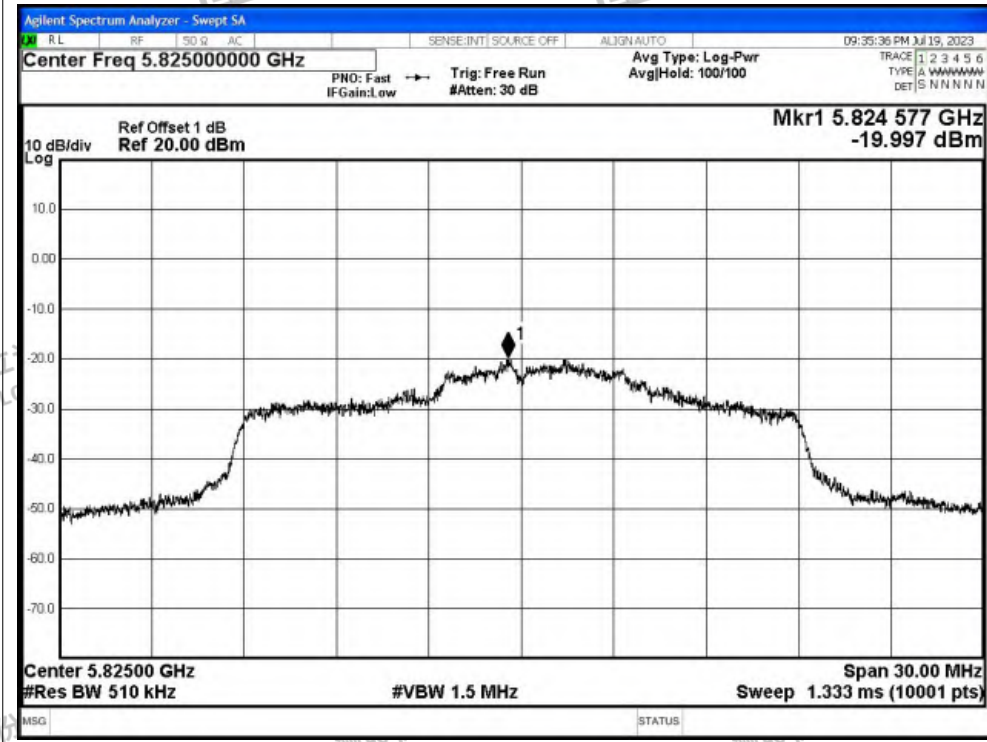


立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

PSD NVNT ac40 5755MHz Ant1

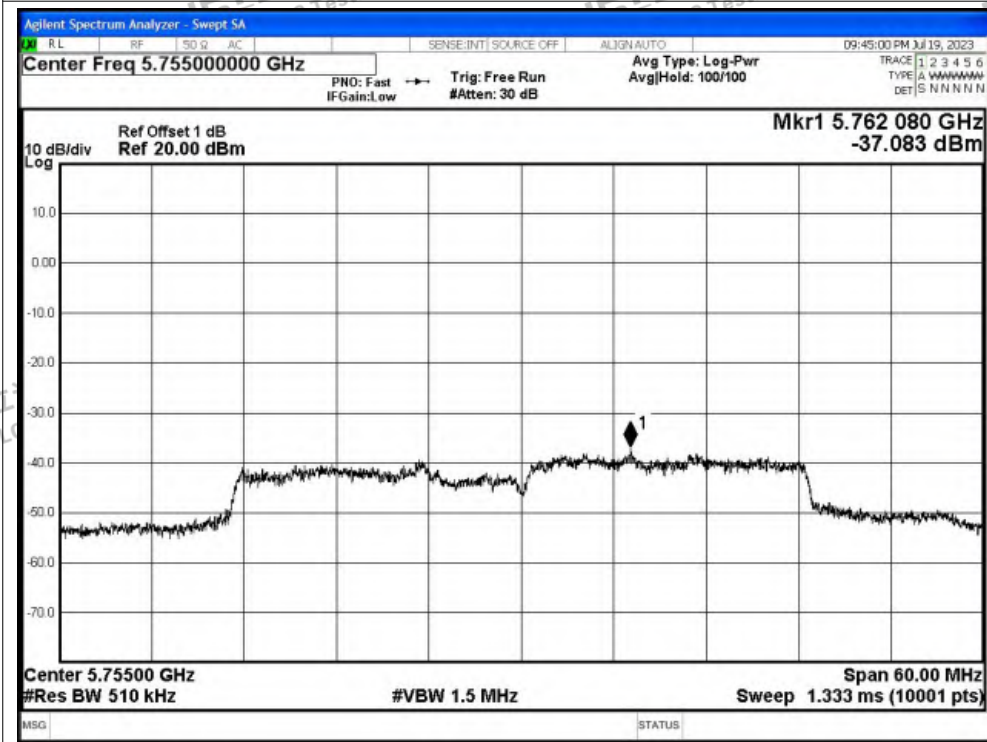

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab






立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

PSD NVNT ac40 5795MHz Ant1

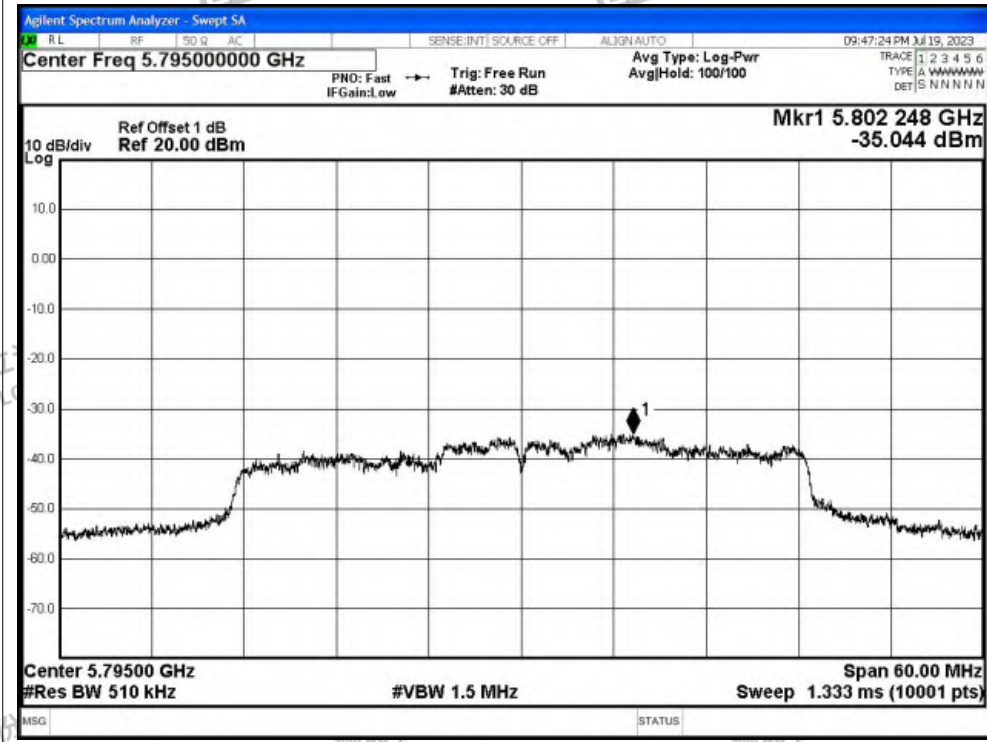


立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

PSD NVNT ac80 5775MHz Ant1

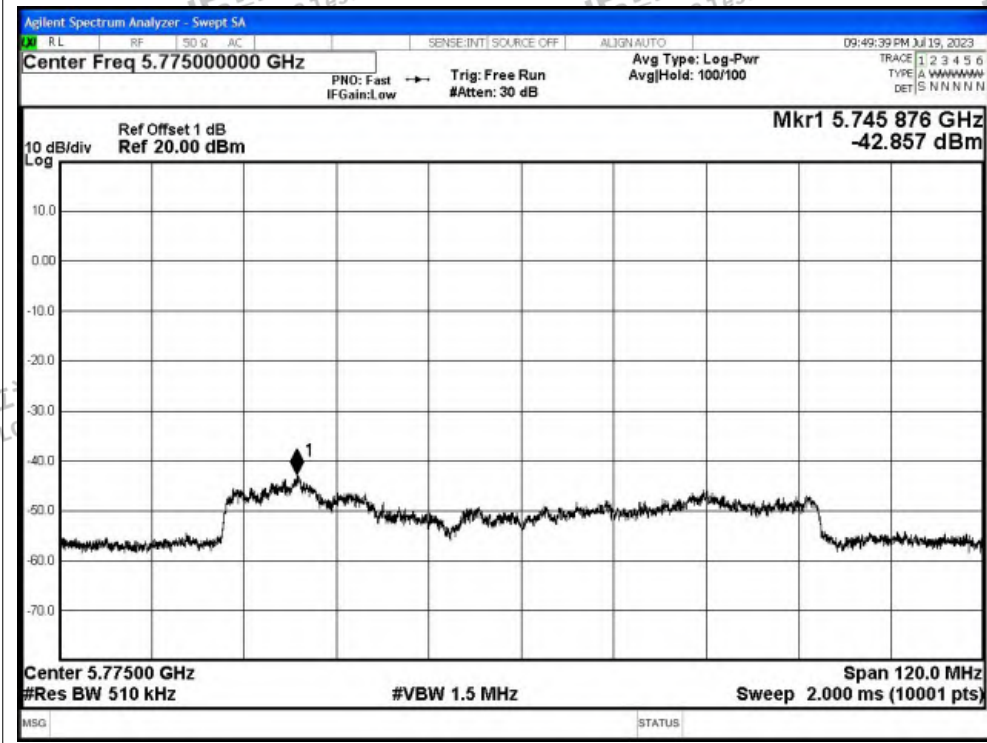

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab





E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	5650	-47.2	2	-45.2	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-56.83	2	-54.83	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-43.41	2	-41.41	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-53.23	2	-51.23	Average	10	Pass
NVNT	a	5745	Ant1	5720	-34.92	2	-32.92	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-46.31	2	-44.31	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-29.31	2	-27.31	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-41.32	2	-39.32	Average	27	Pass
NVNT	a	5825	Ant1	5850	-39.22	2	-37.22	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-48.63	2	-46.63	Average	27	Pass
NVNT	a	5825	Ant1	5855	-41.14	2	-39.14	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-50.59	2	-48.59	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-46.52	2	-44.52	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-55.6	2	-53.6	Average	10	Pass
NVNT	a	5825	Ant1	5925	-47.91	2	-45.91	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-56.95	2	-54.95	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-47.96	2	-45.96	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-56.58	2	-54.58	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-42.03	2	-40.03	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-53.22	2	-51.22	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-38.9	2	-36.9	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-47.18	2	-45.18	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-28.62	2	-26.62	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-42.95	2	-40.95	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-36.36	2	-34.36	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-48.08	2	-46.08	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-40.74	2	-38.74	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-50.18	2	-48.18	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-45.55	2	-43.55	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-55.59	2	-53.59	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-47.87	2	-45.87	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-57.07	2	-55.07	Average	-27	Pass
NVNT	n40	5755	Ant1	5650	-46.57	2	-44.57	Peak	-27	Pass
NVNT	n40	5755	Ant1	5650	-55.76	2	-53.76	Average	-27	Pass
NVNT	n40	5755	Ant1	5700	-34.27	2	-32.27	Peak	10	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




NVNT	n40	5755	Ant1	5700	-48.64	2	-46.64	Average	10	Pass
NVNT	n40	5755	Ant1	5720	-23.46	2	-21.46	Peak	15.6	Pass
NVNT	n40	5755	Ant1	5720	-40.28	2	-38.28	Average	15.6	Pass
NVNT	n40	5755	Ant1	5725	-23.26	2	-21.26	Peak	27	Pass
NVNT	n40	5755	Ant1	5725	-38.39	2	-36.39	Average	27	Pass
NVNT	n40	5795	Ant1	5850	-43.04	2	-41.04	Peak	27	Pass
NVNT	n40	5795	Ant1	5850	-51.37	2	-49.37	Average	27	Pass
NVNT	n40	5795	Ant1	5855	-42.83	2	-40.83	Peak	15.6	Pass
NVNT	n40	5795	Ant1	5855	-52.58	2	-50.58	Average	15.6	Pass
NVNT	n40	5795	Ant1	5875	-43.33	2	-41.33	Peak	10	Pass
NVNT	n40	5795	Ant1	5875	-54.89	2	-52.89	Average	10	Pass
NVNT	n40	5795	Ant1	5925	-48.87	2	-46.87	Peak	-27	Pass
NVNT	n40	5795	Ant1	5925	-57.28	2	-55.28	Average	-27	Pass
NVNT	ac20	5745	Ant1	5650	-46.62	2	-44.62	Peak	-27	Pass
NVNT	ac20	5745	Ant1	5650	-56.76	2	-54.76	Average	-27	Pass
NVNT	ac20	5745	Ant1	5700	-43.18	2	-41.18	Peak	10	Pass
NVNT	ac20	5745	Ant1	5700	-53.43	2	-51.43	Average	10	Pass
NVNT	ac20	5745	Ant1	5720	-35.45	2	-33.45	Peak	15.6	Pass
NVNT	ac20	5745	Ant1	5720	-46.76	2	-44.76	Average	15.6	Pass
NVNT	ac20	5745	Ant1	5725	-30.48	2	-28.48	Peak	27	Pass
NVNT	ac20	5745	Ant1	5725	-42.43	2	-40.43	Average	27	Pass
NVNT	ac20	5825	Ant1	5850	-37.89	2	-35.89	Peak	27	Pass
NVNT	ac20	5825	Ant1	5850	-47.98	2	-45.98	Average	27	Pass
NVNT	ac20	5825	Ant1	5855	-40.05	2	-38.05	Peak	15.6	Pass
NVNT	ac20	5825	Ant1	5855	-50.28	2	-48.28	Average	15.6	Pass
NVNT	ac20	5825	Ant1	5875	-46.51	2	-44.51	Peak	10	Pass
NVNT	ac20	5825	Ant1	5875	-55.67	2	-53.67	Average	10	Pass
NVNT	ac20	5825	Ant1	5925	-48.93	2	-46.93	Peak	-27	Pass
NVNT	ac20	5825	Ant1	5925	-57.33	2	-55.33	Average	-27	Pass
NVNT	ac40	5755	Ant1	5650	-48.59	2	-46.59	Peak	-27	Pass
NVNT	ac40	5755	Ant1	5650	-55.74	2	-53.74	Average	-27	Pass
NVNT	ac40	5755	Ant1	5700	-39.56	2	-37.56	Peak	10	Pass
NVNT	ac40	5755	Ant1	5700	-48.28	2	-46.28	Average	10	Pass
NVNT	ac40	5755	Ant1	5720	-30.14	2	-28.14	Peak	15.6	Pass
NVNT	ac40	5755	Ant1	5720	-40.3	2	-38.3	Average	15.6	Pass
NVNT	ac40	5755	Ant1	5725	-27.23	2	-25.23	Peak	27	Pass
NVNT	ac40	5755	Ant1	5725	-38.31	2	-36.31	Average	27	Pass
NVNT	ac40	5795	Ant1	5850	-41.71	2	-39.71	Peak	27	Pass
NVNT	ac40	5795	Ant1	5850	-50.97	2	-48.97	Average	27	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



NVNT	ac40	5795	Ant1	5855	-43.11	2	-41.11	Peak	15.6	Pass
NVNT	ac40	5795	Ant1	5855	-52.51	2	-50.51	Average	15.6	Pass
NVNT	ac40	5795	Ant1	5875	-47.49	2	-45.49	Peak	10	Pass
NVNT	ac40	5795	Ant1	5875	-54.76	2	-52.76	Average	10	Pass
NVNT	ac40	5795	Ant1	5925	-48.67	2	-46.67	Peak	-27	Pass
NVNT	ac40	5795	Ant1	5925	-57.33	2	-55.33	Average	-27	Pass
NVNT	ac80	5775	Ant1	5650	-41.63	2	-39.63	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5650	-49.62	2	-47.62	Average	-27	Pass
NVNT	ac80	5775	Ant1	5700	-31.68	2	-29.68	Peak	10	Pass
NVNT	ac80	5775	Ant1	5700	-40.09	2	-38.09	Average	10	Pass
NVNT	ac80	5775	Ant1	5720	-27.65	2	-25.65	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5720	-37.72	2	-35.72	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5725	-25.95	2	-23.95	Peak	27	Pass
NVNT	ac80	5775	Ant1	5725	-37.1	2	-35.1	Average	27	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5745MHz Ant1 Peak

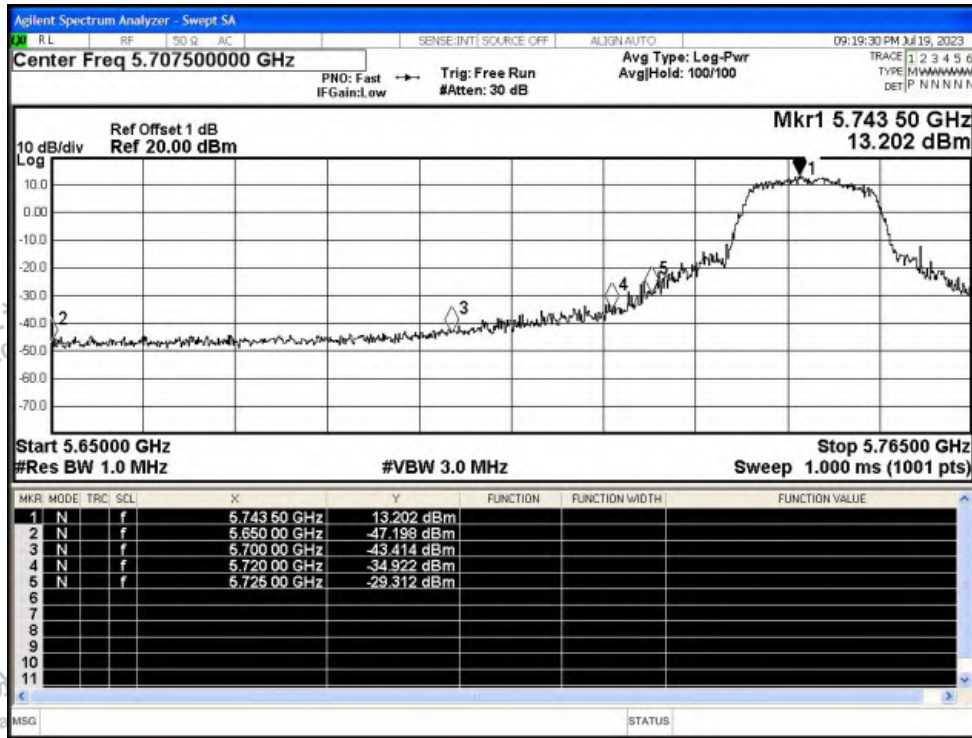


Restrict Band NVNT a 5745MHz Ant1 Average

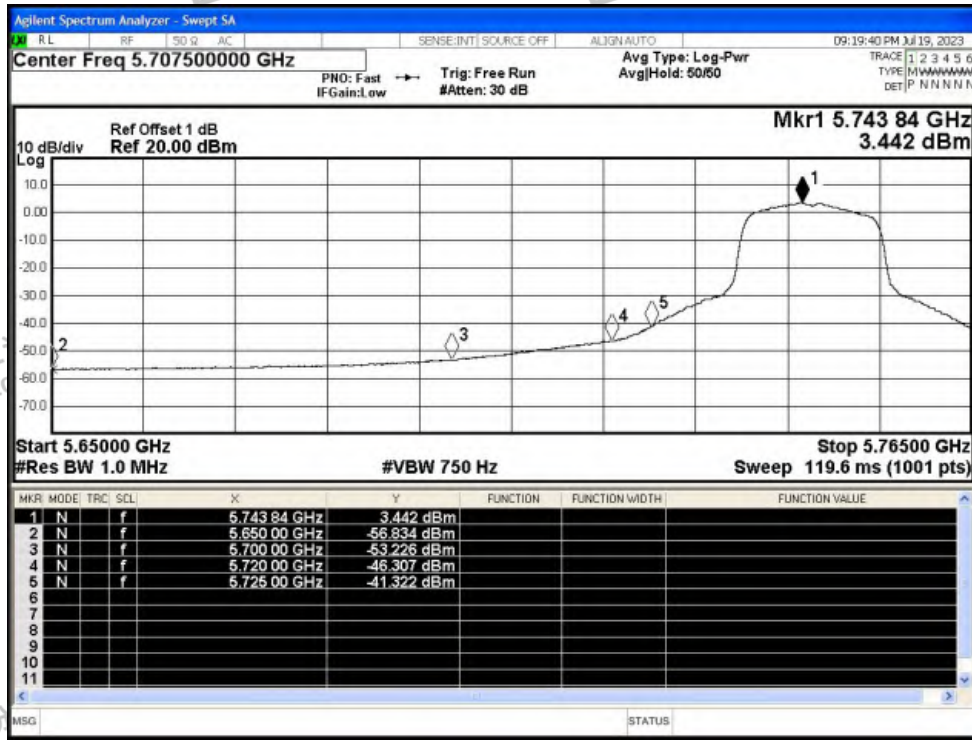




Restrict Band NVNT a 5825MHz Ant1 Peak

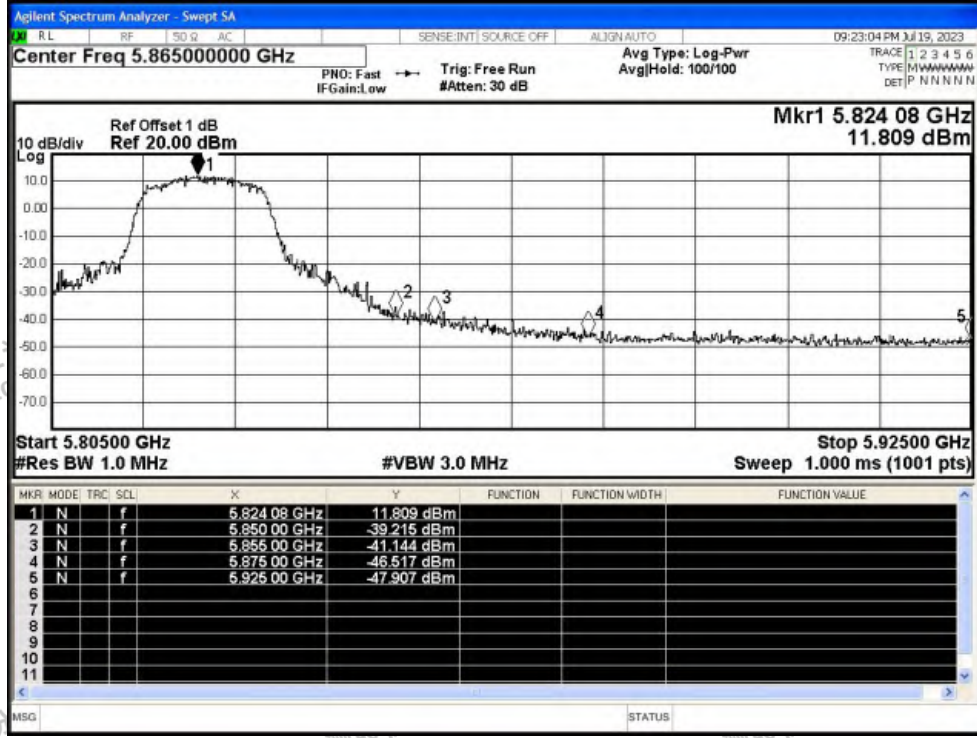


Restrict Band NVNT a 5825MHz Ant1 Average

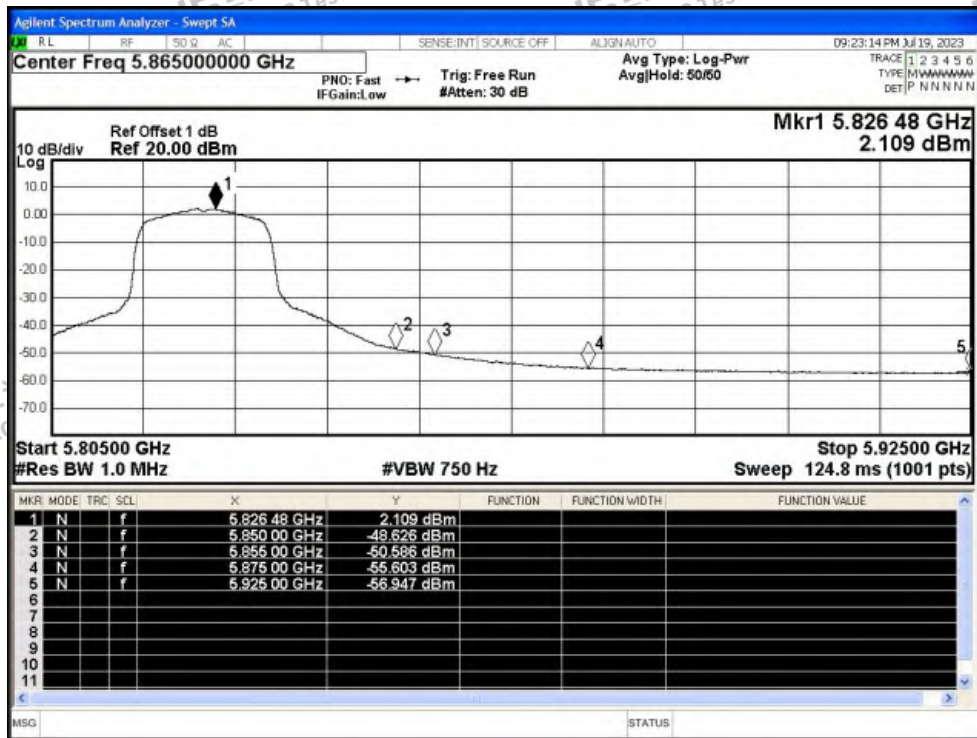




Restrict Band NVNT n20 5745MHz Ant1 Peak

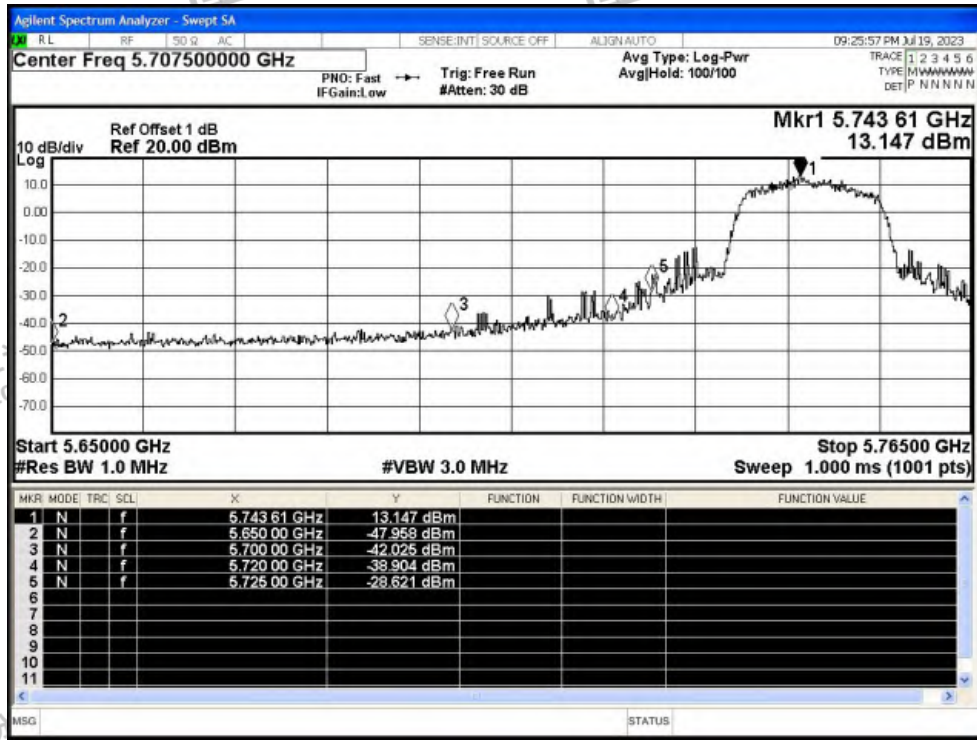


Restrict Band NVNT n20 5745MHz Ant1 Average

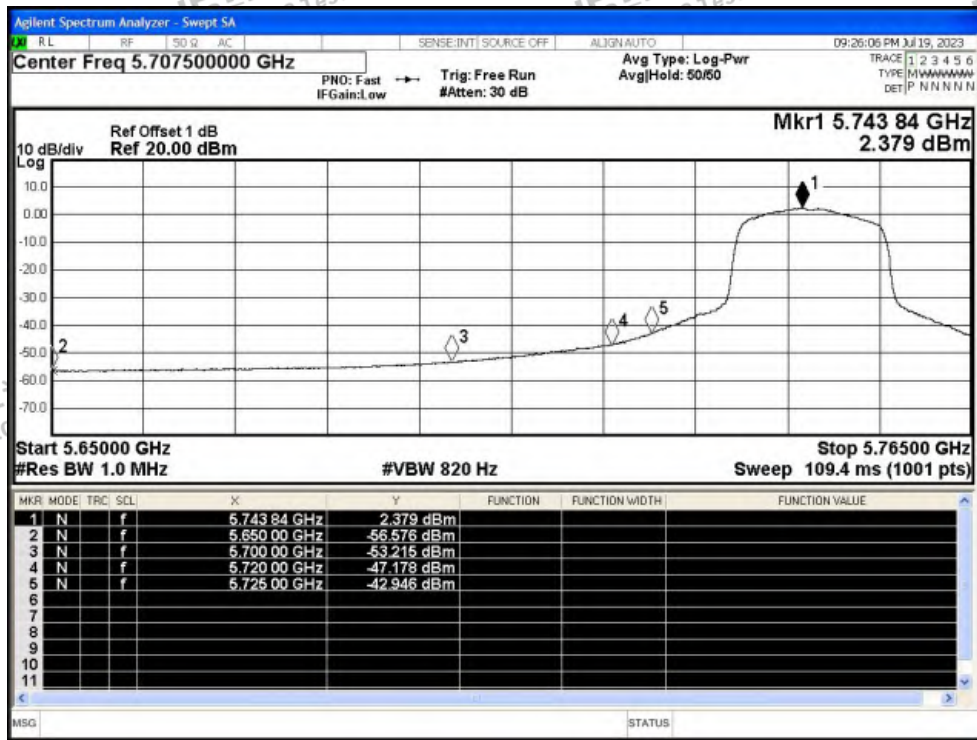




Restrict Band NVNT n20 5825MHz Ant1 Peak

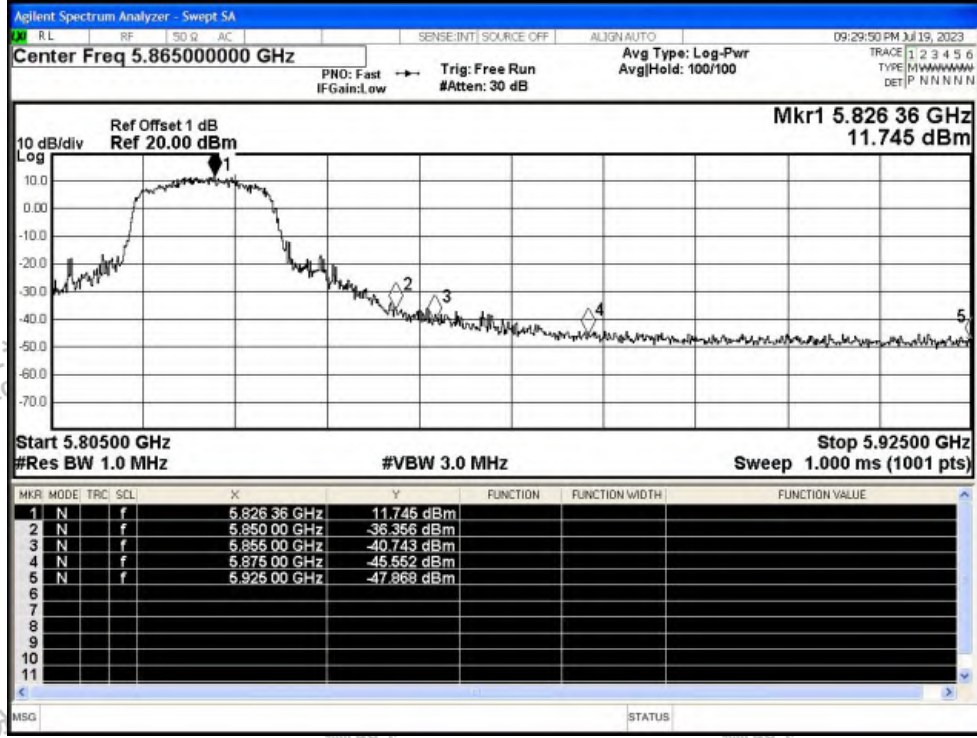


Restrict Band NVNT n20 5825MHz Ant1 Average

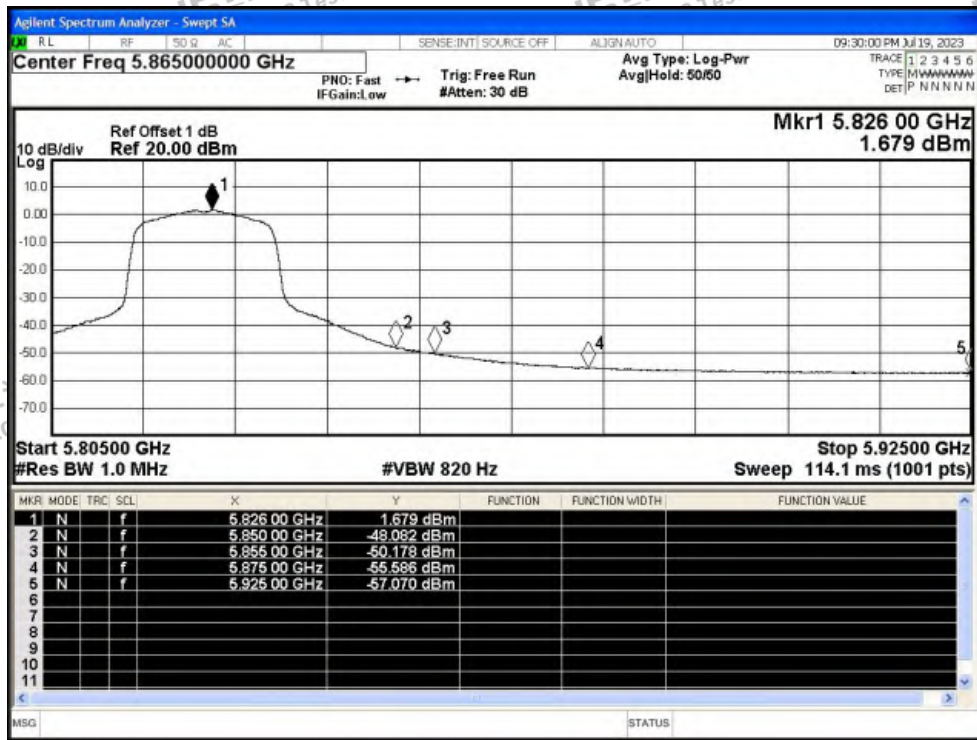




Restrict Band NVNT n40 5755MHz Ant1 Peak

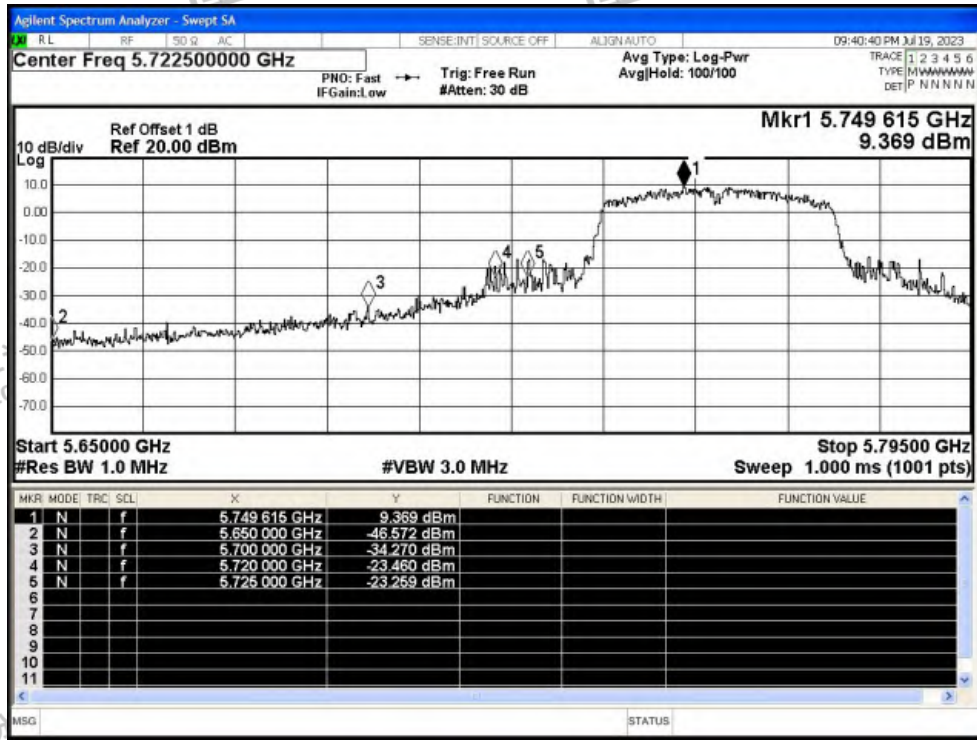


Restrict Band NVNT n40 5755MHz Ant1 Average

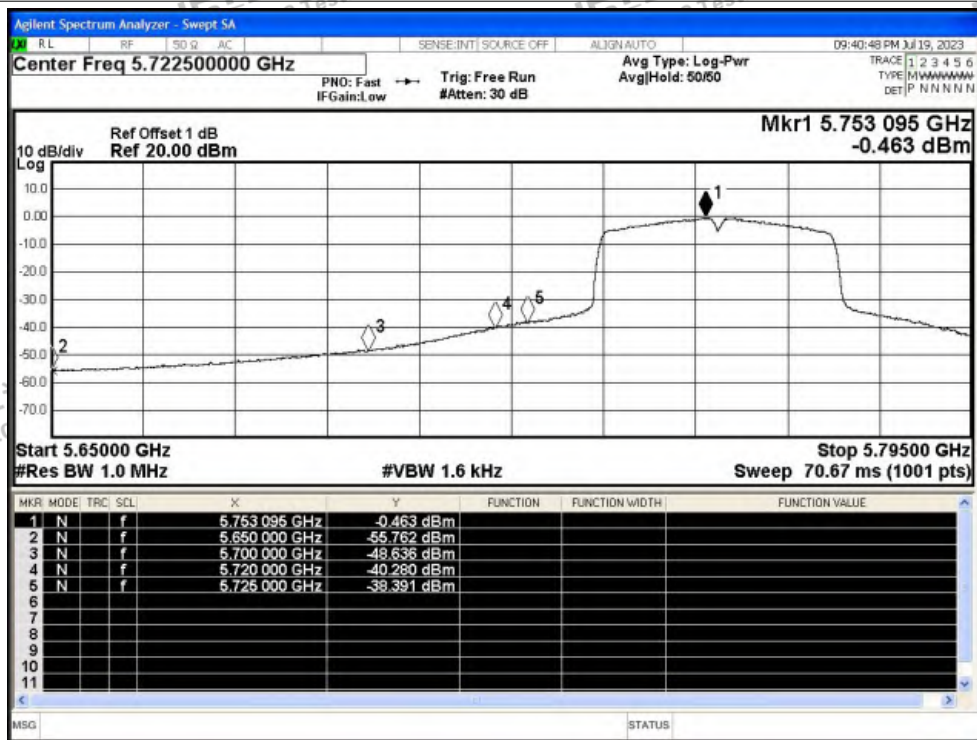




Restrict Band NVNT n40 5795MHz Ant1 Peak

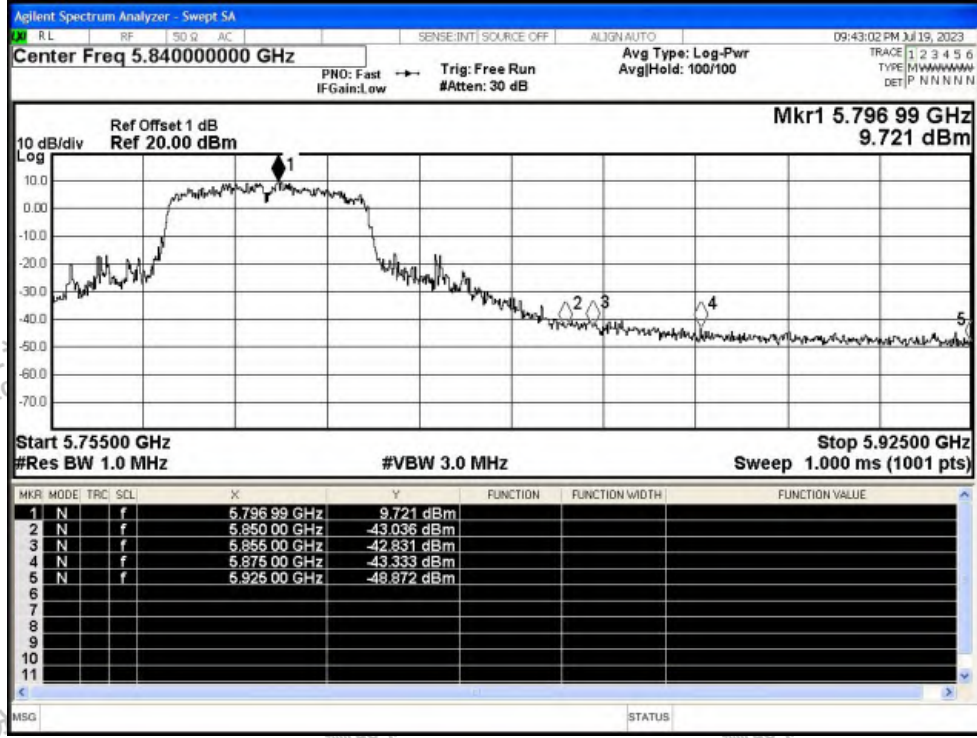


Restrict Band NVNT n40 5795MHz Ant1 Average

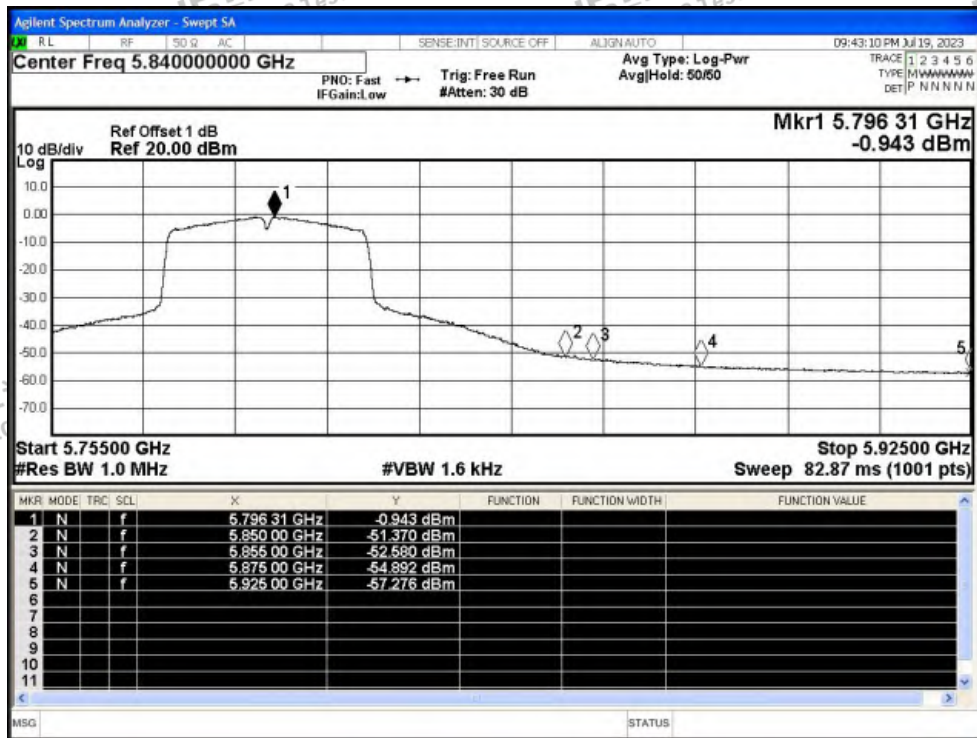




Restrict Band NVNT ac20 5745MHz Ant1 Peak

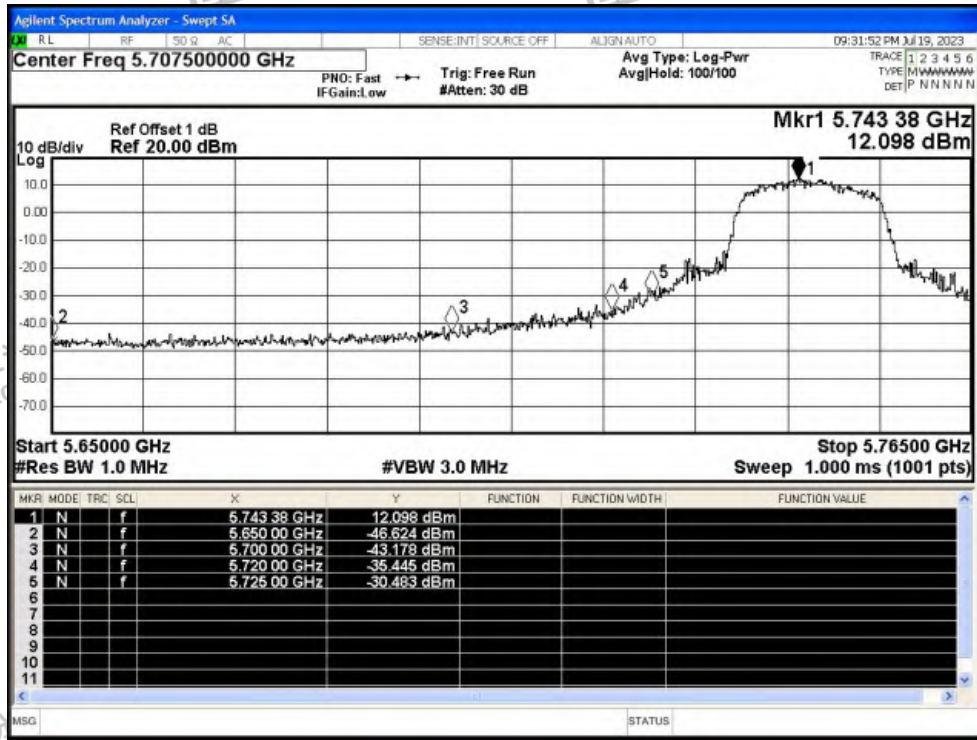


Restrict Band NVNT ac20 5745MHz Ant1 Average

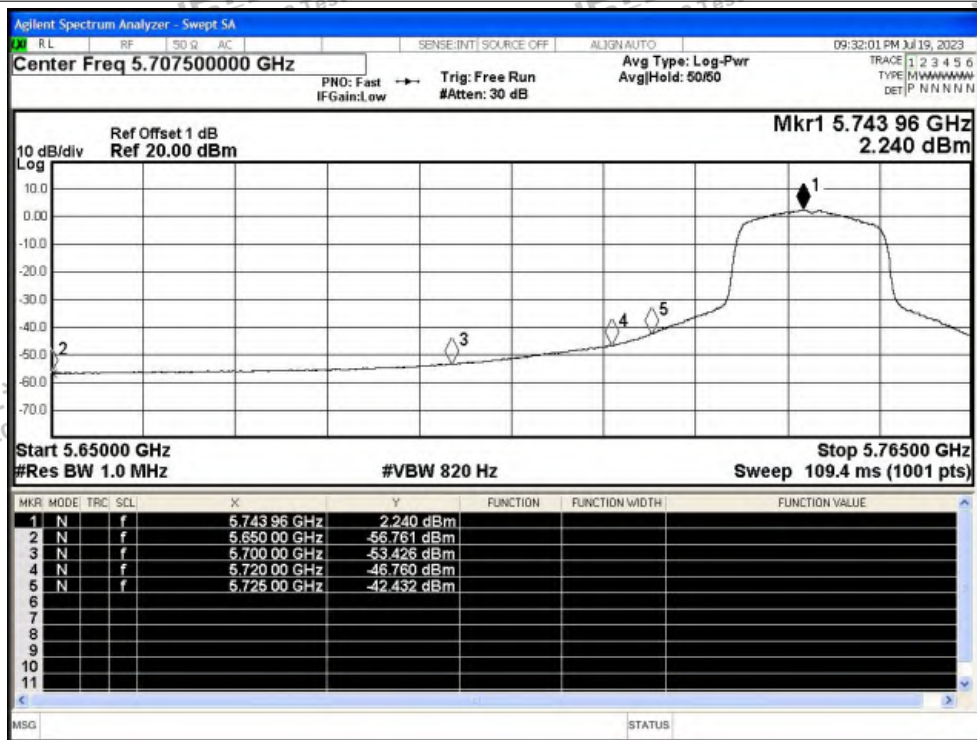




Restrict Band NVNT ac20 5825MHz Ant1 Peak

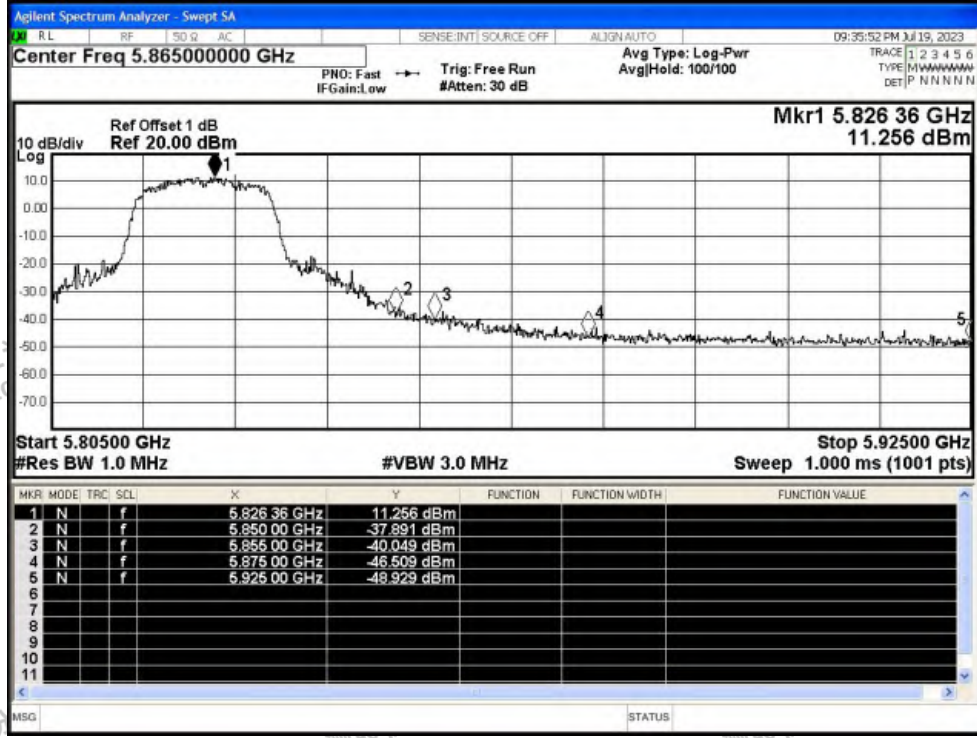


Restrict Band NVNT ac20 5825MHz Ant1 Average

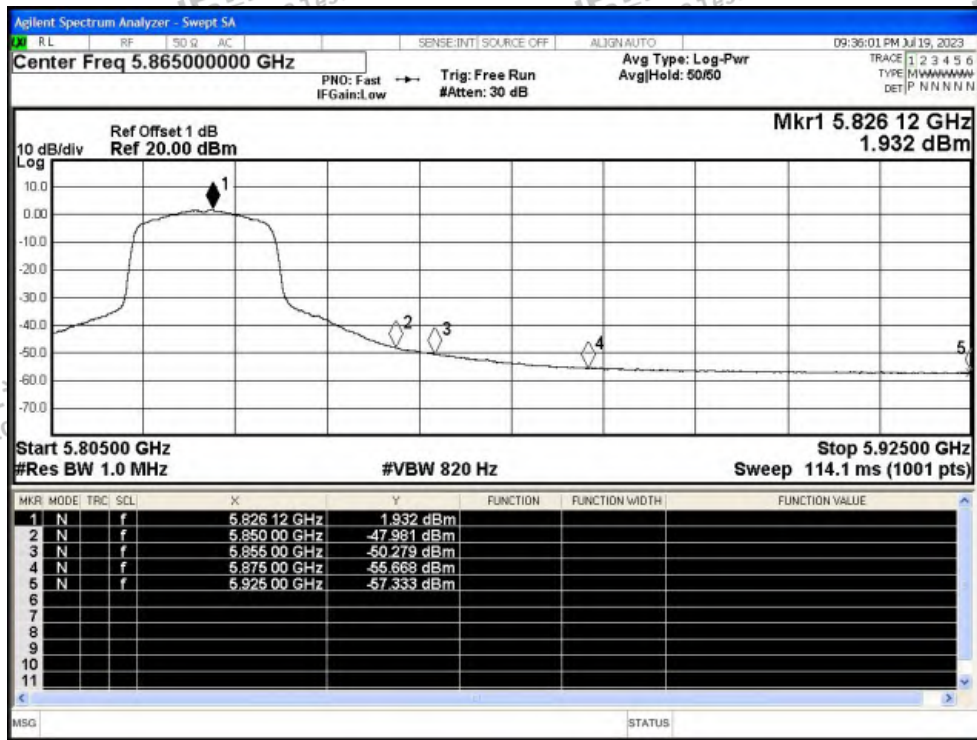




Restrict Band NVNT ac40 5755MHz Ant1 Peak

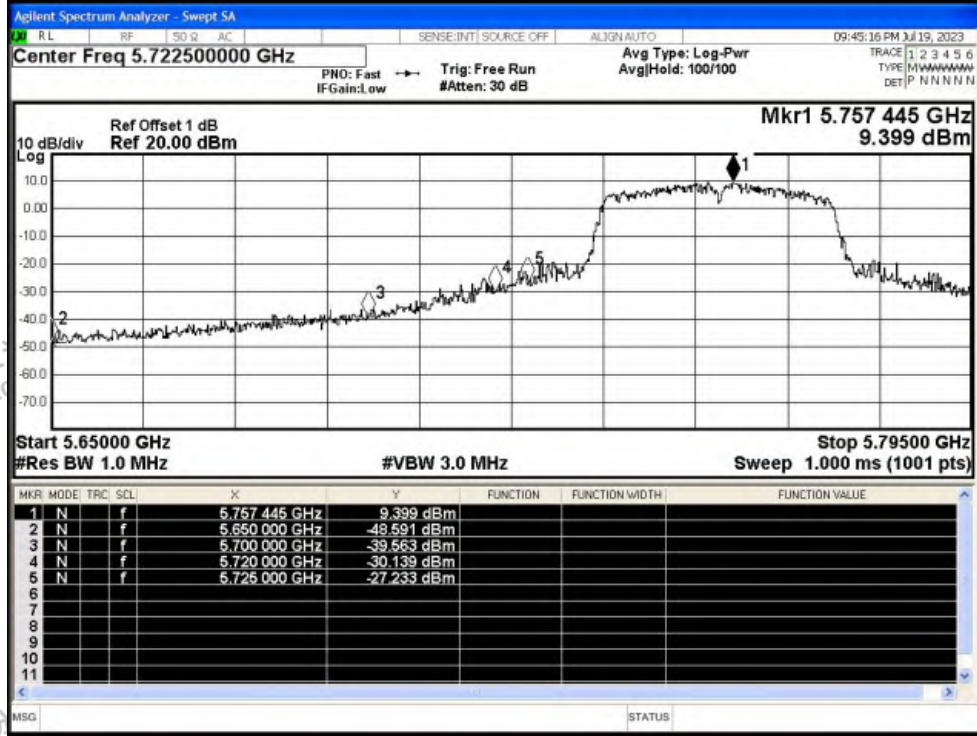


Restrict Band NVNT ac40 5755MHz Ant1 Average

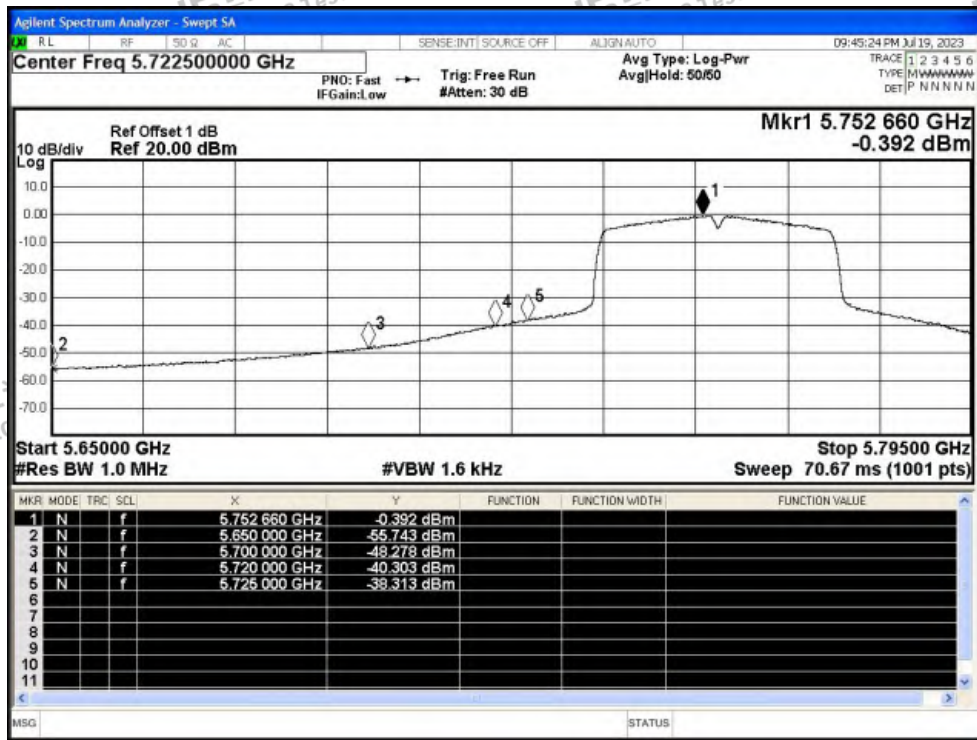




Restrict Band NVNT ac40 5795MHz Ant1 Peak

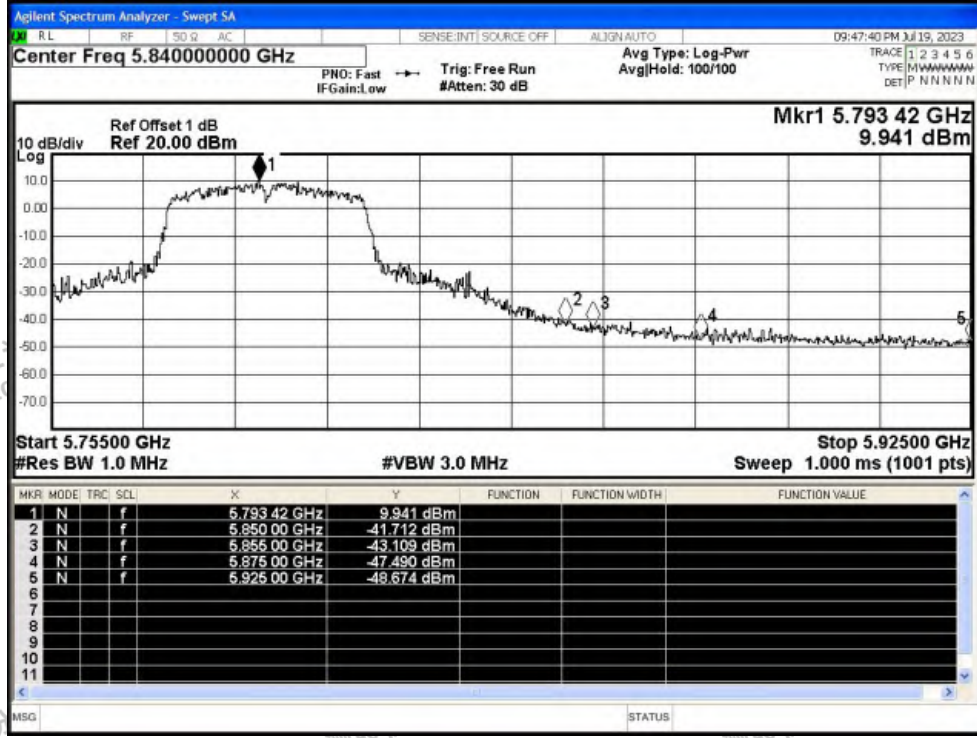


Restrict Band NVNT ac40 5795MHz Ant1 Average

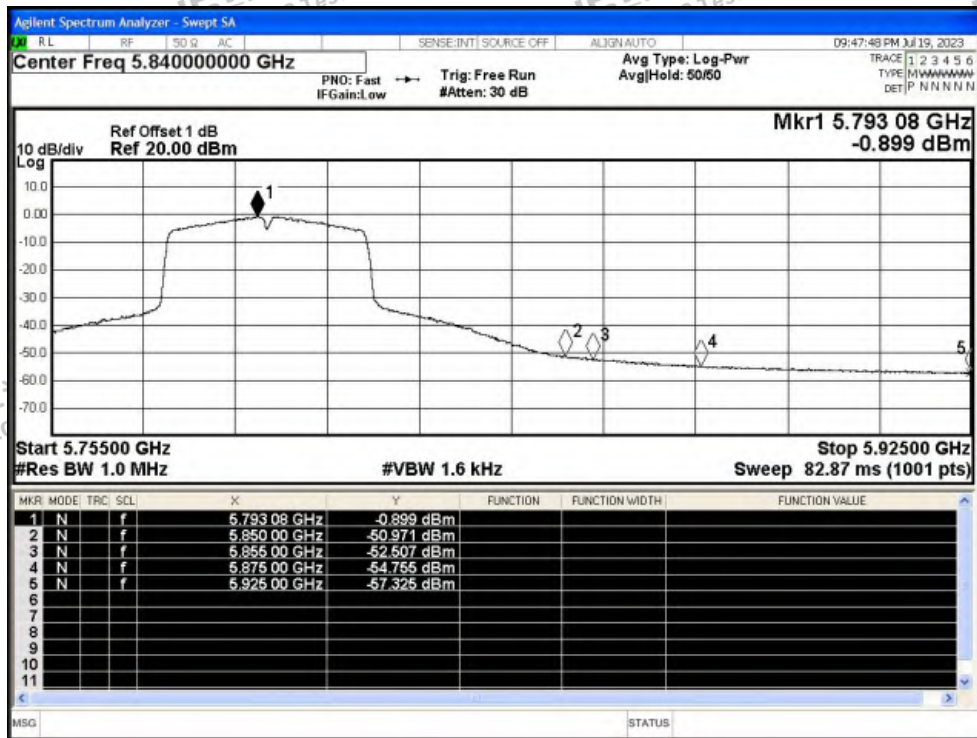




Restrict Band NVNT ac80 5775MHz Ant1 Peak

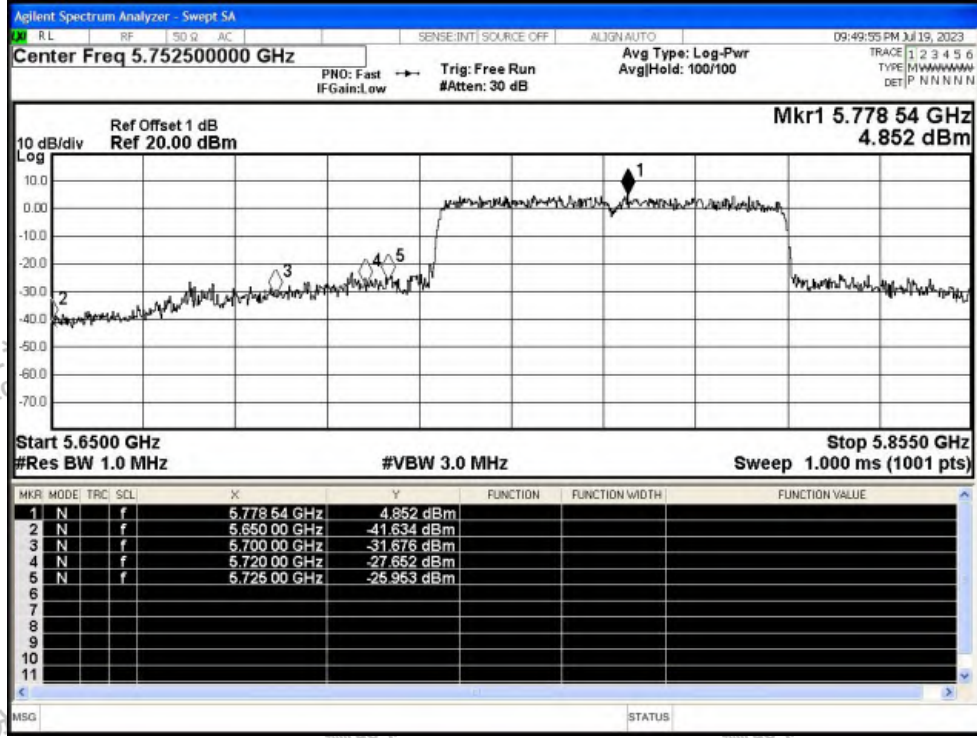

Restrict Band NVNT ac80 5775MHz Ant1 Average

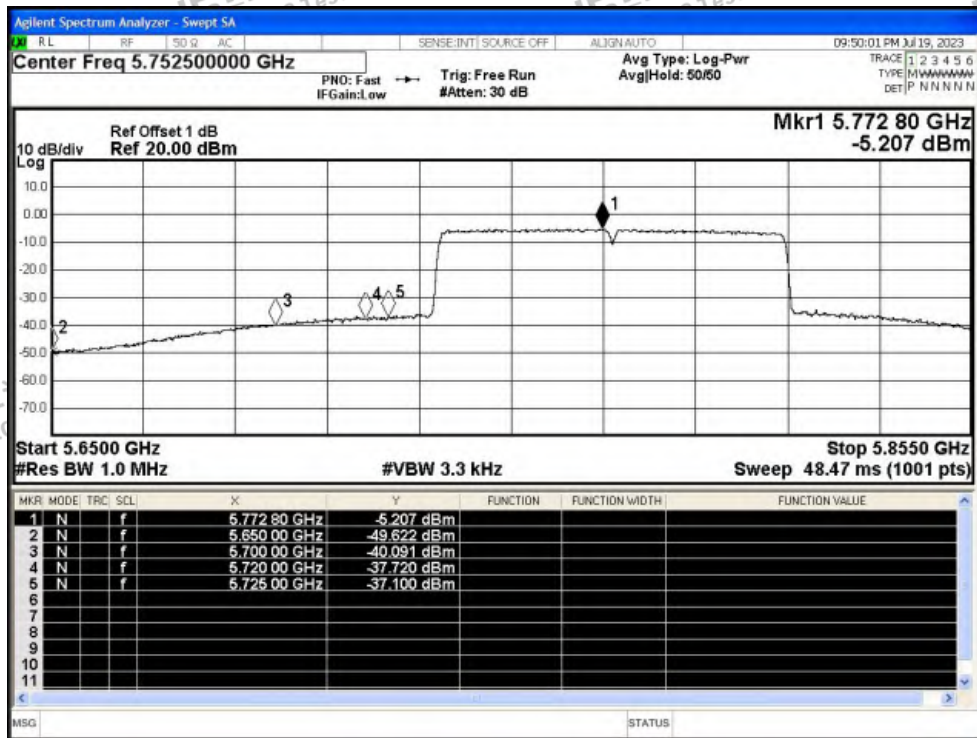



E.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	n40	5755	Ant1	5755	0	0	25	Pass
NVNT	n40	5795	Ant1	5794.88	-120000	-20.71	25	Pass
NVNT	ac20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
NVNT	ac20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	ac20	5825	Ant1	5825.04	40000	6.87	25	Pass
NVNT	ac40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	ac40	5795	Ant1	5795	0	0	25	Pass
NVNT	ac80	5775	Ant1	5775	0	0	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Freq. Stability NVNT n40 5755MHz Ant1

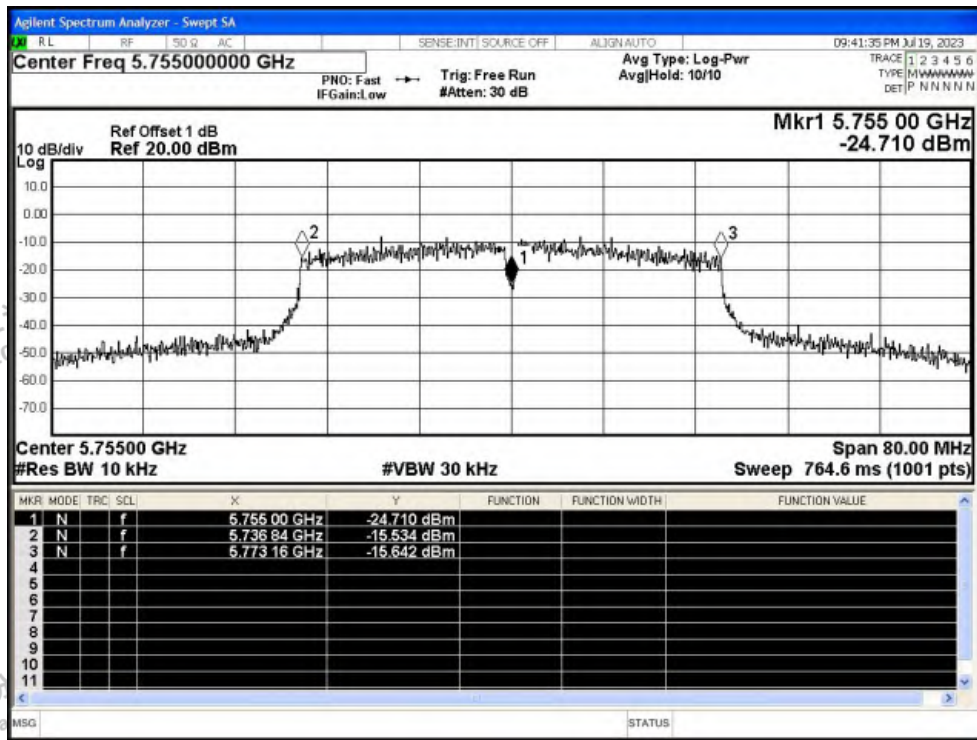


Freq. Stability NVNT n40 5795MHz Ant1

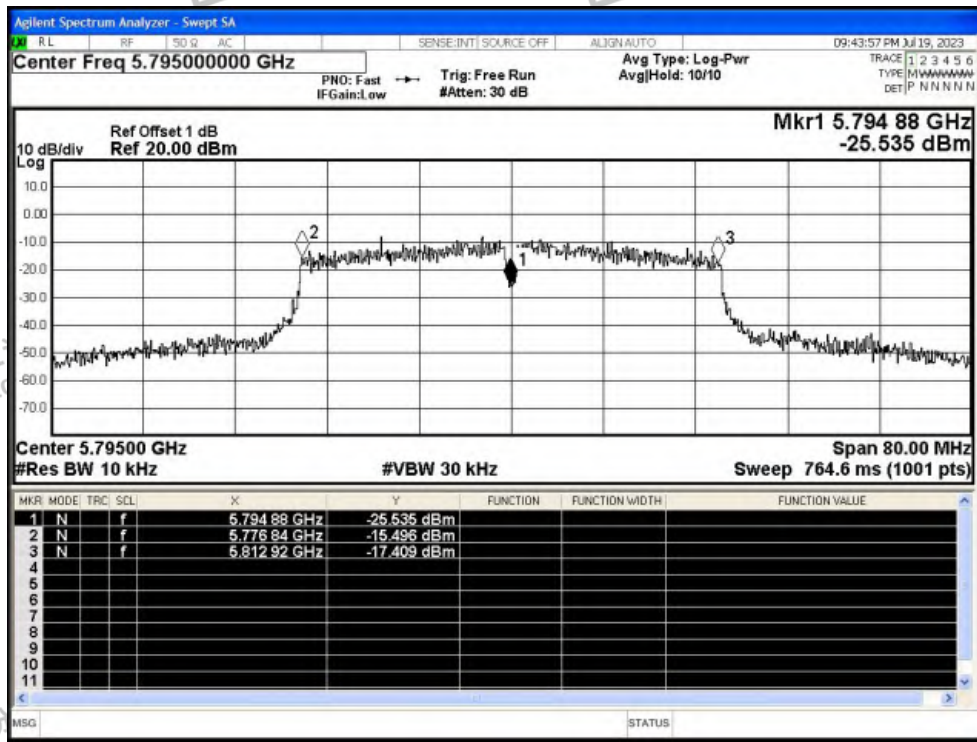




Freq. Stability NVNT ac20 5745MHz Ant1

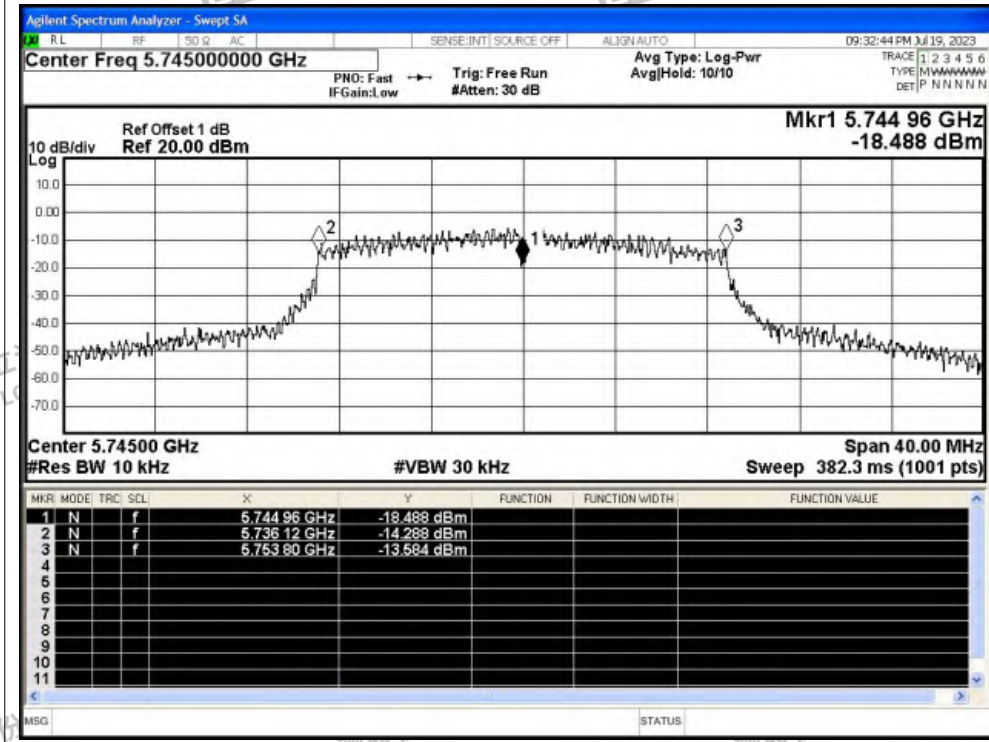


Freq. Stability NVNT ac20 5785MHz Ant1

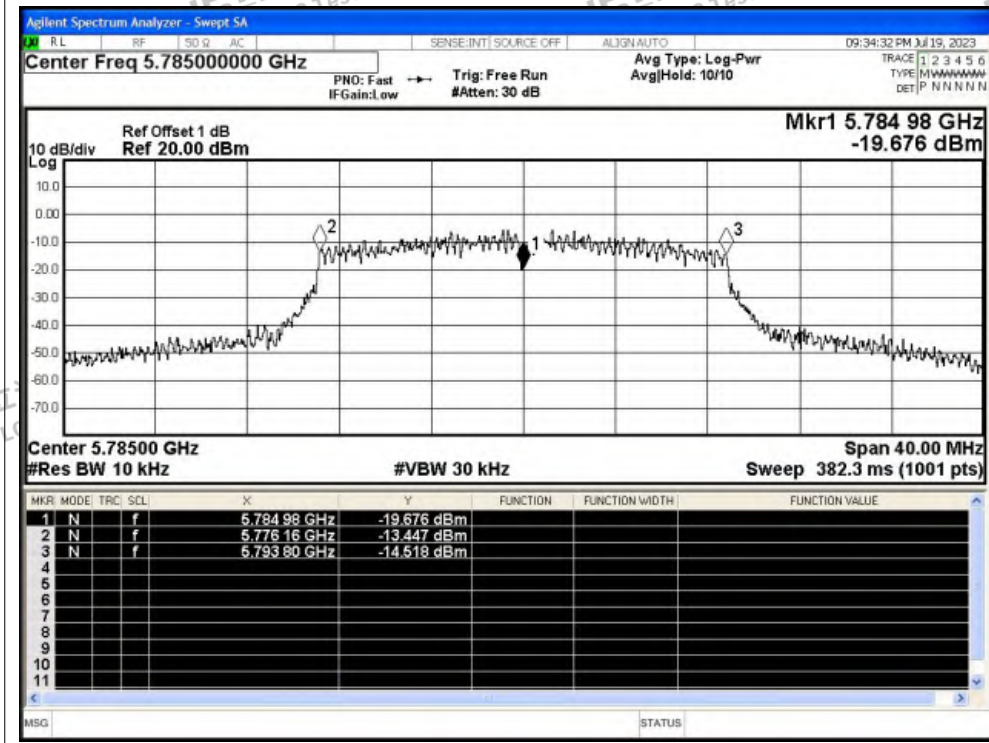




Freq. Stability NVNT ac20 5825MHz Ant1

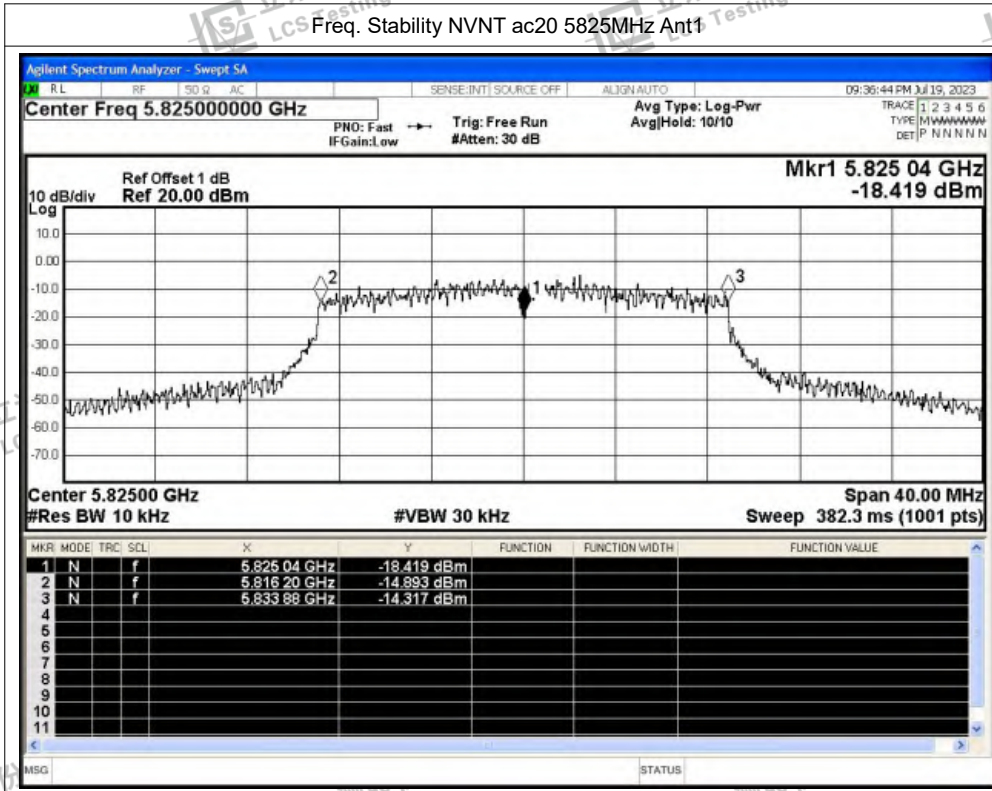


Freq. Stability NVNT ac40 5755MHz Ant1

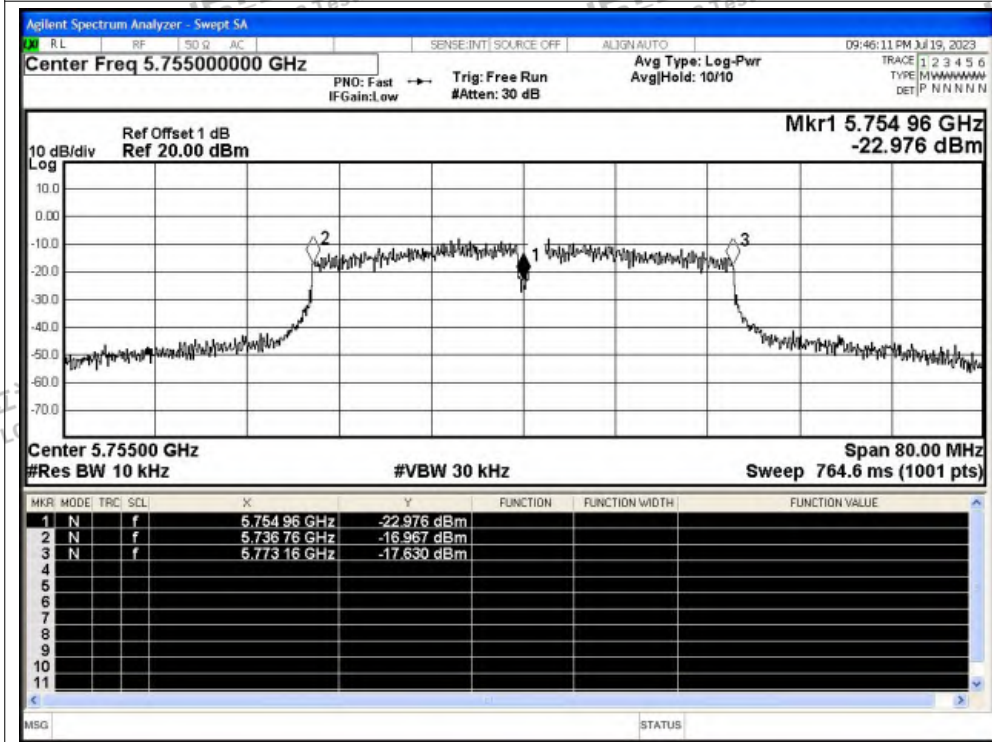




Freq. Stability NVNT ac40 5795MHz Ant1

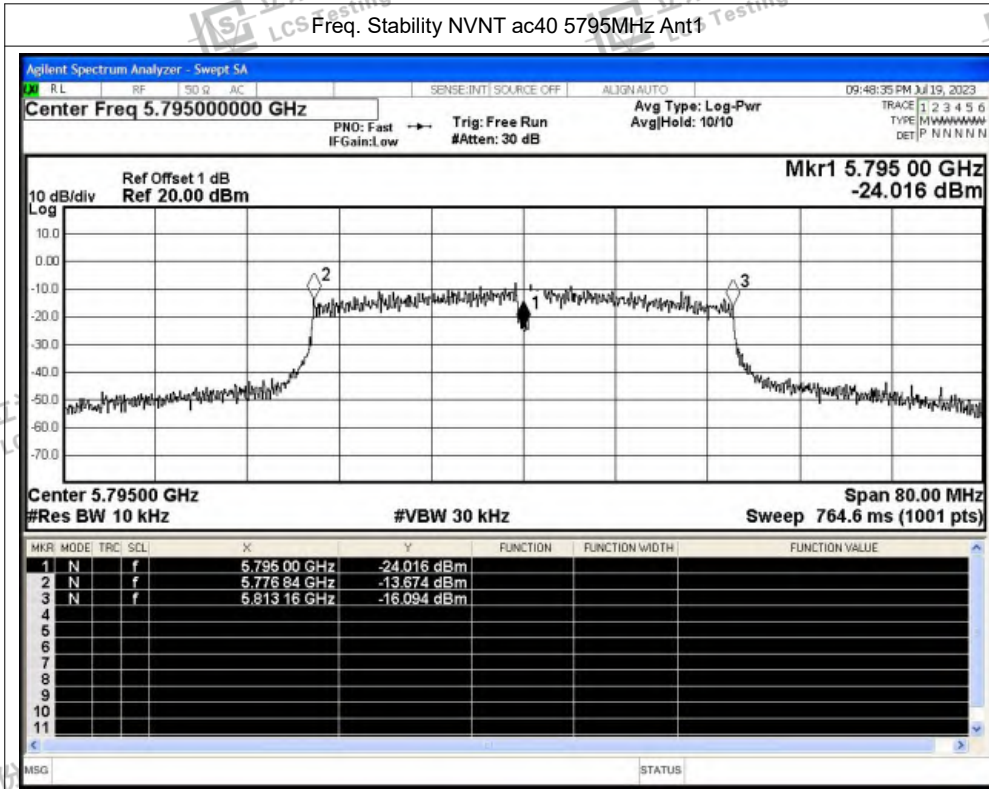

Freq. Stability NVNT ac80 5775MHz Ant1

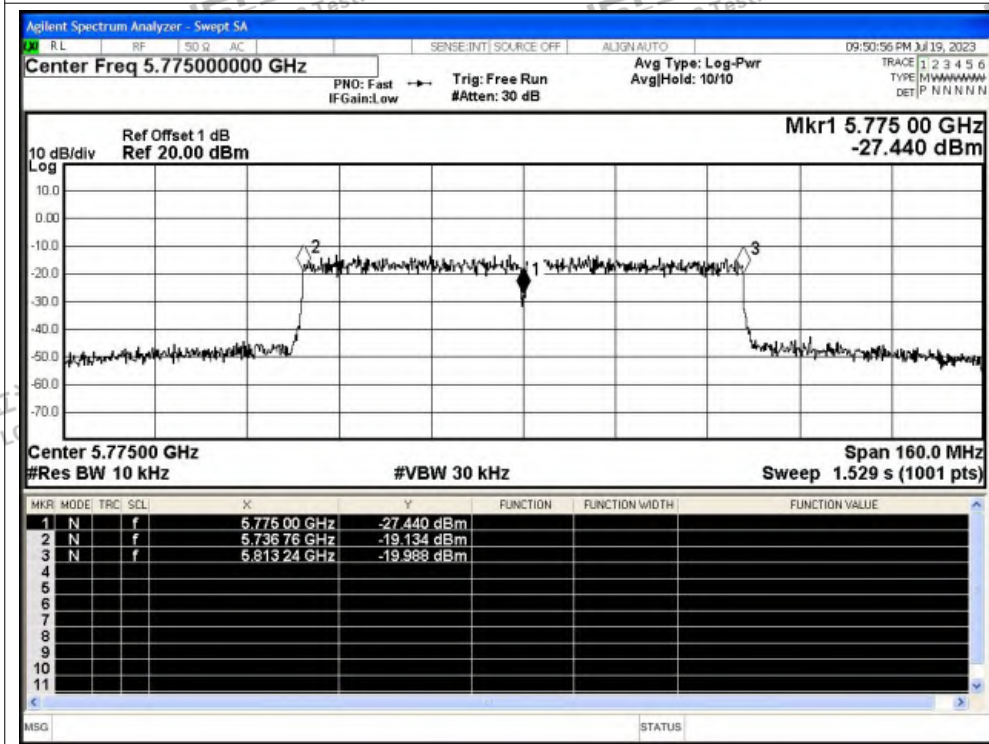



立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

E.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	58.24	2.35	0.72
NVNT	a	5785	Ant1	58.24	2.35	0.72
NVNT	a	5825	Ant1	58.46	2.33	0.72
NVNT	n20	5745	Ant1	56.84	2.45	0.77
NVNT	n20	5785	Ant1	56.13	2.51	0.77
NVNT	n20	5825	Ant1	51.75	2.86	0.77
NVNT	n40	5755	Ant1	37.63	4.24	1.55
NVNT	n40	5795	Ant1	37.83	4.22	1.55
NVNT	ac20	5745	Ant1	53.78	2.69	0.76
NVNT	ac20	5785	Ant1	56.72	2.46	0.76
NVNT	ac20	5825	Ant1	56.94	2.45	0.76
NVNT	ac40	5755	Ant1	37.86	4.22	1.53
NVNT	ac40	5795	Ant1	39.52	4.03	1.53
NVNT	ac80	5775	Ant1	24.7	6.07	3.09

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab

立讯检测股份
LCS Testing Lab




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5745MHz Ant1

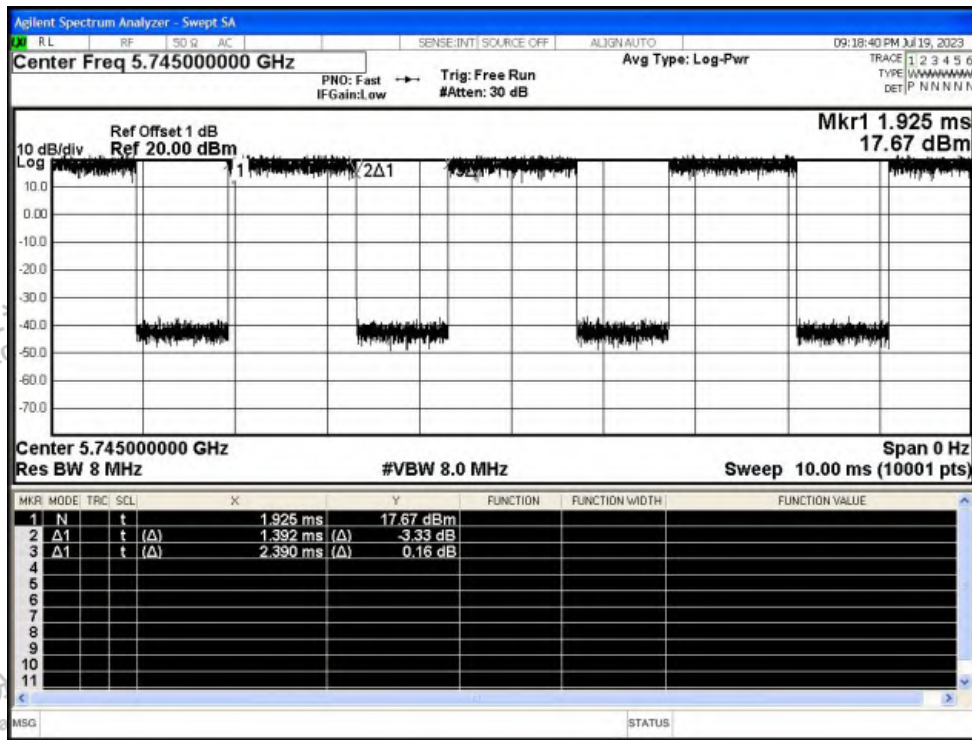


Duty Cycle NVNT a 5785MHz Ant1

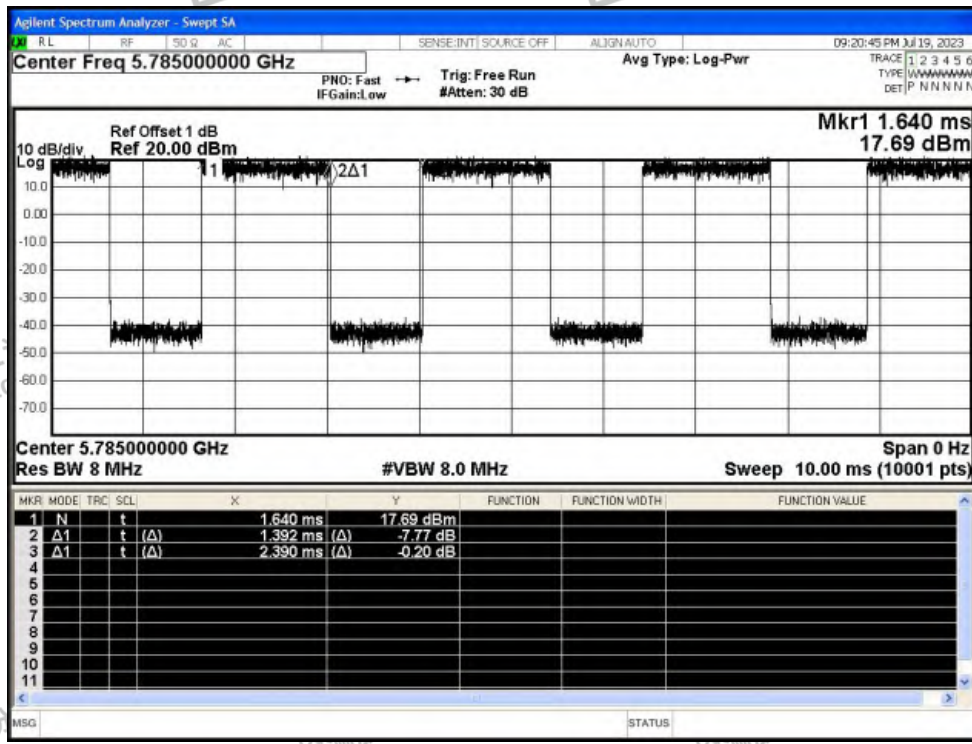




Duty Cycle NVNT a 5825MHz Ant1

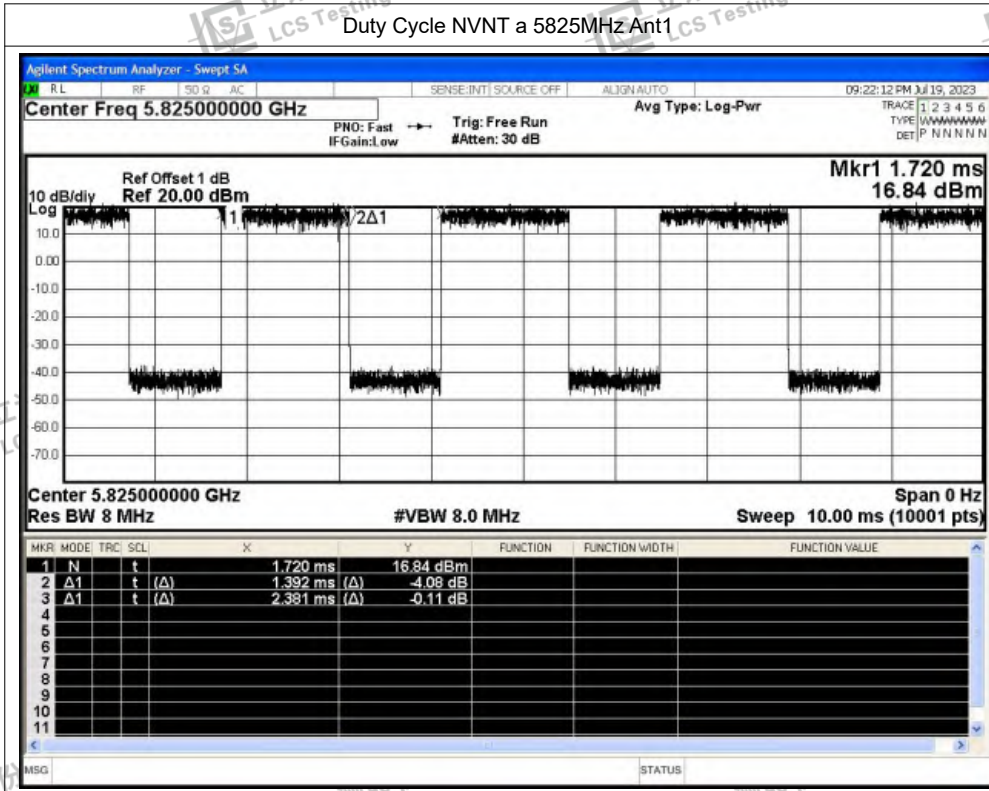


Duty Cycle NVNT n20 5745MHz Ant1

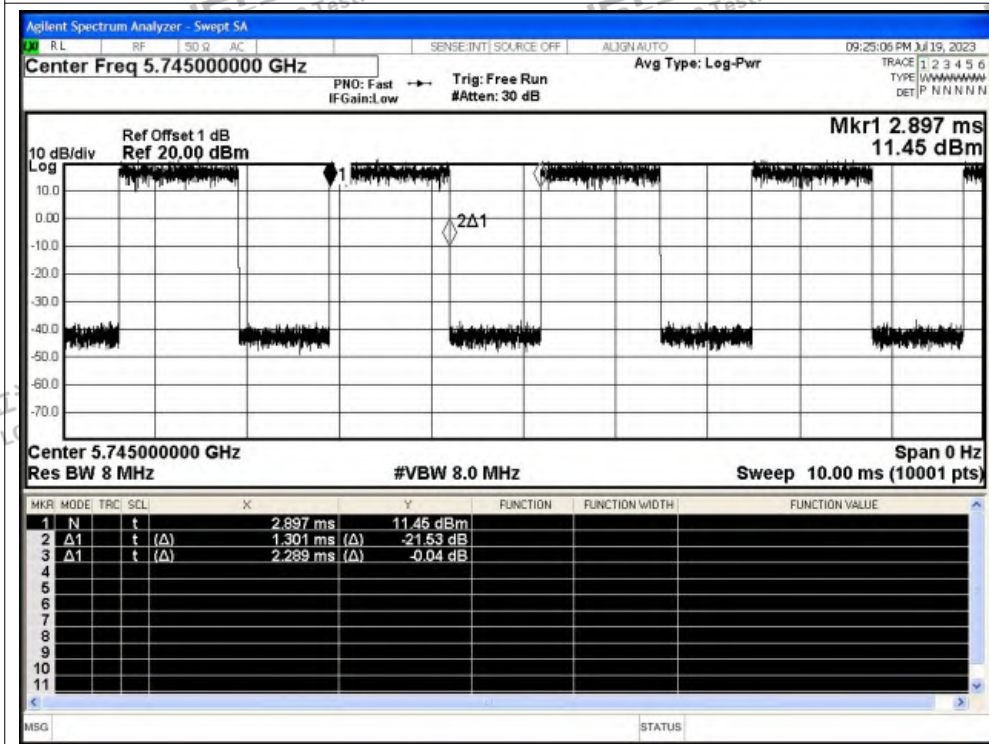




Duty Cycle NVNT n20 5785MHz Ant1

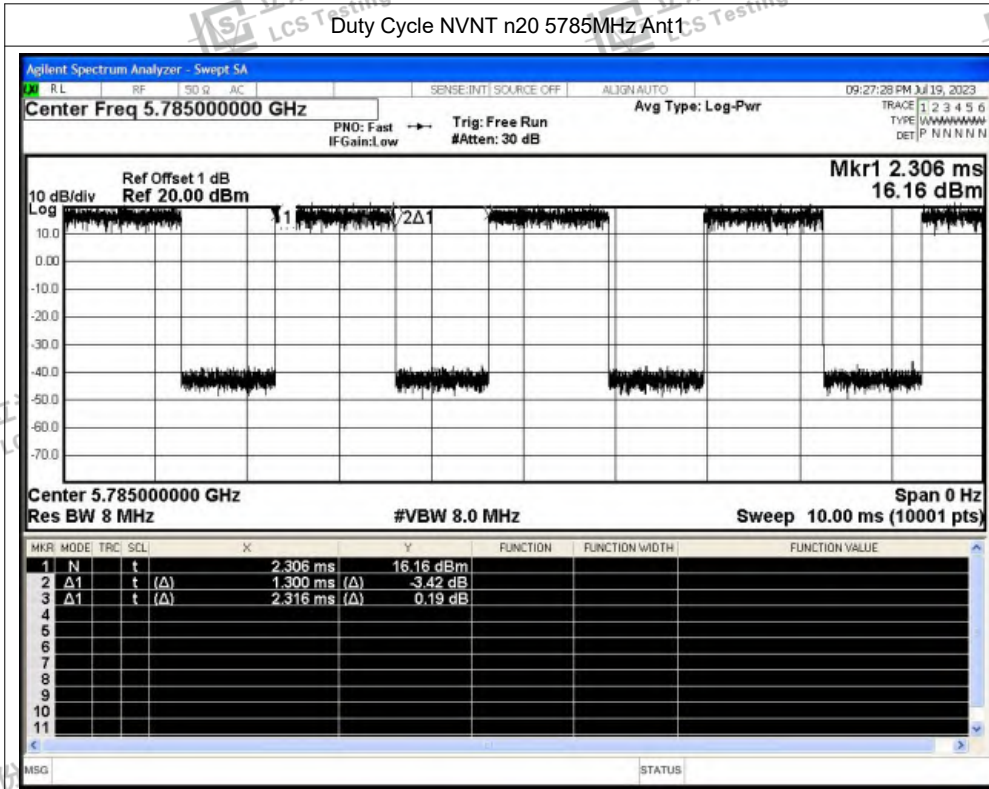


Duty Cycle NVNT n20 5825MHz Ant1

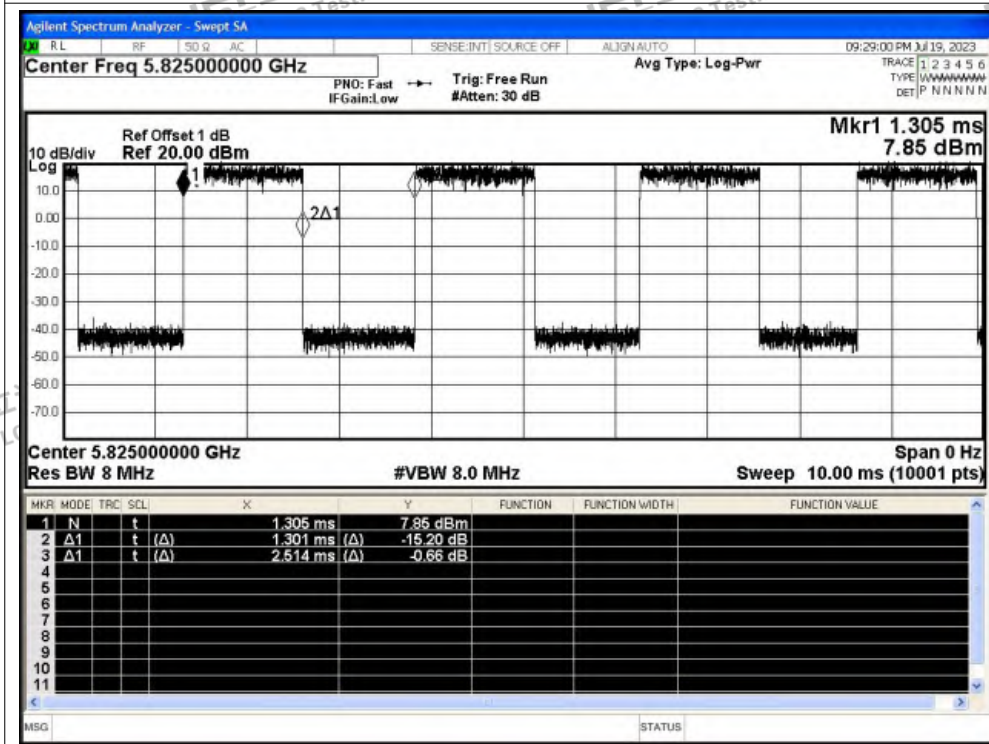




Duty Cycle NVNT n40 5755MHz Ant1

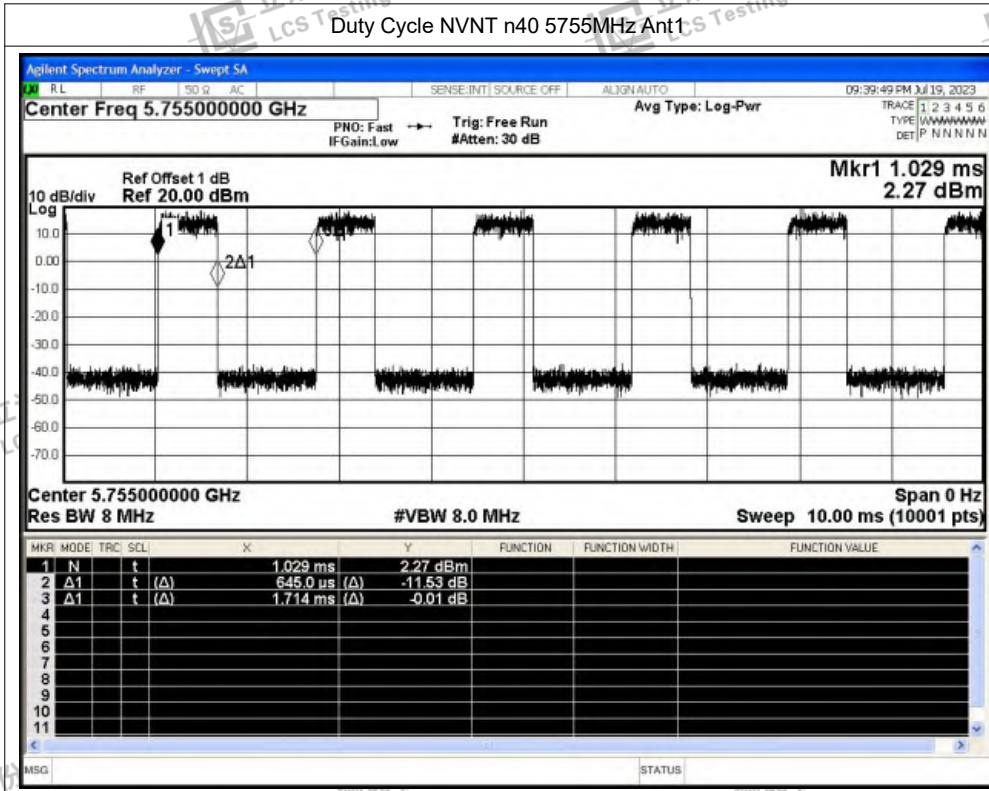


Duty Cycle NVNT n40 5795MHz Ant1

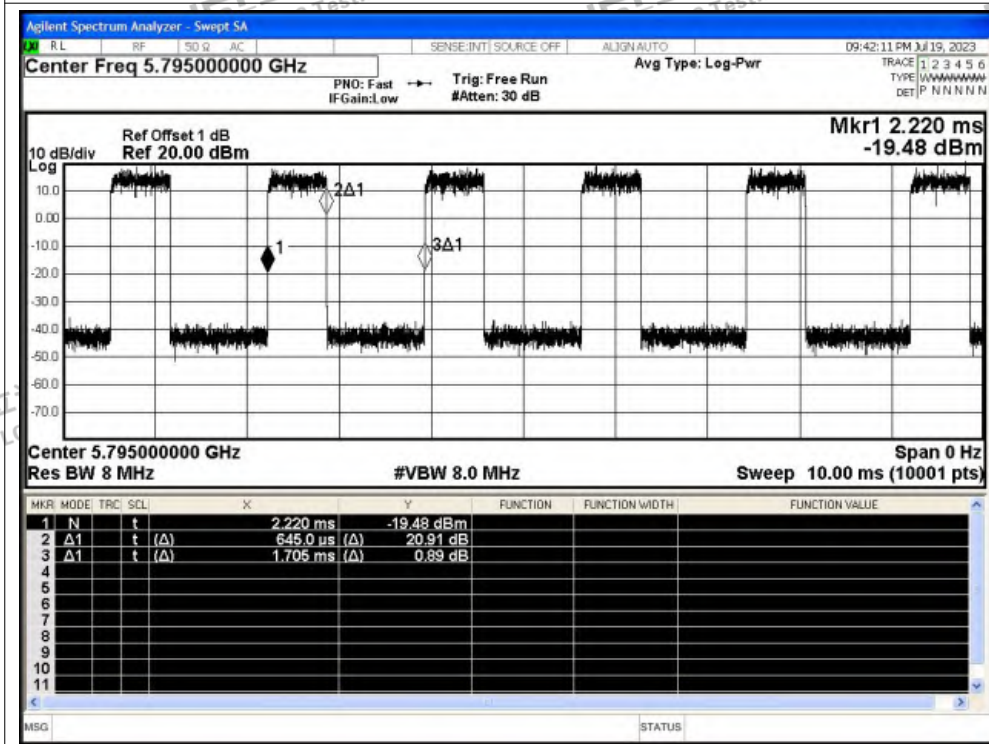




Duty Cycle NVNT ac20 5745MHz Ant1

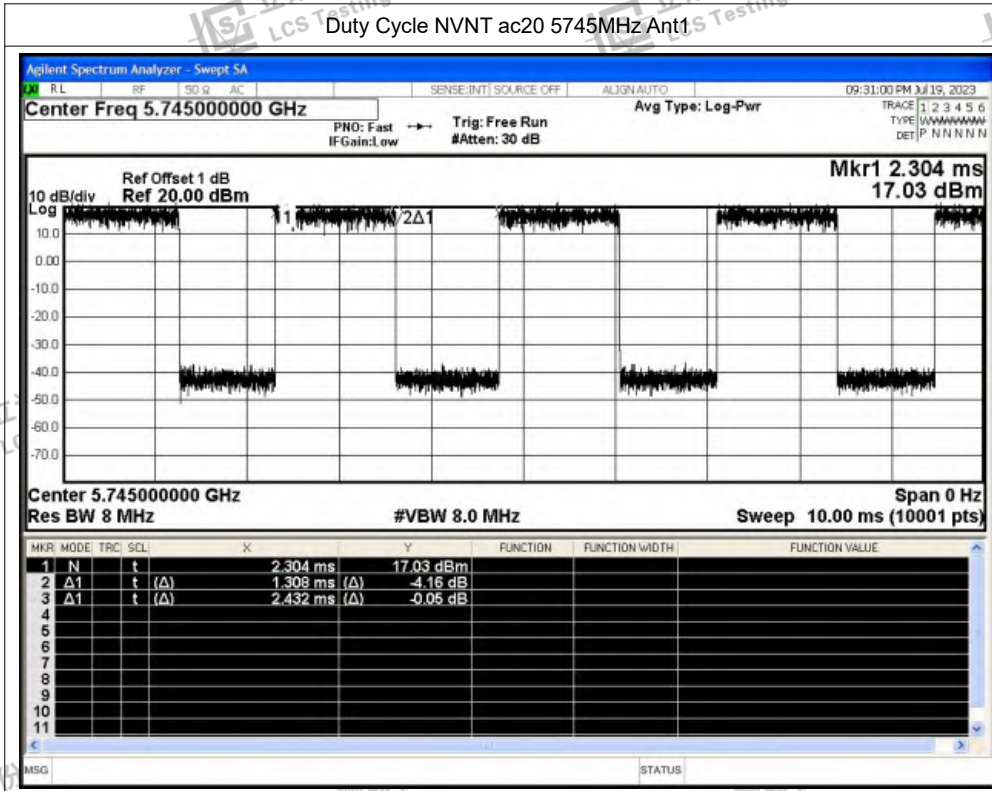


Duty Cycle NVNT ac20 5785MHz Ant1

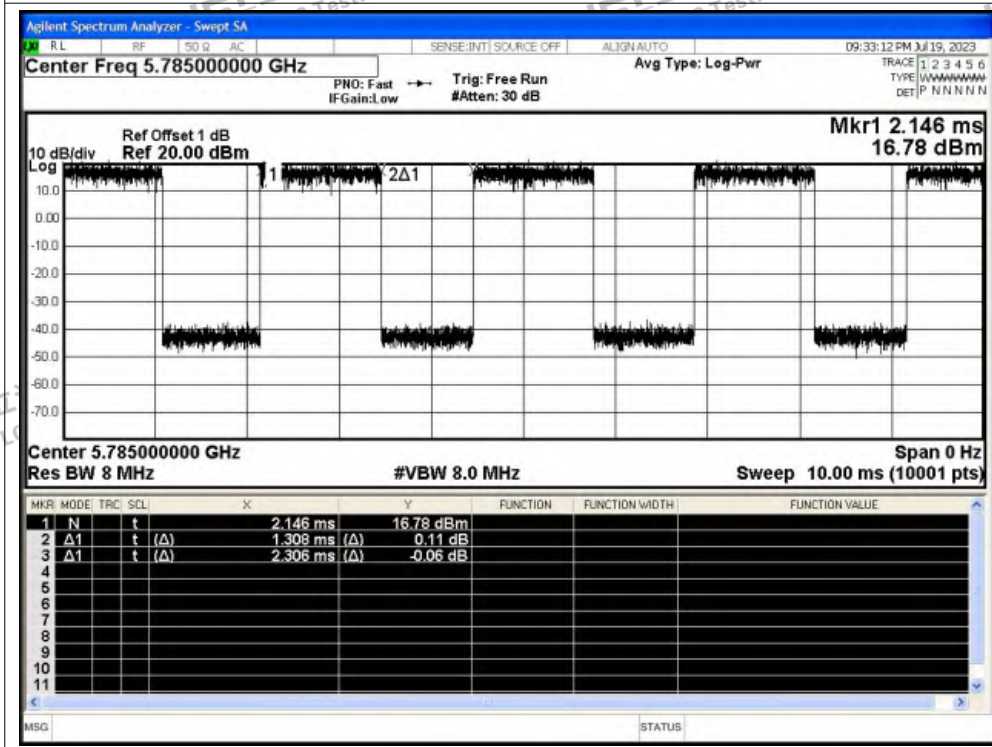




Duty Cycle NVNT ac20 5825MHz Ant1

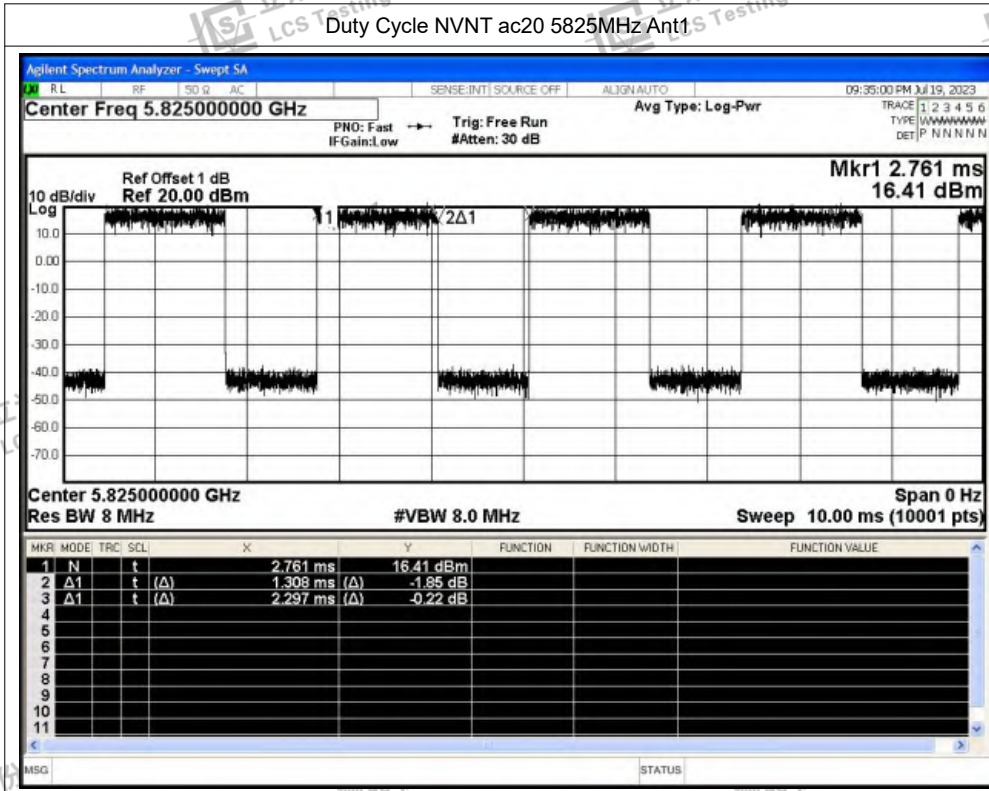


Duty Cycle NVNT ac40 5755MHz Ant1

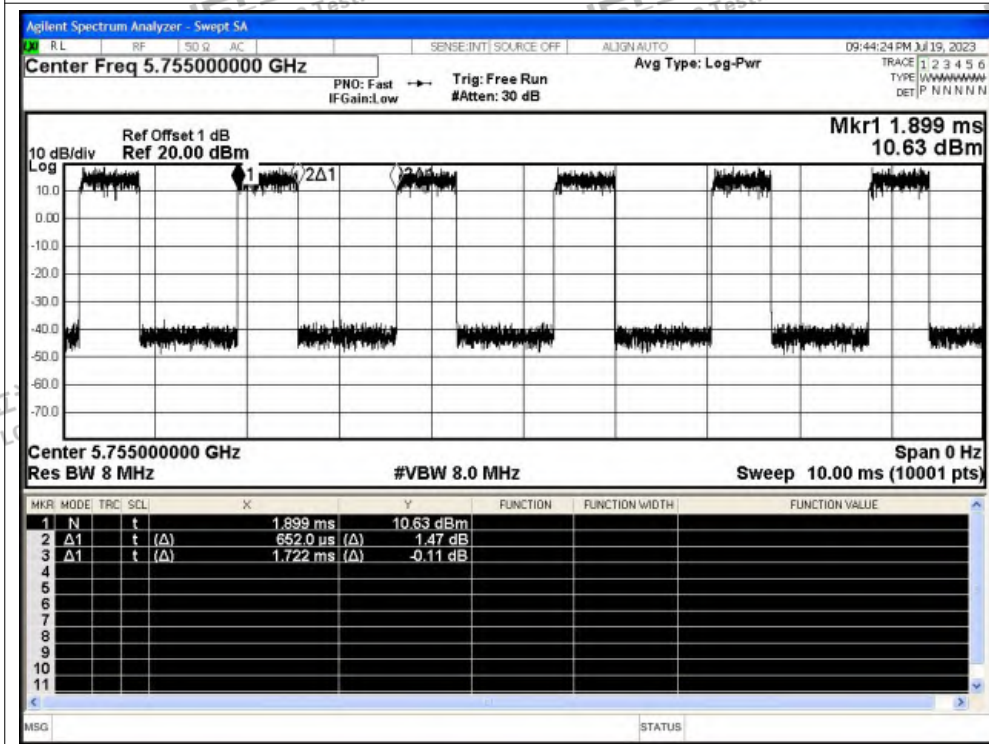



Duty Cycle NVNT ac40 5795MHz Ant1

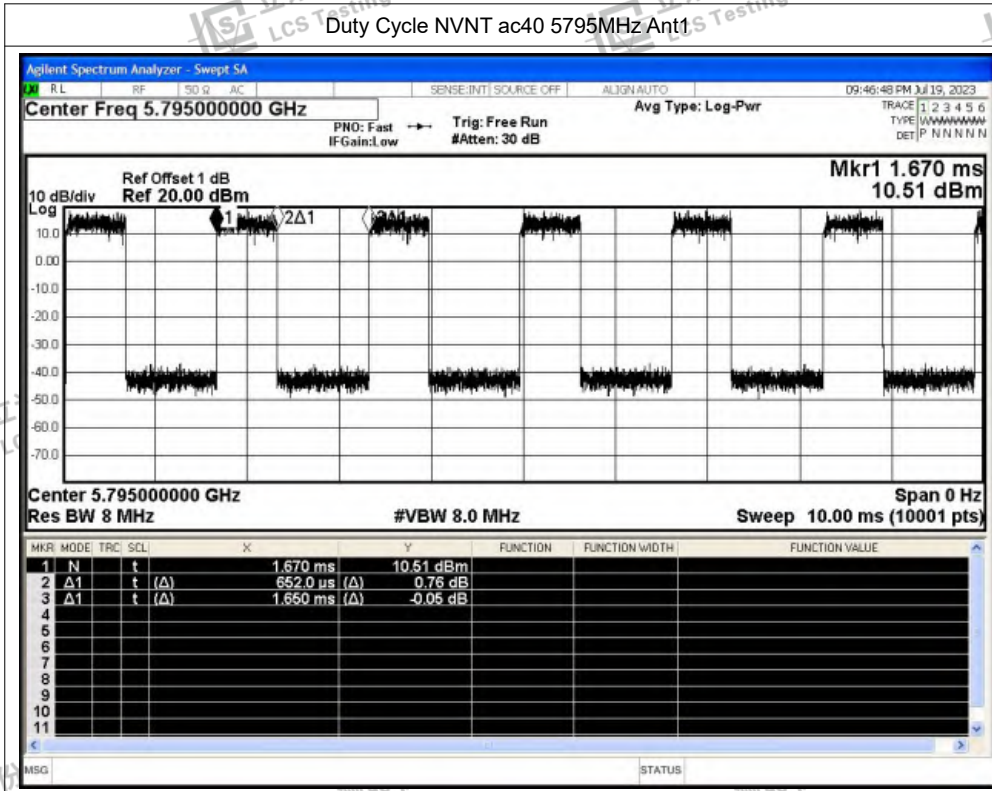

Duty Cycle NVNT ac80 5775MHz Ant1

