

Full key Bluetooth keyboard software development requirements

1. The PCBA size

The tolerance of PCB dimension is + -0.2mm

PCB thickness 1.0mm tolerance + -0.1mm

1.1 Forward and reverse trend diagram of PCB:

The drawings will be packaged later


2. Compatible system

Windows OS, Mac, Android

3. Layout Requirements (KR, US universal Software)


3.1 KR layout :

Retro Classic Standard BT KBD -KR

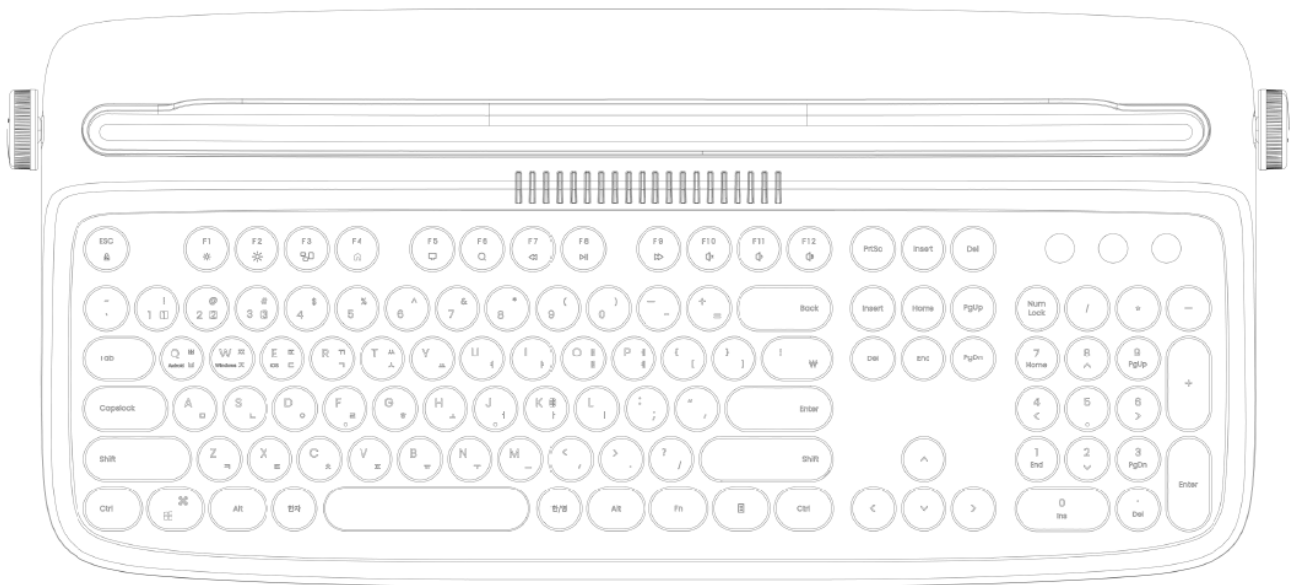

3.2, US layout

Retro Classic Standard BT KBD -US

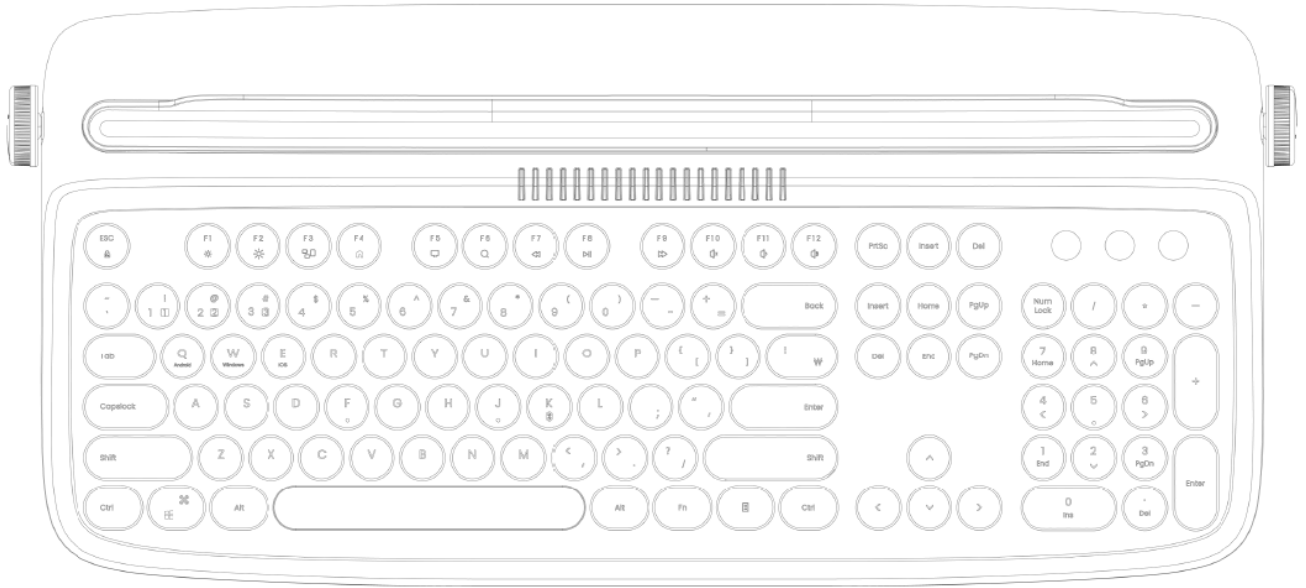

4. LED lights description

From left to right are lights A, B, and C

LED A When the Number Lock is on, the indicator is on white

LED B: With the Caps Lock on, the indicator is on white

LED C composite as follows: RGB light or tri-color light

C1 Bluetooth pairing indicator. The blue light flashes when the keyboard is pairing with Bluetooth, and goes off when the Bluetooth is connected

C2 power indicator. The single battery is correctly installed in the battery compartment. After the keyboard is powered on, the indicator is green for 3 seconds and then turns off

C3 When the keyboard is low voltage, the red led flashes

5.Sleep time: when no key is pressed down, 20minslater the keyboard will enter the sleep state.Press any key to wake up and automatically connect back to the connected device

6.Low voltage alarm: when voltage is lower than 2.3V, the green light alarm; when the voltage is lower than 2.1V, the keyboard enters into shutdown

7. working distance: according to the requirements of CLASS2, no obstacles test effective distance is > 10meters


8.Current (Motherboard key press current (LED does not light up 0.8~ 1.2mA) : no key standby current: 0.5~ 1.0mA (this current as far as possible in the state of maintaining the connection to do the lowest);20 minutes without pressing the button into the sleep state, sleep current: 0.01~0.04mA) :


9.Press the FN+C, the three green lights will turn on to clear the pairing devices

10 . Press FN + Q to switch to android, FN + W to windows, FN+E to IOS

11.Multimedia specification

FN+  to lock multimedia

FN+  to reduce brightness of screen

FN+  to increase brightness of screen

FN+  Multitasking window (win+tab)

FN+  web home

FN+  to show desk(win+D)

FN+  search

FN+  previous

FN+  pause

FN+  next

FN+  mute

FN+  volume-

FN+  volume+

Press F key alone for the corresponding multimedia function, FN + F key to display the function of F key

FN+  The BT pairing

11. Name of device : Actto keyboard

12. Pairing with password

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.