



Mode	29																																																																									
Mode	Band Edge																																																																									
Mode	Straddle channels_5.47-5.725_802.11a_CH144_5720MHz																																																																									
ANT	22																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Blank	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.55</td> <td>51.00</td> <td>74.00</td> <td>-23.00</td> <td>38.00</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>354</td> <td>125</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.05</td> <td>50.41</td> <td>68.30</td> <td>-17.89</td> <td>37.41</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>354</td> <td>125</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>110.41</td> <td>-----</td> <td>-----</td> <td>96.88</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>354</td> <td>125</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5869.20</td> <td>52.53</td> <td>68.30</td> <td>-15.77</td> <td>38.54</td> <td>36.42</td> <td>10.32</td> <td>32.75</td> <td>354</td> <td>125</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5449.55	51.00	74.00	-23.00	38.00	35.93	9.68	32.61	354	125	Peak	2	5466.05	50.41	68.30	-17.89	37.41	35.92	9.69	32.61	354	125	Peak	3	5720.00	110.41	-----	-----	96.88	36.21	10.01	32.69	354	125	Peak	4	5869.20	52.53	68.30	-15.77	38.54	36.42	10.32	32.75	354	125	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5449.55	51.00	74.00	-23.00	38.00	35.93	9.68	32.61	354	125	Peak																																																															
2	5466.05	50.41	68.30	-17.89	37.41	35.92	9.69	32.61	354	125	Peak																																																															
3	5720.00	110.41	-----	-----	96.88	36.21	10.01	32.69	354	125	Peak																																																															
4	5869.20	52.53	68.30	-15.77	38.54	36.42	10.32	32.75	354	125	Peak																																																															
AVG	Blank	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>42.01</td> <td>54.00</td> <td>-11.99</td> <td>29.01</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>354</td> <td>125</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>103.17</td> <td>-----</td> <td>-----</td> <td>89.64</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>354</td> <td>125</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.45	42.01	54.00	-11.99	29.01	35.92	9.69	32.61	354	125	Peak	2	5720.00	103.17	-----	-----	89.64	36.21	10.01	32.69	354	125	Average																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5459.45	42.01	54.00	-11.99	29.01	35.92	9.69	32.61	354	125	Peak																																																															
2	5720.00	103.17	-----	-----	89.64	36.21	10.01	32.69	354	125	Average																																																															



Mode	29																																																																																																	
	Harmonic																																																																																																	
	Straddle channels_5.47-5.725_802.11a_CH144_5720MHz																																																																																																	
ANT	22																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.96</td> <td>74.00</td> <td>-26.04</td> <td>59.38</td> <td>39.18</td> <td>12.84</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>49.29</td> <td>68.30</td> <td>-19.01</td> <td>57.11</td> <td>41.78</td> <td>15.66</td> <td>65.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	47.96	74.00	-26.04	59.38	39.18	12.84	63.44	---	---	Peak	2	17160.00	49.29	68.30	-19.01	57.11	41.78	15.66	65.26	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.14</td> <td>74.00</td> <td>-25.86</td> <td>59.56</td> <td>39.18</td> <td>12.84</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>49.35</td> <td>68.30</td> <td>-18.95</td> <td>57.17</td> <td>41.78</td> <td>15.66</td> <td>65.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	48.14	74.00	-25.86	59.56	39.18	12.84	63.44	---	---	Peak	2	17160.00	49.35	68.30	-18.95	57.17	41.78	15.66	65.26	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11440.00	47.96	74.00	-26.04	59.38	39.18	12.84	63.44	---	---	Peak																																																																																							
2	17160.00	49.29	68.30	-19.01	57.11	41.78	15.66	65.26	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11440.00	48.14	74.00	-25.86	59.56	39.18	12.84	63.44	---	---	Peak																																																																																							
2	17160.00	49.35	68.30	-18.95	57.17	41.78	15.66	65.26	---	---	Peak																																																																																							



Mode	30																																																																					
	Band Edge																																																																					
	Straddle channels_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																					
ANT	22																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.95</td> <td>50.98</td> <td>74.00</td> <td>-23.02</td> <td>38.23</td> <td>35.99</td> <td>9.39</td> <td>32.63</td> <td>388</td> <td>43 Peak</td> </tr> <tr> <td>2</td> <td>5464.95</td> <td>50.53</td> <td>68.30</td> <td>-17.77</td> <td>37.53</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>388</td> <td>43 Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>104.91</td> <td>-----</td> <td>-----</td> <td>91.38</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>388</td> <td>43 Peak</td> </tr> <tr> <td>4</td> <td>5857.65</td> <td>52.35</td> <td>68.30</td> <td>-15.95</td> <td>38.39</td> <td>36.40</td> <td>10.30</td> <td>32.74</td> <td>388</td> <td>43 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5354.95	50.98	74.00	-23.02	38.23	35.99	9.39	32.63	388	43 Peak	2	5464.95	50.53	68.30	-17.77	37.53	35.92	9.69	32.61	388	43 Peak	3	5720.00	104.91	-----	-----	91.38	36.21	10.01	32.69	388	43 Peak	4	5857.65	52.35	68.30	-15.95	38.39	36.40	10.30	32.74	388	43 Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5354.95	50.98	74.00	-23.02	38.23	35.99	9.39	32.63	388	43 Peak																																																												
2	5464.95	50.53	68.30	-17.77	37.53	35.92	9.69	32.61	388	43 Peak																																																												
3	5720.00	104.91	-----	-----	91.38	36.21	10.01	32.69	388	43 Peak																																																												
4	5857.65	52.35	68.30	-15.95	38.39	36.40	10.30	32.74	388	43 Peak																																																												
AVG	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>41.16</td> <td>54.00</td> <td>-12.84</td> <td>28.16</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>388</td> <td>43 Peak</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>97.58</td> <td>-----</td> <td>-----</td> <td>84.05</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>388</td> <td>43 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.45	41.16	54.00	-12.84	28.16	35.92	9.69	32.61	388	43 Peak	2	5720.00	97.58	-----	-----	84.05	36.21	10.01	32.69	388	43 Average																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5459.45	41.16	54.00	-12.84	28.16	35.92	9.69	32.61	388	43 Peak																																																												
2	5720.00	97.58	-----	-----	84.05	36.21	10.01	32.69	388	43 Average																																																												



Mode	30																																																																									
	Band Edge																																																																									
	Straddle channels_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																									
ANT	22																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.30</td> <td>52.20</td> <td>74.00</td> <td>-21.80</td> <td>39.30</td> <td>35.97</td> <td>9.55</td> <td>32.62</td> <td>345</td> <td>259</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>50.53</td> <td>68.30</td> <td>-17.77</td> <td>37.53</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>345</td> <td>259</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>111.36</td> <td>-----</td> <td>-----</td> <td>97.83</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>345</td> <td>259</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5887.35</td> <td>52.48</td> <td>68.30</td> <td>-15.82</td> <td>38.43</td> <td>36.44</td> <td>10.36</td> <td>32.75</td> <td>345</td> <td>259</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5386.30	52.20	74.00	-21.80	39.30	35.97	9.55	32.62	345	259	Peak	2	5460.00	50.53	68.30	-17.77	37.53	35.92	9.69	32.61	345	259	Peak	3	5720.00	111.36	-----	-----	97.83	36.21	10.01	32.69	345	259	Peak	4	5887.35	52.48	68.30	-15.82	38.43	36.44	10.36	32.75	345	259	Peak
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5386.30	52.20	74.00	-21.80	39.30	35.97	9.55	32.62	345	259	Peak																																																															
2	5460.00	50.53	68.30	-17.77	37.53	35.92	9.69	32.61	345	259	Peak																																																															
3	5720.00	111.36	-----	-----	97.83	36.21	10.01	32.69	345	259	Peak																																																															
4	5887.35	52.48	68.30	-15.82	38.43	36.44	10.36	32.75	345	259	Peak																																																															
AVG	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>41.18</td> <td>54.00</td> <td>-12.82</td> <td>28.18</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>345</td> <td>259</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>103.66</td> <td>-----</td> <td>-----</td> <td>90.13</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>345</td> <td>259</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5460.00	41.18	54.00	-12.82	28.18	35.92	9.69	32.61	345	259	Peak	2	5720.00	103.66	-----	-----	90.13	36.21	10.01	32.69	345	259	Average																								
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5460.00	41.18	54.00	-12.82	28.18	35.92	9.69	32.61	345	259	Peak																																																															
2	5720.00	103.66	-----	-----	90.13	36.21	10.01	32.69	345	259	Average																																																															



Mode	30																																																																																																	
	Harmonic																																																																																																	
	Straddle channels_5.47-5.725_802.11n HT20_CH144_5720MHz																																																																																																	
ANT	22																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.30</td> <td>74.00</td> <td>-26.70</td> <td>58.72</td> <td>39.18</td> <td>12.84</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>50.51</td> <td>68.30</td> <td>-17.79</td> <td>58.33</td> <td>41.78</td> <td>15.66</td> <td>65.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	47.30	74.00	-26.70	58.72	39.18	12.84	63.44	---	---	Peak	2	17160.00	50.51	68.30	-17.79	58.33	41.78	15.66	65.26	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>59.02</td> <td>39.18</td> <td>12.84</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>48.62</td> <td>68.30</td> <td>-19.68</td> <td>56.44</td> <td>41.78</td> <td>15.66</td> <td>65.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	47.60	74.00	-26.40	59.02	39.18	12.84	63.44	---	---	Peak	2	17160.00	48.62	68.30	-19.68	56.44	41.78	15.66	65.26	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11440.00	47.30	74.00	-26.70	58.72	39.18	12.84	63.44	---	---	Peak																																																																																							
2	17160.00	50.51	68.30	-17.79	58.33	41.78	15.66	65.26	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11440.00	47.60	74.00	-26.40	59.02	39.18	12.84	63.44	---	---	Peak																																																																																							
2	17160.00	48.62	68.30	-19.68	56.44	41.78	15.66	65.26	---	---	Peak																																																																																							



Mode	31																																																																					
	Band Edge																																																																					
	Straddle channels_5.47-5.725_802.11n HT40_CH142_5710MHz																																																																					
ANT	22																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.85</td> <td>51.97</td> <td>74.00</td> <td>-22.03</td> <td>39.06</td> <td>35.97</td> <td>9.56</td> <td>32.62</td> <td>394</td> <td>29 Peak</td> </tr> <tr> <td>2</td> <td>5467.15</td> <td>51.62</td> <td>68.30</td> <td>-16.68</td> <td>38.62</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>394</td> <td>29 Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>101.32</td> <td>-----</td> <td>-----</td> <td>87.82</td> <td>36.19</td> <td>9.99</td> <td>32.68</td> <td>394</td> <td>29 Peak</td> </tr> <tr> <td>4</td> <td>5881.30</td> <td>54.12</td> <td>68.30</td> <td>-14.18</td> <td>40.09</td> <td>36.43</td> <td>10.35</td> <td>32.75</td> <td>394</td> <td>29 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5386.85	51.97	74.00	-22.03	39.06	35.97	9.56	32.62	394	29 Peak	2	5467.15	51.62	68.30	-16.68	38.62	35.92	9.69	32.61	394	29 Peak	3	5710.00	101.32	-----	-----	87.82	36.19	9.99	32.68	394	29 Peak	4	5881.30	54.12	68.30	-14.18	40.09	36.43	10.35	32.75	394	29 Peak
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5386.85	51.97	74.00	-22.03	39.06	35.97	9.56	32.62	394	29 Peak																																																												
2	5467.15	51.62	68.30	-16.68	38.62	35.92	9.69	32.61	394	29 Peak																																																												
3	5710.00	101.32	-----	-----	87.82	36.19	9.99	32.68	394	29 Peak																																																												
4	5881.30	54.12	68.30	-14.18	40.09	36.43	10.35	32.75	394	29 Peak																																																												
AVG	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.85</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>29.60</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>394</td> <td>29 Peak</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>94.40</td> <td>-----</td> <td>-----</td> <td>80.90</td> <td>36.19</td> <td>9.99</td> <td>32.68</td> <td>394</td> <td>29 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5452.85	42.60	54.00	-11.40	29.60	35.93	9.68	32.61	394	29 Peak	2	5710.00	94.40	-----	-----	80.90	36.19	9.99	32.68	394	29 Average																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1	5452.85	42.60	54.00	-11.40	29.60	35.93	9.68	32.61	394	29 Peak																																																												
2	5710.00	94.40	-----	-----	80.90	36.19	9.99	32.68	394	29 Average																																																												



Mode	31																																																																									
Mode	Band Edge																																																																									
Mode	Straddle channels_5.47-5.725_802.11n HT40_CH142_5710MHZ																																																																									
ANT	22																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.80</td> <td>52.11</td> <td>74.00</td> <td>-21.89</td> <td>39.10</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> <td>344</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5463.85</td> <td>51.70</td> <td>68.30</td> <td>-16.60</td> <td>38.70</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>344</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5710.00</td> <td>108.38</td> <td>-----</td> <td>-----</td> <td>94.88</td> <td>36.19</td> <td>9.99</td> <td>32.68</td> <td>344</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5865.90</td> <td>53.44</td> <td>68.30</td> <td>-14.86</td> <td>39.47</td> <td>36.41</td> <td>10.31</td> <td>32.75</td> <td>344</td> <td>257</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5457.80	52.11	74.00	-21.89	39.10	35.93	9.69	32.61	344	257	Peak	2	5463.85	51.70	68.30	-16.60	38.70	35.92	9.69	32.61	344	257	Peak	3	5710.00	108.38	-----	-----	94.88	36.19	9.99	32.68	344	257	Peak	4	5865.90	53.44	68.30	-14.86	39.47	36.41	10.31	32.75	344	257	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5457.80	52.11	74.00	-21.89	39.10	35.93	9.69	32.61	344	257	Peak																																																															
2	5463.85	51.70	68.30	-16.60	38.70	35.92	9.69	32.61	344	257	Peak																																																															
3	5710.00	108.38	-----	-----	94.88	36.19	9.99	32.68	344	257	Peak																																																															
4	5865.90	53.44	68.30	-14.86	39.47	36.41	10.31	32.75	344	257	Peak																																																															
AVG	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.10</td> <td>42.76</td> <td>54.00</td> <td>-11.24</td> <td>29.76</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>344</td> <td>257</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5710.00</td> <td>100.83</td> <td>-----</td> <td>-----</td> <td>87.33</td> <td>36.19</td> <td>9.99</td> <td>32.68</td> <td>344</td> <td>257</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5450.10	42.76	54.00	-11.24	29.76	35.93	9.68	32.61	344	257	Peak	2	5710.00	100.83	-----	-----	87.33	36.19	9.99	32.68	344	257	Average																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5450.10	42.76	54.00	-11.24	29.76	35.93	9.68	32.61	344	257	Peak																																																															
2	5710.00	100.83	-----	-----	87.33	36.19	9.99	32.68	344	257	Average																																																															



Mode	32																																																																											
Mode	Band Edge																																																																											
Mode	Straddle channels_5.47-5.725_11ac VHT80_CH138_5690MHZ																																																																											
ANT	22																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5385.20</td> <td>52.89</td> <td>74.00</td> <td>-21.11</td> <td>39.99</td> <td>35.97</td> <td>9.55</td> <td>32.62</td> <td>322</td> <td>315</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>51.95</td> <td>68.30</td> <td>-16.35</td> <td>38.95</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>322</td> <td>315</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>102.95</td> <td>-----</td> <td>-----</td> <td>89.51</td> <td>36.17</td> <td>9.95</td> <td>32.68</td> <td>322</td> <td>315</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5864.25</td> <td>53.25</td> <td>68.30</td> <td>-15.05</td> <td>39.28</td> <td>36.41</td> <td>10.31</td> <td>32.75</td> <td>322</td> <td>315</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5385.20	52.89	74.00	-21.11	39.99	35.97	9.55	32.62	322	315	Peak	2	5468.80	51.95	68.30	-16.35	38.95	35.92	9.69	32.61	322	315	Peak	3	5690.00	102.95	-----	-----	89.51	36.17	9.95	32.68	322	315	Peak	4	5864.25	53.25	68.30	-15.05	39.28	36.41	10.31	32.75	322	315	Peak
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1	5385.20	52.89	74.00	-21.11	39.99	35.97	9.55	32.62	322	315	Peak																																																																	
2	5468.80	51.95	68.30	-16.35	38.95	35.92	9.69	32.61	322	315	Peak																																																																	
3	5690.00	102.95	-----	-----	89.51	36.17	9.95	32.68	322	315	Peak																																																																	
4	5864.25	53.25	68.30	-15.05	39.28	36.41	10.31	32.75	322	315	Peak																																																																	
Peak	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>42.48</td> <td>54.00</td> <td>-11.52</td> <td>29.48</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>322</td> <td>315</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>95.01</td> <td>-----</td> <td>-----</td> <td>81.57</td> <td>36.17</td> <td>9.95</td> <td>32.68</td> <td>322</td> <td>315</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.45	42.48	54.00	-11.52	29.48	35.92	9.69	32.61	322	315	Peak	2	5690.00	95.01	-----	-----	81.57	36.17	9.95	32.68	322	315	Average																								
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1	5459.45	42.48	54.00	-11.52	29.48	35.92	9.69	32.61	322	315	Peak																																																																	
2	5690.00	95.01	-----	-----	81.57	36.17	9.95	32.68	322	315	Average																																																																	



Mode	32																																																																									
Mode	Band Edge																																																																									
Mode	Straddle channels_5.47-5.725_11ac VHT80_CH138_5690MHZ																																																																									
ANT	22																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.55</td> <td>51.63</td> <td>74.00</td> <td>-22.37</td> <td>38.64</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> <td>337</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5468.25</td> <td>50.92</td> <td>68.30</td> <td>-17.38</td> <td>37.92</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> <td>337</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5690.00</td> <td>99.95</td> <td>-----</td> <td>-----</td> <td>86.51</td> <td>36.17</td> <td>9.95</td> <td>32.68</td> <td>337</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5883.50</td> <td>53.72</td> <td>68.30</td> <td>-14.58</td> <td>39.68</td> <td>36.44</td> <td>10.35</td> <td>32.75</td> <td>337</td> <td>262</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5416.55	51.63	74.00	-22.37	38.64	35.95	9.66	32.62	337	262	Peak	2	5468.25	50.92	68.30	-17.38	37.92	35.92	9.69	32.61	337	262	Peak	3	5690.00	99.95	-----	-----	86.51	36.17	9.95	32.68	337	262	Peak	4	5883.50	53.72	68.30	-14.58	39.68	36.44	10.35	32.75	337	262	Peak
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5416.55	51.63	74.00	-22.37	38.64	35.95	9.66	32.62	337	262	Peak																																																															
2	5468.25	50.92	68.30	-17.38	37.92	35.92	9.69	32.61	337	262	Peak																																																															
3	5690.00	99.95	-----	-----	86.51	36.17	9.95	32.68	337	262	Peak																																																															
4	5883.50	53.72	68.30	-14.58	39.68	36.44	10.35	32.75	337	262	Peak																																																															
AVG	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5398.40</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>29.64</td> <td>35.96</td> <td>9.62</td> <td>32.62</td> <td>337</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5690.00</td> <td>92.37</td> <td>-----</td> <td>-----</td> <td>78.93</td> <td>36.17</td> <td>9.95</td> <td>32.68</td> <td>337</td> <td>262</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5398.40	42.60	54.00	-11.40	29.64	35.96	9.62	32.62	337	262	Peak	2	5690.00	92.37	-----	-----	78.93	36.17	9.95	32.68	337	262	Average																								
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5398.40	42.60	54.00	-11.40	29.64	35.96	9.62	32.62	337	262	Peak																																																															
2	5690.00	92.37	-----	-----	78.93	36.17	9.95	32.68	337	262	Average																																																															






Mode	33																																																																																																																																																								
	Harmonic																																																																																																																																																								
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																																								
ANT	22																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7659.99</td> <td>46.05</td> <td>74.00</td> <td>-27.95</td> <td>63.79</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>286</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7659.99</td> <td>38.90</td> <td>54.00</td> <td>-15.10</td> <td>56.64</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>286</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11490.00</td> <td>48.05</td> <td>74.00</td> <td>-25.95</td> <td>59.42</td> <td>39.20</td> <td>12.87</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17235.00</td> <td>49.43</td> <td>68.30</td> <td>-18.87</td> <td>57.15</td> <td>41.86</td> <td>15.72</td> <td>65.30</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7659.99	46.05	74.00	-27.95	63.79	36.93	10.18	64.85	100	286	Peak	2	7659.99	38.90	54.00	-15.10	56.64	36.93	10.18	64.85	100	286	Average	3	11490.00	48.05	74.00	-25.95	59.42	39.20	12.87	63.44	---	---	Peak	4	17235.00	49.43	68.30	-18.87	57.15	41.86	15.72	65.30	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7659.99</td> <td>46.17</td> <td>74.00</td> <td>-27.83</td> <td>63.91</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>244</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7659.99</td> <td>39.01</td> <td>54.00</td> <td>-14.99</td> <td>56.75</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>244</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11490.00</td> <td>47.58</td> <td>74.00</td> <td>-26.42</td> <td>58.95</td> <td>39.20</td> <td>12.87</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17235.00</td> <td>48.74</td> <td>68.30</td> <td>-19.56</td> <td>56.46</td> <td>41.86</td> <td>15.72</td> <td>65.30</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7659.99	46.17	74.00	-27.83	63.91	36.93	10.18	64.85	100	244	Peak	2	7659.99	39.01	54.00	-14.99	56.75	36.93	10.18	64.85	100	244	Average	3	11490.00	47.58	74.00	-26.42	58.95	39.20	12.87	63.44	---	---	Peak	4	17235.00	48.74	68.30	-19.56	56.46	41.86	15.72	65.30	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	7659.99	46.05	74.00	-27.95	63.79	36.93	10.18	64.85	100	286	Peak																																																																																																																																														
2	7659.99	38.90	54.00	-15.10	56.64	36.93	10.18	64.85	100	286	Average																																																																																																																																														
3	11490.00	48.05	74.00	-25.95	59.42	39.20	12.87	63.44	---	---	Peak																																																																																																																																														
4	17235.00	49.43	68.30	-18.87	57.15	41.86	15.72	65.30	---	---	Peak																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	7659.99	46.17	74.00	-27.83	63.91	36.93	10.18	64.85	100	244	Peak																																																																																																																																														
2	7659.99	39.01	54.00	-14.99	56.75	36.93	10.18	64.85	100	244	Average																																																																																																																																														
3	11490.00	47.58	74.00	-26.42	58.95	39.20	12.87	63.44	---	---	Peak																																																																																																																																														
4	17235.00	48.74	68.30	-19.56	56.46	41.86	15.72	65.30	---	---	Peak																																																																																																																																														



Mode	34																																																																																																																																																								
	Harmonic																																																																																																																																																								
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																																								
ANT	22																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7713.14</td> <td>45.81</td> <td>74.00</td> <td>-28.19</td> <td>63.47</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>284</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7713.14</td> <td>38.89</td> <td>54.00</td> <td>-15.11</td> <td>56.55</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>284</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11570.00</td> <td>48.02</td> <td>74.00</td> <td>-25.98</td> <td>59.31</td> <td>39.23</td> <td>12.93</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17355.00</td> <td>48.80</td> <td>68.30</td> <td>-19.50</td> <td>56.36</td> <td>41.99</td> <td>15.81</td> <td>65.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7713.14	45.81	74.00	-28.19	63.47	36.97	10.22	64.85	100	284	Peak	2	7713.14	38.89	54.00	-15.11	56.55	36.97	10.22	64.85	100	284	Average	3	11570.00	48.02	74.00	-25.98	59.31	39.23	12.93	63.45	---	---	Peak	4	17355.00	48.80	68.30	-19.50	56.36	41.99	15.81	65.36	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7707.50</td> <td>45.61</td> <td>74.00</td> <td>-28.39</td> <td>63.28</td> <td>36.97</td> <td>10.21</td> <td>64.85</td> <td>100</td> <td>240</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7713.14</td> <td>38.65</td> <td>54.00</td> <td>-15.35</td> <td>56.31</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>240</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11570.00</td> <td>48.28</td> <td>74.00</td> <td>-25.72</td> <td>59.57</td> <td>39.23</td> <td>12.93</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17355.00</td> <td>48.93</td> <td>68.30</td> <td>-19.37</td> <td>56.49</td> <td>41.99</td> <td>15.81</td> <td>65.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7707.50	45.61	74.00	-28.39	63.28	36.97	10.21	64.85	100	240	Peak	2	7713.14	38.65	54.00	-15.35	56.31	36.97	10.22	64.85	100	240	Average	3	11570.00	48.28	74.00	-25.72	59.57	39.23	12.93	63.45	---	---	Peak	4	17355.00	48.93	68.30	-19.37	56.49	41.99	15.81	65.36	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	7713.14	45.81	74.00	-28.19	63.47	36.97	10.22	64.85	100	284	Peak																																																																																																																																														
2	7713.14	38.89	54.00	-15.11	56.55	36.97	10.22	64.85	100	284	Average																																																																																																																																														
3	11570.00	48.02	74.00	-25.98	59.31	39.23	12.93	63.45	---	---	Peak																																																																																																																																														
4	17355.00	48.80	68.30	-19.50	56.36	41.99	15.81	65.36	---	---	Peak																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	7707.50	45.61	74.00	-28.39	63.28	36.97	10.21	64.85	100	240	Peak																																																																																																																																														
2	7713.14	38.65	54.00	-15.35	56.31	36.97	10.22	64.85	100	240	Average																																																																																																																																														
3	11570.00	48.28	74.00	-25.72	59.57	39.23	12.93	63.45	---	---	Peak																																																																																																																																														
4	17355.00	48.93	68.30	-19.37	56.49	41.99	15.81	65.36	---	---	Peak																																																																																																																																														

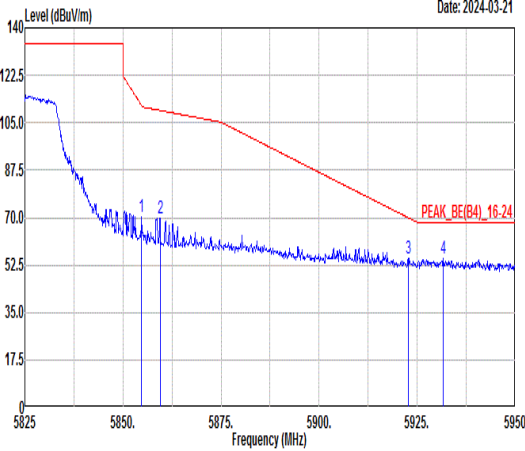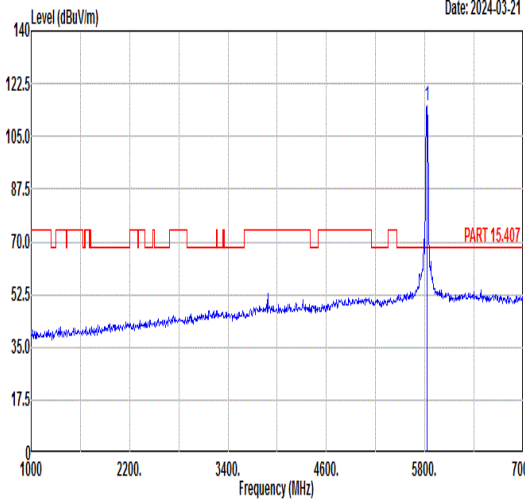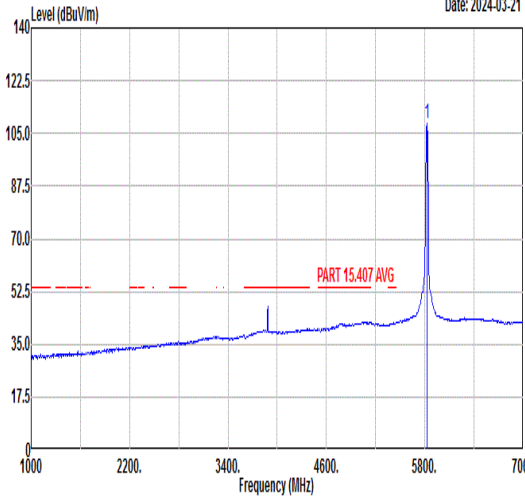

Mode	35																																																																																					
	Band Edge																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																					
ANT	22																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.75</td> <td>70.42</td> <td>111.37</td> <td>-40.95</td> <td>56.08</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5859.50</td> <td>69.56</td> <td>109.54</td> <td>-39.98</td> <td>55.22</td> <td>36.40</td> <td>10.30</td> <td>32.36</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.75</td> <td>55.04</td> <td>69.95</td> <td>-14.91</td> <td>40.54</td> <td>36.49</td> <td>10.43</td> <td>32.42</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.63</td> <td>55.19</td> <td>68.30</td> <td>-13.11</td> <td>40.67</td> <td>36.50</td> <td>10.45</td> <td>32.43</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5854.75	70.42	111.37	-40.95	56.08	36.40	10.29	32.35	100	292	PEAK	2	5859.50	69.56	109.54	-39.98	55.22	36.40	10.30	32.36	100	292	PEAK	3	5922.75	55.04	69.95	-14.91	40.54	36.49	10.43	32.42	100	292	PEAK	4	5931.63	55.19	68.30	-13.11	40.67	36.50	10.45	32.43	100	292	PEAK	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>115.22</td> <td>70.00</td> <td>45.22</td> <td>100.96</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5825.00	115.22	70.00	45.22	100.96	36.35	10.23	32.32	100	292	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5854.75	70.42	111.37	-40.95	56.08	36.40	10.29	32.35	100	292	PEAK																																																																											
2	5859.50	69.56	109.54	-39.98	55.22	36.40	10.30	32.36	100	292	PEAK																																																																											
3	5922.75	55.04	69.95	-14.91	40.54	36.49	10.43	32.42	100	292	PEAK																																																																											
4	5931.63	55.19	68.30	-13.11	40.67	36.50	10.45	32.43	100	292	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5825.00	115.22	70.00	45.22	100.96	36.35	10.23	32.32	100	292	PEAK																																																																											
Avg	Blank	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>108.29</td> <td>52.50</td> <td>55.79</td> <td>94.03</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>100</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5825.00	108.29	52.50	55.79	94.03	36.35	10.23	32.32	100	292	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5825.00	108.29	52.50	55.79	94.03	36.35	10.23	32.32	100	292	AVERAGE																																																																											






Mode	35																																																																									
	Band Edge																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																									
ANT	22																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5855.00 55.14 110.80 -55.66</td> <td>40.80</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>373</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>2 5868.75 59.87 106.95 -47.08</td> <td>45.50</td> <td>36.42</td> <td>10.32</td> <td>32.37</td> <td>373</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>3 5924.88 52.99 68.39 -15.40</td> <td>38.48</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>373</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>4 5938.75 54.41 68.30 -13.89</td> <td>39.87</td> <td>36.51</td> <td>10.47</td> <td>32.44</td> <td>373</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5855.00 55.14 110.80 -55.66	40.80	36.40	10.29	32.35	373	257	PEAK	2 5868.75 59.87 106.95 -47.08	45.50	36.42	10.32	32.37	373	257	PEAK	3 5924.88 52.99 68.39 -15.40	38.48	36.49	10.44	32.42	373	257	PEAK	4 5938.75 54.41 68.30 -13.89	39.87	36.51	10.47	32.44	373	257	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 105.79</td> <td>91.53</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>373</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5825.00 105.79	91.53	36.35	10.23	32.32	373	257	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																																				
1 5855.00 55.14 110.80 -55.66	40.80	36.40	10.29	32.35	373	257	PEAK																																																																			
2 5868.75 59.87 106.95 -47.08	45.50	36.42	10.32	32.37	373	257	PEAK																																																																			
3 5924.88 52.99 68.39 -15.40	38.48	36.49	10.44	32.42	373	257	PEAK																																																																			
4 5938.75 54.41 68.30 -13.89	39.87	36.51	10.47	32.44	373	257	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																																				
1 5825.00 105.79	91.53	36.35	10.23	32.32	373	257	PEAK																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 98.71</td> <td>84.47</td> <td>36.35</td> <td>10.21</td> <td>32.32</td> <td>373</td> <td>257</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5825.00 98.71	84.47	36.35	10.21	32.32	373	257	AVERAGE																																																
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																																				
1 5825.00 98.71	84.47	36.35	10.21	32.32	373	257	AVERAGE																																																																			



Mode	35																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																	
ANT	22																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>46.79</td> <td>74.00</td> <td>-27.21</td> <td>57.99</td> <td>39.26</td> <td>12.99</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.15</td> <td>68.30</td> <td>-18.15</td> <td>57.56</td> <td>42.12</td> <td>15.90</td> <td>65.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	46.79	74.00	-27.21	57.99	39.26	12.99	63.45	---	---	Peak	2	17475.00	50.15	68.30	-18.15	57.56	42.12	15.90	65.43	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.30</td> <td>74.00</td> <td>-24.70</td> <td>60.50</td> <td>39.26</td> <td>12.99</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.47</td> <td>68.30</td> <td>-17.83</td> <td>57.88</td> <td>42.12</td> <td>15.90</td> <td>65.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	49.30	74.00	-24.70	60.50	39.26	12.99	63.45	---	---	Peak	2	17475.00	50.47	68.30	-17.83	57.88	42.12	15.90	65.43	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	46.79	74.00	-27.21	57.99	39.26	12.99	63.45	---	---	Peak																																																																																							
2	17475.00	50.15	68.30	-18.15	57.56	42.12	15.90	65.43	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	49.30	74.00	-24.70	60.50	39.26	12.99	63.45	---	---	Peak																																																																																							
2	17475.00	50.47	68.30	-17.83	57.88	42.12	15.90	65.43	---	---	Peak																																																																																							

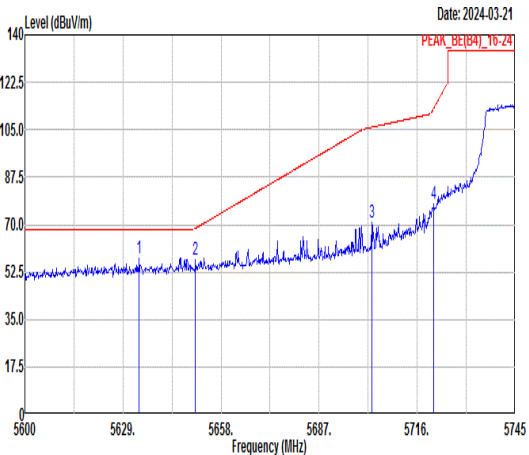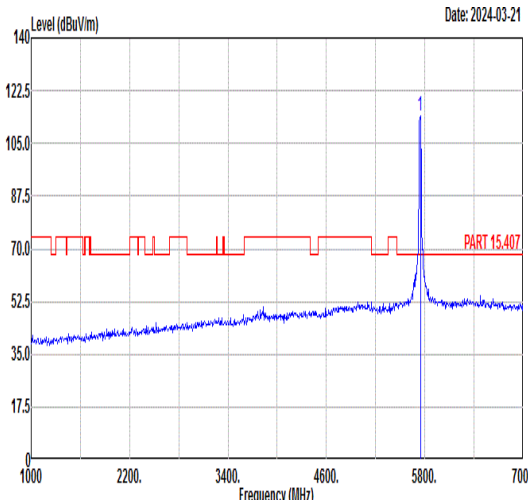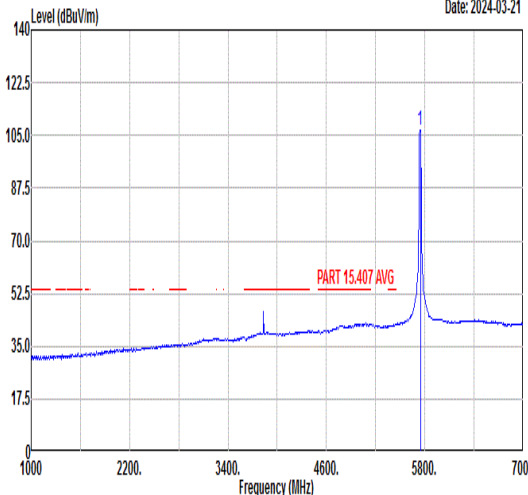

Mode	36																																																																																					
	Band Edge																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																					
ANT	22																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Apos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5633.79</td> <td>57.60</td> <td>68.30</td> <td>-10.70</td> <td>43.81</td> <td>36.09</td> <td>9.83</td> <td>32.13</td> <td>100</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.46</td> <td>57.00</td> <td>68.64</td> <td>-11.64</td> <td>43.18</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>100</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.52</td> <td>70.67</td> <td>105.91</td> <td>-35.24</td> <td>56.72</td> <td>36.18</td> <td>9.97</td> <td>32.20</td> <td>100</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.93</td> <td>77.44</td> <td>112.92</td> <td>-35.48</td> <td>63.44</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Apos (cm)	TPos (deg)	Remark	1	5633.79	57.60	68.30	-10.70	43.81	36.09	9.83	32.13	100	289	PEAK	2	5650.46	57.00	68.64	-11.64	43.18	36.11	9.86	32.15	100	289	PEAK	3	5702.52	70.67	105.91	-35.24	56.72	36.18	9.97	32.20	100	289	PEAK	4	5720.93	77.44	112.92	-35.48	63.44	36.21	10.01	32.22	100	289	PEAK	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Apos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>114.10</td> <td>70.00</td> <td>44.10</td> <td>100.05</td> <td>36.24</td> <td>10.06</td> <td>32.25</td> <td>100</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Apos (cm)	TPos (deg)	Remark	1	5745.00	114.10	70.00	44.10	100.05	36.24	10.06	32.25	100	289	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Apos (cm)	TPos (deg)	Remark																																																																											
1	5633.79	57.60	68.30	-10.70	43.81	36.09	9.83	32.13	100	289	PEAK																																																																											
2	5650.46	57.00	68.64	-11.64	43.18	36.11	9.86	32.15	100	289	PEAK																																																																											
3	5702.52	70.67	105.91	-35.24	56.72	36.18	9.97	32.20	100	289	PEAK																																																																											
4	5720.93	77.44	112.92	-35.48	63.44	36.21	10.01	32.22	100	289	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Apos (cm)	TPos (deg)	Remark																																																																											
1	5745.00	114.10	70.00	44.10	100.05	36.24	10.06	32.25	100	289	PEAK																																																																											
Avg	Blank	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Apos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.86</td> <td>52.50</td> <td>54.36</td> <td>92.81</td> <td>36.24</td> <td>10.06</td> <td>32.25</td> <td>100</td> <td>289</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Apos (cm)	TPos (deg)	Remark	1	5745.00	106.86	52.50	54.36	92.81	36.24	10.06	32.25	100	289	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Apos (cm)	TPos (deg)	Remark																																																																											
1	5745.00	106.86	52.50	54.36	92.81	36.24	10.06	32.25	100	289	AVERAGE																																																																											



Mode	36																																																																																					
	Band Edge																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																					
ANT	22																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.49</td> <td>56.01</td> <td>68.30</td> <td>-12.29</td> <td>42.20</td> <td>36.10</td> <td>9.85</td> <td>32.14</td> <td>390</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.04</td> <td>54.99</td> <td>69.07</td> <td>-14.08</td> <td>41.17</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>390</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.63</td> <td>66.13</td> <td>110.70</td> <td>-44.57</td> <td>52.13</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>390</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.79</td> <td>69.76</td> <td>112.59</td> <td>-42.83</td> <td>55.76</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>390</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5642.49	56.01	68.30	-12.29	42.20	36.10	9.85	32.14	390	247	PEAK	2	5651.04	54.99	69.07	-14.08	41.17	36.11	9.86	32.15	390	247	PEAK	3	5719.63	66.13	110.70	-44.57	52.13	36.21	10.01	32.22	390	247	PEAK	4	5720.79	69.76	112.59	-42.83	55.76	36.21	10.01	32.22	390	247	PEAK	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.75</td> <td>70.00</td> <td>35.75</td> <td>91.70</td> <td>36.24</td> <td>10.06</td> <td>32.25</td> <td>390</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5745.00	105.75	70.00	35.75	91.70	36.24	10.06	32.25	390	247	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																										
1	5642.49	56.01	68.30	-12.29	42.20	36.10	9.85	32.14	390	247	PEAK																																																																											
2	5651.04	54.99	69.07	-14.08	41.17	36.11	9.86	32.15	390	247	PEAK																																																																											
3	5719.63	66.13	110.70	-44.57	52.13	36.21	10.01	32.22	390	247	PEAK																																																																											
4	5720.79	69.76	112.59	-42.83	55.76	36.21	10.01	32.22	390	247	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5745.00	105.75	70.00	35.75	91.70	36.24	10.06	32.25	390	247	PEAK																																																																											
Avg	Blank	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.04</td> <td>70.00</td> <td>28.04</td> <td>83.99</td> <td>36.24</td> <td>10.06</td> <td>32.25</td> <td>390</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5745.00	98.04	70.00	28.04	83.99	36.24	10.06	32.25	390	247	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5745.00	98.04	70.00	28.04	83.99	36.24	10.06	32.25	390	247	AVERAGE																																																																											






Mode	36																																																																																																																																									
	Harmonic																																																																																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																																									
ANT	22																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7659.99</td> <td>45.08</td> <td>74.00</td> <td>-28.92</td> <td>62.82</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>283</td> <td>Peak</td> </tr> <tr> <td>2 7659.99</td> <td>38.46</td> <td>54.00</td> <td>-15.54</td> <td>56.20</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>283</td> <td>Average</td> </tr> <tr> <td>3 11490.00</td> <td>48.39</td> <td>74.00</td> <td>-25.61</td> <td>59.76</td> <td>39.20</td> <td>12.87</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4 17235.00</td> <td>49.24</td> <td>68.30</td> <td>-19.06</td> <td>56.96</td> <td>41.86</td> <td>15.72</td> <td>65.30</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7659.99	45.08	74.00	-28.92	62.82	36.93	10.18	64.85	100	283	Peak	2 7659.99	38.46	54.00	-15.54	56.20	36.93	10.18	64.85	100	283	Average	3 11490.00	48.39	74.00	-25.61	59.76	39.20	12.87	63.44	---	---	Peak	4 17235.00	49.24	68.30	-19.06	56.96	41.86	15.72	65.30	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7659.99</td> <td>44.52</td> <td>74.00</td> <td>-29.48</td> <td>62.26</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>245</td> <td>Peak</td> </tr> <tr> <td>2 7659.99</td> <td>37.84</td> <td>54.00</td> <td>-16.16</td> <td>55.58</td> <td>36.93</td> <td>10.18</td> <td>64.85</td> <td>100</td> <td>245</td> <td>Average</td> </tr> <tr> <td>3 11490.00</td> <td>47.74</td> <td>74.00</td> <td>-26.26</td> <td>59.11</td> <td>39.20</td> <td>12.87</td> <td>63.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4 17235.00</td> <td>49.07</td> <td>68.30</td> <td>-19.23</td> <td>56.79</td> <td>41.86</td> <td>15.72</td> <td>65.30</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7659.99	44.52	74.00	-29.48	62.26	36.93	10.18	64.85	100	245	Peak	2 7659.99	37.84	54.00	-16.16	55.58	36.93	10.18	64.85	100	245	Average	3 11490.00	47.74	74.00	-26.26	59.11	39.20	12.87	63.44	---	---	Peak	4 17235.00	49.07	68.30	-19.23	56.79	41.86	15.72	65.30	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																		
Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																			
1 7659.99	45.08	74.00	-28.92	62.82	36.93	10.18	64.85	100	283	Peak																																																																																																																																
2 7659.99	38.46	54.00	-15.54	56.20	36.93	10.18	64.85	100	283	Average																																																																																																																																
3 11490.00	48.39	74.00	-25.61	59.76	39.20	12.87	63.44	---	---	Peak																																																																																																																																
4 17235.00	49.24	68.30	-19.06	56.96	41.86	15.72	65.30	---	---	Peak																																																																																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																			
Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																			
1 7659.99	44.52	74.00	-29.48	62.26	36.93	10.18	64.85	100	245	Peak																																																																																																																																
2 7659.99	37.84	54.00	-16.16	55.58	36.93	10.18	64.85	100	245	Average																																																																																																																																
3 11490.00	47.74	74.00	-26.26	59.11	39.20	12.87	63.44	---	---	Peak																																																																																																																																
4 17235.00	49.07	68.30	-19.23	56.79	41.86	15.72	65.30	---	---	Peak																																																																																																																																



Mode	37																																																																																																																																																								
	Harmonic																																																																																																																																																								
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																																																																								
ANT	22																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7713.14</td> <td>45.61</td> <td>74.00</td> <td>-28.39</td> <td>63.27</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>282</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7713.14</td> <td>38.10</td> <td>54.00</td> <td>-15.90</td> <td>55.76</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>282</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11570.00</td> <td>48.26</td> <td>74.00</td> <td>-25.74</td> <td>59.55</td> <td>39.23</td> <td>12.93</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17355.00</td> <td>49.02</td> <td>68.30</td> <td>-19.28</td> <td>56.58</td> <td>41.99</td> <td>15.81</td> <td>65.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7713.14	45.61	74.00	-28.39	63.27	36.97	10.22	64.85	100	282	Peak	2	7713.14	38.10	54.00	-15.90	55.76	36.97	10.22	64.85	100	282	Average	3	11570.00	48.26	74.00	-25.74	59.55	39.23	12.93	63.45	---	---	Peak	4	17355.00	49.02	68.30	-19.28	56.58	41.99	15.81	65.36	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7713.14</td> <td>45.21</td> <td>74.00</td> <td>-28.79</td> <td>62.87</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>240</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7713.14</td> <td>38.03</td> <td>54.00</td> <td>-15.97</td> <td>55.69</td> <td>36.97</td> <td>10.22</td> <td>64.85</td> <td>100</td> <td>240</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11570.00</td> <td>48.14</td> <td>74.00</td> <td>-25.86</td> <td>59.43</td> <td>39.23</td> <td>12.93</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17355.00</td> <td>48.90</td> <td>68.30</td> <td>-19.40</td> <td>56.46</td> <td>41.99</td> <td>15.81</td> <td>65.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7713.14	45.21	74.00	-28.79	62.87	36.97	10.22	64.85	100	240	Peak	2	7713.14	38.03	54.00	-15.97	55.69	36.97	10.22	64.85	100	240	Average	3	11570.00	48.14	74.00	-25.86	59.43	39.23	12.93	63.45	---	---	Peak	4	17355.00	48.90	68.30	-19.40	56.46	41.99	15.81	65.36	---	---
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	7713.14	45.61	74.00	-28.39	63.27	36.97	10.22	64.85	100	282	Peak																																																																																																																																														
2	7713.14	38.10	54.00	-15.90	55.76	36.97	10.22	64.85	100	282	Average																																																																																																																																														
3	11570.00	48.26	74.00	-25.74	59.55	39.23	12.93	63.45	---	---	Peak																																																																																																																																														
4	17355.00	49.02	68.30	-19.28	56.58	41.99	15.81	65.36	---	---	Peak																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	7713.14	45.21	74.00	-28.79	62.87	36.97	10.22	64.85	100	240	Peak																																																																																																																																														
2	7713.14	38.03	54.00	-15.97	55.69	36.97	10.22	64.85	100	240	Average																																																																																																																																														
3	11570.00	48.14	74.00	-25.86	59.43	39.23	12.93	63.45	---	---	Peak																																																																																																																																														
4	17355.00	48.90	68.30	-19.40	56.46	41.99	15.81	65.36	---	---	Peak																																																																																																																																														

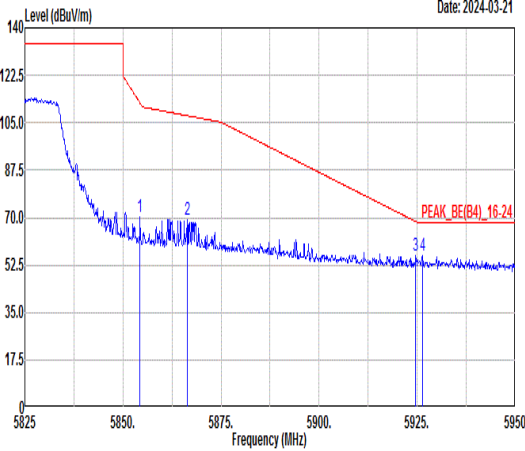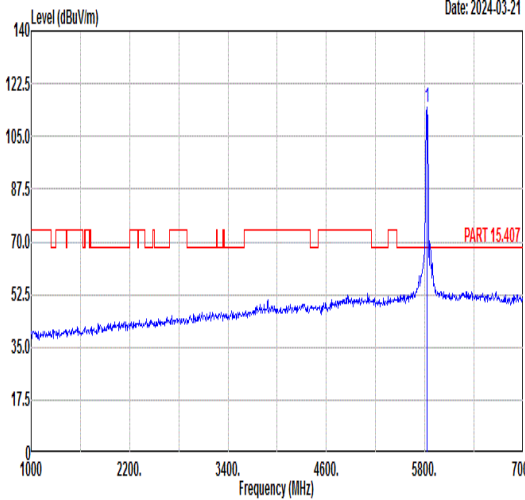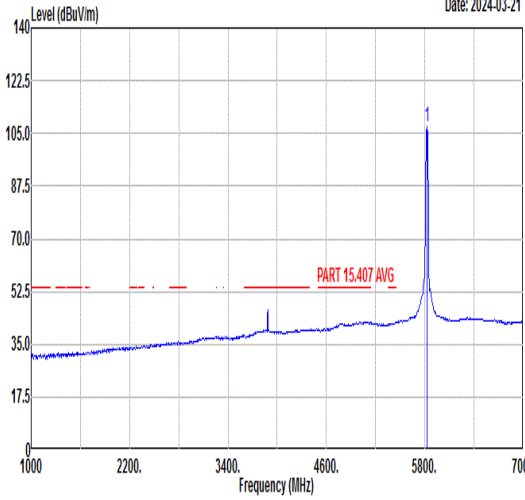

Mode	38																																																																																																																					
	Band Edge																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																					
ANT	22																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.38</td> <td>70.39</td> <td>112.22</td> <td>-41.83</td> <td>56.05</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>105</td> <td>294</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5866.38</td> <td>69.13</td> <td>107.61</td> <td>-38.48</td> <td>54.77</td> <td>36.41</td> <td>10.32</td> <td>32.37</td> <td>105</td> <td>294</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>55.80</td> <td>68.58</td> <td>-12.78</td> <td>41.29</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>105</td> <td>294</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.38</td> <td>55.87</td> <td>68.30</td> <td>-12.43</td> <td>41.36</td> <td>36.50</td> <td>10.44</td> <td>32.43</td> <td>105</td> <td>294</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.38	70.39	112.22	-41.83	56.05	36.40	10.29	32.35	105	294	PEAK	2	5866.38	69.13	107.61	-38.48	54.77	36.41	10.32	32.37	105	294	PEAK	3	5924.63	55.80	68.58	-12.78	41.29	36.49	10.44	32.42	105	294	PEAK	4	5926.38	55.87	68.30	-12.43	41.36	36.50	10.44	32.43	105	294	PEAK	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>114.74</td> <td>-----</td> <td>-----</td> <td>100.48</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>105</td> <td>294</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	114.74	-----	-----	100.48	36.35	10.23	32.32	105	294	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5854.38	70.39	112.22	-41.83	56.05	36.40	10.29	32.35	105	294	PEAK																																																																																																											
2	5866.38	69.13	107.61	-38.48	54.77	36.41	10.32	32.37	105	294	PEAK																																																																																																											
3	5924.63	55.80	68.58	-12.78	41.29	36.49	10.44	32.42	105	294	PEAK																																																																																																											
4	5926.38	55.87	68.30	-12.43	41.36	36.50	10.44	32.43	105	294	PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5825.00	114.74	-----	-----	100.48	36.35	10.23	32.32	105	294	PEAK																																																																																																											
Avg	Blank	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.24</td> <td>-----</td> <td>-----</td> <td>92.98</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>105</td> <td>294</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	107.24	-----	-----	92.98	36.35	10.23	32.32	105	294	AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5825.00	107.24	-----	-----	92.98	36.35	10.23	32.32	105	294	AVERAGE																																																																																																											






Mode	38																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																			
ANT	22																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.75</td> <td>62.43</td> <td>113.65</td> <td>-51.22</td> <td>48.09</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.75</td> <td>62.58</td> <td>110.31</td> <td>-47.73</td> <td>48.24</td> <td>36.40</td> <td>10.30</td> <td>32.36</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.50</td> <td>53.08</td> <td>68.67</td> <td>-15.59</td> <td>38.57</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.00</td> <td>53.39</td> <td>68.30</td> <td>-14.91</td> <td>38.87</td> <td>36.50</td> <td>10.45</td> <td>32.43</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5853.75	62.43	113.65	-51.22	48.09	36.40	10.29	32.35	100	243	PEAK	2	5856.75	62.58	110.31	-47.73	48.24	36.40	10.30	32.36	100	243	PEAK	3	5924.50	53.08	68.67	-15.59	38.57	36.49	10.44	32.42	100	243	PEAK	4	5928.00	53.39	68.30	-14.91	38.87	36.50	10.45	32.43	100	243	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.13</td> <td>-----</td> <td>-----</td> <td>91.87</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.13	-----	-----	91.87	36.35	10.23	32.32	100	243	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5853.75	62.43	113.65	-51.22	48.09	36.40	10.29	32.35	100	243	PEAK																																																																																																									
2	5856.75	62.58	110.31	-47.73	48.24	36.40	10.30	32.36	100	243	PEAK																																																																																																									
3	5924.50	53.08	68.67	-15.59	38.57	36.49	10.44	32.42	100	243	PEAK																																																																																																									
4	5928.00	53.39	68.30	-14.91	38.87	36.50	10.45	32.43	100	243	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5825.00	106.13	-----	-----	91.87	36.35	10.23	32.32	100	243	PEAK																																																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.12</td> <td>-----</td> <td>-----</td> <td>84.86</td> <td>36.35</td> <td>10.23</td> <td>32.32</td> <td>100</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	99.12	-----	-----	84.86	36.35	10.23	32.32	100	243	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5825.00	99.12	-----	-----	84.86	36.35	10.23	32.32	100	243	AVERAGE																																																																																																									



Mode	38																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																	
ANT	22																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.69</td> <td>74.00</td> <td>-26.31</td> <td>58.89</td> <td>39.26</td> <td>12.99</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.16</td> <td>68.30</td> <td>-18.14</td> <td>57.57</td> <td>42.12</td> <td>15.90</td> <td>65.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.69	74.00	-26.31	58.89	39.26	12.99	63.45	---	---	Peak	2	17475.00	50.16	68.30	-18.14	57.57	42.12	15.90	65.43	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.47</td> <td>74.00</td> <td>-25.53</td> <td>59.67</td> <td>39.26</td> <td>12.99</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.27</td> <td>68.30</td> <td>-18.03</td> <td>57.68</td> <td>42.12</td> <td>15.90</td> <td>65.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	48.47	74.00	-25.53	59.67	39.26	12.99	63.45	---	---	Peak	2	17475.00	50.27	68.30	-18.03	57.68	42.12	15.90	65.43	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	47.69	74.00	-26.31	58.89	39.26	12.99	63.45	---	---	Peak																																																																																							
2	17475.00	50.16	68.30	-18.14	57.57	42.12	15.90	65.43	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	48.47	74.00	-25.53	59.67	39.26	12.99	63.45	---	---	Peak																																																																																							
2	17475.00	50.27	68.30	-18.03	57.68	42.12	15.90	65.43	---	---	Peak																																																																																							

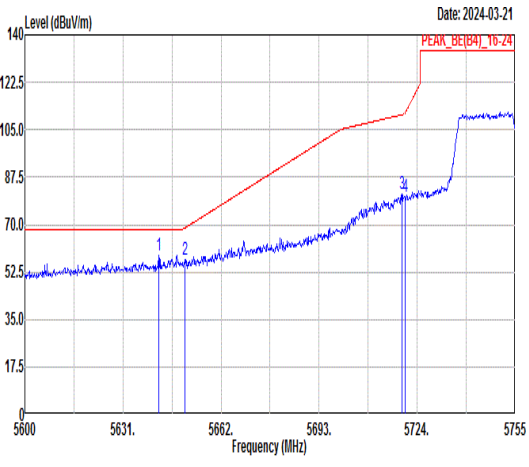
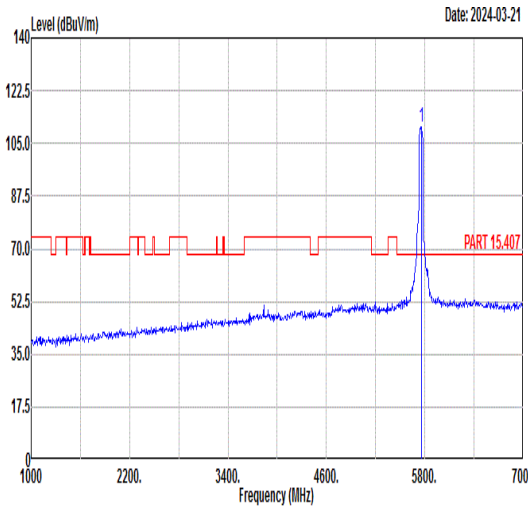
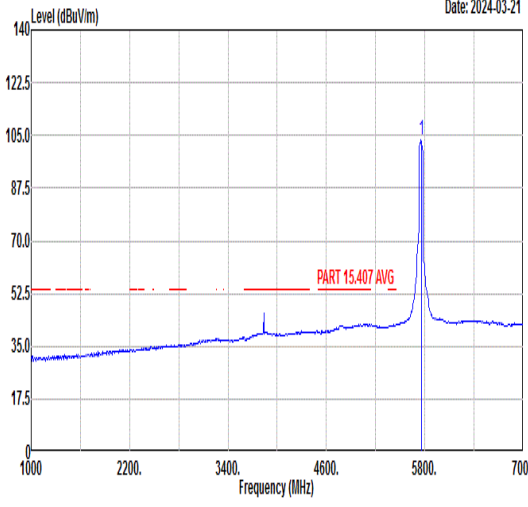


Mode	39																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																					
ANT	22																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.32</td> <td>58.75</td> <td>68.30</td> <td>-9.55</td> <td>44.95</td> <td>36.10</td> <td>9.84</td> <td>32.14</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.69</td> <td>56.93</td> <td>68.81</td> <td>-11.88</td> <td>43.11</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.20</td> <td>81.32</td> <td>110.57</td> <td>-29.25</td> <td>67.32</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.13</td> <td>80.05</td> <td>111.09</td> <td>-31.04</td> <td>66.05</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5642.32	58.75	68.30	-9.55	44.95	36.10	9.84	32.14	100	292	PEAK	2	5650.69	56.93	68.81	-11.88	43.11	36.11	9.86	32.15	100	292	PEAK	3	5719.20	81.32	110.57	-29.25	67.32	36.21	10.01	32.22	100	292	PEAK	4	5720.13	80.05	111.09	-31.04	66.05	36.21	10.01	32.22	100	292	PEAK	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>110.62</td> <td>-----</td> <td>-----</td> <td>96.54</td> <td>36.25</td> <td>10.08</td> <td>32.25</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5755.00	110.62	-----	-----	96.54	36.25	10.08	32.25	100	292	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5642.32	58.75	68.30	-9.55	44.95	36.10	9.84	32.14	100	292	PEAK																																																																											
2	5650.69	56.93	68.81	-11.88	43.11	36.11	9.86	32.15	100	292	PEAK																																																																											
3	5719.20	81.32	110.57	-29.25	67.32	36.21	10.01	32.22	100	292	PEAK																																																																											
4	5720.13	80.05	111.09	-31.04	66.05	36.21	10.01	32.22	100	292	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5755.00	110.62	-----	-----	96.54	36.25	10.08	32.25	100	292	PEAK																																																																											
Avg	Blank	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>103.32</td> <td>-----</td> <td>-----</td> <td>89.24</td> <td>36.25</td> <td>10.08</td> <td>32.25</td> <td>100</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5755.00	103.32	-----	-----	89.24	36.25	10.08	32.25	100	292	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5755.00	103.32	-----	-----	89.24	36.25	10.08	32.25	100	292	AVERAGE																																																																											



Mode	39																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																			
ANT	22																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>55.54</td> <td>111.17</td> <td>-55.63</td> <td>41.20</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>54.98</td> <td>105.22</td> <td>-50.24</td> <td>40.60</td> <td>36.42</td> <td>10.33</td> <td>32.37</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>54.53</td> <td>68.56</td> <td>-14.03</td> <td>40.02</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5941.03</td> <td>53.69</td> <td>68.30</td> <td>-14.61</td> <td>39.14</td> <td>36.52</td> <td>10.47</td> <td>32.44</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5854.84	55.54	111.17	-55.63	41.20	36.40	10.29	32.35	100	292	PEAK	2	5874.93	54.98	105.22	-50.24	40.60	36.42	10.33	32.37	100	292	PEAK	3	5924.65	54.53	68.56	-14.03	40.02	36.49	10.44	32.42	100	292	PEAK	4	5941.03	53.69	68.30	-14.61	39.14	36.52	10.47	32.44	100	292	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																												
1	5854.84	55.54	111.17	-55.63	41.20	36.40	10.29	32.35	100	292	PEAK																																																									
2	5874.93	54.98	105.22	-50.24	40.60	36.42	10.33	32.37	100	292	PEAK																																																									
3	5924.65	54.53	68.56	-14.03	40.02	36.49	10.44	32.42	100	292	PEAK																																																									
4	5941.03	53.69	68.30	-14.61	39.14	36.52	10.47	32.44	100	292	PEAK																																																									

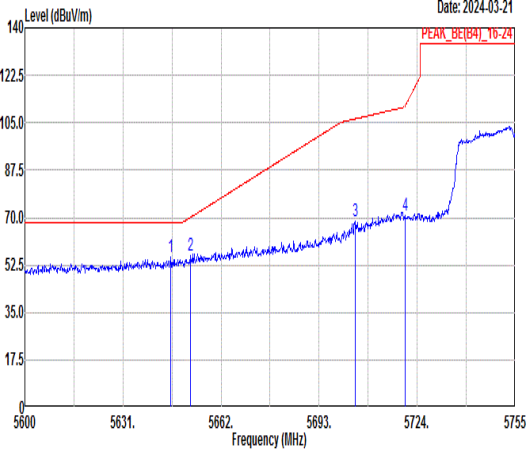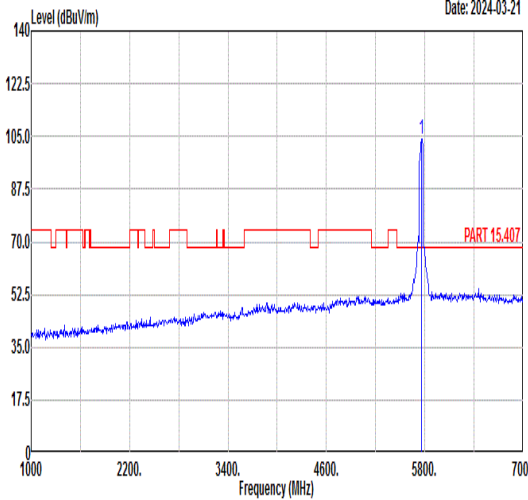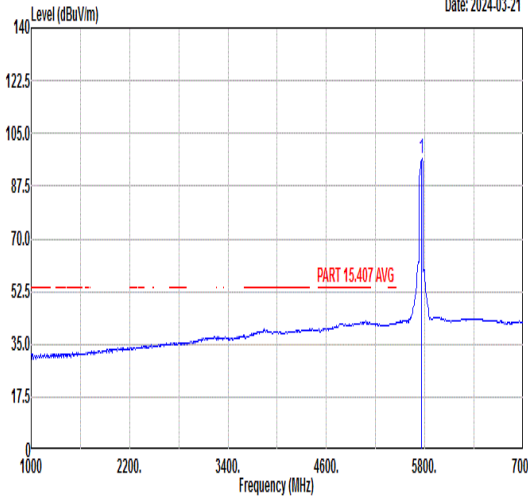

Mode	39																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																					
ANT	22																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5646.19</td> <td>55.48</td> <td>68.30</td> <td>-12.82</td> <td>41.68</td> <td>36.10</td> <td>9.85</td> <td>32.15</td> <td>369</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.24</td> <td>55.78</td> <td>69.96</td> <td>-14.18</td> <td>41.95</td> <td>36.11</td> <td>9.87</td> <td>32.15</td> <td>369</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.32</td> <td>68.47</td> <td>106.41</td> <td>-37.94</td> <td>54.50</td> <td>36.19</td> <td>9.98</td> <td>32.20</td> <td>369</td> <td>247</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.13</td> <td>70.68</td> <td>111.09</td> <td>-40.41</td> <td>56.68</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>369</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5646.19	55.48	68.30	-12.82	41.68	36.10	9.85	32.15	369	247	PEAK	2	5652.24	55.78	69.96	-14.18	41.95	36.11	9.87	32.15	369	247	PEAK	3	5704.32	68.47	106.41	-37.94	54.50	36.19	9.98	32.20	369	247	PEAK	4	5720.13	70.68	111.09	-40.41	56.68	36.21	10.01	32.22	369	247	PEAK	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>104.16</td> <td>-----</td> <td>-----</td> <td>90.04</td> <td>36.28</td> <td>10.11</td> <td>32.27</td> <td>369</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5755.00	104.16	-----	-----	90.04	36.28	10.11	32.27	369	247	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5646.19	55.48	68.30	-12.82	41.68	36.10	9.85	32.15	369	247	PEAK																																																																											
2	5652.24	55.78	69.96	-14.18	41.95	36.11	9.87	32.15	369	247	PEAK																																																																											
3	5704.32	68.47	106.41	-37.94	54.50	36.19	9.98	32.20	369	247	PEAK																																																																											
4	5720.13	70.68	111.09	-40.41	56.68	36.21	10.01	32.22	369	247	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5755.00	104.16	-----	-----	90.04	36.28	10.11	32.27	369	247	PEAK																																																																											
Avg	Blank	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.57</td> <td>-----</td> <td>-----</td> <td>82.45</td> <td>36.28</td> <td>10.11</td> <td>32.27</td> <td>369</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5755.00	96.57	-----	-----	82.45	36.28	10.11	32.27	369	247	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV/m)	Ant Level (dBuV/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5755.00	96.57	-----	-----	82.45	36.28	10.11	32.27	369	247	AVERAGE																																																																											



Mode	39																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																			
ANT	22																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>52.13</td> <td>111.17</td> <td>-59.04</td> <td>37.79</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>369</td> <td>247 PEAK</td> </tr> <tr> <td>2</td> <td>5870.25</td> <td>52.66</td> <td>106.53</td> <td>-53.87</td> <td>38.29</td> <td>36.42</td> <td>10.32</td> <td>32.37</td> <td>369</td> <td>247 PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>52.17</td> <td>68.56</td> <td>-16.39</td> <td>37.66</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>369</td> <td>247 PEAK</td> </tr> <tr> <td>4</td> <td>5939.08</td> <td>53.05</td> <td>68.30</td> <td>-15.25</td> <td>38.51</td> <td>36.51</td> <td>10.47</td> <td>32.44</td> <td>369</td> <td>247 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5854.84	52.13	111.17	-59.04	37.79	36.40	10.29	32.35	369	247 PEAK	2	5870.25	52.66	106.53	-53.87	38.29	36.42	10.32	32.37	369	247 PEAK	3	5924.65	52.17	68.56	-16.39	37.66	36.49	10.44	32.42	369	247 PEAK	4	5939.08	53.05	68.30	-15.25	38.51	36.51	10.47	32.44	369	247 PEAK	Blank
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5854.84	52.13	111.17	-59.04	37.79	36.40	10.29	32.35	369	247 PEAK																																																										
2	5870.25	52.66	106.53	-53.87	38.29	36.42	10.32	32.37	369	247 PEAK																																																										
3	5924.65	52.17	68.56	-16.39	37.66	36.49	10.44	32.42	369	247 PEAK																																																										
4	5939.08	53.05	68.30	-15.25	38.51	36.51	10.47	32.44	369	247 PEAK																																																										



Mode	39																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																	
ANT	22																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>47.19</td> <td>74.00</td> <td>-26.81</td> <td>58.55</td> <td>39.20</td> <td>12.89</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>49.13</td> <td>68.30</td> <td>-19.17</td> <td>56.82</td> <td>41.89</td> <td>15.74</td> <td>65.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11510.00	47.19	74.00	-26.81	58.55	39.20	12.89	63.45	---	---	Peak	2	17265.00	49.13	68.30	-19.17	56.82	41.89	15.74	65.32	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>48.22</td> <td>74.00</td> <td>-25.78</td> <td>59.58</td> <td>39.20</td> <td>12.89</td> <td>63.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>48.73</td> <td>68.30</td> <td>-19.57</td> <td>56.42</td> <td>41.89</td> <td>15.74</td> <td>65.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11510.00	48.22	74.00	-25.78	59.58	39.20	12.89	63.45	---	---	Peak	2	17265.00	48.73	68.30	-19.57	56.42	41.89	15.74	65.32	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11510.00	47.19	74.00	-26.81	58.55	39.20	12.89	63.45	---	---	Peak																																																																																							
2	17265.00	49.13	68.30	-19.17	56.82	41.89	15.74	65.32	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11510.00	48.22	74.00	-25.78	59.58	39.20	12.89	63.45	---	---	Peak																																																																																							
2	17265.00	48.73	68.30	-19.57	56.42	41.89	15.74	65.32	---	---	Peak																																																																																							



Mode	40																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																					
ANT	22																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.40</td> <td>54.50</td> <td>68.30</td> <td>-13.80</td> <td>40.73</td> <td>36.08</td> <td>9.82</td> <td>32.13</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.31</td> <td>53.38</td> <td>68.53</td> <td>-15.15</td> <td>39.56</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.52</td> <td>62.86</td> <td>106.47</td> <td>-43.61</td> <td>48.89</td> <td>36.19</td> <td>9.98</td> <td>32.20</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>64.21</td> <td>111.52</td> <td>-47.31</td> <td>50.21</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	5631.40	54.50	68.30	-13.80	40.73	36.08	9.82	32.13	100	296	PEAK	2	5650.31	53.38	68.53	-15.15	39.56	36.11	9.86	32.15	100	296	PEAK	3	5704.52	62.86	106.47	-43.61	48.89	36.19	9.98	32.20	100	296	PEAK	4	5720.32	64.21	111.52	-47.31	50.21	36.21	10.01	32.22	100	296	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>111.59</td> <td>70.00</td> <td>41.59</td> <td>97.39</td> <td>36.32</td> <td>10.18</td> <td>32.30</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	111.59	70.00	41.59	97.39	36.32	10.18	32.30	100	296	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																										
1	5631.40	54.50	68.30	-13.80	40.73	36.08	9.82	32.13	100	296	PEAK																																																																											
2	5650.31	53.38	68.53	-15.15	39.56	36.11	9.86	32.15	100	296	PEAK																																																																											
3	5704.52	62.86	106.47	-43.61	48.89	36.19	9.98	32.20	100	296	PEAK																																																																											
4	5720.32	64.21	111.52	-47.31	50.21	36.21	10.01	32.22	100	296	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	111.59	70.00	41.59	97.39	36.32	10.18	32.30	100	296	PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>104.51</td> <td>52.50</td> <td>52.01</td> <td>90.31</td> <td>36.32</td> <td>10.18</td> <td>32.30</td> <td>100</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	104.51	52.50	52.01	90.31	36.32	10.18	32.30	100	296	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	104.51	52.50	52.01	90.31	36.32	10.18	32.30	100	296	AVERAGE																																																																											



Mode	40																																																																				
	Band Edge - R																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																				
ANT	22																																																																				
Pol.	Horizontal	Fundamental																																																																			
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.21</td> <td>64.35</td> <td>112.60</td> <td>-48.25</td> <td>50.01</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.12</td> <td>62.51</td> <td>105.73</td> <td>-43.22</td> <td>48.13</td> <td>36.42</td> <td>10.33</td> <td>32.37</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.34</td> <td>55.04</td> <td>69.52</td> <td>-14.48</td> <td>40.53</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5949.85</td> <td>54.34</td> <td>68.30</td> <td>-13.96</td> <td>39.77</td> <td>36.53</td> <td>10.49</td> <td>32.45</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5854.21	64.35	112.60	-48.25	50.01	36.40	10.29	32.35	100	296	PEAK	2	5873.12	62.51	105.73	-43.22	48.13	36.42	10.33	32.37	100	296	PEAK	3	5923.34	55.04	69.52	-14.48	40.53	36.49	10.44	32.42	100	296	PEAK	4	5949.85	54.34	68.30	-13.96	39.77	36.53	10.49	32.45	100	296	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg																																																												
1	5854.21	64.35	112.60	-48.25	50.01	36.40	10.29	32.35	100	296	PEAK																																																										
2	5873.12	62.51	105.73	-43.22	48.13	36.42	10.33	32.37	100	296	PEAK																																																										
3	5923.34	55.04	69.52	-14.48	40.53	36.49	10.44	32.42	100	296	PEAK																																																										
4	5949.85	54.34	68.30	-13.96	39.77	36.53	10.49	32.45	100	296	PEAK																																																										



Mode	40																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																					
ANT	22																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5635.30</td> <td>52.74</td> <td>68.30</td> <td>-15.56</td> <td>38.96</td> <td>36.09</td> <td>9.83</td> <td>32.14</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.68</td> <td>53.08</td> <td>69.54</td> <td>-16.46</td> <td>39.26</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.62</td> <td>54.80</td> <td>105.37</td> <td>-50.57</td> <td>40.85</td> <td>36.18</td> <td>9.97</td> <td>32.20</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>56.37</td> <td>111.52</td> <td>-55.15</td> <td>42.37</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5635.30	52.74	68.30	-15.56	38.96	36.09	9.83	32.14	100	245	PEAK	2	5651.68	53.08	69.54	-16.46	39.26	36.11	9.86	32.15	100	245	PEAK	3	5700.62	54.80	105.37	-50.57	40.85	36.18	9.97	32.20	100	245	PEAK	4	5720.32	56.37	111.52	-55.15	42.37	36.21	10.01	32.22	100	245	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>104.37</td> <td>70.00</td> <td>34.37</td> <td>90.19</td> <td>36.31</td> <td>10.16</td> <td>32.29</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	104.37	70.00	34.37	90.19	36.31	10.16	32.29	100	245	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5635.30	52.74	68.30	-15.56	38.96	36.09	9.83	32.14	100	245	PEAK																																																																											
2	5651.68	53.08	69.54	-16.46	39.26	36.11	9.86	32.15	100	245	PEAK																																																																											
3	5700.62	54.80	105.37	-50.57	40.85	36.18	9.97	32.20	100	245	PEAK																																																																											
4	5720.32	56.37	111.52	-55.15	42.37	36.21	10.01	32.22	100	245	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	104.37	70.00	34.37	90.19	36.31	10.16	32.29	100	245	PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>97.86</td> <td>52.50</td> <td>45.36</td> <td>83.68</td> <td>36.31</td> <td>10.16</td> <td>32.29</td> <td>100</td> <td>245</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5795.00	97.86	52.50	45.36	83.68	36.31	10.16	32.29	100	245	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5795.00	97.86	52.50	45.36	83.68	36.31	10.16	32.29	100	245	AVERAGE																																																																											



Mode	40																																																																				
	Band Edge - R																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																				
ANT	22																																																																				
Pol.	Vertical	Fundamental																																																																			
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.37</td> <td>58.21</td> <td>112.25</td> <td>-54.04</td> <td>43.87</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.74</td> <td>56.72</td> <td>105.55</td> <td>-48.83</td> <td>42.34</td> <td>36.42</td> <td>10.33</td> <td>32.37</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.43</td> <td>51.71</td> <td>68.72</td> <td>-17.01</td> <td>37.20</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.54</td> <td>54.07</td> <td>68.30</td> <td>-14.23</td> <td>39.55</td> <td>36.50</td> <td>10.45</td> <td>32.43</td> <td>100</td> <td>245</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5854.37	58.21	112.25	-54.04	43.87	36.40	10.29	32.35	100	245	PEAK	2	5873.74	56.72	105.55	-48.83	42.34	36.42	10.33	32.37	100	245	PEAK	3	5924.43	51.71	68.72	-17.01	37.20	36.49	10.44	32.42	100	245	PEAK	4	5929.54	54.07	68.30	-14.23	39.55	36.50	10.45	32.43	100	245	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg																																																												
1	5854.37	58.21	112.25	-54.04	43.87	36.40	10.29	32.35	100	245	PEAK																																																										
2	5873.74	56.72	105.55	-48.83	42.34	36.42	10.33	32.37	100	245	PEAK																																																										
3	5924.43	51.71	68.72	-17.01	37.20	36.49	10.44	32.42	100	245	PEAK																																																										
4	5929.54	54.07	68.30	-14.23	39.55	36.50	10.45	32.43	100	245	PEAK																																																										






Mode	41																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																					
ANT	22																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.10</td> <td>55.79</td> <td>68.30</td> <td>-12.51</td> <td>41.98</td> <td>36.10</td> <td>9.85</td> <td>32.14</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>54.75</td> <td>68.47</td> <td>-13.72</td> <td>40.93</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.60</td> <td>74.54</td> <td>106.21</td> <td>-31.67</td> <td>60.58</td> <td>36.19</td> <td>9.97</td> <td>32.20</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.23</td> <td>77.50</td> <td>111.31</td> <td>-33.81</td> <td>63.50</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	5644.10	55.79	68.30	-12.51	41.98	36.10	9.85	32.14	100	293	PEAK	2	5650.23	54.75	68.47	-13.72	40.93	36.11	9.86	32.15	100	293	PEAK	3	5703.60	74.54	106.21	-31.67	60.58	36.19	9.97	32.20	100	293	PEAK	4	5720.23	77.50	111.31	-33.81	63.50	36.21	10.01	32.22	100	293	PEAK	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>106.47</td> <td>70.00</td> <td>36.47</td> <td>92.27</td> <td>36.32</td> <td>10.18</td> <td>32.30</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	5775.00	106.47	70.00	36.47	92.27	36.32	10.18	32.30	100	293	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																										
1	5644.10	55.79	68.30	-12.51	41.98	36.10	9.85	32.14	100	293	PEAK																																																																											
2	5650.23	54.75	68.47	-13.72	40.93	36.11	9.86	32.15	100	293	PEAK																																																																											
3	5703.60	74.54	106.21	-31.67	60.58	36.19	9.97	32.20	100	293	PEAK																																																																											
4	5720.23	77.50	111.31	-33.81	63.50	36.21	10.01	32.22	100	293	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5775.00	106.47	70.00	36.47	92.27	36.32	10.18	32.30	100	293	PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>98.97</td> <td>52.50</td> <td>46.47</td> <td>84.85</td> <td>36.28</td> <td>10.11</td> <td>32.27</td> <td>100</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	5775.00	98.97	52.50	46.47	84.85	36.28	10.11	32.27	100	293	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5775.00	98.97	52.50	46.47	84.85	36.28	10.11	32.27	100	293	AVERAGE																																																																											



Mode	41																																																																				
	Band Edge - R																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																				
ANT	22																																																																				
Pol.	Horizontal	Fundamental																																																																			
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>66.99</td> <td>111.65</td> <td>-44.66</td> <td>52.65</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5870.55</td> <td>67.11</td> <td>106.44</td> <td>-39.33</td> <td>52.74</td> <td>36.42</td> <td>10.32</td> <td>32.37</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>52.92</td> <td>68.45</td> <td>-15.53</td> <td>38.41</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.50</td> <td>55.00</td> <td>68.30</td> <td>-13.30</td> <td>40.49</td> <td>36.50</td> <td>10.44</td> <td>32.43</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5854.63	66.99	111.65	-44.66	52.65	36.40	10.29	32.35	100	293	PEAK	2	5870.55	67.11	106.44	-39.33	52.74	36.42	10.32	32.37	100	293	PEAK	3	5924.80	52.92	68.45	-15.53	38.41	36.49	10.44	32.42	100	293	PEAK	4	5925.50	55.00	68.30	-13.30	40.49	36.50	10.44	32.43	100	293	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	dB	cm	deg																																																												
1	5854.63	66.99	111.65	-44.66	52.65	36.40	10.29	32.35	100	293	PEAK																																																										
2	5870.55	67.11	106.44	-39.33	52.74	36.42	10.32	32.37	100	293	PEAK																																																										
3	5924.80	52.92	68.45	-15.53	38.41	36.49	10.44	32.42	100	293	PEAK																																																										
4	5925.50	55.00	68.30	-13.30	40.49	36.50	10.44	32.43	100	293	PEAK																																																										

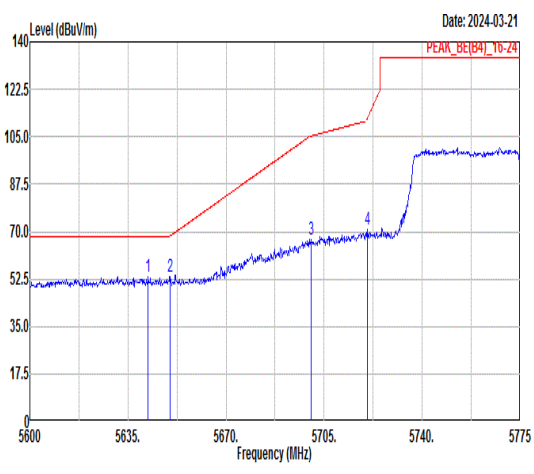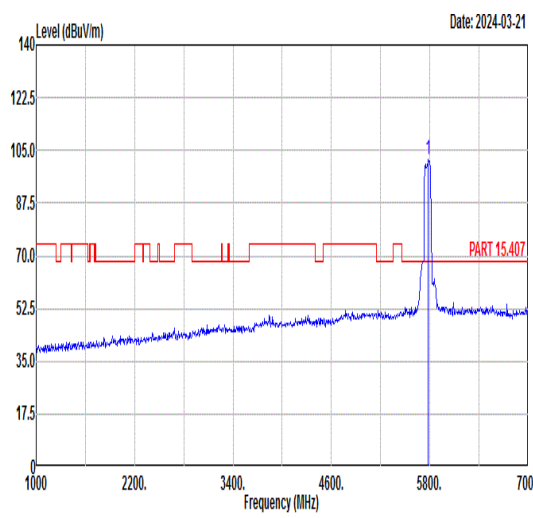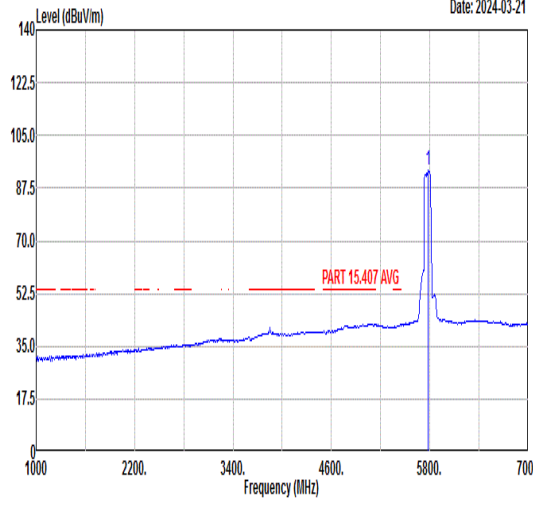

Mode	41																																																																																					
	Band Edge - L																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																					
ANT	22																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.18</td> <td>53.45</td> <td>68.30</td> <td>-14.85</td> <td>39.65</td> <td>36.10</td> <td>9.84</td> <td>32.14</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>53.18</td> <td>68.34</td> <td>-15.16</td> <td>39.36</td> <td>36.11</td> <td>9.86</td> <td>32.15</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.28</td> <td>67.23</td> <td>105.28</td> <td>-38.05</td> <td>53.28</td> <td>36.18</td> <td>9.97</td> <td>32.20</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>70.87</td> <td>111.71</td> <td>-40.84</td> <td>56.87</td> <td>36.21</td> <td>10.01</td> <td>32.22</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5642.18	53.45	68.30	-14.85	39.65	36.10	9.84	32.14	100	257	PEAK	2	5650.05	53.18	68.34	-15.16	39.36	36.11	9.86	32.15	100	257	PEAK	3	5700.28	67.23	105.28	-38.05	53.28	36.18	9.97	32.20	100	257	PEAK	4	5720.40	70.87	111.71	-40.84	56.87	36.21	10.01	32.22	100	257	PEAK	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>101.96</td> <td>70.00</td> <td>31.96</td> <td>87.81</td> <td>36.29</td> <td>10.14</td> <td>32.28</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5775.00	101.96	70.00	31.96	87.81	36.29	10.14	32.28	100	257	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																										
1	5642.18	53.45	68.30	-14.85	39.65	36.10	9.84	32.14	100	257	PEAK																																																																											
2	5650.05	53.18	68.34	-15.16	39.36	36.11	9.86	32.15	100	257	PEAK																																																																											
3	5700.28	67.23	105.28	-38.05	53.28	36.18	9.97	32.20	100	257	PEAK																																																																											
4	5720.40	70.87	111.71	-40.84	56.87	36.21	10.01	32.22	100	257	PEAK																																																																											
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5775.00	101.96	70.00	31.96	87.81	36.29	10.14	32.28	100	257	PEAK																																																																											
Avg	Blank	 <p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>93.38</td> <td>52.50</td> <td>40.88</td> <td>79.23</td> <td>36.29</td> <td>10.14</td> <td>32.28</td> <td>100</td> <td>257</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5775.00	93.38	52.50	40.88	79.23	36.29	10.14	32.28	100	257	AVERAGE																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Read (dBuV)	Ant Loss (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																											
1	5775.00	93.38	52.50	40.88	79.23	36.29	10.14	32.28	100	257	AVERAGE																																																																											



Mode	41																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																			
ANT	22																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<p>Date: 2024-03-21</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.80</td> <td>59.80</td> <td>111.26</td> <td>-51.46</td> <td>45.46</td> <td>36.40</td> <td>10.29</td> <td>32.35</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>2 5867.75</td> <td>61.45</td> <td>107.23</td> <td>-45.78</td> <td>47.09</td> <td>36.41</td> <td>10.32</td> <td>32.37</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>3 5923.75</td> <td>53.87</td> <td>69.22</td> <td>-15.35</td> <td>39.36</td> <td>36.49</td> <td>10.44</td> <td>32.42</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> <tr> <td>4 5930.05</td> <td>53.72</td> <td>68.30</td> <td>-14.58</td> <td>39.20</td> <td>36.50</td> <td>10.45</td> <td>32.43</td> <td>100</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5854.80	59.80	111.26	-51.46	45.46	36.40	10.29	32.35	100	257	PEAK	2 5867.75	61.45	107.23	-45.78	47.09	36.41	10.32	32.37	100	257	PEAK	3 5923.75	53.87	69.22	-15.35	39.36	36.49	10.44	32.42	100	257	PEAK	4 5930.05	53.72	68.30	-14.58	39.20	36.50	10.45	32.43	100	257	PEAK	Blank
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5854.80	59.80	111.26	-51.46	45.46	36.40	10.29	32.35	100	257	PEAK																																																										
2 5867.75	61.45	107.23	-45.78	47.09	36.41	10.32	32.37	100	257	PEAK																																																										
3 5923.75	53.87	69.22	-15.35	39.36	36.49	10.44	32.42	100	257	PEAK																																																										
4 5930.05	53.72	68.30	-14.58	39.20	36.50	10.45	32.43	100	257	PEAK																																																										



Mode	42																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58																																																																																																																																																																									
ANT	22																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>24.33</td><td>40.00</td><td>-15.67</td><td>30.71</td><td>24.70</td><td>0.54</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>128.94</td><td>22.19</td><td>43.50</td><td>-21.31</td><td>35.01</td><td>17.80</td><td>1.16</td><td>31.78</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>234.67</td><td>31.08</td><td>46.00</td><td>-14.92</td><td>44.40</td><td>16.70</td><td>1.58</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>580.96</td><td>28.14</td><td>46.00</td><td>-17.86</td><td>30.76</td><td>26.00</td><td>2.52</td><td>31.14</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>757.50</td><td>30.20</td><td>46.00</td><td>-15.80</td><td>30.23</td><td>28.30</td><td>2.86</td><td>31.19</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>947.62</td><td>32.37</td><td>46.00</td><td>-13.63</td><td>29.22</td><td>30.72</td><td>3.23</td><td>30.80</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	24.33	40.00	-15.67	30.71	24.70	0.54	31.62	---	---	Peak	2	128.94	22.19	43.50	-21.31	35.01	17.80	1.16	31.78	---	---	Peak	3	234.67	31.08	46.00	-14.92	44.40	16.70	1.58	31.60	---	---	Peak	4	580.96	28.14	46.00	-17.86	30.76	26.00	2.52	31.14	---	---	Peak	5	757.50	30.20	46.00	-15.80	30.23	28.30	2.86	31.19	---	---	Peak	6	947.62	32.37	46.00	-13.63	29.22	30.72	3.23	30.80	---	---	Peak	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>33.88</td><td>31.59</td><td>40.00</td><td>-8.41</td><td>39.61</td><td>23.10</td><td>0.56</td><td>31.68</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>63.95</td><td>26.93</td><td>40.00</td><td>-13.07</td><td>45.93</td><td>12.00</td><td>0.80</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>186.17</td><td>22.65</td><td>43.50</td><td>-20.85</td><td>38.09</td><td>14.80</td><td>1.39</td><td>31.63</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>234.67</td><td>24.89</td><td>46.00</td><td>-21.11</td><td>38.21</td><td>16.70</td><td>1.58</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>579.02</td><td>27.06</td><td>46.00</td><td>-18.94</td><td>29.66</td><td>26.02</td><td>2.52</td><td>31.14</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>918.52</td><td>32.60</td><td>46.00</td><td>-13.40</td><td>30.80</td><td>29.47</td><td>3.19</td><td>30.86</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	33.88	31.59	40.00	-8.41	39.61	23.10	0.56	31.68	---	---	Peak	2	63.95	26.93	40.00	-13.07	45.93	12.00	0.80	31.80	---	---	Peak	3	186.17	22.65	43.50	-20.85	38.09	14.80	1.39	31.63	---	---	Peak	4	234.67	24.89	46.00	-21.11	38.21	16.70	1.58	31.60	---	---	Peak	5	579.02	27.06	46.00	-18.94	29.66	26.02	2.52	31.14	---	---	Peak	6	918.52	32.60	46.00	-13.40	30.80	29.47	3.19	30.86	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																														
1	30.97	24.33	40.00	-15.67	30.71	24.70	0.54	31.62	---	---	Peak																																																																																																																																																															
2	128.94	22.19	43.50	-21.31	35.01	17.80	1.16	31.78	---	---	Peak																																																																																																																																																															
3	234.67	31.08	46.00	-14.92	44.40	16.70	1.58	31.60	---	---	Peak																																																																																																																																																															
4	580.96	28.14	46.00	-17.86	30.76	26.00	2.52	31.14	---	---	Peak																																																																																																																																																															
5	757.50	30.20	46.00	-15.80	30.23	28.30	2.86	31.19	---	---	Peak																																																																																																																																																															
6	947.62	32.37	46.00	-13.63	29.22	30.72	3.23	30.80	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	33.88	31.59	40.00	-8.41	39.61	23.10	0.56	31.68	---	---	Peak																																																																																																																																																															
2	63.95	26.93	40.00	-13.07	45.93	12.00	0.80	31.80	---	---	Peak																																																																																																																																																															
3	186.17	22.65	43.50	-20.85	38.09	14.80	1.39	31.63	---	---	Peak																																																																																																																																																															
4	234.67	24.89	46.00	-21.11	38.21	16.70	1.58	31.60	---	---	Peak																																																																																																																																																															
5	579.02	27.06	46.00	-18.94	29.66	26.02	2.52	31.14	---	---	Peak																																																																																																																																																															
6	918.52	32.60	46.00	-13.40	30.80	29.47	3.19	30.86	---	---	Peak																																																																																																																																																															



Mode	43																																																																																																																																																																									
	LF																																																																																																																																																																									
	UNII 3_5.47-5.85_ 802.11n HT40 CH151																																																																																																																																																																									
ANT	22																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>24.41</td><td>40.00</td><td>-15.59</td><td>30.28</td><td>25.20</td><td>0.53</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>127.97</td><td>21.93</td><td>43.50</td><td>-21.57</td><td>34.76</td><td>17.80</td><td>1.16</td><td>31.79</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>185.20</td><td>24.20</td><td>43.50</td><td>-19.30</td><td>39.65</td><td>14.80</td><td>1.38</td><td>31.63</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>232.73</td><td>30.55</td><td>46.00</td><td>-15.45</td><td>44.08</td><td>16.50</td><td>1.57</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>592.60</td><td>26.86</td><td>46.00</td><td>-19.14</td><td>29.53</td><td>25.90</td><td>2.54</td><td>31.11</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>946.65</td><td>32.86</td><td>46.00</td><td>-13.14</td><td>29.76</td><td>30.68</td><td>3.23</td><td>30.81</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	24.41	40.00	-15.59	30.28	25.20	0.53	31.60	---	---	Peak	2	127.97	21.93	43.50	-21.57	34.76	17.80	1.16	31.79	---	---	Peak	3	185.20	24.20	43.50	-19.30	39.65	14.80	1.38	31.63	---	---	Peak	4	232.73	30.55	46.00	-15.45	44.08	16.50	1.57	31.60	---	---	Peak	5	592.60	26.86	46.00	-19.14	29.53	25.90	2.54	31.11	---	---	Peak	6	946.65	32.86	46.00	-13.14	29.76	30.68	3.23	30.81	---	---	Peak	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>31.73</td><td>40.00</td><td>-8.27</td><td>39.24</td><td>23.60</td><td>0.55</td><td>31.66</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>60.07</td><td>27.06</td><td>40.00</td><td>-12.94</td><td>46.08</td><td>12.00</td><td>0.78</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>183.26</td><td>23.15</td><td>43.50</td><td>-20.35</td><td>38.50</td><td>14.90</td><td>1.38</td><td>31.63</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>231.76</td><td>24.95</td><td>46.00</td><td>-21.05</td><td>38.58</td><td>16.40</td><td>1.57</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>472.32</td><td>25.02</td><td>46.00</td><td>-20.98</td><td>30.68</td><td>23.54</td><td>2.26</td><td>31.46</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>947.62</td><td>32.80</td><td>46.00</td><td>-13.20</td><td>29.65</td><td>30.72</td><td>3.23</td><td>30.80</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	32.91	31.73	40.00	-8.27	39.24	23.60	0.55	31.66	---	---	Peak	2	60.07	27.06	40.00	-12.94	46.08	12.00	0.78	31.80	---	---	Peak	3	183.26	23.15	43.50	-20.35	38.50	14.90	1.38	31.63	---	---	Peak	4	231.76	24.95	46.00	-21.05	38.58	16.40	1.57	31.60	---	---	Peak	5	472.32	25.02	46.00	-20.98	30.68	23.54	2.26	31.46	---	---	Peak	6	947.62	32.80	46.00	-13.20	29.65	30.72	3.23	30.80	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																														
1	30.00	24.41	40.00	-15.59	30.28	25.20	0.53	31.60	---	---	Peak																																																																																																																																																															
2	127.97	21.93	43.50	-21.57	34.76	17.80	1.16	31.79	---	---	Peak																																																																																																																																																															
3	185.20	24.20	43.50	-19.30	39.65	14.80	1.38	31.63	---	---	Peak																																																																																																																																																															
4	232.73	30.55	46.00	-15.45	44.08	16.50	1.57	31.60	---	---	Peak																																																																																																																																																															
5	592.60	26.86	46.00	-19.14	29.53	25.90	2.54	31.11	---	---	Peak																																																																																																																																																															
6	946.65	32.86	46.00	-13.14	29.76	30.68	3.23	30.81	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	32.91	31.73	40.00	-8.27	39.24	23.60	0.55	31.66	---	---	Peak																																																																																																																																																															
2	60.07	27.06	40.00	-12.94	46.08	12.00	0.78	31.80	---	---	Peak																																																																																																																																																															
3	183.26	23.15	43.50	-20.35	38.50	14.90	1.38	31.63	---	---	Peak																																																																																																																																																															
4	231.76	24.95	46.00	-21.05	38.58	16.40	1.57	31.60	---	---	Peak																																																																																																																																																															
5	472.32	25.02	46.00	-20.98	30.68	23.54	2.26	31.46	---	---	Peak																																																																																																																																																															
6	947.62	32.80	46.00	-13.20	29.65	30.72	3.23	30.80	---	---	Peak																																																																																																																																																															



<Co-location mode>:

		44																																																																												
Mode		Band Edge - L																																																																												
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link Co-location																																																																												
Pol.	Horizontal	Fundamental																																																																												
Peak	<p style="text-align: right;">Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.49</td> <td>52.47</td> <td>74.00</td> <td>-21.53</td> <td>40.33</td> <td>36.12</td> <td>8.52</td> <td>32.50</td> <td>100</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5139.49	52.47	74.00	-21.53	40.33	36.12	8.52	32.50	100	117 PEAK	<p style="text-align: right;">Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>99.78</td> <td>-----</td> <td>-----</td> <td>86.96</td> <td>36.02</td> <td>9.09</td> <td>32.29</td> <td>100</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	99.78	-----	-----	86.96	36.02	9.09	32.29	100	117 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5139.49	52.47	74.00	-21.53	40.33	36.12	8.52	32.50	100	117 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5290.00	99.78	-----	-----	86.96	36.02	9.09	32.29	100	117 PEAK																																																																				
Avg	<p style="text-align: right;">Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.16</td> <td>43.53</td> <td>54.00</td> <td>-10.47</td> <td>31.39</td> <td>36.11</td> <td>8.53</td> <td>32.50</td> <td>100</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5146.16	43.53	54.00	-10.47	31.39	36.11	8.53	32.50	100	117 AVERAGE	<p style="text-align: right;">Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>93.17</td> <td>-----</td> <td>-----</td> <td>80.35</td> <td>36.02</td> <td>9.09</td> <td>32.29</td> <td>100</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	93.17	-----	-----	80.35	36.02	9.09	32.29	100	117 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5146.16	43.53	54.00	-10.47	31.39	36.11	8.53	32.50	100	117 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5290.00	93.17	-----	-----	80.35	36.02	9.09	32.29	100	117 AVERAGE																																																																				



		44																																								
Mode		Band Edge - R																																								
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link Co-location																																								
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5371.43</td> <td>58.45</td> <td>74.00</td> <td>-15.55</td> <td>45.17</td> <td>35.98</td> <td>9.48</td> <td>32.18</td> <td>100</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5371.43	58.45	74.00	-15.55	45.17	35.98	9.48	32.18	100	117	PEAK	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																		
1	5371.43	58.45	74.00	-15.55	45.17	35.98	9.48	32.18	100	117	PEAK																															
Avg	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.60</td> <td>50.38</td> <td>54.00</td> <td>-3.62</td> <td>37.20</td> <td>35.99</td> <td>9.39</td> <td>32.20</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5354.60	50.38	54.00	-3.62	37.20	35.99	9.39	32.20	100	117	AVERAGE	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																		
1	5354.60	50.38	54.00	-3.62	37.20	35.99	9.39	32.20	100	117	AVERAGE																															



		44																																																																																
Mode		Band Edge - L																																																																																
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link Co-location																																																																																
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5047.27</td> <td>52.22</td> <td>74.00</td> <td>-21.78</td> <td>40.33</td> <td>36.17</td> <td>8.35</td> <td>32.63</td> <td>316</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5047.27	52.22	74.00	-21.78	40.33	36.17	8.35	32.63	316	64	PEAK	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>94.51</td> <td>-----</td> <td>-----</td> <td>81.58</td> <td>36.01</td> <td>9.18</td> <td>32.26</td> <td>316</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	94.51	-----	-----	81.58	36.01	9.18	32.26	316	64	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5047.27	52.22	74.00	-21.78	40.33	36.17	8.35	32.63	316	64	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5290.00	94.51	-----	-----	81.58	36.01	9.18	32.26	316	64	PEAK																																																																							
Avg	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5082.07</td> <td>43.44</td> <td>54.00</td> <td>-10.56</td> <td>31.47</td> <td>36.15</td> <td>8.41</td> <td>32.59</td> <td>316</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5082.07	43.44	54.00	-10.56	31.47	36.15	8.41	32.59	316	64	AVERAGE	<p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>87.85</td> <td>-----</td> <td>-----</td> <td>74.95</td> <td>36.02</td> <td>9.15</td> <td>32.27</td> <td>316</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	87.85	-----	-----	74.95	36.02	9.15	32.27	316	64	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5082.07	43.44	54.00	-10.56	31.47	36.15	8.41	32.59	316	64	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5290.00	87.85	-----	-----	74.95	36.02	9.15	32.27	316	64	AVERAGE																																																																							



		44																																							
Mode	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link Co-location																																								
Pol.	Vertical		Fundamental																																						
Peak	<p style="text-align: right;">Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.35</td> <td>56.04</td> <td>74.00</td> <td>-17.96</td> <td>42.89</td> <td>35.99</td> <td>9.37</td> <td>32.21</td> <td>316</td> <td>64 PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.35	56.04	74.00	-17.96	42.89	35.99	9.37	32.21	316	64 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.35	56.04	74.00	-17.96	42.89	35.99	9.37	32.21	316	64 PEAK																															
Avg	<p style="text-align: right;">Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.83</td> <td>47.26</td> <td>54.00</td> <td>-6.74</td> <td>34.06</td> <td>35.99</td> <td>9.41</td> <td>32.20</td> <td>316</td> <td>64 AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5357.83	47.26	54.00	-6.74	34.06	35.99	9.41	32.20	316	64 AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5357.83	47.26	54.00	-6.74	34.06	35.99	9.41	32.20	316	64 AVERAGE																															



		44																																																																																																																																
Mode		Harmonic																																																																																																																																
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link Co-location																																																																																																																																
Pol.		Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>48.41</td> <td>68.30</td> <td>-19.89</td> <td>30.62</td> <td>38.83</td> <td>12.22</td> <td>33.26</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td colspan="2">Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>48.32</td> <td>74.00</td> <td>-25.68</td> <td>26.66</td> <td>41.00</td> <td>14.73</td> <td>34.07</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td colspan="2">Peak</td> </tr> </tbody> </table>			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB	dB	cm	deg			1	10580.00	48.41	68.30	-19.89	30.62	38.83	12.22	33.26	---	---	---	---	---	Peak		2	15870.00	48.32	74.00	-25.68	26.66	41.00	14.73	34.07	---	---	---	---	---	Peak		<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>48.68</td> <td>68.30</td> <td>-19.62</td> <td>30.89</td> <td>38.83</td> <td>12.22</td> <td>33.26</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td colspan="2">Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>49.38</td> <td>74.00</td> <td>-24.62</td> <td>27.72</td> <td>41.00</td> <td>14.73</td> <td>34.07</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td colspan="2">Peak</td> </tr> </tbody> </table>			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB	dB	cm	deg			1	10580.00	48.68	68.30	-19.62	30.89	38.83	12.22	33.26	---	---	---	---	---	Peak		2	15870.00	49.38	74.00	-24.62	27.72	41.00	14.73	34.07	---	---	---	---	---	Peak	
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB	dB	cm	deg																																																																																																																					
1	10580.00	48.41	68.30	-19.89	30.62	38.83	12.22	33.26	---	---	---	---	---	Peak																																																																																																																				
2	15870.00	48.32	74.00	-25.68	26.66	41.00	14.73	34.07	---	---	---	---	---	Peak																																																																																																																				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	dB	dB	cm	deg																																																																																																																					
1	10580.00	48.68	68.30	-19.62	30.89	38.83	12.22	33.26	---	---	---	---	---	Peak																																																																																																																				
2	15870.00	49.38	74.00	-24.62	27.72	41.00	14.73	34.07	---	---	---	---	---	Peak																																																																																																																				

Note: #3 is fundamental signal of WLAN 5G which can be ignored.



		45																																																																																
Mode		Band Edge - L																																																																																
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link+BLE 2Mbps_CH39 Link Co-location																																																																																
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.46</td> <td>53.25</td> <td>74.00</td> <td>-20.75</td> <td>41.29</td> <td>36.12</td> <td>8.51</td> <td>32.67</td> <td>111</td> <td>56 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5137.46	53.25	74.00	-20.75	41.29	36.12	8.51	32.67	111	56 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>98.45</td> <td>-----</td> <td>-----</td> <td>86.07</td> <td>36.03</td> <td>8.99</td> <td>32.64</td> <td>111</td> <td>56 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	98.45	-----	-----	86.07	36.03	8.99	32.64	111	56 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5137.46	53.25	74.00	-20.75	41.29	36.12	8.51	32.67	111	56 PEAK																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5290.00	98.45	-----	-----	86.07	36.03	8.99	32.64	111	56 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.93</td> <td>43.53</td> <td>54.00</td> <td>-10.47</td> <td>31.55</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>111</td> <td>56 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.93	43.53	54.00	-10.47	31.55	36.11	8.54	32.67	111	56 AVERAGE	Blank																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5149.93	43.53	54.00	-10.47	31.55	36.11	8.54	32.67	111	56 AVERAGE																																																																								



		45																														
Mode		Band Edge - R																														
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link+BLE 2Mbps_CH39 Link Co-location																														
Pol.	Horizontal	Fundamental																														
Peak	<p>Date: 2024-03-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5366.50</td> <td>56.55</td> <td>74.00</td> <td>-17.45</td> <td>43.75</td> <td>35.98</td> <td>9.45</td> <td>32.63</td> <td>111</td> <td>56 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5366.50	56.55	74.00	-17.45	43.75	35.98	9.45	32.63	111	56 PEAK	Blank	
Limit	Read	Ant	Cable	Preamp	APos	TPos																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																						
1	5366.50	56.55	74.00	-17.45	43.75	35.98	9.45	32.63	111	56 PEAK																						
Avg	<p>Date: 2024-03-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.20</td> <td>50.12</td> <td>54.00</td> <td>-3.88</td> <td>37.39</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>111</td> <td>56 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5351.20	50.12	54.00	-3.88	37.39	35.99	9.37	32.63	111	56 AVERAGE	Blank	
Limit	Read	Ant	Cable	Preamp	APos	TPos																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																						
1	5351.20	50.12	54.00	-3.88	37.39	35.99	9.37	32.63	111	56 AVERAGE																						



		45																																																																								
Mode		Band Edge - L																																																																								
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link+BLE 2Mbps_CH39 Link Co-location																																																																								
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5101.79</td> <td>52.58</td> <td>74.00</td> <td>-21.42</td> <td>40.67</td> <td>36.14</td> <td>8.45</td> <td>32.68</td> <td>339</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5101.79	52.58	74.00	-21.42	40.67	36.14	8.45	32.68	339	68	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>92.48</td> <td>-----</td> <td>-----</td> <td>80.13</td> <td>36.04</td> <td>8.96</td> <td>32.65</td> <td>339</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	92.48	-----	-----	80.13	36.04	8.96	32.65	339	68	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5101.79	52.58	74.00	-21.42	40.67	36.14	8.45	32.68	339	68	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5290.00	92.48	-----	-----	80.13	36.04	8.96	32.65	339	68	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5131.66</td> <td>43.38</td> <td>54.00</td> <td>-10.62</td> <td>31.43</td> <td>36.12</td> <td>8.50</td> <td>32.67</td> <td>339</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5131.66	43.38	54.00	-10.62	31.43	36.12	8.50	32.67	339	68	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>85.65</td> <td>-----</td> <td>-----</td> <td>73.36</td> <td>36.04</td> <td>8.90</td> <td>32.65</td> <td>339</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5290.00	85.65	-----	-----	73.36	36.04	8.90	32.65	339	68	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5131.66	43.38	54.00	-10.62	31.43	36.12	8.50	32.67	339	68	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5290.00	85.65	-----	-----	73.36	36.04	8.90	32.65	339	68	AVERAGE																																																															



		45																															
Mode		Band Edge - R																															
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link+BLE 2Mbps_CH39 Link Co-location																															
Pol.	Vertical	Fundamental																															
Peak	<p>Date: 2024-03-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5370.07</td> <td>54.95</td> <td>74.00</td> <td>-19.05</td> <td>42.13</td> <td>35.98</td> <td>9.47</td> <td>32.63</td> <td>339</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5370.07	54.95	74.00	-19.05	42.13	35.98	9.47	32.63	339	68	PEAK	Blank	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																								
1	5370.07	54.95	74.00	-19.05	42.13	35.98	9.47	32.63	339	68	PEAK																						
Avg	<p>Date: 2024-03-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.62</td> <td>47.69</td> <td>54.00</td> <td>-6.31</td> <td>34.94</td> <td>35.99</td> <td>9.39</td> <td>32.63</td> <td>339</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5355.62	47.69	54.00	-6.31	34.94	35.99	9.39	32.63	339	68	AVERAGE	Blank	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																								
1	5355.62	47.69	54.00	-6.31	34.94	35.99	9.39	32.63	339	68	AVERAGE																						



		45																																																																																				
Mode		Harmonic																																																																																				
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz+LTE B13 Link+BLE 2Mbps_CH39 Link Co-location																																																																																				
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<p>Data: 1 Date: 2024-03-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 10580.00</td> <td>46.59</td> <td>-21.71</td> <td>68.30</td> <td>28.79</td> <td>38.83</td> <td>12.23</td> <td>33.26</td> <td>--- --- Peak</td> </tr> <tr> <td>2 15870.00</td> <td>46.46</td> <td>-27.54</td> <td>74.00</td> <td>24.80</td> <td>41.00</td> <td>14.73</td> <td>34.07</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 10580.00	46.59	-21.71	68.30	28.79	38.83	12.23	33.26	--- --- Peak	2 15870.00	46.46	-27.54	74.00	24.80	41.00	14.73	34.07	--- --- Peak	<p>Data: 2 Date: 2024-03-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 10580.00</td> <td>47.12</td> <td>-21.18</td> <td>68.30</td> <td>29.32</td> <td>38.83</td> <td>12.23</td> <td>33.26</td> <td>--- --- Peak</td> </tr> <tr> <td>2 15870.00</td> <td>47.92</td> <td>-26.08</td> <td>74.00</td> <td>26.26</td> <td>41.00</td> <td>14.73</td> <td>34.07</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 10580.00	47.12	-21.18	68.30	29.32	38.83	12.23	33.26	--- --- Peak	2 15870.00	47.92	-26.08	74.00	26.26	41.00	14.73	34.07	--- --- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1 * 10580.00	46.59	-21.71	68.30	28.79	38.83	12.23	33.26	--- --- Peak																																																																														
2 15870.00	46.46	-27.54	74.00	24.80	41.00	14.73	34.07	--- --- Peak																																																																														
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1 * 10580.00	47.12	-21.18	68.30	29.32	38.83	12.23	33.26	--- --- Peak																																																																														
2 15870.00	47.92	-26.08	74.00	26.26	41.00	14.73	34.07	--- --- Peak																																																																														

Note:


- #3 is fundamental signal of BLE which can be ignored.
- #4 is fundamental signal of WLAN 5G which can be ignored.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.90	2.029	0.493	1kHz
802.11n HT20	98.12	-	-	10Hz
802.11n HT40	96.25	0.930	1.075	3kHz
802.11ac VHT80	92.35	0.455	2.197	3kHz

802.11a

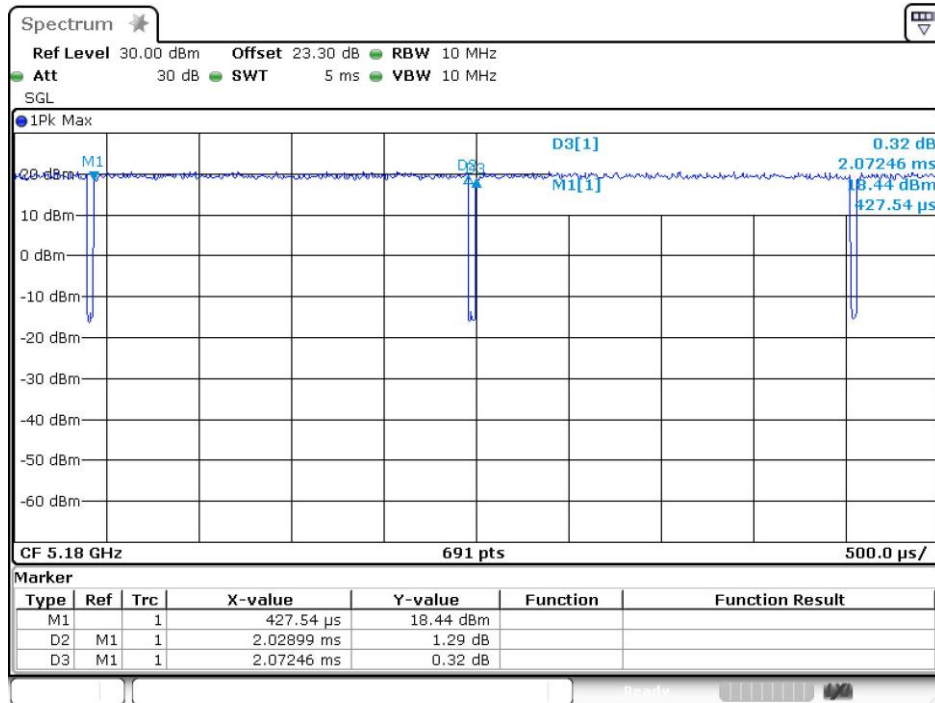




802.11n HT20

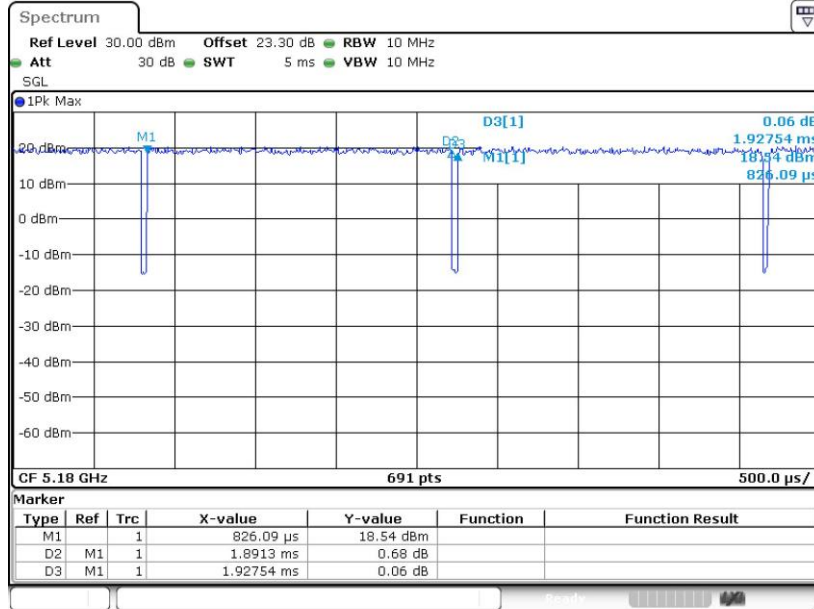

802.11n HT40

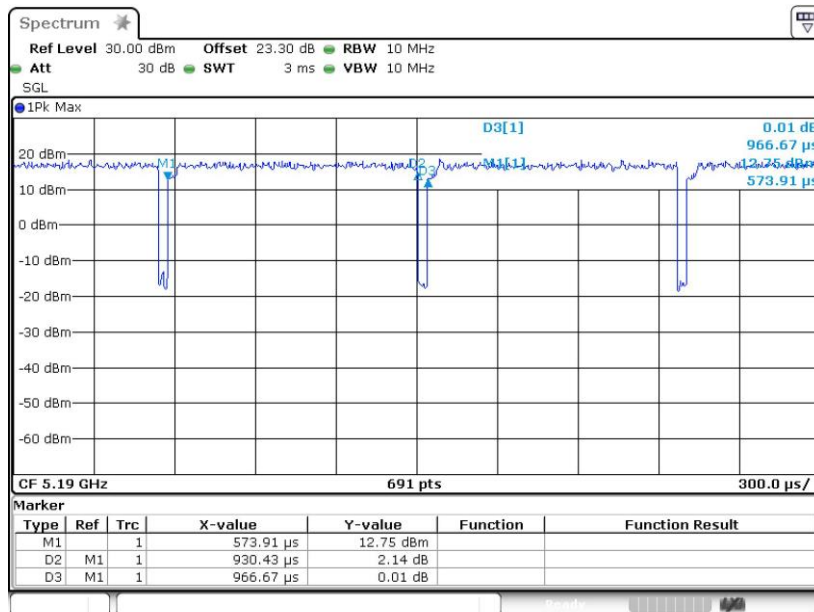



802.11ac VHT80

