



FCC Radio Test Report

FCC ID: 2AF82-TD0360H

Report No. : BTL-FCCP-1-2311T064

Equipment : Panel PC

Model Name : TD-0360, TD-036XXXXXXXX (where "X" may be any alphanumeric, blank

"_" or "-" for marketing purpose only)

Brand Name : Qbic

Applicant: Qbic Technology Co., Ltd.

Address : 26F.-12, NO.99, SEC. 1, XINTAI 5TH RD., XIZHI DIST., NEW TAIPEI CITY

22175, TAIWAN

Radio Function : NFC (13.56 MHz)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.225)

Measurement : ANSI C63.10-2013

Procedure(s)

Date of Receipt : 2023/12/12

Date of Test : 2024/1/8 ~ 2024/1/15

Issued Date : 2024/1/24

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

Jerry Chuang, Supervisor

Approved by

Peter Chen, Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Project No.: 2311T064 Page 1 of 40 Report Version: R00



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Project No.: 2311T064 Page 2 of 40 Report Version: R00





CONTENTS REVISION HISTORY 5 SUMMARY OF TEST RESULTS 6 1.1 **TEST FACILITY** 7 MEASUREMENT UNCERTAINTY 1.2 7 1.3 **TEST ENVIRONMENT CONDITIONS** 7 2 **GENERAL INFORMATION** 8 2.1 **DESCRIPTION OF EUT** 8 2.2 **TEST MODES** 9 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 10 2.4 SUPPORT UNITS 11 3 AC POWER LINE CONDUCTED EMISSIONS TEST 12 3.1 LIMIT 12 3.2 TEST PROCEDURE 12 **DEVIATION FROM TEST STANDARD** 3.3 13 3.4 **TEST SETUP** 13 **TEST RESULT** 3.5 13 RADIATED EMISSIONS TEST 14 4 4.1 14 LIMIT 4.2 **TEST PROCEDURE** 15 4.3 **DEVIATION FROM TEST STANDARD** 15 4.4 **TEST SETUP** 15 4.5 **EUT OPERATING CONDITIONS** 16 4.6 TEST RESULT - 9 KHZ TO 30 MHZ- FCC PART 15.209 16 4.7 TEST RESULT - 30 MHZ TO 1 GHZ - FCC PART 15.209 16 TEST RESULT - FCC PART 15.225 4.8 16 5 FREQUENCY STABILITY 17 5.1 LIMIT 17 5.2 **TEST PROCEDURE** 17 **DEVIATION FROM TEST STANDARD** 5.3 17 5.4 **EUT OPERATING CONDITIONS** 17 5.5 **TEST RESULT** 17 20 DB BANDWIDTH 18 6 6.1 LIMIT 18 6.2 **TEST PROCEDURE** 18 6.3 **DEVIATION FROM TEST STANDARD** 18 6.4 **TEST SETUP** 18 **EUT OPERATING CONDITIONS** 18 6.5 6.6 **TEST RESULT** 18 7 LIST OF MEASURING EQUIPMENTS 19 8 **EUT TEST PHOTO** 20 9 **EUT PHOTOS** 20 APPENDIX A AC POWER LINE CONDUCTED EMISSIONS 21 APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ 26 APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ 31 RADIATED EMISSIONS - FCC PART 15.225 APPENDIX D 34 APPENDIX E FREQUENCY STABILITY MEASUREMENT 37



APPENDIX F	20 DB BANDWIDTH	39

Project No.: 2311T064 Page 4 of 40 Report Version: R00



REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2311T064	R00	Original Report.	2024/1/24	Valid

Project No.: 2311T064 Page 5 of 40 Report Version: R00

SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	
15.35 15.205 15.209 15.225	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	
15.225(e)	Frequency Stability	APPENDIX E	Pass	
15.203	Antenna Requirement		Pass	
15.215(c)	20 dB Bandwidth	APPENDIX F	Pass	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.(2) The report format version is TP.1.1.1.

Project No.: 2311T064 Page 6 of 40 Report Version: R00

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

(FCC DN: TW0659)

□ C05 □ CB08

□ CB11

⊠ SR10

☐ SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

(FCC DN: TW0659)

□ CB22

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expanded uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k} = \mathbf{2}$, providing a level of confidence of approximately $\mathbf{95}$ %. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 \mathbf{U}_{cispr} requirement.

A. AC power line conducted emissions test:

-	Test Site Method Measurement Frequency Range		U (dB)	
	C06	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
CB21	CICDD	9 kHz ~ 150 kHz	2.82
	CISPR	150 kHz ~ 30 MHz	2.58

Test Site	Measurement Frequency Range	U (dB)
	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
CB21	1 GHz ~ 6 GHz	5.21
CB21	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	23 °C, 55 %	AC 120V	Ken Lan
Radiated emissions (9KHz-30MHz)	Refer to data	AC 120V	Mark Wang
Radiated emissions (30MHz TO 1000MHz)	Refer to data	AC 120V	Mark Wang
Frequency Stability	21.9 °C, 64 %	AC 120V	Jerry Chuang
20 dB Bandwidth	21.9 °C, 64 %	AC 120V	Jerry Chuang

Project No.: 2311T064 Page 7 of 40 Report Version: R00



2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Panel PC			
Model Name	TD-0360, TD-036XXXXXXX (where "X" may be any alphanumeric, blank "_" or "-" for marketing purpose only)			
Brand Name	ame Qbic			
Model Difference	Different model distribute to different area.			
Power Source	DC Voltage supplied from AC/DC adapter.			
D D. d'a	EUT: DC 5V, 2A			
Power Rating	For PSAF10R-050Q:			
	Input: 100-240V~50/60Hz 0.3A 50-60Hz Output: 5V, 2.0A 10.0W			
Products Covered	1* Adapter: Phihong Technology Co., Ltd / PSAF10R-050Q 1* USB cable: GET-CHANCE TECHNOLOGY CO., LTD. / KXTYCTD063M01 1* Wall mount: HON-SHIN PLASTIC FACTORY / PTD063WM10001 1* RF module: AzureWave / AW-CM467-SUR 1* MemoryDown0LPDDR3: Samsung / K4E6E304ED-EGCG 1* eMMC: Samsung / KLMAG1JETD-B041 1* MIPI Panel: AUO / A036FAB01.1 1* RTC: NXP / PCA85073A 1* CPU: Rockchip / PX30			
Operation Frequency	13.56 MHz			
Max H-field strength	94.48 dBuV/m@1m(Peak)			
Test Model	TD-0360			
Sample Status	Engineering Sample			
EUT Modification(s)	N/A			

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

Orial inter Elet.				
Channel	Frequency (MHz)			
01	13.56			

(3) Table for Filed Antenna:

Antenna	Brand Name	Model Name	Antenna Type	Connector	Gain (dBi)
1	 \$\$ SMARFID	TH6M22P	N/A	FPC	N/A

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

Project No.: 2311T064 Page 8 of 40 Report Version: R00



2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Radiated emissions (9KHz-30MHz)	TX	01	ı
Radiated emissions (30MHz TO 1000MHz)	TX	01	
Frequency Stability	TX	01	ı
20 dB Bandwidth	TX	01	-


Project No.: 2311T064 Page 9 of 40 Report Version: R00




2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

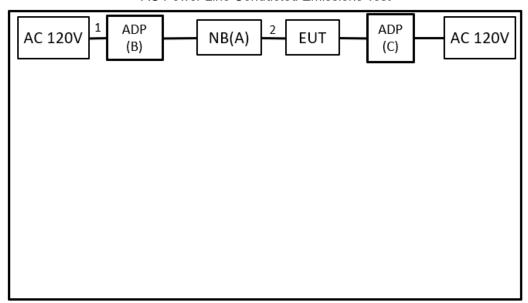

Radiated Emissions Test

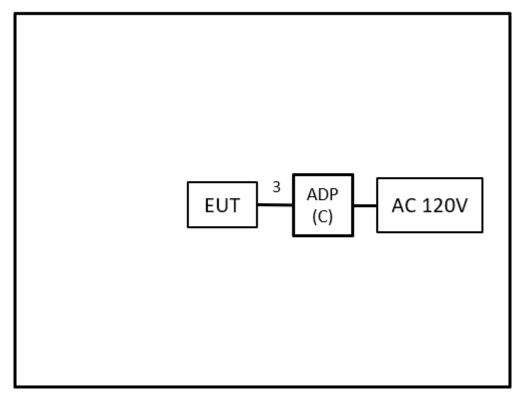

Project No.: 2311T064 Page 10 of 40 Report Version: R00

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
Α	NB	HP	250 G5	N/A	Furnished by test lab.
В	ADP	HP	HSTNN-LA40	N/A	Furnished by test lab.
С	ADP	Phihong Technology Co., Ltd	PSAF10R-050Q	N/A	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1m	Power Cord	Furnished by test lab.
2	N/A	N/A	0.6m	USB to Micro USB	Furnished by test lab.
3	N/A	N/A	3m	Type C Cable	Supplied by test requester.

Project No.: 2311T064 Page 11 of 40 Report Version: R00



3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency	Limit (dBμV)
(MHz)	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB)		Measurement Value (dBuV)
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
(dBµV)		(dBµV)		(dB)
41.67	-	60 =		-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 - All other support equipment were powered from an additional LISN(s).
 - The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 - The end of the cable will be terminated, using the correct terminating impedance.
 - The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item EUT TEST PHOTO.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used. BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


Project No.: 2311T064 Page 12 of 40 Report Version: R00



3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

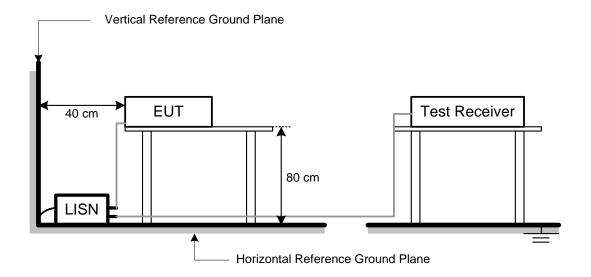

3.5 TEST RESULT

Please refer to the APPENDIX A.



RADIATED EMISSIONS TEST

4.1 LIMIT

FCC Part 15.209					
Frequency	Field Strength Lir	nitation	Field Strength Limitation at 3m Measurement Dist		
(MHz)	(uV/m)	Dist	(uV/m)	(dBuV/m)	
0.009 - 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80	
0.490 - 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40	
1.705 – 30.00	30	30m	100* 30	20log 30 + 40	
30.0 - 88.0	100	3m	100	20log 100	
88.0 – 216.0	150	3m	150	20log 150	
216.0 – 960.0	200	3m	200	20log 200	
Above 960.0	500	3m	500	20log 500	
		FCC P	art 15.225(a)/(b)/(c)		
Frequency	Field Strength Lir	mitation	Field Strength Limitation at 3m Measurement Dist		
(MHz)	(uV/m)	Dist	(uV/m)	(dBuV/m)	
13.553 – 13.567	15,848	30 m	15,848*100	124	
13.567 – 13.710	334	30 m	334*100	90.5	
13.110 – 13.410 13.710 – 14.010	106	30 m	106*100	80.5	

NOTE:

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d_2/d_1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as L_{d1} = $L_1 = 30 \text{uV/m} * (10)^2 = 100 * 30 \text{ uV/m}$ (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

Project No.: 2311T064 Page 14 of 40 Report Version: R00



4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- b. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE: (FCC PART 15.209)

- Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

NOTE: (FCC PART 15.225)

- a. Spectrum Setting:
 - 9 KHz 150 KHz, RBW= 200Hz, VBW=200Hz, Sweep time = 200 ms.
 - 150 K Hz 30 MHz, RBW= 10 KHz, VBW=10 KHz, Sweep time = 200 ms.
 - 30 MHz 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- c. The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.

4.3 DEVIATION FROM TEST STANDARD

No deviation.


4.4 TEST SETUP

Metal Full Soldered Ground Plane Spectrum Analyzer /Receiver

9 KHz to 30 MHz

Project No.: 2311T064 Page 15 of 40 Report Version: R00



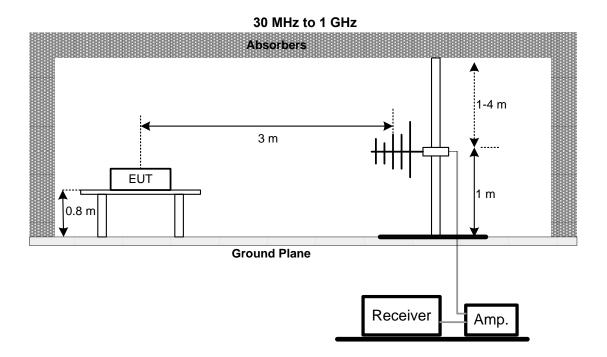

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHZ TO 30 MHZ- FCC PART 15.209

Please refer to the APPENDIX B

4.7 TEST RESULT - 30 MHZ TO 1 GHZ - FCC PART 15.209

Please refer to the APPENDIX C.

4.8 TEST RESULT - FCC PART 15.225

Please refer to the APPENDIX D.

NOTE:

(1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

Project No.: 2311T064 Page 16 of 40 Report Version: R00



5 FREQUENCY STABILITY

5.1 LIMIT

FCC Part 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of - 20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests shall be performed using a new battery.

5.2 TEST PROCEDURE

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber.
- b. At room temperature (25±5°C), an external variable AC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 TEST RESULT

Please refer to the APPENDIX E.

Project No.: 2311T064 Page 17 of 40 Report Version: R00



6 20 DB BANDWIDTH

6.1 LIMIT

FCC Part 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through §15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1 kHz, VBW=1 kHz, Sweep time = 20 ms.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX F.

Project No.: 2311T064 Page 18 of 40 Report Version: R00



7 LIST OF MEASURING EQUIPMENTS

	AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101497	2023/5/18	2024/5/17
2	Test Cable	EMCI	EMC400-BM-BM- 5000	170501	2023/8/1	2024/7/31
3	EMI Test Receiver	R&S	ESR3	102950	2023/4/12	2024/4/11
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

	Radiated Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2023/9/6	2024/9/5
2	Preamplifier	EMCI	EMC001340	980579	2023/9/6	2024/9/5
3	Test Cable	EMCI	EMC104-SM-100 0	180809	2023/7/10	2024/7/9
4	Test Cable	EMCI	EMC104-SM-SM- 3000	220322	2023/3/14	2024/3/13
5	Test Cable	EMCI	EMC104-SM-SM- 7000	220324	2023/3/14	2024/3/13
6	EXA Signal Analyzer	keysight	N9020B	MY57120120	2023/2/24	2024/2/23
7	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2023/9/12	2024/9/11
8	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2023/5/9	2024/5/8
9	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2023/5/9	2024/5/8
10	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

	Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSV7	103032	2023/8/10	2024/8/9
2	Thermal Chamber	HOLINK	H-TH-2SP-B	EK04101902	2023/7/3	2024/7/2

		20 dE	Bandwidth Meas	surement		
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSV7	103032	2023/8/10	2024/8/9

Remark: "N/A" denotes no model name, no serial no. or no calibration specified. All calibration period of equipment list is one year.



8 EUT TEST PHOTO
Please refer to document Appendix No.: TP-2311T064-FCCP-1 (APPENDIX-TEST PHOTOS).
9 EUT PHOTOS
Please refer to document Appendix No.: EP-2311T064-2 (APPENDIX-EUT PHOTOS).


Project No.: 2311T064 Page 20 of 40 Report Version: R00



APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS

Project No.: 2311T064 Page 21 of 40 Report Version: R00

Test Mode	Normal	Tested Date	2024/1/9	
Test Frequency	-	Phase	Line	

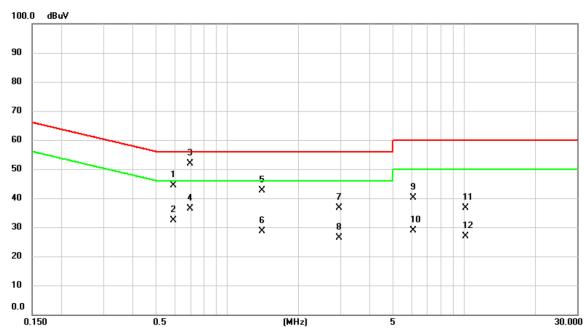


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.5910	34.66	9.76	44.42	56.00	-11.58	QP	
2		0.5910	22.56	9.76	32.32	46.00	-13.68	AVG	
3	*	0.6990	42.13	9.77	51.90	56.00	-4.10	QP	
4		0.6990	26.56	9.77	36.33	46.00	-9.67	AVG	
5		1.3988	32.83	9.78	42.61	56.00	-13.39	QP	
6		1.3988	18.93	9.78	28.71	46.00	-17.29	AVG	
7		2.9693	26.83	9.78	36.61	56.00	-19.39	QP	
8		2.9693	16.56	9.78	26.34	46.00	-19.66	AVG	
9		6.1170	30.25	9.79	40.04	60.00	-19.96	QP	
10		6.1170	19.11	9.79	28.90	50.00	-21.10	AVG	
11		10.1580	26.80	9.77	36.57	60.00	-23.43	QP	
12		10.1580	17.19	9.77	26.96	50.00	-23.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/1/9
Test Frequency	-	Phase	Neutral

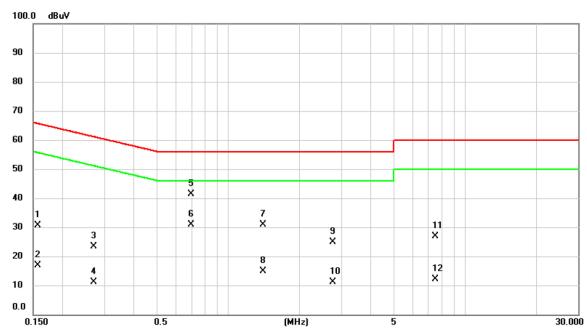


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1568	30.72	0.03	30.75	65.63	-34.88	QP	
2		0.1568	16.85	0.03	16.88	55.63	-38.75	AVG	
3		0.2714	23.39	0.03	23.42	61.07	-37.65	QP	
4		0.2714	11.21	0.03	11.24	51.07	-39.83	AVG	
5	*	0.6990	41.36	0.05	41.41	56.00	-14.59	QP	
6		0.6990	30.85	0.05	30.90	46.00	-15.10	AVG	
7		1.3988	30.79	0.07	30.86	56.00	-25.14	QP	
8		1.3988	14.88	0.07	14.95	46.00	-31.05	AVG	
9		2.7713	24.75	0.10	24.85	56.00	-31.15	QP	
10		2.7713	10.93	0.10	11.03	46.00	-34.97	AVG	
11		7.4963	26.75	0.16	26.91	60.00	-33.09	QP	
12		7.4963	12.03	0.16	12.19	50.00	-37.81	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value - Limit Value.

Ш				
	Test Mode	Idle	Tested Date	2024/1/9
ı	Test Frequency	-	Phase	Line

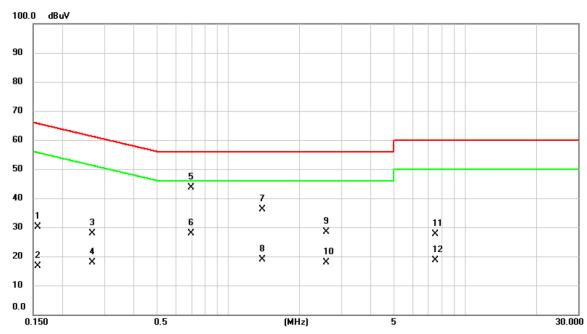


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1568	30.02	0.03	30.05	65.63	-35.58	QP	
2		0.1568	16.60	0.03	16.63	55.63	-39.00	AVG	
3		0.2670	27.75	0.03	27.78	61.21	-33.43	QP	
4		0.2670	17.92	0.03	17.95	51.21	-33.26	AVG	
5	*	0.6990	43.51	0.05	43.56	56.00	-12.44	QP	
6		0.6990	27.88	0.05	27.93	46.00	-18.07	AVG	
7		1.3920	35.94	0.07	36.01	56.00	-19.99	QP	
8		1.3920	18.83	0.07	18.90	46.00	-27.10	AVG	
9		2.6025	28.31	0.09	28.40	56.00	-27.60	QP	
10		2.6025	17.85	0.09	17.94	46.00	-28.06	AVG	
11		7.4625	27.48	0.16	27.64	60.00	-32.36	QP	
12		7.4625	18.55	0.16	18.71	50.00	-31.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value - Limit Value.

Project No.: 2311T064 Page 24 of 40 Report Version: R00

Test Mode	Idle	Tested Date	2024/1/9
Test Frequency	-	Phase	Neutral

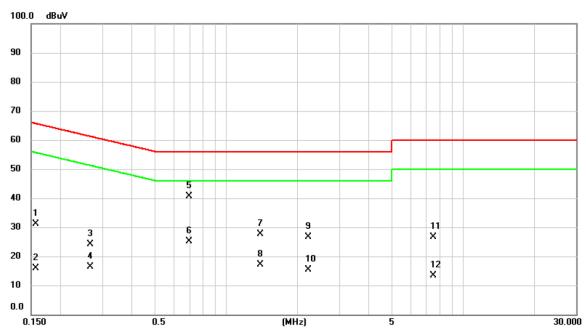

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1568	31.12	0.03	31.15	65.63	-34.48	QP	
2		0.1568	15.95	0.03	15.98	55.63	-39.65	AVG	
3		0.2670	24.14	0.03	24.17	61.21	-37.04	QP	
4		0.2670	16.41	0.03	16.44	51.21	-34.77	AVG	
5	*	0.6990	40.67	0.05	40.72	56.00	-15.28	QP	
6		0.6990	24.96	0.05	25.01	46.00	-20.99	AVG	
7		1.3920	27.62	0.07	27.69	56.00	-28.31	QP	
8		1.3920	17.02	0.07	17.09	46.00	-28.91	AVG	
9		2.2200	26.54	0.08	26.62	56.00	-29.38	QP	
10		2.2200	15.25	0.08	15.33	46.00	-30.67	AVG	
11		7.4625	26.49	0.16	26.65	60.00	-33.35	QP	
12		7.4625	13.17	0.16	13.33	50.00	-36.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.(2) Margin Level = Measurement Value - Limit Value.

Project No.: 2311T064 Page 25 of 40 Report Version: R00



	Report No., BTL-FCCF-1-23111004
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Project No.: 2311T064 Page 26 of 40 Report Version: R00

	Test Mod			TX			Test Date			1/1/11	
Tes	st Frequ	ency		6MHz		P	olarization		Vertical		
	Temp		2	1°C		Hum.			58	3%	
50.0 dB	luV/m										_
_	_										
40											\dashv
30											_
20									 -		_
20											-
10											\dashv
00											
0											-
o											_
o 🗀											
0											+
o					_						4
					1 X						
0											1
0											-
0.0											
0.009	0.02	0.04	0.05	0.07	0.08	0.0	9 0.11	0.12	2	0.15	┸
No.	Mk.	Freq.	Reading	Correct		asure-	Limit	Over			
			Level	Factor		nent		2.0.			
		MHz	dBuV	dB		uV/m	dBuV/m	dB	Detector	Comm	ent
1	*	0.0743	25.67	20.05	4:	5.72	129.26	-83.54	AVG		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

	Test Mo			TX		Test Date			1/1/11	
T	est Freq			6MHz		Polarization	Vertical			
	Tem	ρ	2	1°C		Hum.		58	3%	
130.0	0.0 dBuV/m									_
120										
20										
10 🕌										\dashv
00										
0										-
30 📙	1									
70										
io	_									
50	1 X	2 X	3 X	4		5		6		-
40		*	^	×		X		×		_
.										
30										T
20										\dashv
10										
0.0 0.150	3.14	6.12	9.10	12.09	15.08 1	8.06 21.	D4 24.	US	30.00	
No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	03	30.00	
140.	IVIIX.	r roq.	Level	Factor	ment	Liiiit	OVCI			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comm	ent
1	*	1.2067	49.37	0.29	49.66	85.05	-35.39	QP		
2		3.5668	50.95	-3.98	46.97	88.62	-41.65	QP		
3		9.3766	51.28	-3.36	47.92	88.62	-40.70	QP		
4		13.3716	47.03	-3.51	43.52	88.62	-45.10	QP		
5		20.6061	49.13	-3.83	45.30	88.62	-43.32	QP		
6		25.2310	48.17	-1.62	46.55	88.62	-42.07	QP		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

	Test Mod			TX			Test Date			4/1/11	
Tes	st Frequ			6MHz		P	olarization			zontal	
	Temp		2	1°C			Hum.		58	8%	
50.0 dE	BuV/m										_
	_										
40	_										1
30											4
20											4
											\exists
10											+
00											_
U											1
:0											+
o											_
.											
0											1
0					1 X						\dashv
o 📖					•••						
:0											1
20.0											
0.009	0.02	0.04	0.05	0.07	0.08	0.0	9 0.11	0.12		0.15	MH
No.	Mk.	Freq.	Reading	Corr		easure-	Limit	Over	-		
			Level	Fac		ment					
		MHz	dBuV	dE			dBuV/m	dB	Detector	Comme	ent
1	*	0.0740	28.93	20.0	09 4	19.02	129.30	-80.28	AVG		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

	-	Test Mo	de		TX			Test D	ate	202	24/1/11	
	Tes	st Frequ	iency	1	3.56MF	Ιz		Polariza	ation	Hor	izontal	
		Temp			21°C			Hum			58%	
130.0) dB	uV/m										
120 110 100 90												
80 70 60												
	1 X		2 X		3 X	4 ×	5 X			6 X		
20 10 3.0												
- 1	150	3.14	6.12	9.10	12.0)9	15.08	18.06	21.04	24.03	30.00	— _{мн}
No	Ο.	Mk.	Freq.	Readii Leve		orrect	Measure ment	e- Limi	t Over	r		
			MHz	dBu\		dB	dBuV/m	n dBuV	m dB	Detector	Comm	nent
1			0.3780	45.66		6.87	52.53	115.1				
2			4.7817	37.99		4.39	33.60	88.6				
3			11.6821	41.90		3.35	38.55	88.6				
4		*	12.6382	42.7°		3.45	39.26	88.6				
5			16.0362	34.76		3.76	31.00	88.6				
6			26.4330	36.12		1.05	35.07	88.6				

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.



APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Project No.: 2311T064 Page 31 of 40 Report Version: R00

	Test Mo				TX 6MHz	,			Test Da				l/1/15 tical	
16	Temp				1°С	-			Hum				110ai 7%	
80.0 dE	luV/m				10				Hulli	1.			70	
70 60 50 40 30		2 3 X X	,	Į.		5X					6 X			
10														
0.0 30.000	127.00	224.0	0 3	21.00	418.00	<u> </u>	515.0	0 6	12.00	709.0	00 806	6.00	1000.00	
No.	Mk.	Freq.	R	eading Level	Cori	rect	Ме	asure- nent	Limi		Over			
		MHz		dBuV	dl			uV/m	dBuV/	/m	dB	Detector	Comme	ent
1		116.944		36.60	-14	.51		2.09	43.50		-21.41	peak		
2		149.989		40.04	-11.			8.27	43.50		-15.23	peak		
3		189.597	73 4	43.45	-14	.42	2	9.03	43.50	0	-14.47	peak		
4		300.015	57 :	33.27	-11.	.28	2	1.99	46.00	0	-24.01	peak		
5		450.010	00 4	41.15	-7.	15	3	4.00	46.00	0	-12.00	peak		
6	*	750.031	In ·	37.32	-1.	16	3	5.86	46.00	Λ	-10.14	peak		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

-	Test Mo	de			-	ΓX				Τe	est Date)		2024	4/1/15	
Tes	st Frequ	iency			13.5	6MF	lz			Ро	larizatio	n		Hori	zontal	
	Temp)			2	1°C					Hum.			5	7%	
80.0 dB	uV/m															7
70																
60																-
50																
40		3					5 X						6 ×			
30	1 ×	2 X 3 X		4 ×			••									
20				×												
10																
0.0																
30.000	127.00	224.	00	321.		418.		515.0	00 6	612.0		09.00		6.00	1000.00	MH
No.	Mk.	Freq			ding vel		rrect actor		asure- nent		Limit	C	Over			
		MHz	_	dB	uV	(dB	dE	3uV/m	d	lBuV/m		dB	Detector	Commo	ent
1		118.69	03	43	.47	-1	4.39	2	9.08		43.50	-1	4.42	peak		
2		149.98	90	45	.00	-1	1.77	3	3.23		43.50	-1	0.27	peak		
3		194.86	77	45	.48	-1	4.84	3	80.64		43.50	-1	2.86	peak		
4		297.88	17	35	.33	-1	1.31	2	24.02		46.00	-2	1.98	peak		
5		450.01	00	43	.08	-7	7.15	3	5.93		46.00	-1	0.07	peak		
6	*	750.03	10	40	.17		1.46	3	88.71		46.00	- 7	7.29	peak		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.



APPENDIX D RADIATED EMISSIONS - FCC PART 15.225

Project No.: 2311T064 Page 34 of 40 Report Version: R00

7	est Mod	de	-	ГХ		Test Date		2024	I/1/10	
Tes	t Freque	ency	13.5	6MHz		Polarization)	Ver	tical	
	Temp	•	2:	3°C		Hum.		57%		
50.0 dB	uV/m									
40										\dashv
30										
20										\dashv
10										
										4
)0										1
,										4
)										1
)										\dashv
, 📖										
,										
)										+
, L										
0.0										
13.510	13.52	13.53	13.54	13.55	13.56 1	3.57 13.	58 13.	59	13.61	_ Mi
No.	Mk.	Freq.	Reading	Correct	Measure-		Over			
	.,,,,,	1 104.	Level	Factor	ment	Liiiit	0 7 0.			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comm	ent
1	*	13.5598	94.02	-3.53	90.49	143.07	-52.58	peak		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.

1	Test Mod	de	-	TX		Test Date	•	2024	1/1/10	
Tes	st Freque	ency	13.5	6MHz		Polarizatio	n	Horiz	zontal	
	Temp		2	3°C		Hum.		57%		
50.0 dB	uV/m									
40										+
30										
20										-
10										_
										4
00					1 *					1
o										4
o										
0										+
o 📖										
0										-
0										4
0.0										
13.510	13.52	13.53	13.54	13.55	13.56	13.57 13	3.58 13.	59	13.61	_ MH
No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over			
		· .	Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comm	ent
1	*	13.5600	98.01	-3.53	94.48	143.07	-48.59	peak		

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value Limit Value.



APPENDIX E	FREQUENCY STABILITY MEASUREMENT

Project No.: 2311T064 Page 37 of 40 Report Version: R00





Test Mode TX Tested Date 2024/1/8

	Condition					Freque	ncy Error	(ppm)						
Temperature	Modulation Mode	Test Freq.	0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min	Limit (ppm)	Result		
				Normal										
T _{20°C} Vmax	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97	100	Pass		
T _{20°C} Vmin	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97	100	Pass		
		•		Extreme										
T _{50°C} Vnom	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97		Pass		
T _{40°C} Vnom	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97		Pass		
T _{30°C} Vnom	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97]	Pass		
T _{20°C} Vnom	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97	100	Pass		
T _{10°C} Vnom	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97	1	Pass		
T0 _{°C} Vnom	CW	13.56	13.559797	13.559797	13.559797	13.559797	-14.97	-14.97	-14.97	-14.97	1	Pass		

NOTE: 0.01 % = 100 ppm.

Project No.: 2311T064 Page 38 of 40 Report Version: R00






	Report No.: BTL-FCCP-1-2311T064
ADDENDIV F	
APPENDIX F	20 DB BANDWIDTH

Project No.: 2311T064 Page 39 of 40 Report Version: R00



Test Mode	TX

Frequency (MHz)	20 dB Bandwidth (MHz)	Operated Frequency Range (MHz)	Designated Frequency Band (MHz)	Result
13.56	13.56	0.002460	0.014	Complied

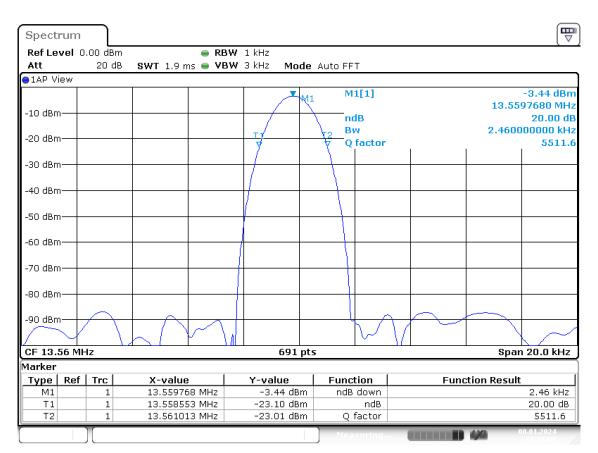

Date: 8.JAN.2024 17:27:08

End of Test Report