



PIR LED WALL LIGHTS WITH MOTION SENSOR

Quick Start Guide


MODEL: BDB55WF-3

COMPONENTS AND STRUCTURE

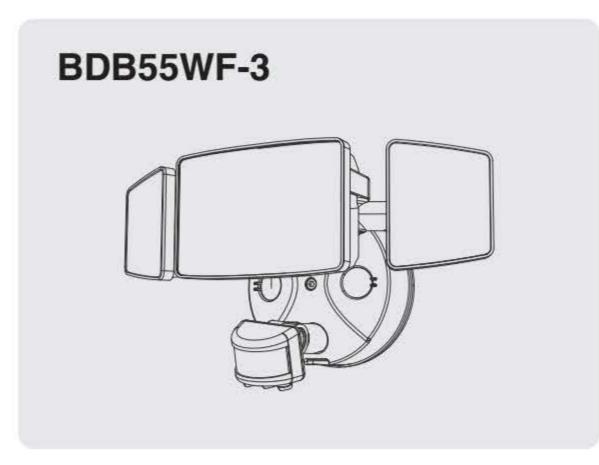

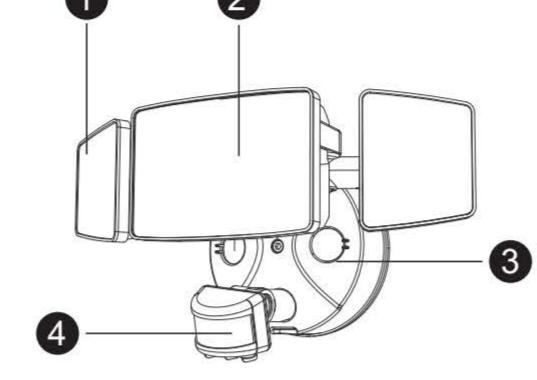

PARTS LIST

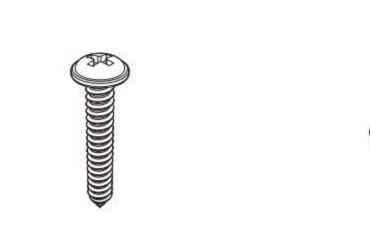














Machine Screw QTY: 2

SPECIFICATIONS

		WALL LAMP
Model	BDB55WF-3	
Input Current	0.7A	
Rated Power	55W	
Luminous Flux	5500lm	
Input Voltage	100-120V ~ 60Hz	
CCT	6500K	
CRI	≥80	
Power Factor	≥0.9	
L ₇₀ B ₅₀ lifetime	30000hours L ₇₀ B ₅₀ @ 25°	
Beam Angle	120°	
<i>t</i> a	-20-40°C/-4°F-104°F	
Luminaire Location	SUITABLE FOR WET LOCATIONS	
	DIM	IENSIONS
Model	BDB55WF-3	
Dimensions (LxHxW)	272x123x121mm/ 10.71x4.84x4.76 in	
Weight	0.9kg/1.98 lb	
Max Projected Area	0.0214m ² /0.23ft ²	
Max. Lighting Coverage	90m²/968ft²	
Note: The testing standard of the product's luminous flux: Place the three/two lights on the same horizontal surface for testing, and the tested luminous flux		


is the accurate luminous flux.

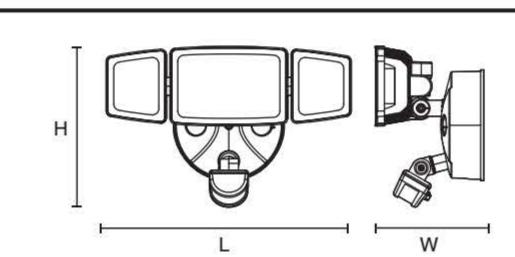


PAIRING LED LIGHT WITH "Onforu" APP

Step 1: "Onforu Home" App Download. There are 2 options for obtaining and downloading the "Onforu Home" App on your smart device. 1. Scan the QR code on the right. 2. Search for "Onforu Home" in the App Store or



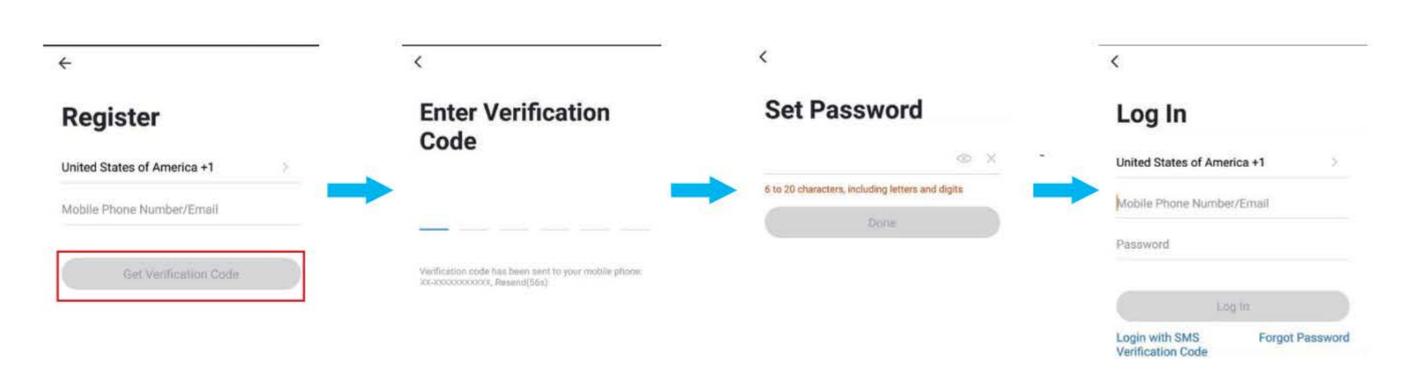

Step 2: Enter the "Onforu Home" App. Register an account and log in. If you already have an account for Onforu Home App, Please select "Log in with existing account". Note: You will need your "Onforu Home" App username and password to pair with Amazon Alexa and/or Google Assistant.

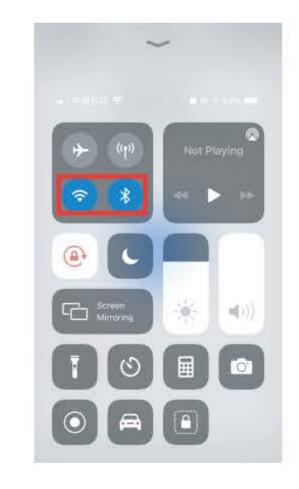

Google Play.


Step 3: Please turn on the Wi-Fi and Bluetooth before connecting LED lights to the "Onforu Home" App.

Step 4: How to pair the LED Light Set the light to the pending pairing state.


Power on the LED Light.

2. Turn the light on and off 3 times until it starts flashing, indicating that the light is ready for pairing.

Method 1

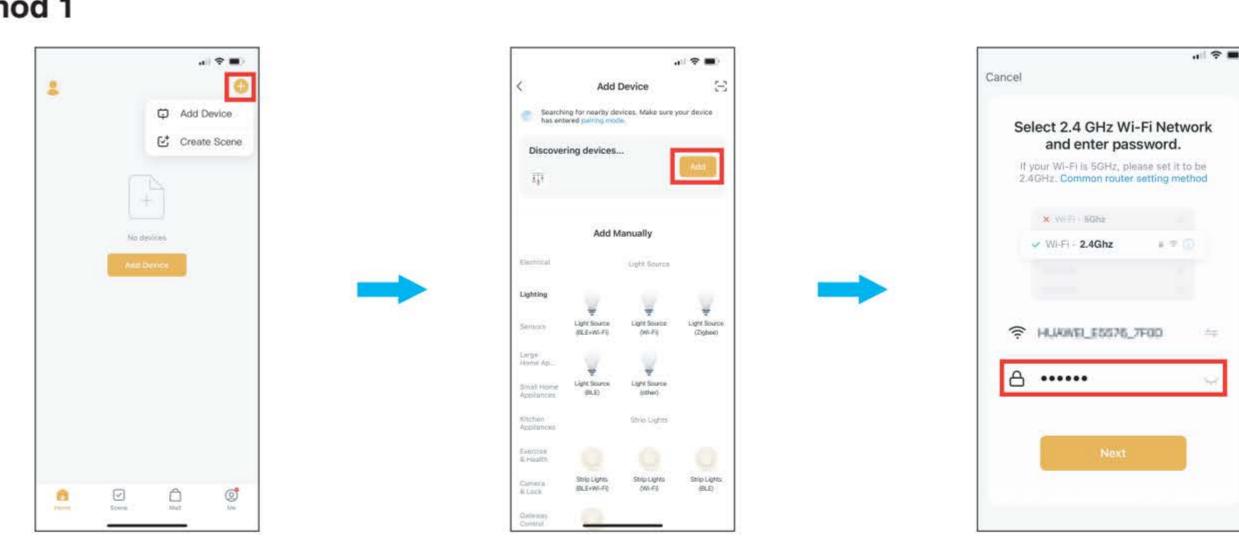


- 1. Tap "+" button on top right 2. The app will automatically corner and tap "Add Device" search for the device. After discovering the device, to add device. tap "Add".
- Enter Wi-Fi password to join your network. Please Note:
 - a. This smart LED Light can only support 2.4 GHz network and cannot work with 5.0 GHz network.
 - b. Please check if your home network is 2.4 GHz and make sure that your phone has been connected to your Wi-Fi network. Please ensure your network is not hidden.

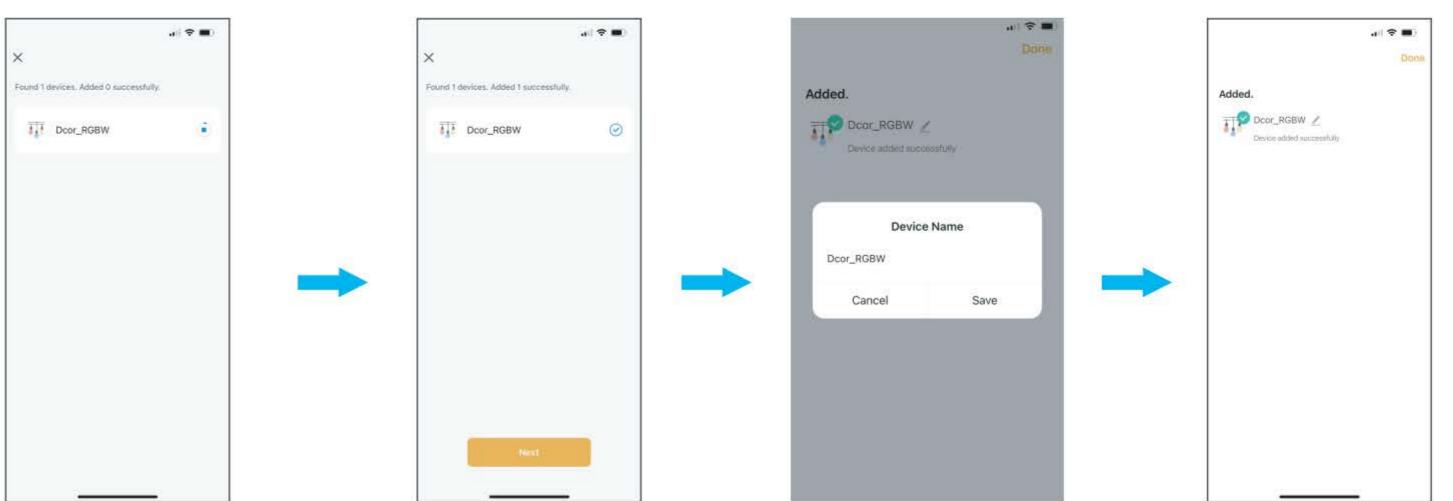

6. You can tap " 🖊 " to Tap "Next" to complete register (about 30-60s). the light pairing. change the device

7. Tap "Done" to enter the control panel.

Method 2

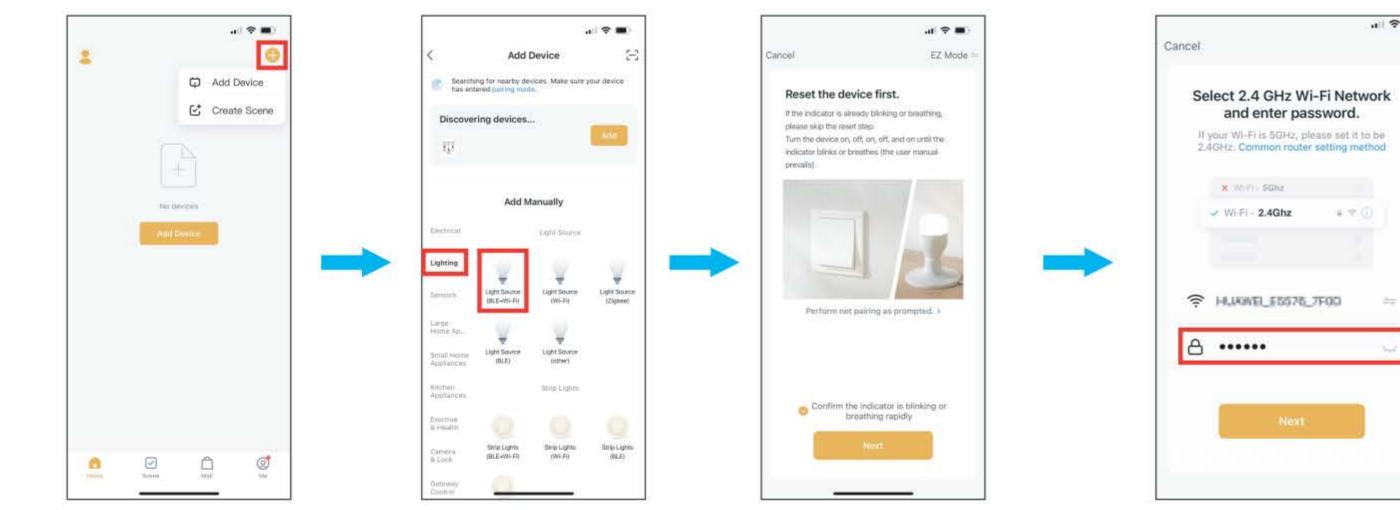

1. Tap "+" button on top 2. Tap "Lighting" and right corner and tap "Add then "Light Source" to Device" to add device.

register (about 30-60s). the light pairing.

LED Light.

3. Tap the "Next" 4. Enter Wi-Fi password to join your


change the device

Please Note: a. This smart LED Light can only support 2.4 GHz network and cannot work with 5.0 GHz network. b. Please check if your home network is 2.4 GHz and make sure that your phone has been connected to your

Please ensure your network is not

the control panel.

Wi-Fi network.

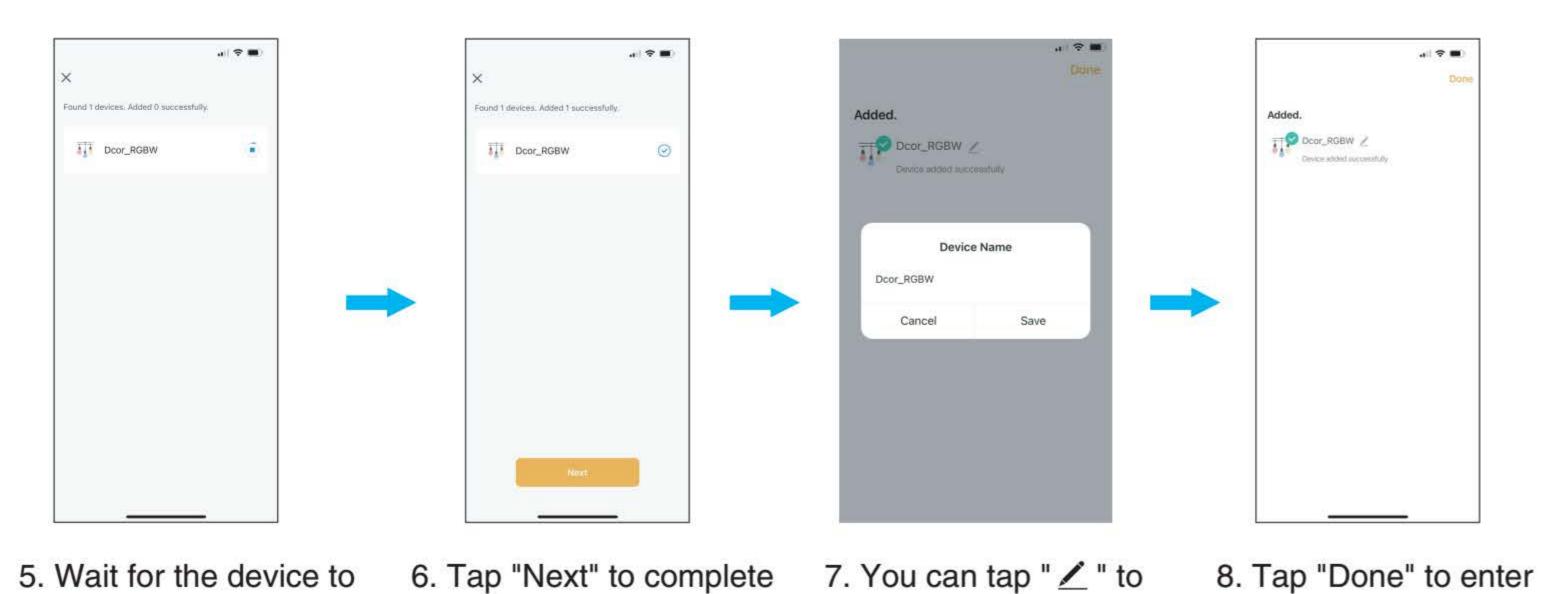



HOW TO OPERATE THE APP

 Color Temperature and **Brightness Adjustment**




2. Motion Sensing

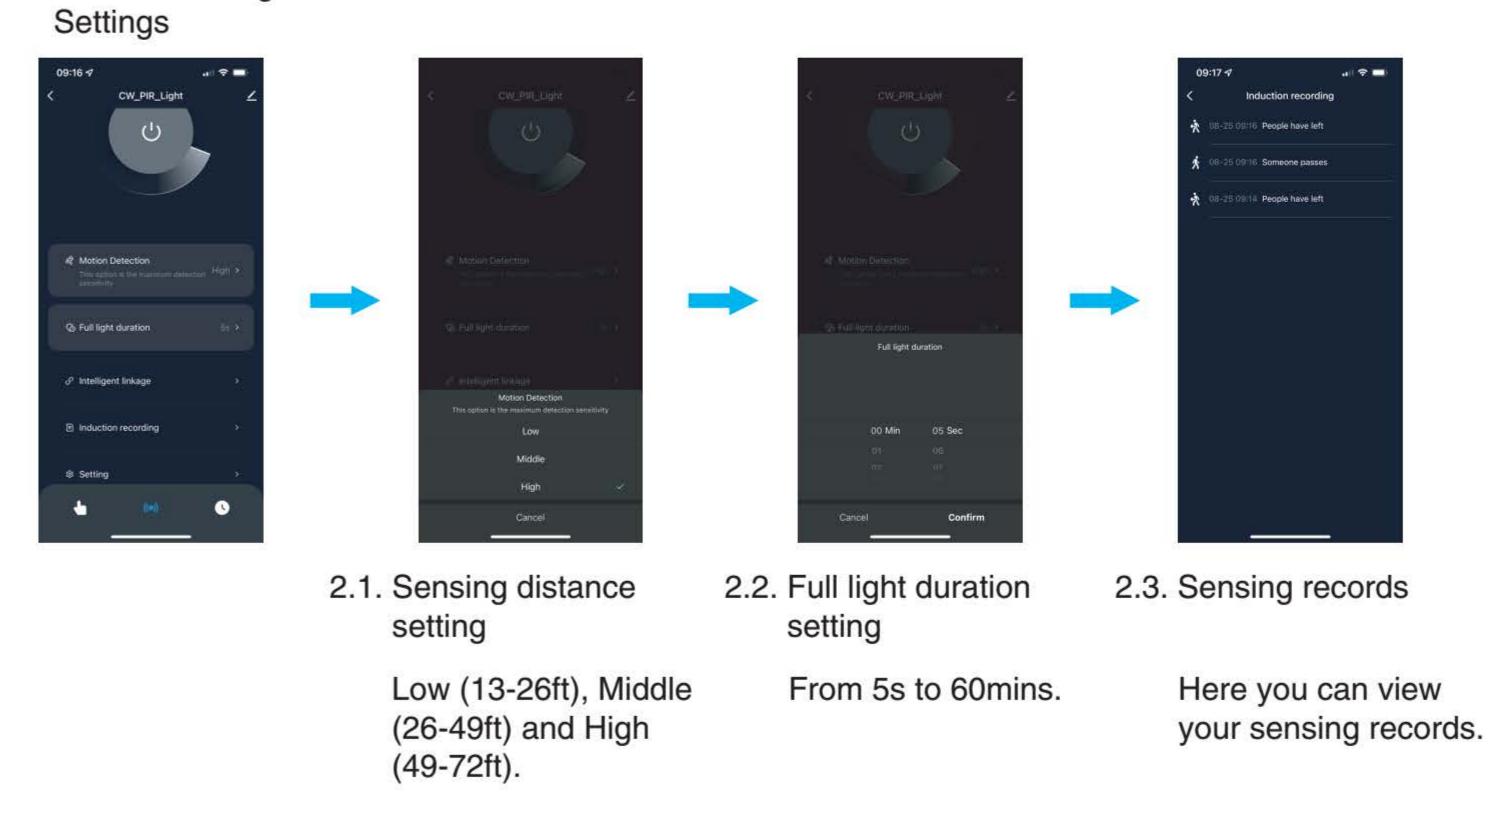

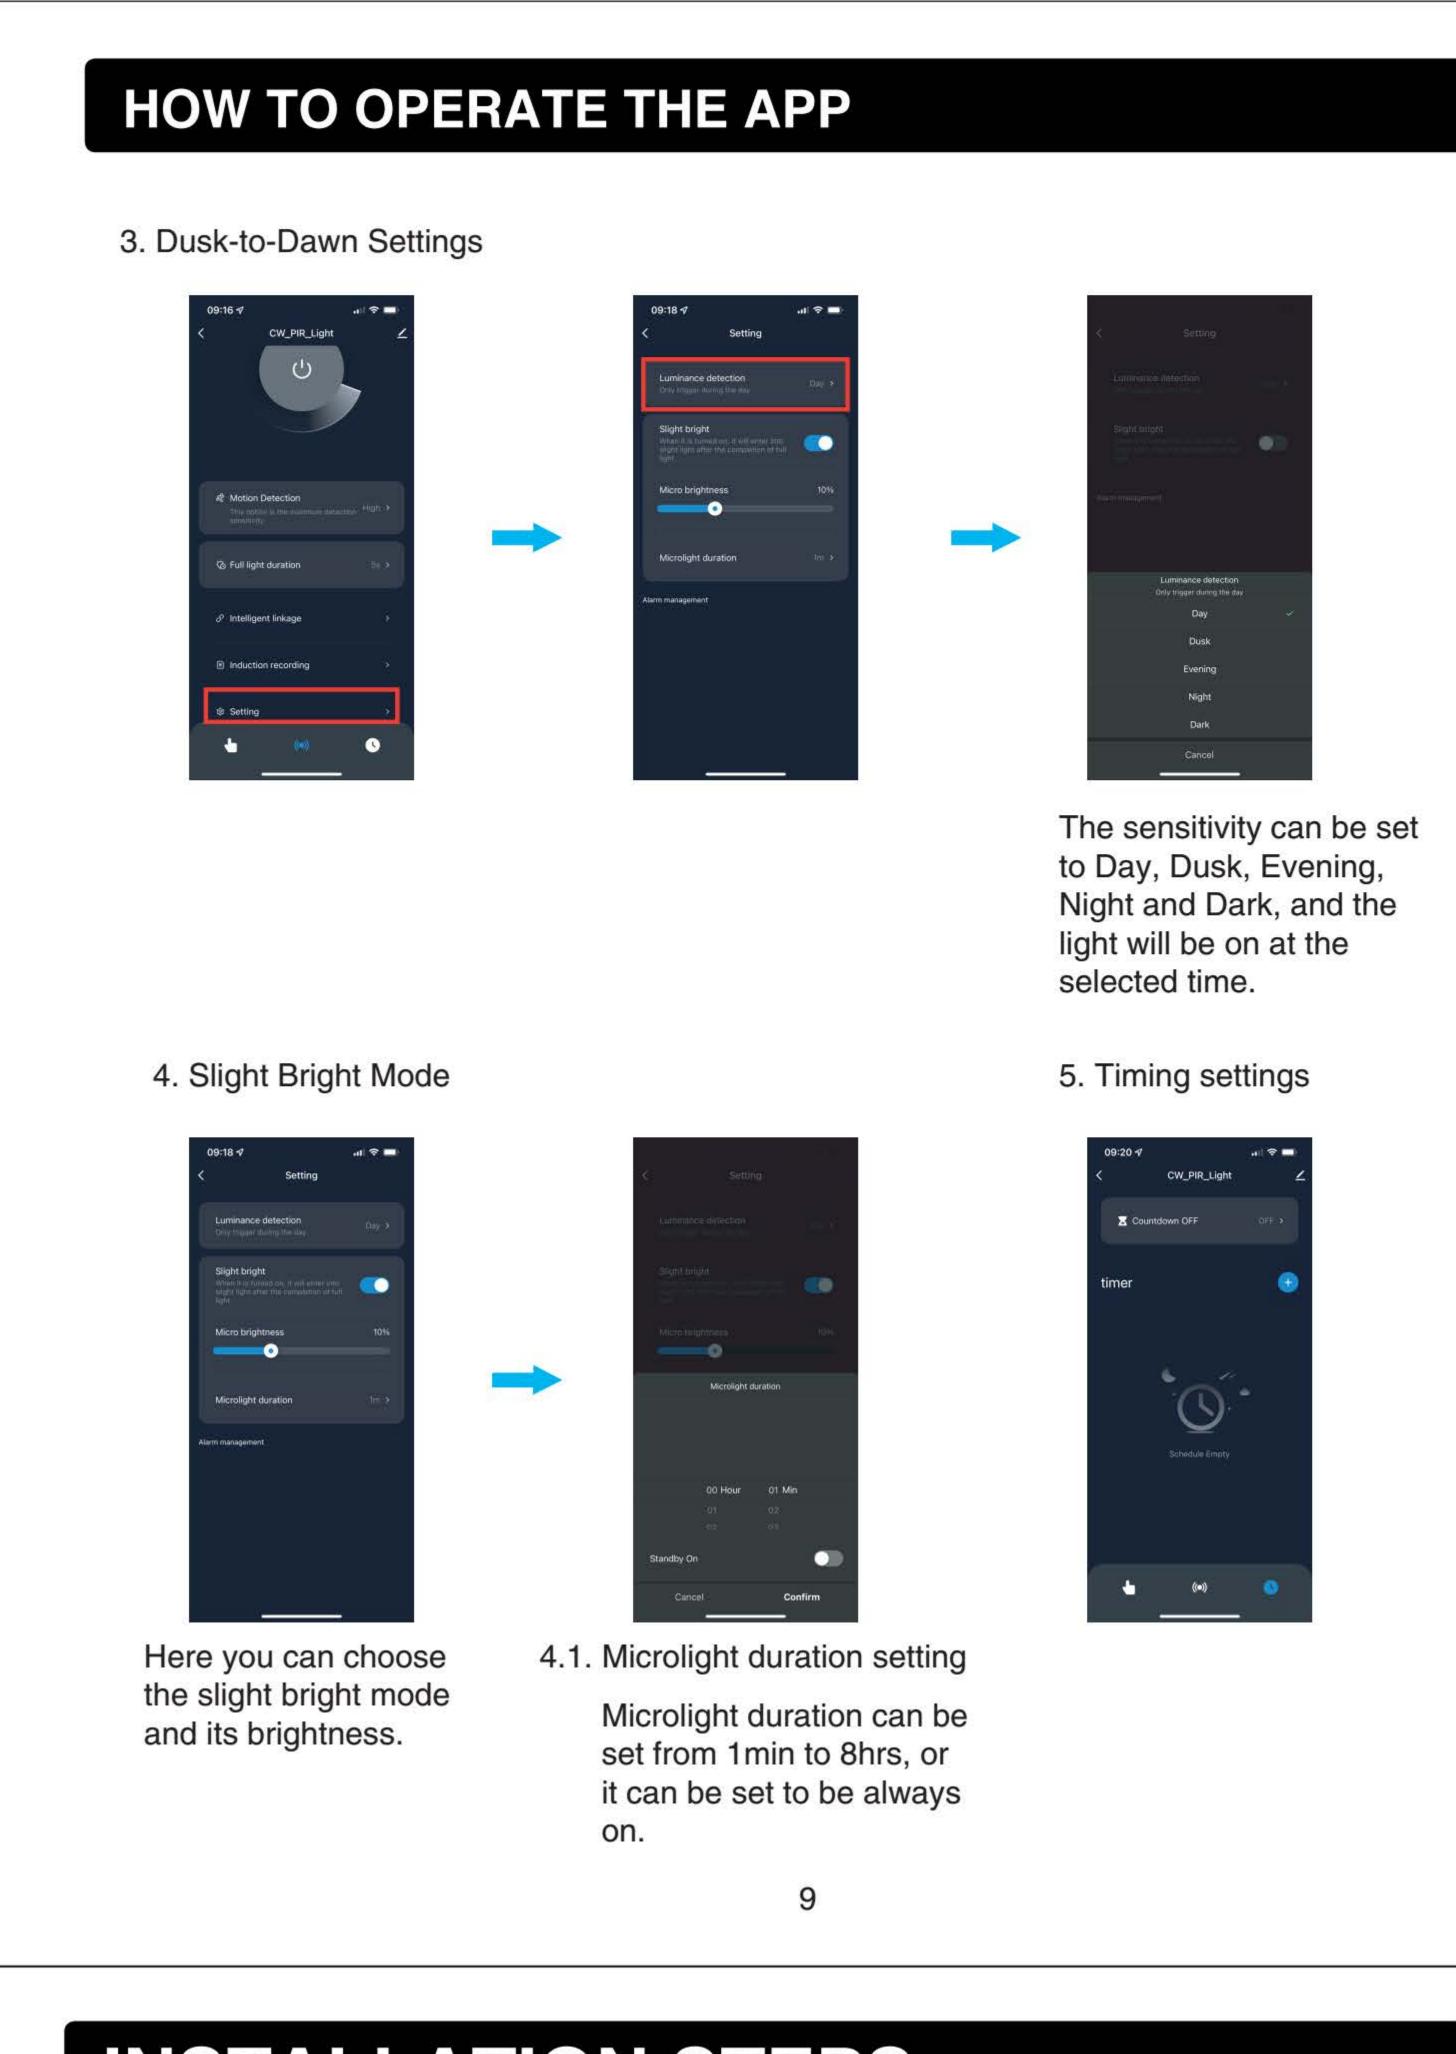

HOW TO CONNECT WITH ALEXA AND GOOGLE **ASSISTANT APP**

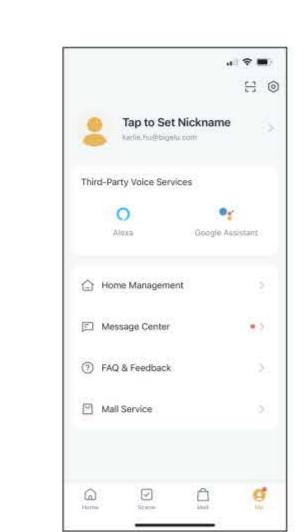

Tap "Me", find the third-party voice device you want to connect to and tap it, then follow the steps to connect.

PREPARATION


NOTE:

Before beginning assembly of product, make sure all parts are present. Compare parts with parts list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 30-60 minutes.

Recommended to be installed 2.5m (8.2ft) above the ground but not higher than 5m (16.4ft).

Product appearance may vary from image shown.

TOOLS REQUIRED (not included)

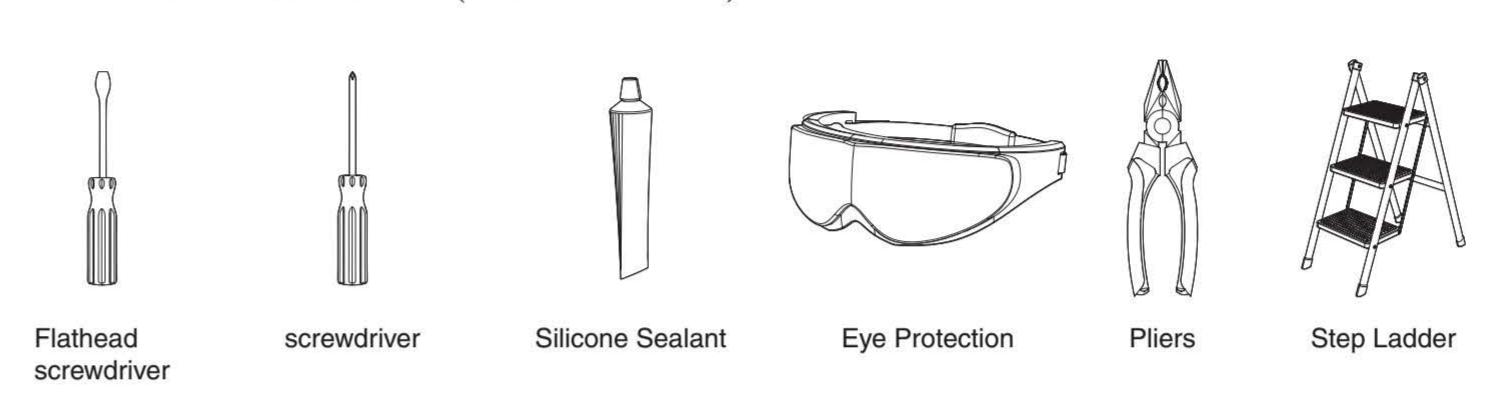

WARNING:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CAUTION:

PLEASE MAKE SURE YOUR WALL SWITCH AND POWER AT MAIN CIRCUIT BREAKER BOTH ARE OFF.

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION, CONSULT A LICENSED ELECTRICIAN.

PREPARATION

RISK OF SHOCK:

BEFORE BEGINNING INSTALLATION, TURN OFF ELECTRICITY AT THE CIRCUIT BREAKER BOX OR THE MAIN FUSE BOX.

NOTE:

BE SURE TO USE WIRE NUTS/CONNECTORS RATED FOR THE CORRECT GAUGE AND NUMBER OF WIRES USED.

MAKE SURE THERE ARE NO EXPOSED WIRE BUNDLES OUTSIDE THE WIRE NUT/CONNECTOR (IF APPLICABLE).

BE CAREFUL NOT TO DAMAGE OR CUT THE WIRE INSULA-TION (COVERING) DURING INSTALLATION. DO NOT LET THE WIRES TOUCH ANY SHARP EDGES.


WARNING:


DO NOT CONNECT THIS LIGHT FIXTURE TO AN UNGROUNDED **ELECTRICAL SYSTEM. ATTACH GROUND FIXTURE WIRE TO** EITHER GREEN GROUND SCREW ON MOUNTING PLATE OR THE GROUND WIRE IN THE OUTLET BOX.


INSTALLING THIS LIGHT IN AN UNGROUNDED ELECTRICAL SYSTEM MAY CAUSE THE METAL PARTS OF THE LIGHT TO CARRY CURRENT IF ANY WIRES OR WIRE CONNECTIONS ARE DAMAGED OR LOOSE. IN THIS CASE, ANYONE WHO TOUCHES THE LIGHT WILL RECEIVE AN ELECTRIC SHOCK, RESULTING IN INJURY OR DEATH.

INSTALLATION STEPS

FOR WET LOCATION, MAKE SURE FILL FULL THE GAP OF EVA GASKET AND MOUNTING SURFACE WITH SEALING COMPOUND OR SILICONE GLUE.

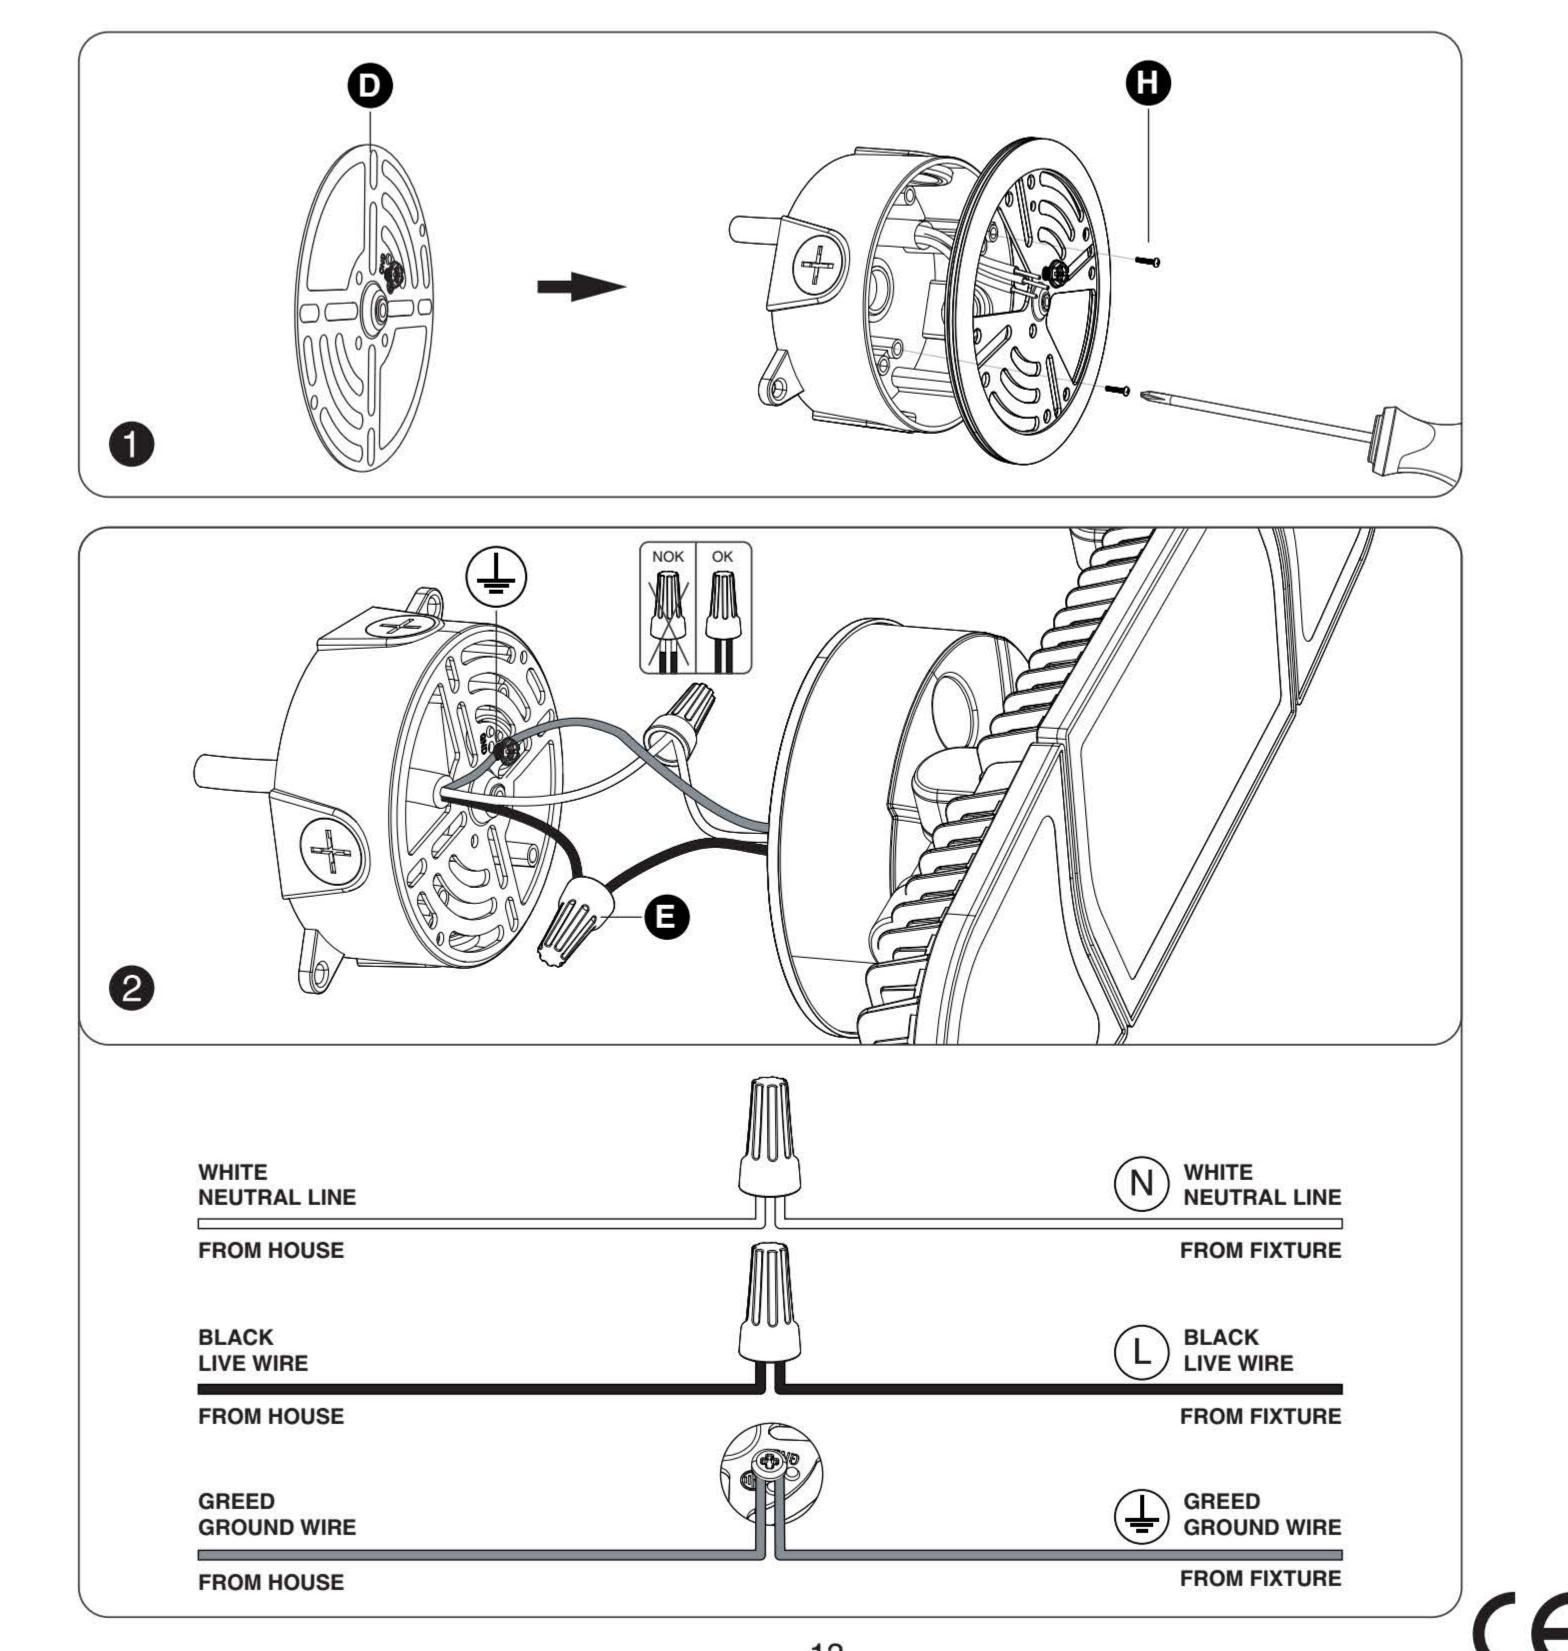


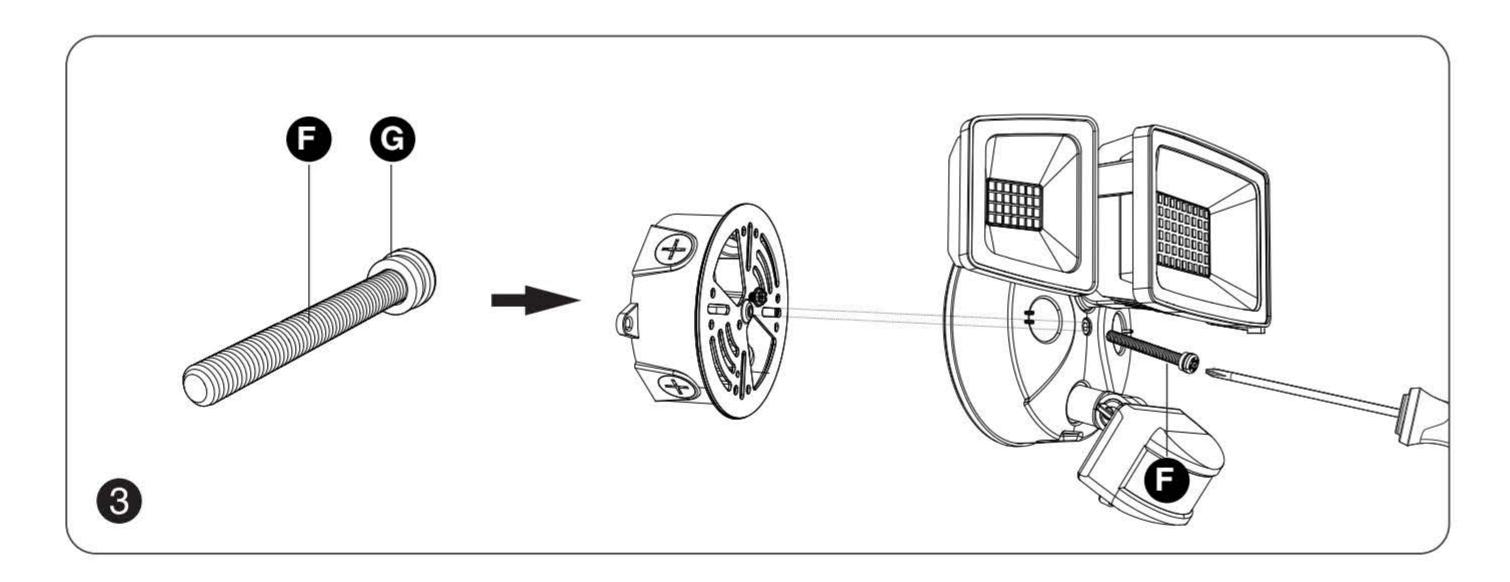

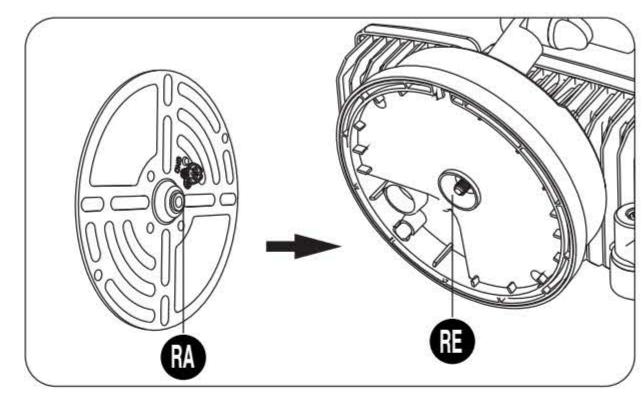

The raised part (RA) of the metal plate must be engaged with the recessed part (RE) of the base, otherwise it cannot be installed.

Detection Range: 180°

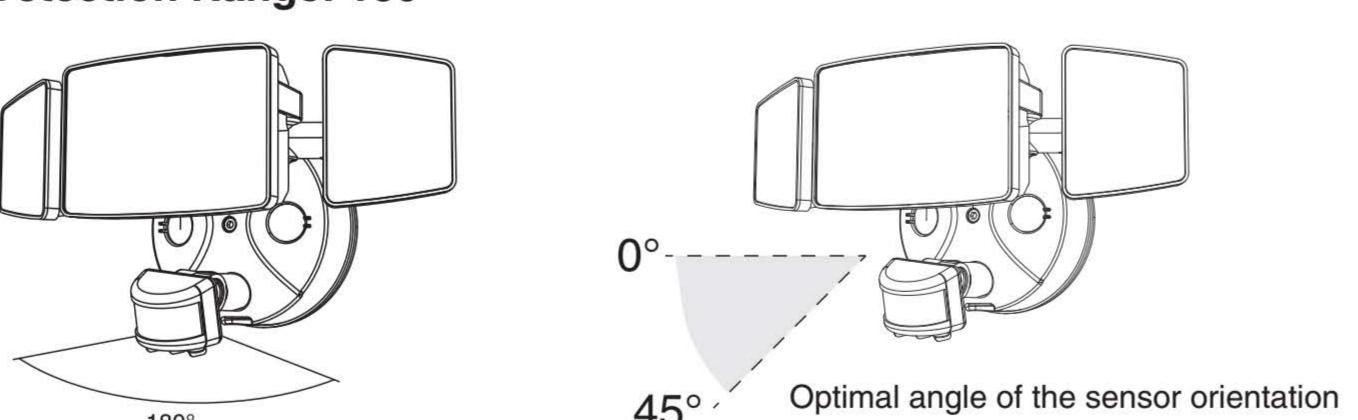

NOTE:

- 1. The PIR sensor shall always be tilted slightly downward.
- 2. The orientation angle of the sensor shall be between 0-45°.
- 3. The detection distance of the sensor is the farthest when the ambient temperature is 25°C.
- Any temperature fluctuations above or below 25°C will affect the detection distance. 4. If the light continues to detect motion while it is on, it will remain on until the motion stops.

FCC Warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two

(1) This device may not cause harmful interference, and

FCC ID: 2A3W8BDB55WF-3

(2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital

device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Manufacturer / Hersteller: Shen Zhen Shi Meng Zhi Tuo Ke Ji You Xian Gong Si Address: qian wan yi lu 1 hao A dong 201 shi qian hai shen gang he zuo qu Shen Zhen, Guang Dong, 518000, CN support@onforuled.com www.onforuleds.com

EU REP MDH LIGHTING LTD Suite 302, 292 Strovolos Avenue, 2048 Strovolos Nicosia, Cyprus | support@onforuled.com

UK REP MDH LIGHTING LTD 69 Aberdeen Avenue, Cambridge CB2 8DL, United Kingdom | support@onforuled.com

Made in China