

FCC Radio Test Report

FCC ID: 2AG5OPB-701-B

Report No. : BTL-FCCP-1-2007T023
Equipment : Pebblebee Found
Model Name : PB-701-B
Brand Name : Found
Applicant : PB Inc.
Address : PO Box 2962 Renton Washington United States 98056


Radio Function : Bluetooth Low Energy

FCC Rule Part(s) : FCC Part15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2020/7/9
Date of Test : 2020/7/9 ~ 2020/7/29
Issued Date : 2020/9/22


The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :

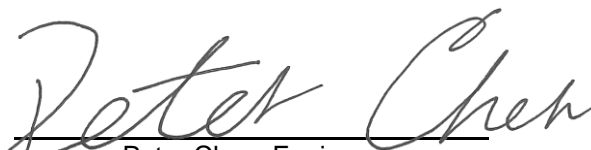
Peter Chen, Engineer



Approved by :


Scott Hsu, Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REPORT ISSUED HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
1.5 DUTY CYCLE	8
2 GENERAL INFORMATION	9
2.1 DESCRIPTION OF EUT	9
2.2 TEST MODES	10
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 SUPPORT UNITS	11
3 AC POWER LINE CONDUCTED EMISSIONS TEST	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 DEVIATION FROM TEST STANDARD	12
3.4 TEST SETUP	13
3.5 TEST RESULT	13
4 RADIATED EMISSIONS TEST	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	15
4.4 TEST SETUP	16
4.5 EUT OPERATING CONDITIONS	17
4.6 TEST RESULT – 30 MHZ TO 1 GHZ	17
4.7 TEST RESULT – ABOVE 1 GHZ	17
5 BANDWIDTH TEST	18
5.1 APPLIED PROCEDURES / LIMIT	18
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM STANDARD	18
5.4 TEST SETUP	18
5.5 EUT OPERATION CONDITIONS	18
5.6 TEST RESULTS	18
6 OUTPUT POWER TEST	19
6.1 APPLIED PROCEDURES / LIMIT	19
6.2 TEST PROCEDURE	19
6.3 DEVIATION FROM STANDARD	19
6.4 TEST SETUP	19
6.5 EUT OPERATION CONDITIONS	19
6.6 TEST RESULTS	19
7 POWER SPECTRAL DENSITY TEST	20
7.1 APPLIED PROCEDURES / LIMIT	20
7.2 TEST PROCEDURE	20
7.3 DEVIATION FROM STANDARD	20
7.4 TEST SETUP	20
7.5 EUT OPERATION CONDITIONS	20
7.6 TEST RESULTS	20

8	ANTENNA CONDUCTED SPURIOUS EMISSION	21
8.1	APPLIED PROCEDURES / LIMIT	21
8.2	TEST PROCEDURE	21
8.3	DEVIATION FROM STANDARD	21
8.4	TEST SETUP	21
8.5	EUT OPERATION CONDITIONS	21
8.6	TEST RESULTS	21
9	LIST OF MEASURING EQUIPMENTS	22
10	EUT TEST PHOTO	24
11	EUT PHOTOS	24
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	25
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	28
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	31
APPENDIX D	BANDWIDTH	56
APPENDIX E	OUTPUT POWER	58
APPENDIX F	POWER SPECTRAL DENSITY TEST	60
APPENDIX G	ANTENNA CONDUCTED SPURIOUS EMISSION	62

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2020/9/7
R01	Revised Typo.	2020/9/22

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart C (15.247)				
Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.247(a)(2)	Bandwidth	APPENDIX D	Pass	-----
15.247(b)(3)	Output Power	APPENDIX E	Pass	-----
15.247(e)	Power Spectral Density	APPENDIX F	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX G	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

- C05 CB08 CB11 CB15 CB16
 SR06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Bandwidth	1.13
Output power	1.06
Power Spectral Density	1.20
Conducted Spurious emissions	1.14
Conducted Band edges	1.13

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	24 °C, 57 %	AC 120V/60Hz	Jay Kao
Radiated emissions below 1 GHz	22 °C, 61 %	DC 5V	Aven Ho
Radiated emissions above 1 GHz	22 °C, 61 %	DC 5V	Aven Ho
Bandwidth	23.9 °C, 46 %	DC 5V	William Wei
Output Power	23.9 °C, 46 %	DC 5V	William Wei
Power Spectral Density	23.9 °C, 46 %	DC 5V	William Wei
Antenna conducted Spurious Emission	23.9 °C, 46 %	DC 5V	William Wei

1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test Software	Hardware_Evaluation_Tool_r1.5			
Modulation Mode	2402 MHz	2440 MHz	2480 MHz	Data Rate
BLE	8	8	8	1 Mbps
BLE	8	8	8	2 Mbps

1.5 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.

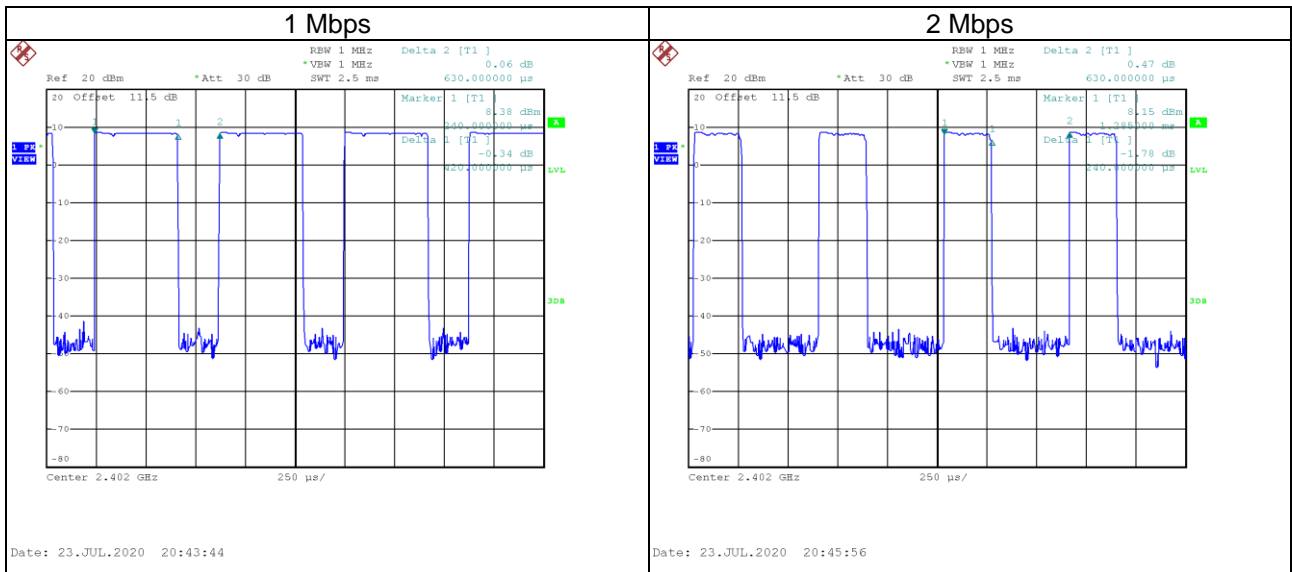

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
1 Mbps	0.420	1	0.420	0.630	66.67%	1.76
2 Mbps	0.240	1	0.240	0.630	38.10%	4.19

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Pebblebee Found
Model Name	PB-701-B
Brand Name	Found
Model Difference	N/A
Power Source	Supplied from Battery.
Power Rating	I/P: DC 5V 1A
Products Covered	N/A
Hardware Version	PB_GO_DVT
Software Version	Firmware Ver: N.3.1.7
Frequency Range	2400 MHz ~ 2483.5 MHz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK
Transfer Rate	1, 2 Mbps
Output Power Max.	1 Mbps: 8.64 dBm (0.0073 W) 2 Mbps: 8.73 dBm (0.0075 W)
Test Model	PB-701-B
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- (2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

- (3) Table for Filed Antenna:

Ant.	Brand	Part number	Antenna Type	Connector	Gain (dBi)
J2	WIESON	ARY197-1757-003-00	PIFA	N/A	-2.57

2.2 TEST MODES



Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	BLE5.0 (1 Mbps)	39	-
Transmitter Radiated Emissions (above 1GHz)	BLE4.0/BLE5.0 (1, 2 Mbps)	00/39	Bandedge
	BLE4.0/BLE5.0 (1, 2 Mbps)	00/19/39	Harmonic
Bandwidth	BLE 1, 2 Mbps	00/19/39	-
Output Power	BLE 1, 2 Mbps	00/19/39	-
Power Spectral Density	BLE 1, 2 Mbps	00/19/39	-
Antenna conducted Spurious Emission	BLE 1, 2 Mbps	00/19/39	-

NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (4) There were no emissions found below 30 MHz within 20 dB of the limit.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

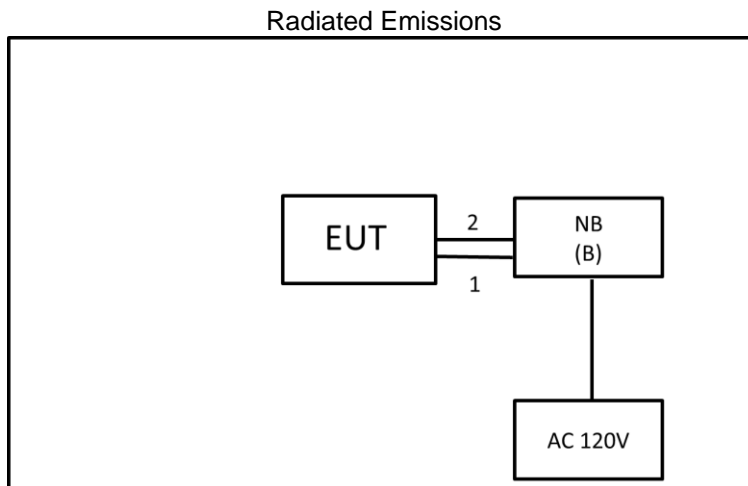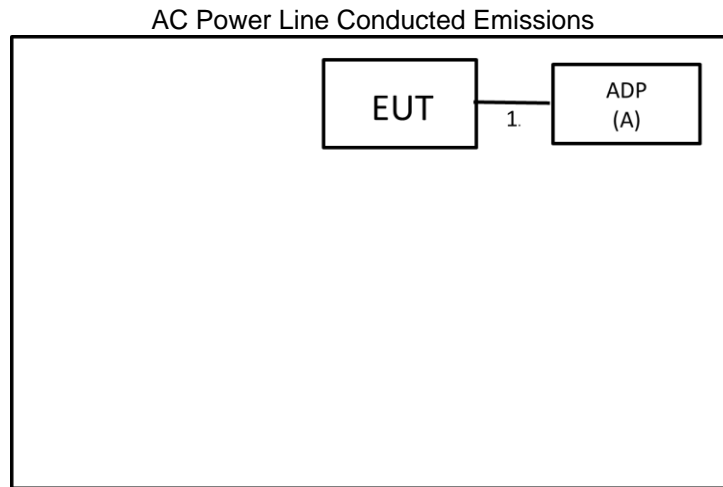

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	SAMSUNG	EP-TA12/WS	NA	Furnished by test lab.
B	NB	HP	TPN-I119	NA	Furnished by test lab.

Item	Cable Type	Shielded	Ferrite Core	Length	Remarks
1	USB Cable	YES	NA	0.15M	Supplied by test requester
2	Fixture Cable to USB	NA	NA	0.5M	Supplied by test requester

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

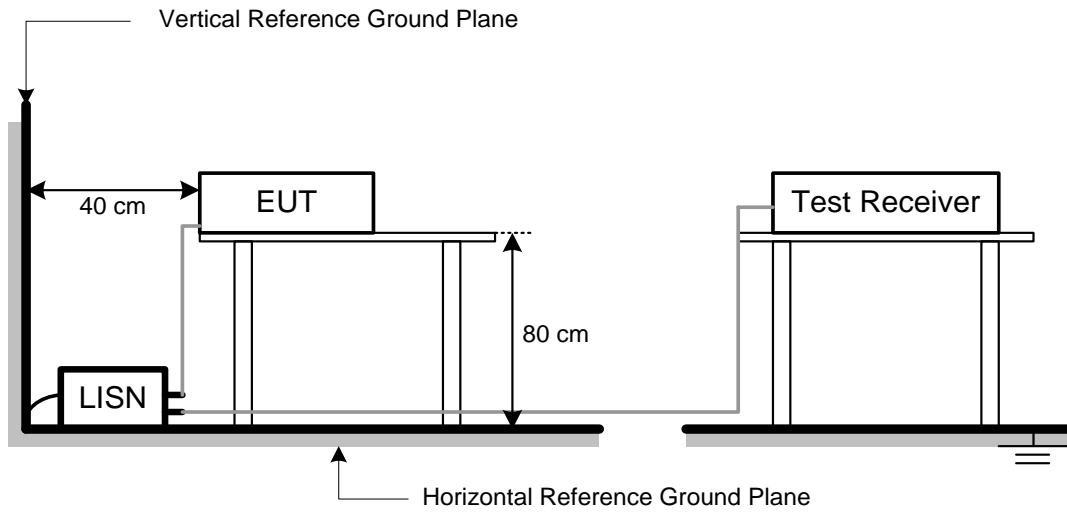

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
41.91	+	-8.36	=	33.55

Measurement Value		Limit Value		Margin Level
33.55	-	43.50	=	-9.95

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

30 MHz to 1 GHz

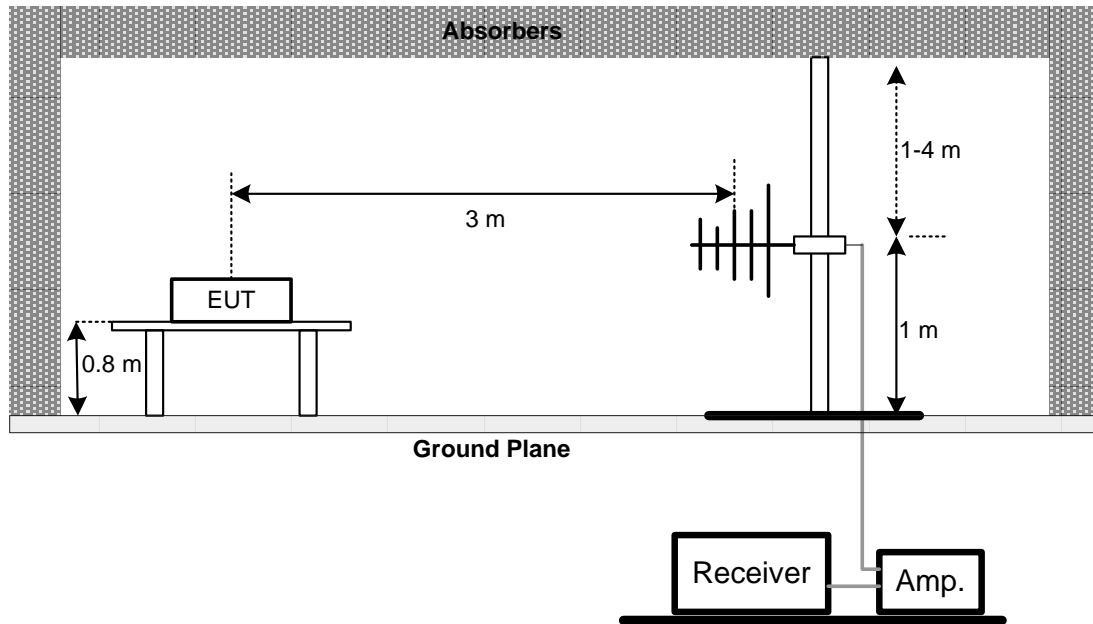

Above 1 GHz

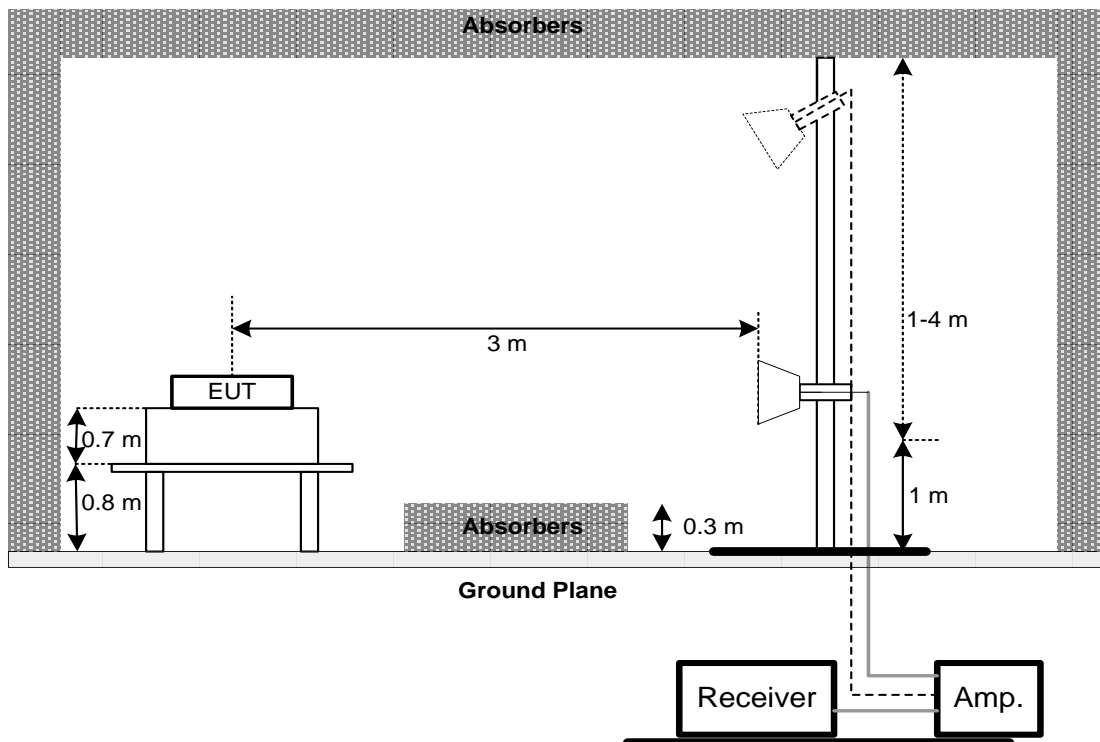

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST**5.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP**5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY TEST**7.1 APPLIED PROCEDURES / LIMIT**


FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8 ANTENNA CONDUCTED SPURIOUS EMISSION

8.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

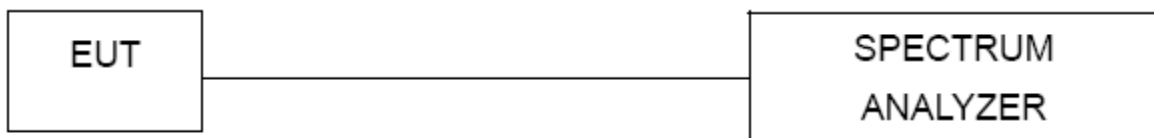

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9 LIST OF MEASURING EQUIPMENTS

AC power line conducted emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	2020/6/11	2021/6/11
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2019/8/15	2020/8/14
3	EMI Test Receiver	R&S	ESR7	101433	2019/12/13	2020/12/11
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC001340	980555	2020/4/10	2021/4/9
2	Preamplifier	EMCI	EMC02325B	980217	2020/4/10	2021/4/9
3	Preamplifier	EMCI	EMC012645B	980267	2020/4/10	2021/4/9
4	Test Cable	EMCI	EMC104-SM-SM-800	150207	2020/4/10	2021/4/9
5	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2020/4/10	2021/4/9
6	Test Cable	EMCI	EMC-SM-SM-7000	180408	2020/4/10	2021/4/9
7	MXE EMI Receiver	Agilent	N9038A	MY554200087	2020/6/10	2021/6/9
8	Signal Analyzer	Agilent	N9010A	MY56480554	2020/6/4	2021/6/3
9	Loop Ant	EMCO	6502	274	2020/6/16	2021/6/15
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-01783	2019/8/14	2020/8/13
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	0992	2020/7/10	2021/7/9
12	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0508	2020/7/10	2021/7/9

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2020/3/30	2021/3/29

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Anritsu	ML2495A	1128008	2020/6/11	2021/6/10
2	Power Sensor	Anritsu	MA2411B	1126001	2020/6/11	2021/6/10

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2020/3/30	2021/3/29

Antenna conducted Spurious Emission

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP38	101139	2020/3/30	2021/3/29

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2007T023-FCCP-1 (APPENDIX-TEST PHOTOS).

11 EUT PHOTOS

Please refer to document Appendix No.: EP-2007T023-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS


Test Mode	Normal	Tested Date	2020/7/22
Test Voltage	AC 120V/60Hz	Phase	Line

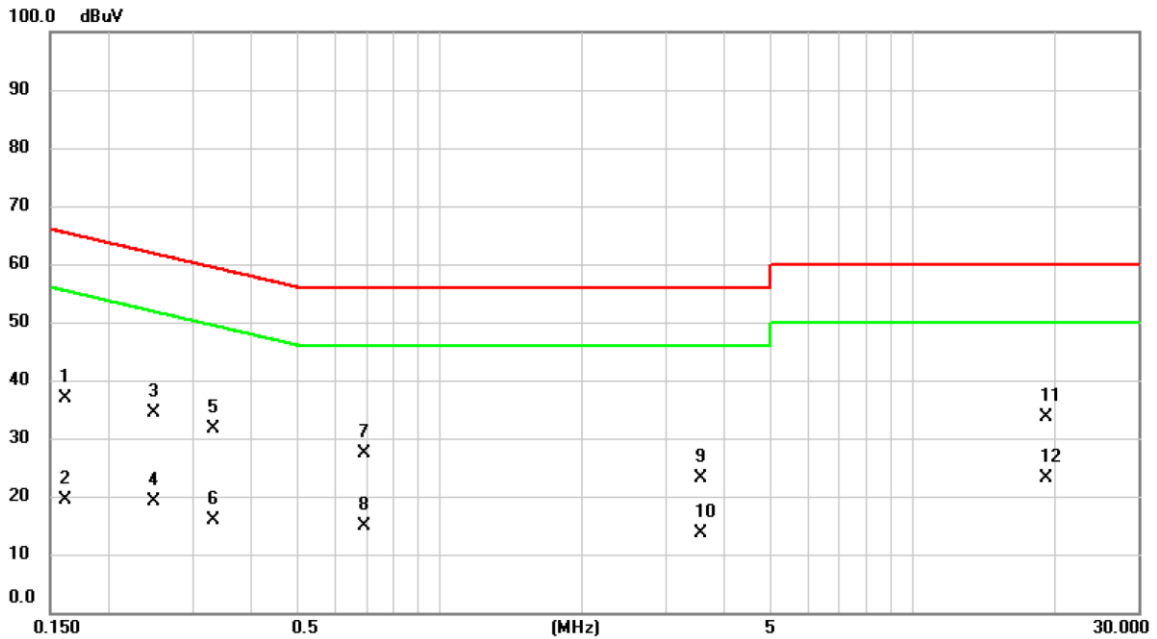

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1612	27.10	9.68	36.78	65.40	-28.62	QP	
2		0.1612	9.60	9.68	19.28	55.40	-36.12	AVG	
3		0.2490	24.74	9.68	34.42	61.79	-27.37	QP	
4		0.2490	9.41	9.68	19.09	51.79	-32.70	AVG	
5		0.3322	22.05	9.68	31.73	59.40	-27.67	QP	
6		0.3322	6.21	9.68	15.89	49.40	-33.51	AVG	
7		0.6922	17.64	9.68	27.32	56.00	-28.68	QP	
8		0.6922	5.30	9.68	14.98	46.00	-31.02	AVG	
9		3.5745	13.31	9.78	23.09	56.00	-32.91	QP	
10		3.5745	3.85	9.78	13.63	46.00	-32.37	AVG	
11	*	19.1084	23.75	9.96	33.71	60.00	-26.29	QP	
12		19.1084	13.16	9.96	23.12	50.00	-26.88	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2020/7/22
Test Voltage	AC 120V/60Hz	Phase	Neutral

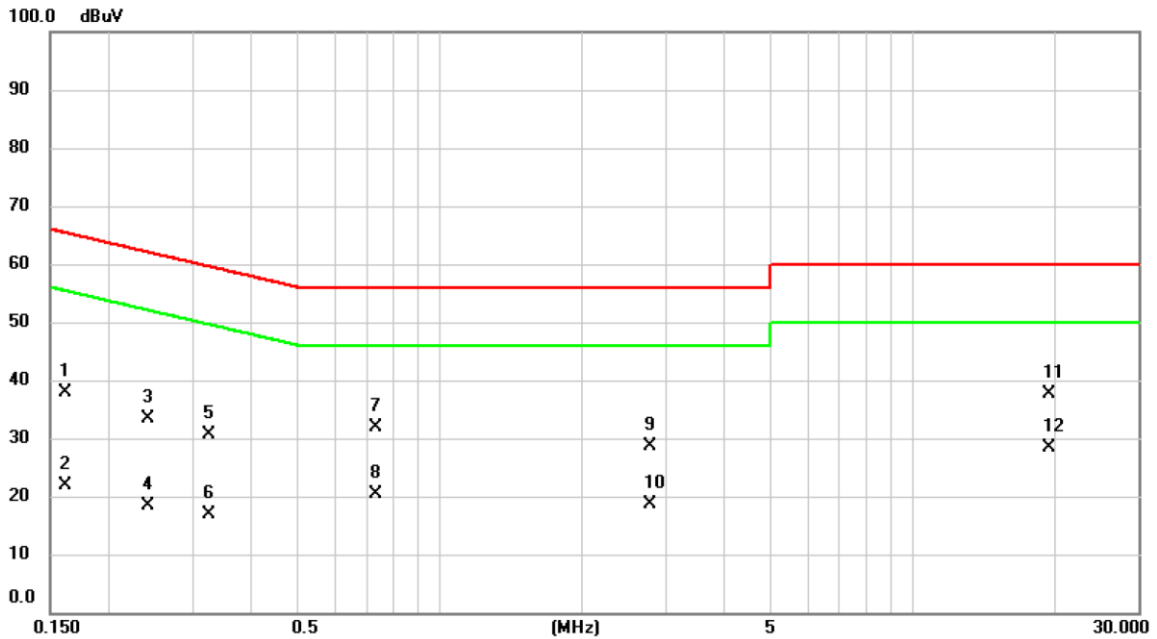


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1613	28.23	9.68	37.91	65.40	-27.49	QP	
2	0.1613	12.10	9.68	21.78	55.40	-33.62	AVG	
3	0.2423	23.60	9.68	33.28	62.02	-28.74	QP	
4	0.2423	8.62	9.68	18.30	52.02	-33.72	AVG	
5	0.3255	21.03	9.68	30.71	59.57	-28.86	QP	
6	0.3255	7.18	9.68	16.86	49.57	-32.71	AVG	
7	0.7304	22.25	9.68	31.93	56.00	-24.07	QP	
8	0.7304	10.78	9.68	20.46	46.00	-25.54	AVG	
9	2.7758	18.84	9.76	28.60	56.00	-27.40	QP	
10	2.7758	8.78	9.76	18.54	46.00	-27.46	AVG	
11	19.4662	27.77	9.96	37.73	60.00	-22.27	QP	
12 *	19.4662	18.39	9.96	28.35	50.00	-21.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/24
Test Frequency	CH39: 2480 MHz	Polarization	Vertical

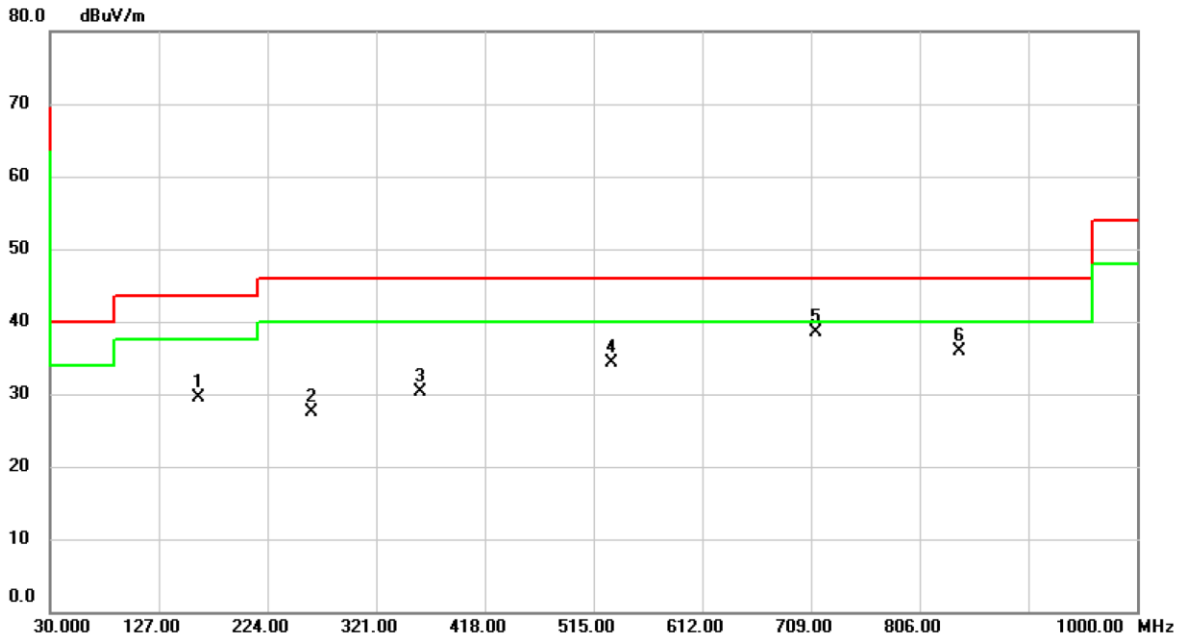


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	161.9200	37.31	-7.84	29.47	43.50	-14.03	peak	
2	263.7700	36.09	-8.59	27.50	46.00	-18.50	peak	
3	359.8000	35.88	-5.66	30.22	46.00	-15.78	peak	
4	531.4900	36.31	-2.02	34.29	46.00	-11.71	peak	
5 *	712.8800	37.22	1.38	38.60	46.00	-7.40	peak	
6	841.8900	32.73	3.21	35.94	46.00	-10.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/24
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

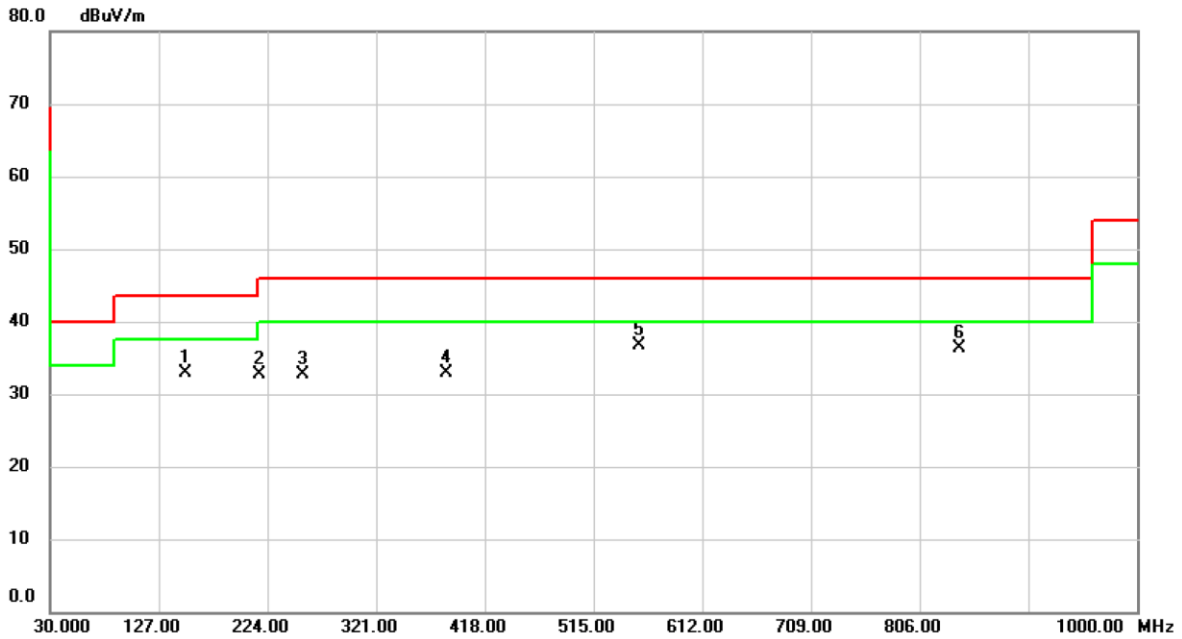


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		150.2800	40.80	-7.90	32.90	43.50	-10.60	peak	
2		216.2400	43.13	-10.35	32.78	46.00	-13.22	peak	
3		256.0100	41.61	-8.88	32.73	46.00	-13.27	peak	
4		384.0500	38.14	-5.23	32.91	46.00	-13.09	peak	
5	*	555.7400	38.19	-1.44	36.75	46.00	-9.25	peak	
6		841.8900	33.04	3.21	36.25	46.00	-9.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Horizontal

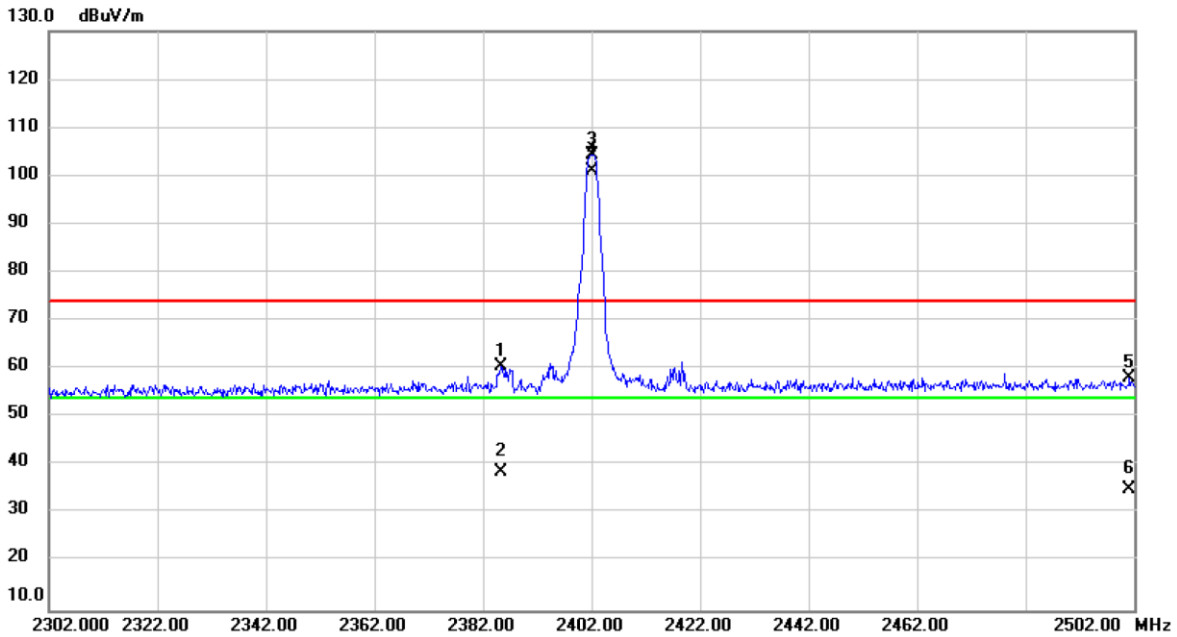


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2385.400	29.60	31.09	60.69	74.00	-13.31	peak	
2		2385.400	7.66	31.09	38.75	54.00	-15.25	AVG	
3	X	2402.000	73.21	31.16	104.37	74.00	30.37	peak	No Limit
4	*	2402.000	69.84	31.16	101.00	54.00	47.00	AVG	No Limit
5		2501.200	26.57	31.53	58.10	74.00	-15.90	peak	
6		2501.200	3.49	31.53	35.02	54.00	-18.98	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

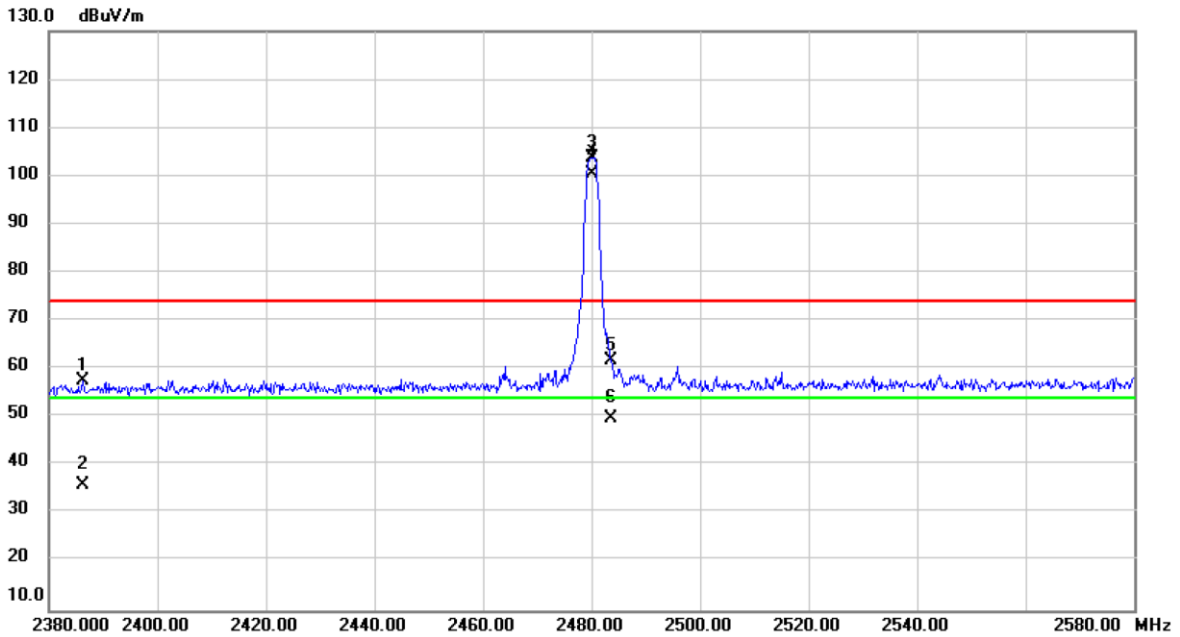


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2386.200	26.59	31.10	57.69	74.00	-16.31	peak	
2		2386.200	4.93	31.10	36.03	54.00	-17.97	AVG	
3	X	2480.000	72.43	31.46	103.89	74.00	29.89	peak	No Limit
4	*	2480.000	69.09	31.46	100.55	54.00	46.55	AVG	No Limit
5		2483.500	30.35	31.47	61.82	74.00	-12.18	peak	
6		2483.500	18.36	31.47	49.83	54.00	-4.17	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Horizontal

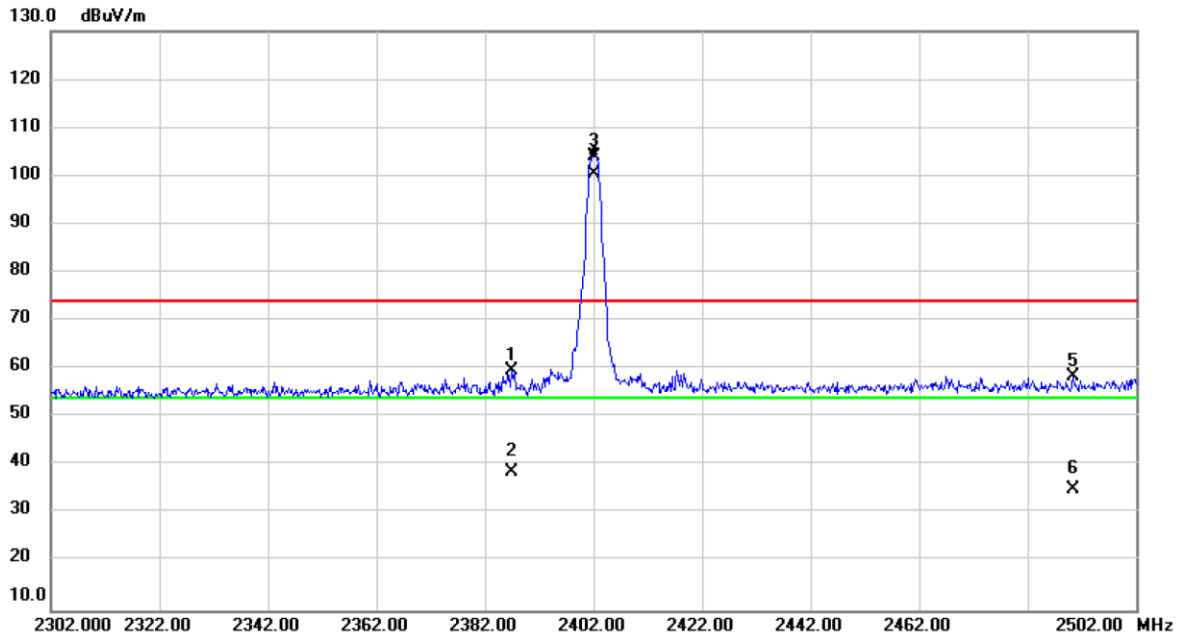


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2387.000	28.42	31.10	59.52	74.00	-14.48	peak	
2		2387.000	7.52	31.10	38.62	54.00	-15.38	AVG	
3	X	2402.000	72.82	31.16	103.98	74.00	29.98	peak	No Limit
4	*	2402.000	69.43	31.16	100.59	54.00	46.59	AVG	No Limit
5		2490.400	26.82	31.49	58.31	74.00	-15.69	peak	
6		2490.400	3.50	31.49	34.99	54.00	-19.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

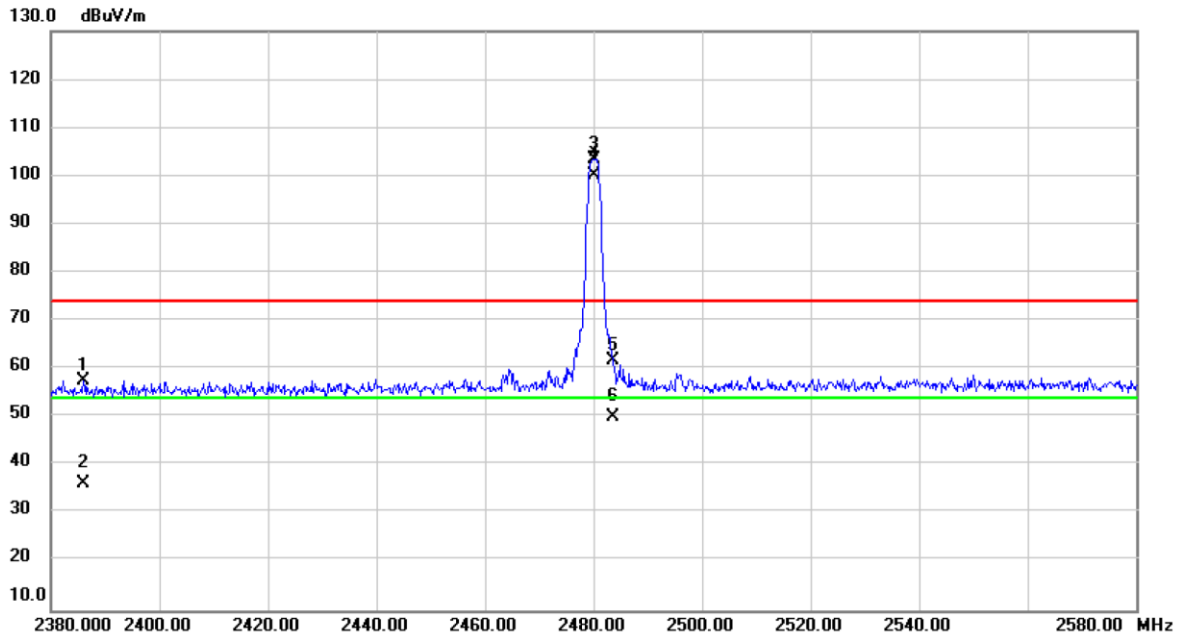


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2386.000	26.44	31.10	57.54	74.00	-16.46	peak	
2		2386.000	5.08	31.10	36.18	54.00	-17.82	AVG	
3	X	2480.000	72.13	31.46	103.59	74.00	29.59	peak	No Limit
4	*	2480.000	68.79	31.46	100.25	54.00	46.25	AVG	No Limit
5		2483.500	30.15	31.47	61.62	74.00	-12.38	peak	
6		2483.500	18.66	31.47	50.13	54.00	-3.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Horizontal

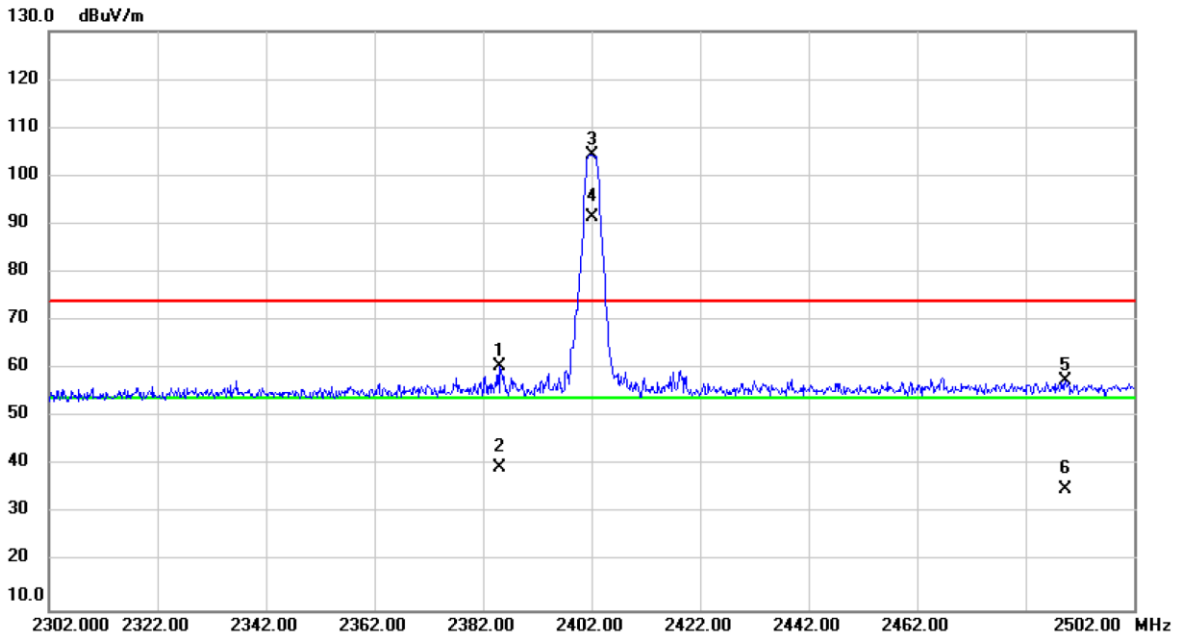


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2385.200	29.35	31.09	60.44	74.00	-13.56	peak	
2		2385.200	8.56	31.09	39.65	54.00	-14.35	AVG	
3	X	2402.000	73.07	31.16	104.23	74.00	30.23	peak	No Limit
4	*	2402.000	60.17	31.16	91.33	54.00	37.33	AVG	No Limit
5		2489.400	26.11	31.49	57.60	74.00	-16.40	peak	
6		2489.400	3.44	31.49	34.93	54.00	-19.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

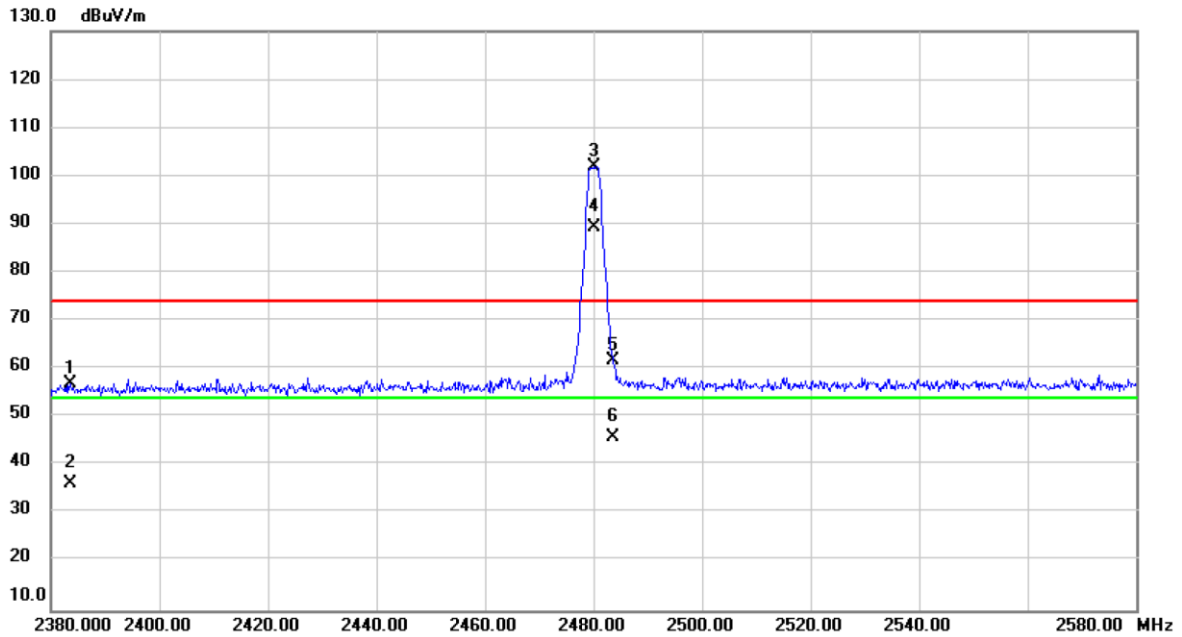


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2383.600	25.74	31.09	56.83	74.00	-17.17	peak	
2		2383.600	5.23	31.09	36.32	54.00	-17.68	AVG	
3	X	2480.000	70.35	31.46	101.81	74.00	27.81	peak	No Limit
4	*	2480.000	57.98	31.46	89.44	54.00	35.44	AVG	No Limit
5		2483.500	30.17	31.47	61.64	74.00	-12.36	peak	
6		2483.500	14.24	31.47	45.71	54.00	-8.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Vertical

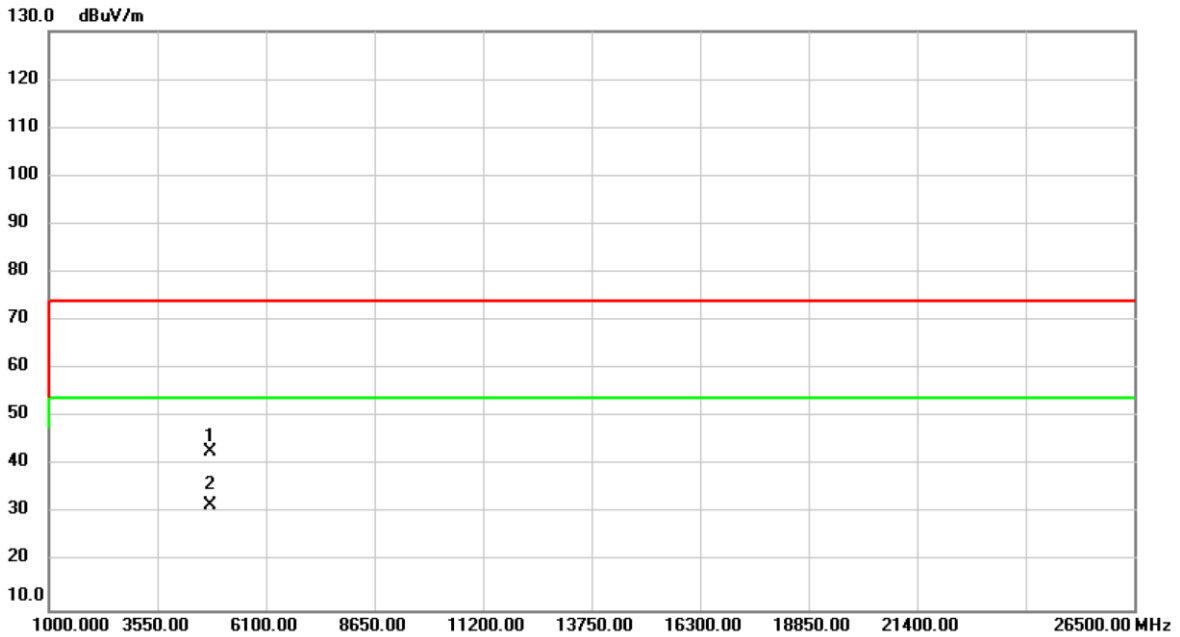


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	52.96	-10.01	42.95	74.00	-31.05	peak	
2	*	4804.000	41.71	-10.01	31.70	54.00	-22.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Horizontal

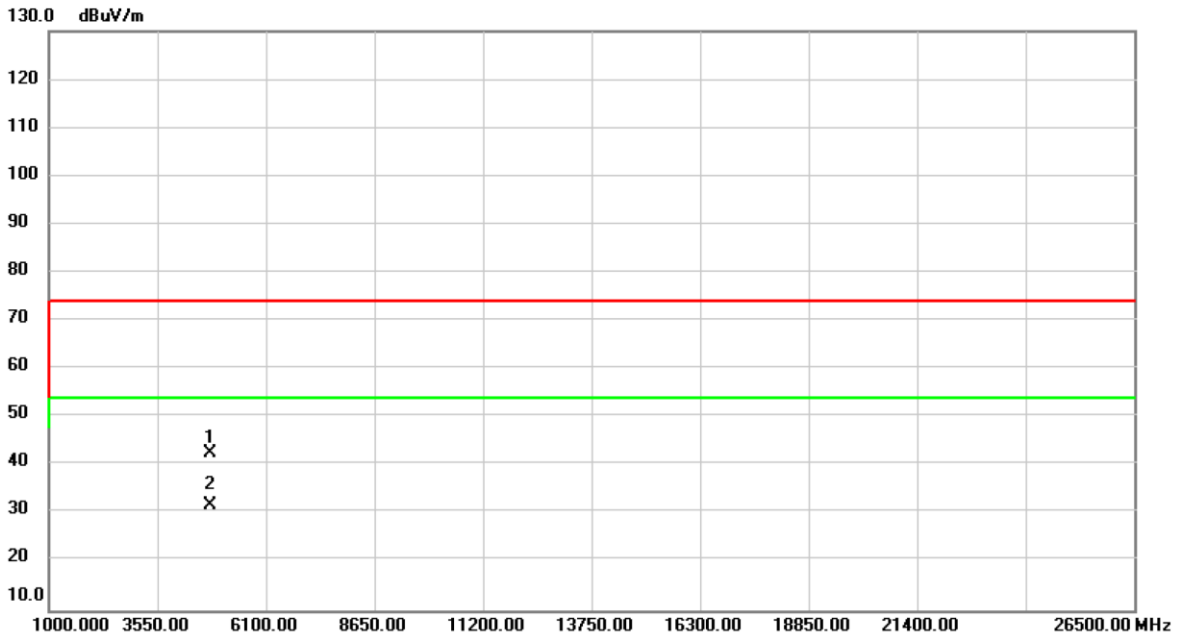


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	52.58	-10.01	42.57	74.00	-31.43	peak	
2	*	4804.000	41.70	-10.01	31.69	54.00	-22.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH19: 2440 MHz	Polarization	Vertical

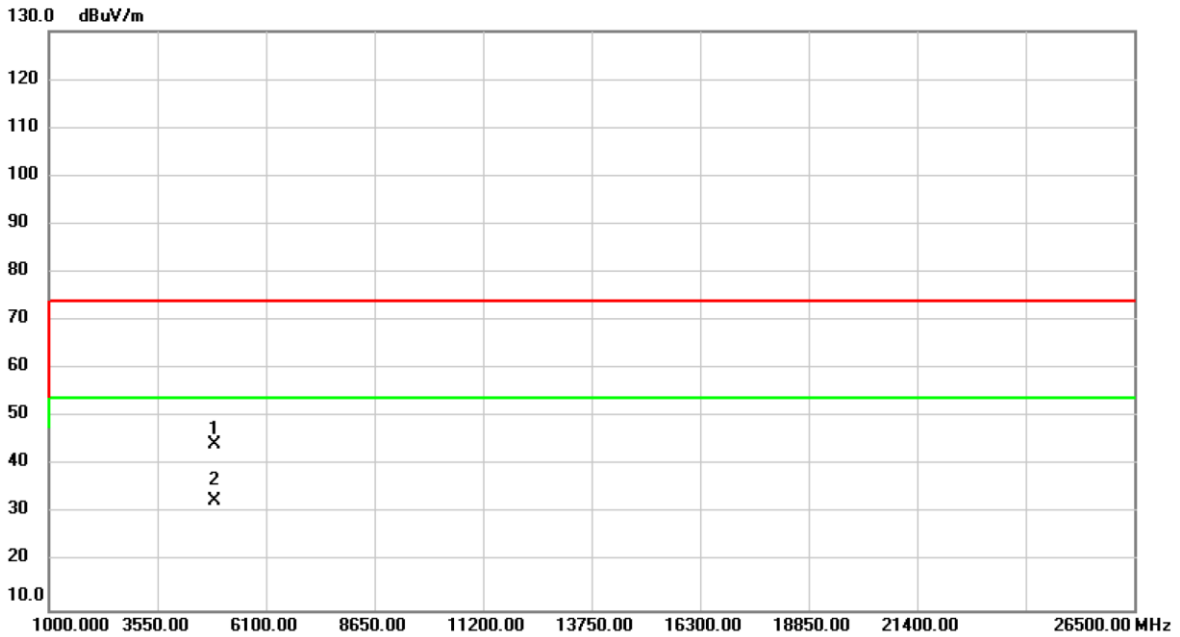


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.000	54.20	-9.72	44.48	74.00	-29.52	peak	
2	*	4880.000	42.42	-9.72	32.70	54.00	-21.30	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH19: 2440 MHz	Polarization	Horizontal

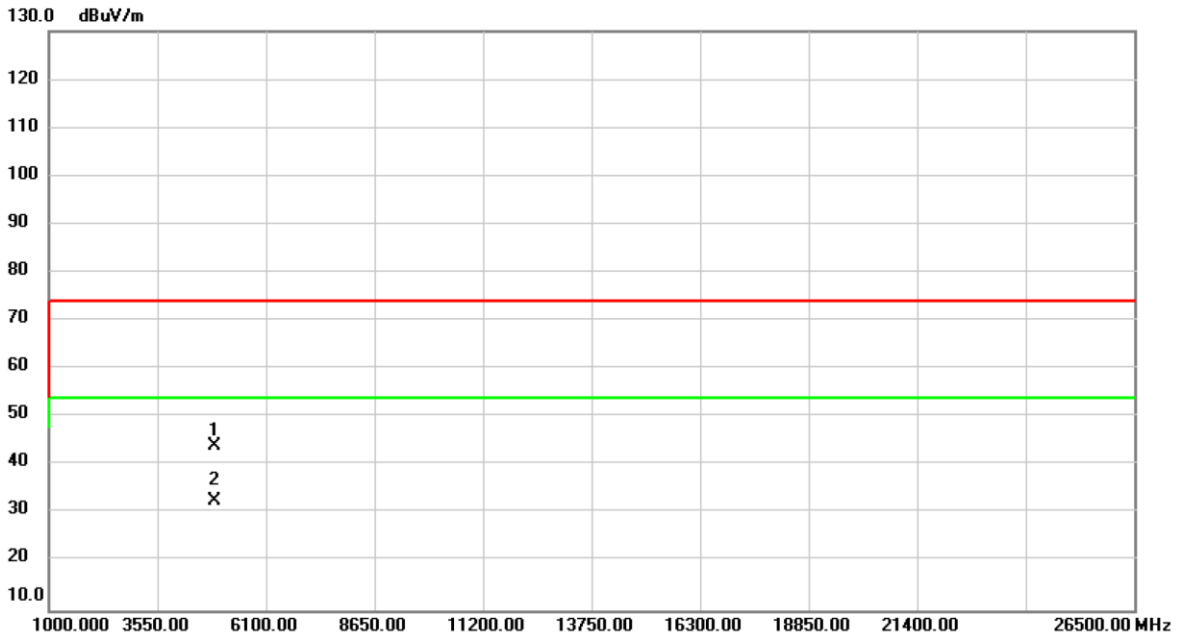


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.000	53.86	-9.72	44.14	74.00	-29.86	peak	
2	*	4880.000	42.26	-9.72	32.54	54.00	-21.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Vertical

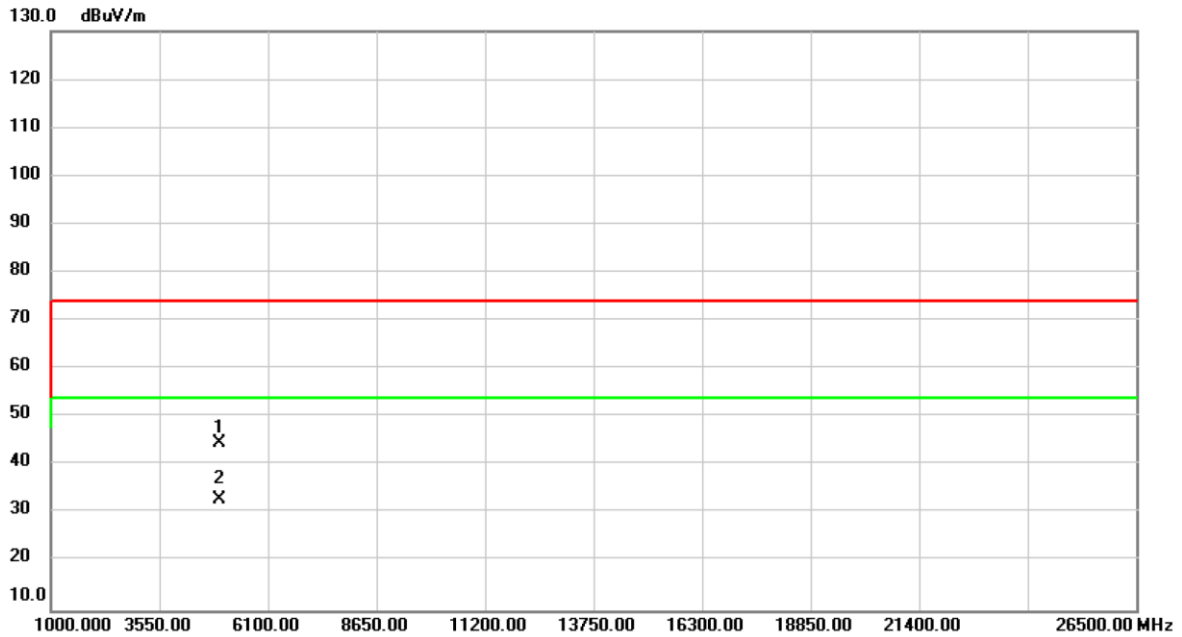


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	53.98	-9.41	44.57	74.00	-29.43	peak	
2	*	4960.000	42.49	-9.41	33.08	54.00	-20.92	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

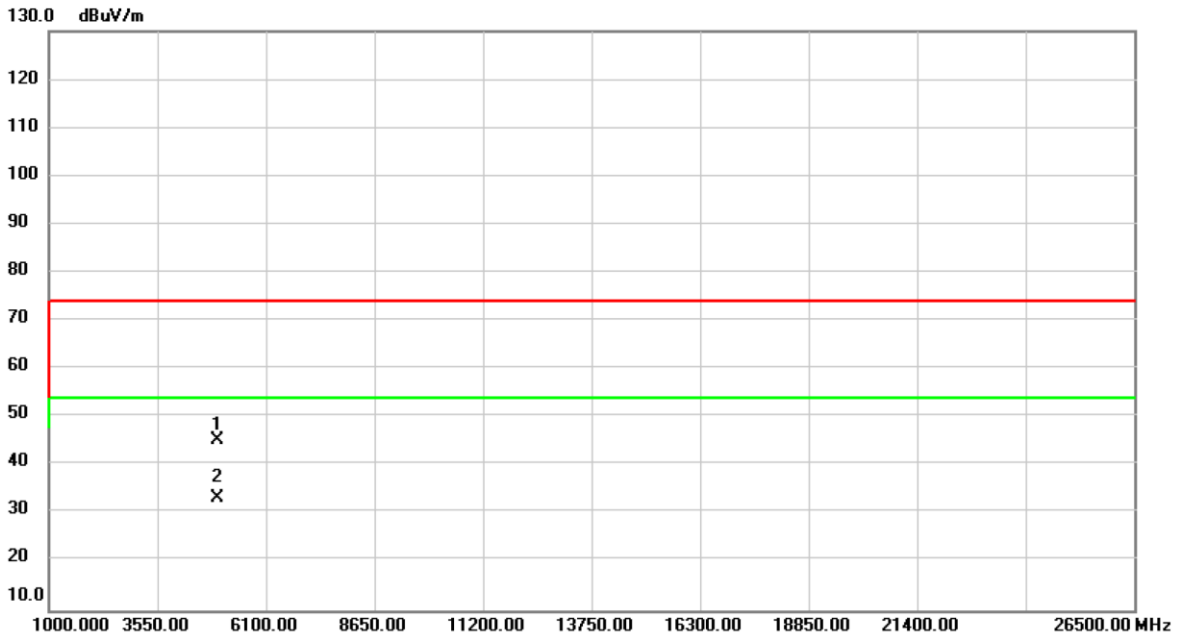


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	54.74	-9.41	45.33	74.00	-28.67	peak	
2	*	4960.000	42.52	-9.41	33.11	54.00	-20.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Vertical

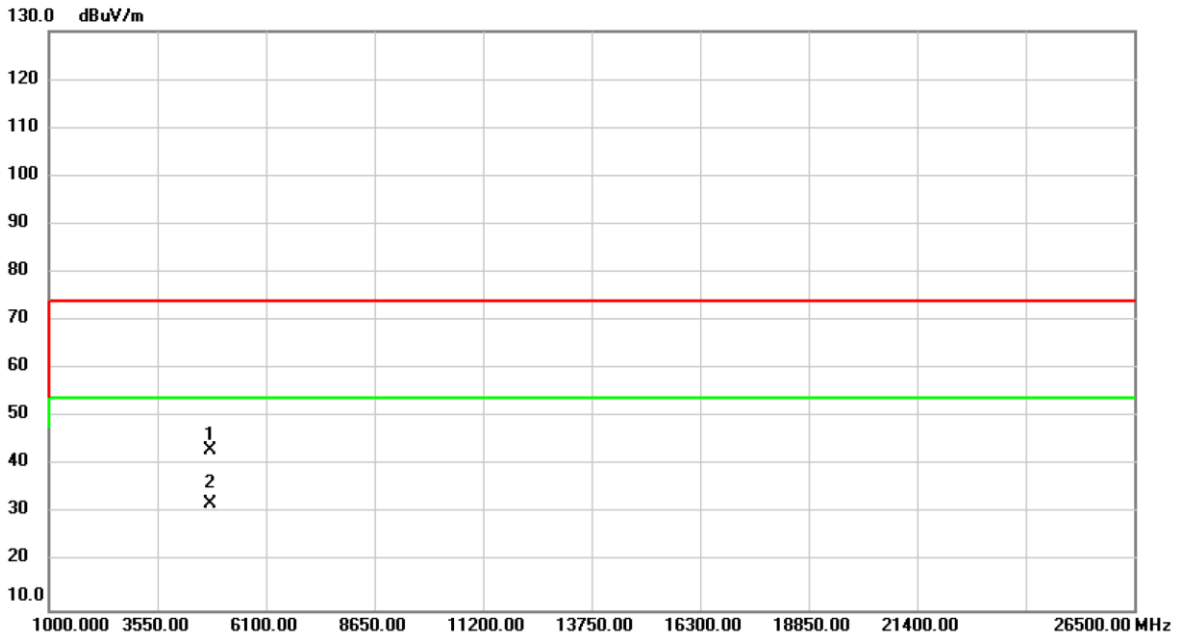


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	53.29	-10.01	43.28	74.00	-30.72	peak	
2	*	4804.000	41.96	-10.01	31.95	54.00	-22.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Horizontal

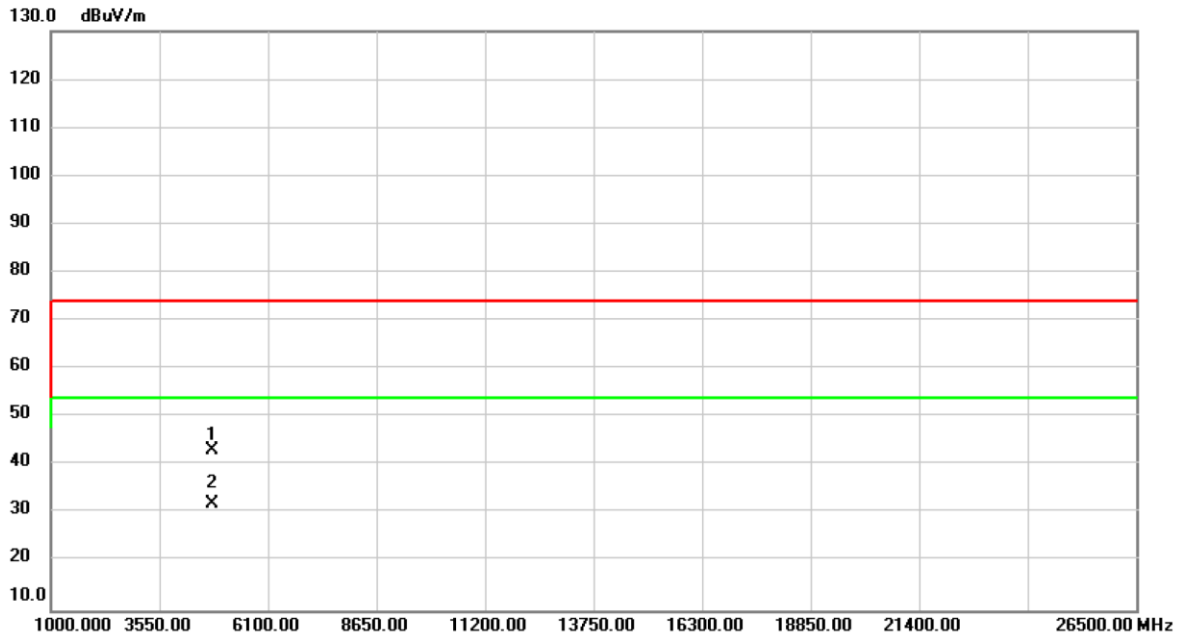


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	53.10	-10.01	43.09	74.00	-30.91	peak	
2	*	4804.000	41.97	-10.01	31.96	54.00	-22.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH19: 2440 MHz	Polarization	Vertical

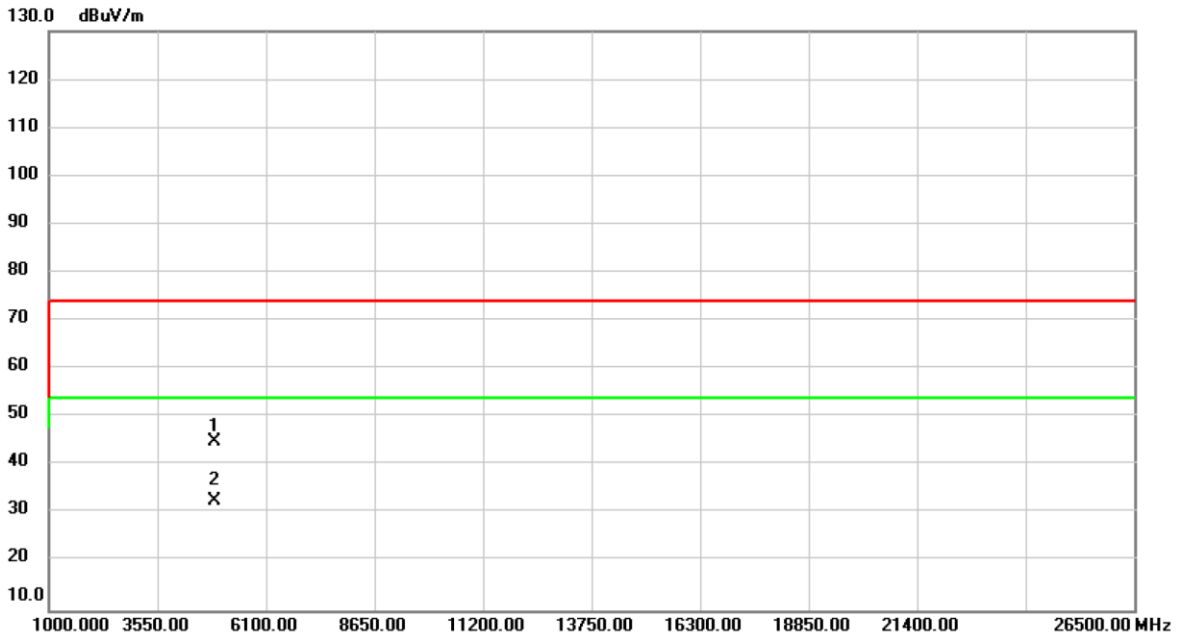


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.000	54.54	-9.72	44.82	74.00	-29.18	peak	
2	*	4880.000	42.30	-9.72	32.58	54.00	-21.42	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH19: 2440 MHz	Polarization	Horizontal

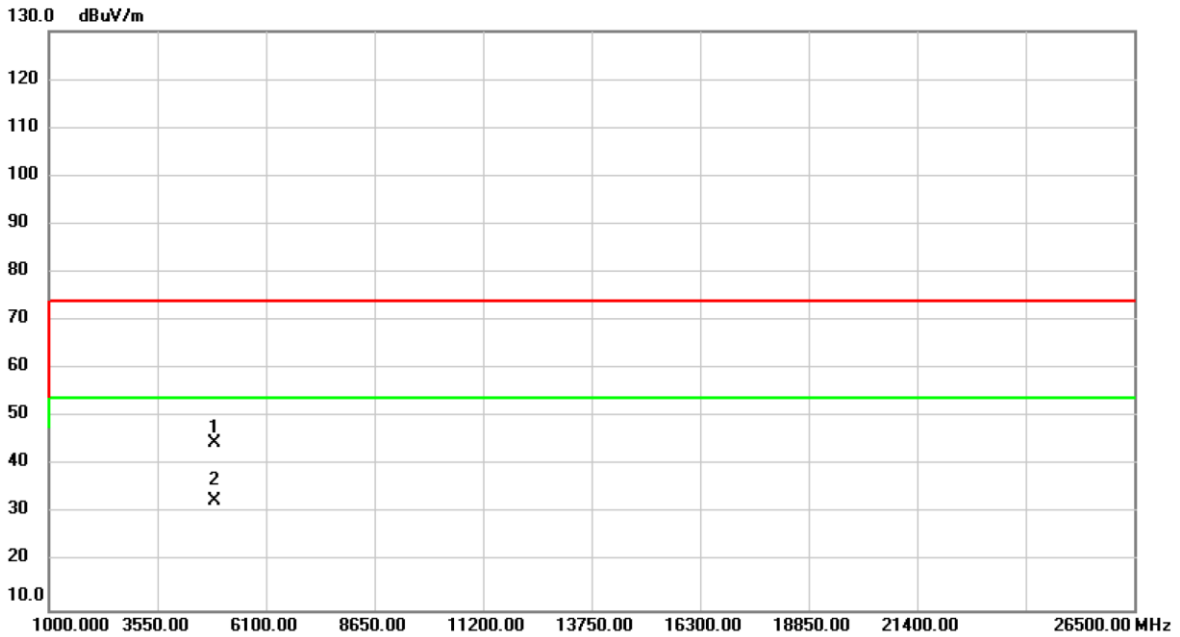


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.000	54.52	-9.72	44.80	74.00	-29.20	peak	
2	*	4880.000	42.26	-9.72	32.54	54.00	-21.46	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Vertical

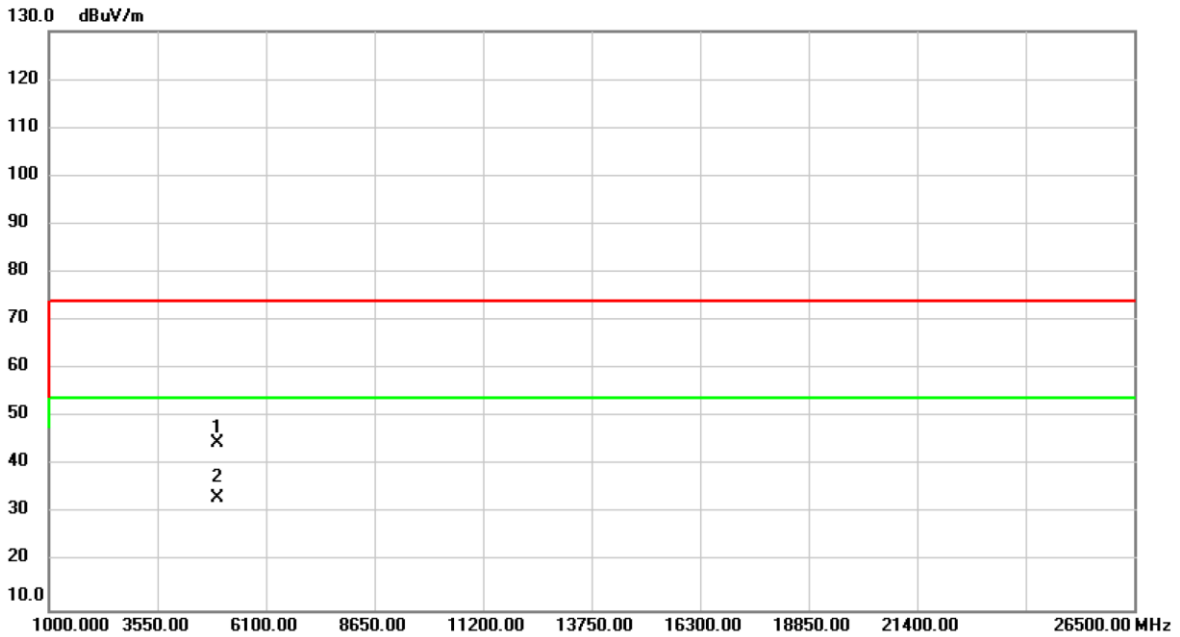


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	54.14	-9.41	44.73	74.00	-29.27	peak	
2	*	4960.000	42.55	-9.41	33.14	54.00	-20.86	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


Test Mode	BLE5.0 (1 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

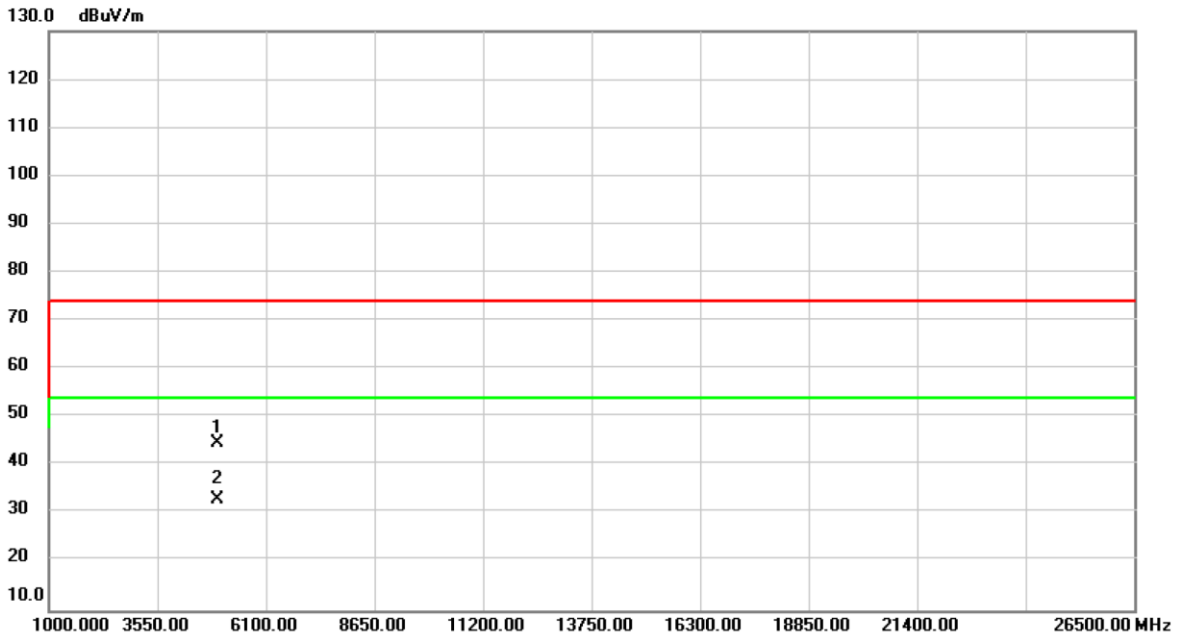

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	53.99	-9.41	44.58	74.00	-29.42	peak	
2	*	4960.000	42.50	-9.41	33.09	54.00	-20.91	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Vertical

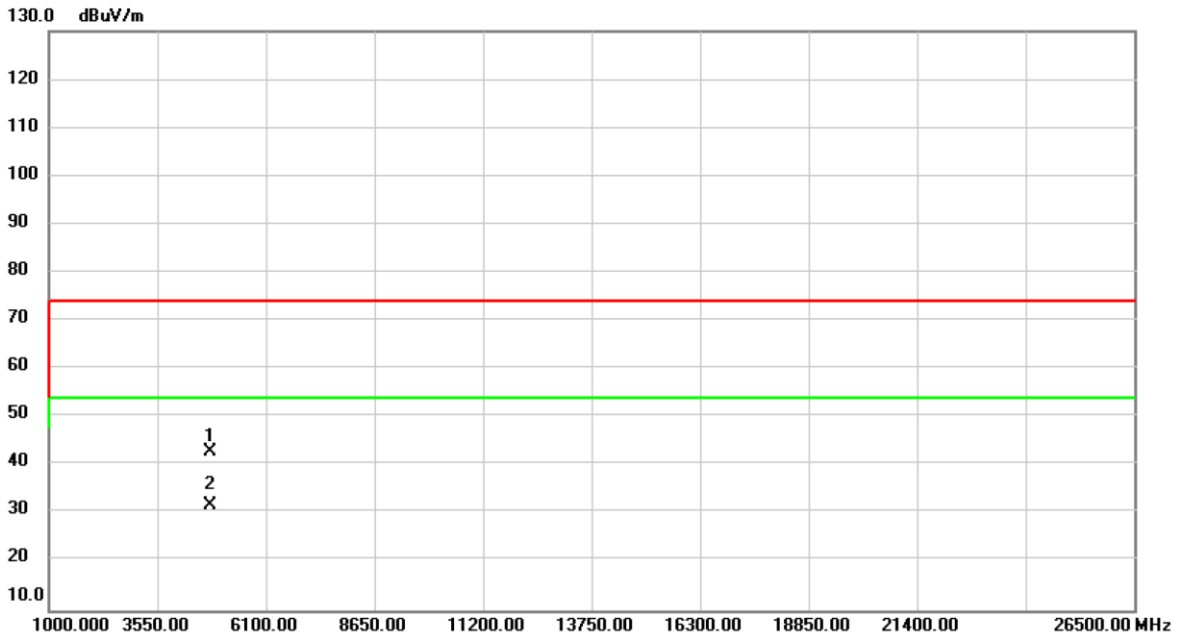


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	52.79	-10.01	42.78	74.00	-31.22	peak	
2	*	4804.000	41.65	-10.01	31.64	54.00	-22.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH01: 2402 MHz	Polarization	Horizontal

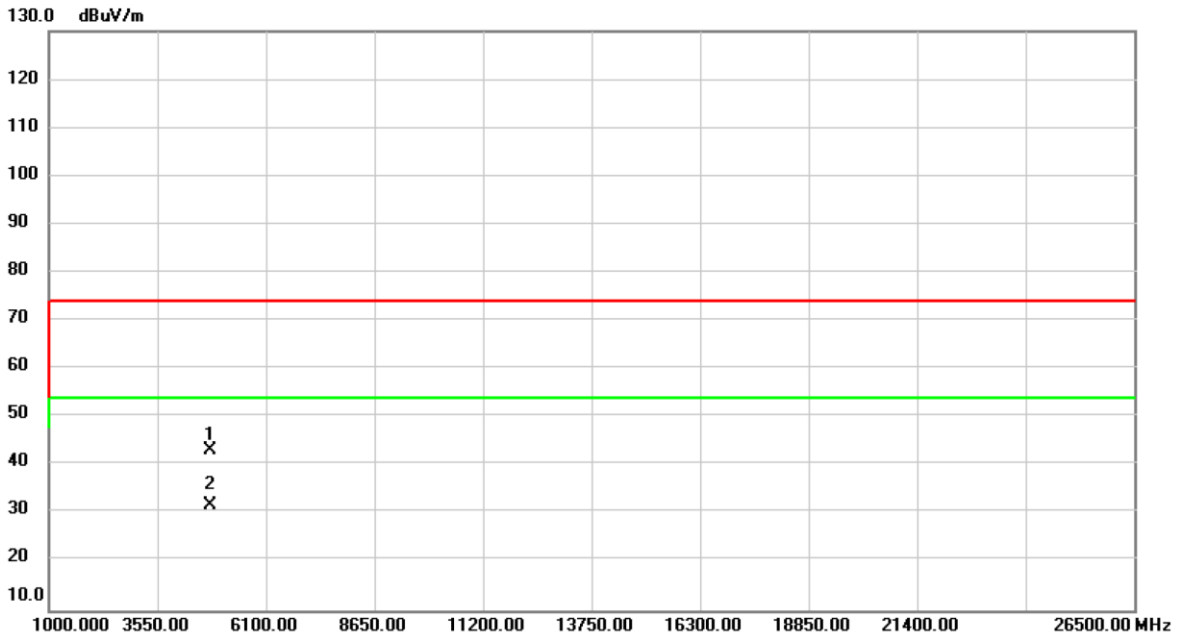


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	53.10	-10.01	43.09	74.00	-30.91	peak	
2	*	4804.000	41.89	-10.01	31.88	54.00	-22.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH19: 2440 MHz	Polarization	Vertical

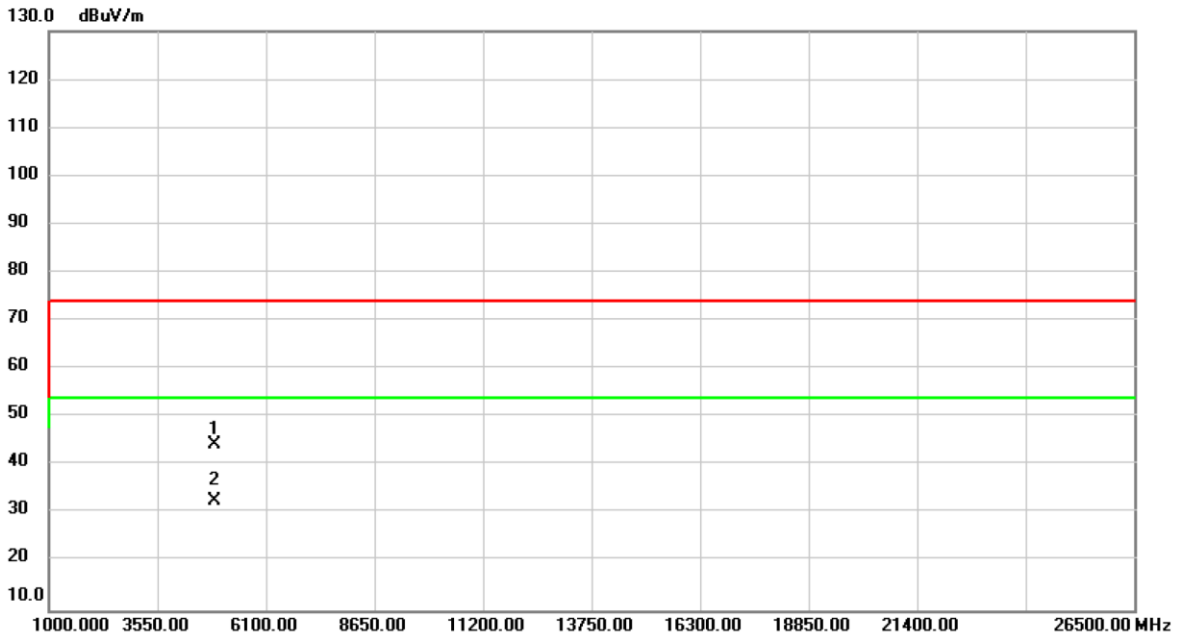


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.000	54.05	-9.72	44.33	74.00	-29.67	peak	
2	*	4880.000	42.27	-9.72	32.55	54.00	-21.45	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH19: 2440 MHz	Polarization	Horizontal

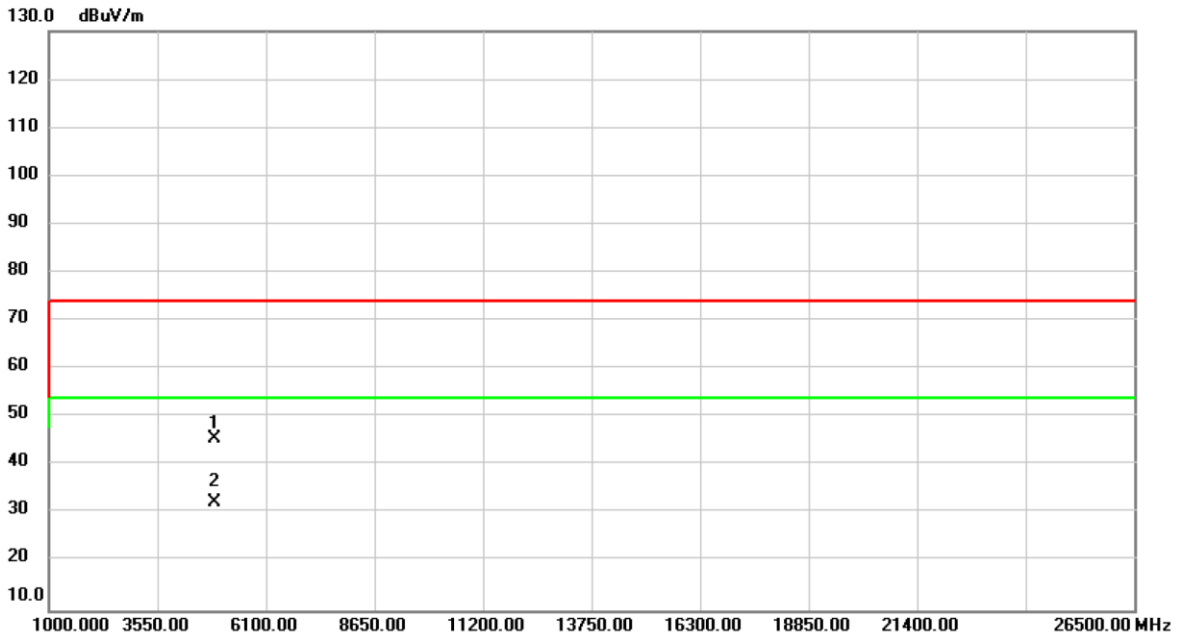


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4880.000	55.31	-9.72	45.59	74.00	-28.41	peak	
2	*	4880.000	42.20	-9.72	32.48	54.00	-21.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Vertical

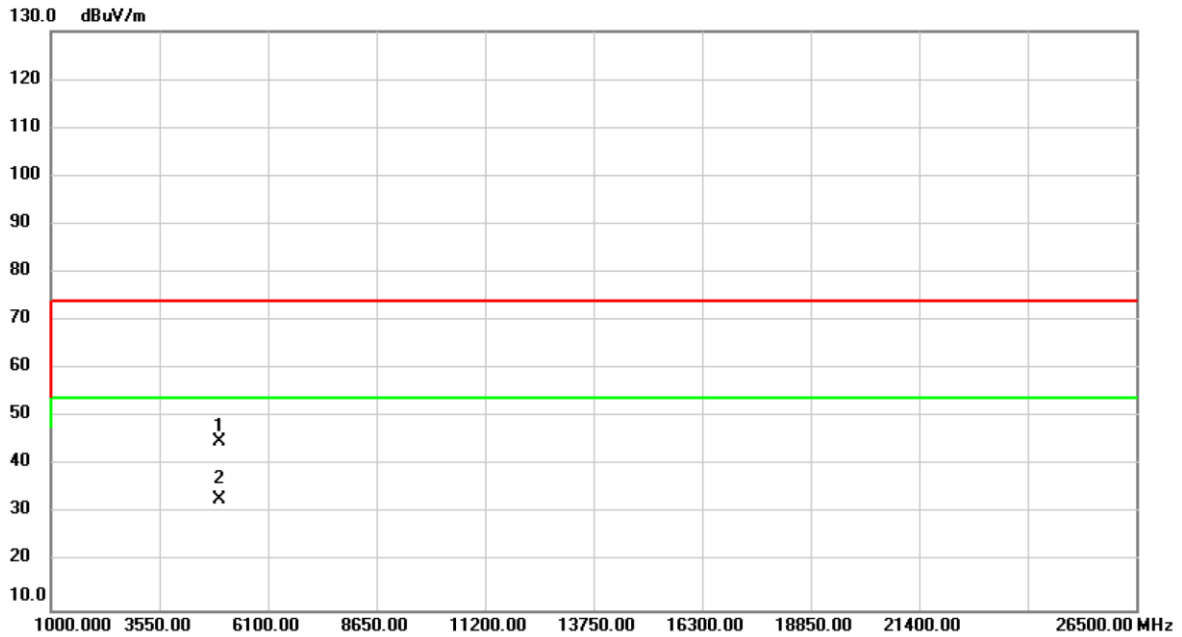


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	54.36	-9.41	44.95	74.00	-29.05	peak	
2	*	4960.000	42.48	-9.41	33.07	54.00	-20.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE5.0 (2 Mbps)	Test Date	2020/7/14
Test Frequency	CH39: 2480 MHz	Polarization	Horizontal

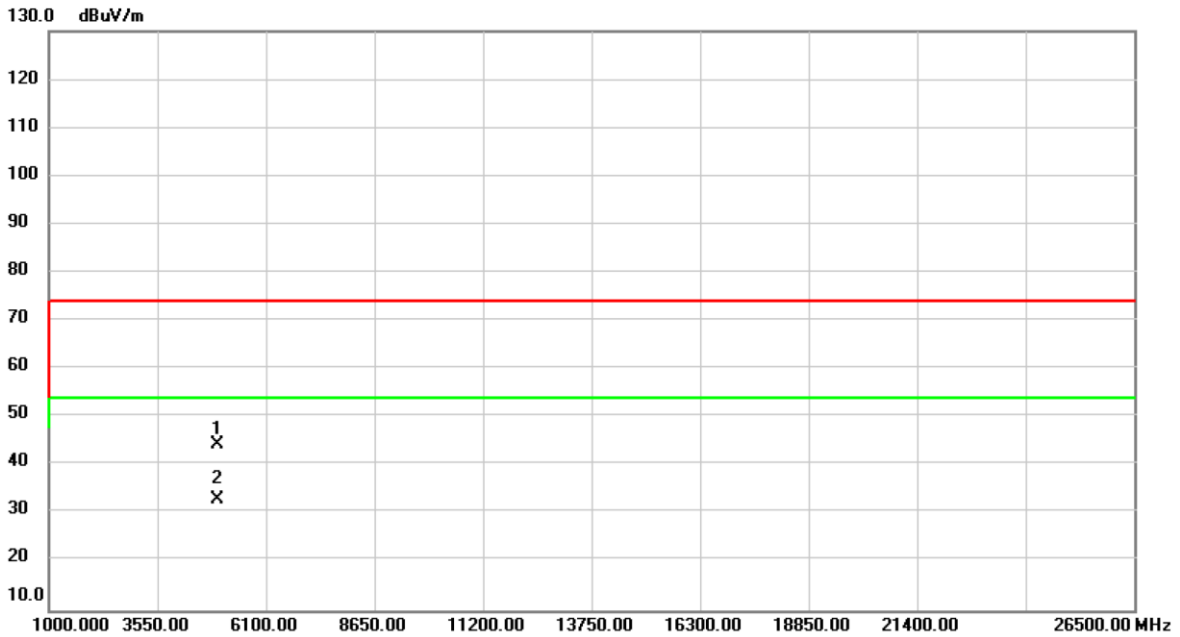

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	53.89	-9.41	44.48	74.00	-29.52	peak	
2	*	4960.000	42.33	-9.41	32.92	54.00	-21.08	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH


Test Mode: BLE 1 Mbps

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.65	1.06	500	Pass
2440	0.65	1.04	500	Pass
2480	0.66	1.03	500	Pass

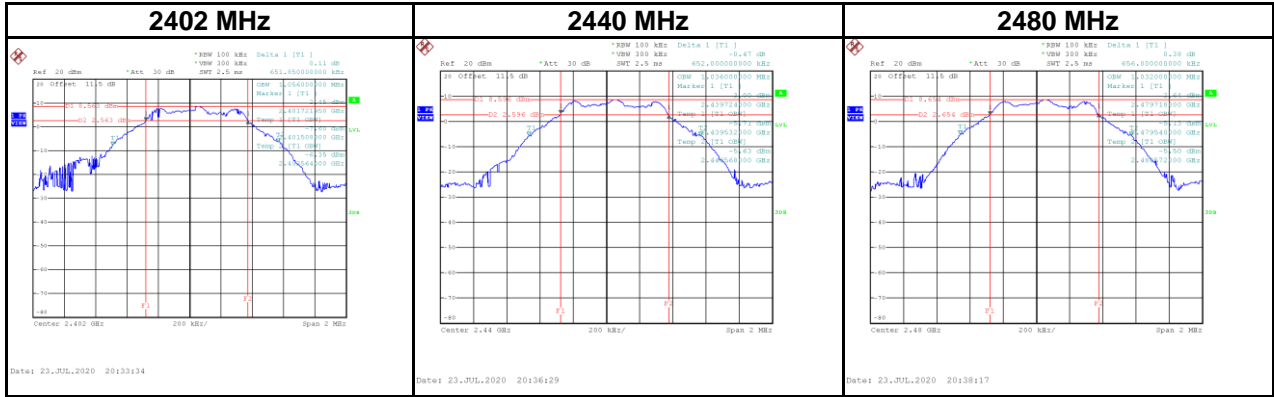

Test Mode: BLE 2 Mbps

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	1.12	2.03	500	Pass
2440	1.11	2.03	500	Pass
2480	1.12	2.03	500	Pass

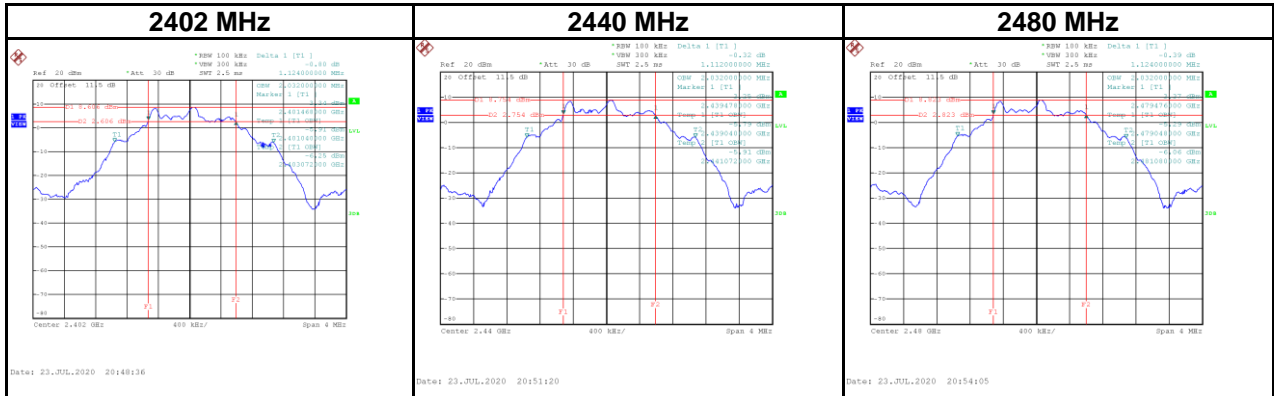

APPENDIX E OUTPUT POWER

Test Mode :	BLE 1 Mbps	Tested Date	2020/7/23
-------------	------------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	8.64	0.0073	30.00	1.0000	Pass
2440	8.58	0.0072	30.00	1.0000	Pass
2480	8.62	0.0073	30.00	1.0000	Pass


Test Mode :	BLE 2 Mbps	Tested Date	2020/7/23
-------------	------------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	8.60	0.0072	30.00	1.0000	Pass
2440	8.66	0.0073	30.00	1.0000	Pass
2480	8.73	0.0075	30.00	1.0000	Pass

APPENDIX F POWER SPECTRAL DENSITY TEST


Test Mode: BLE 1 Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-4.92	8	Pass
2440	-4.73	8	Pass
2480	-4.72	8	Pass

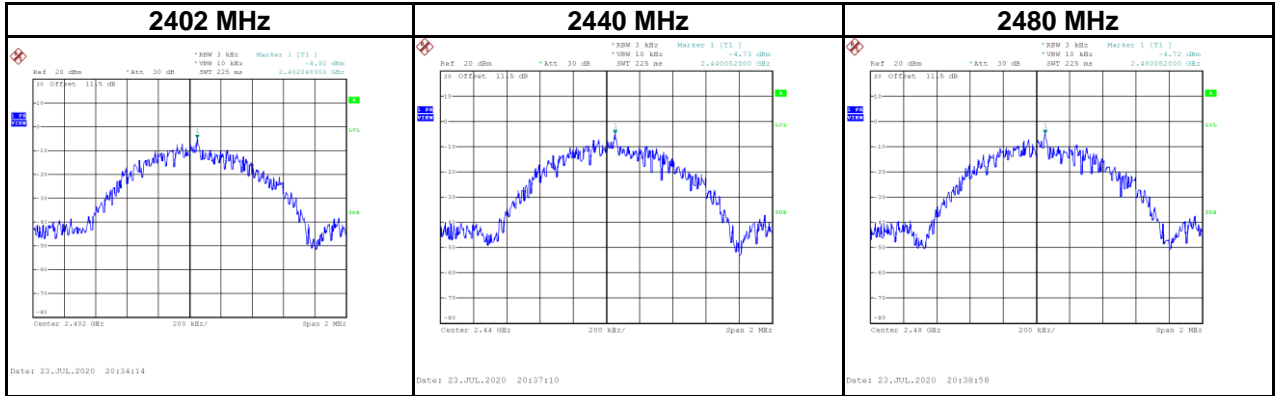





Test Mode: BLE 2 Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-5.04	8	Pass
2440	-4.94	8	Pass
2480	-4.69	8	Pass




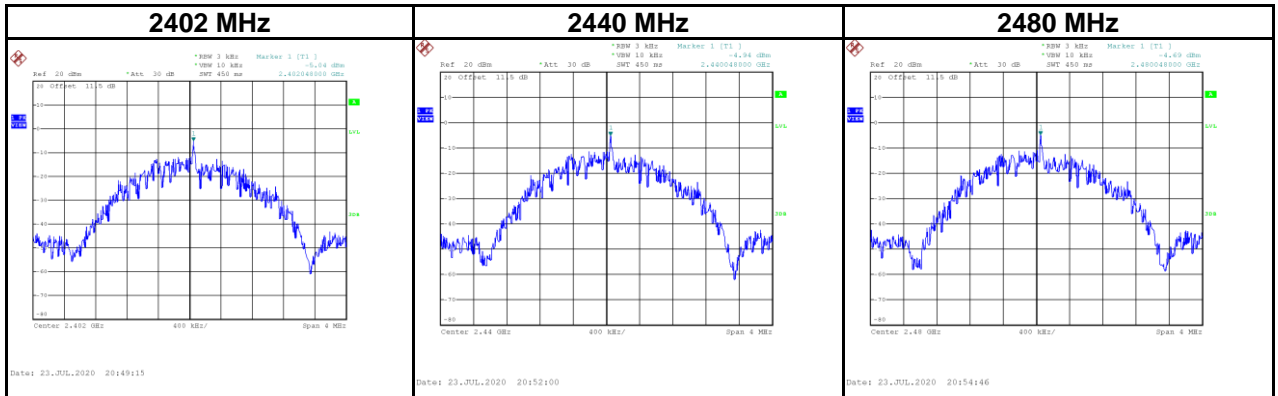


APPENDIX G ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode : BLE 1 Mbps

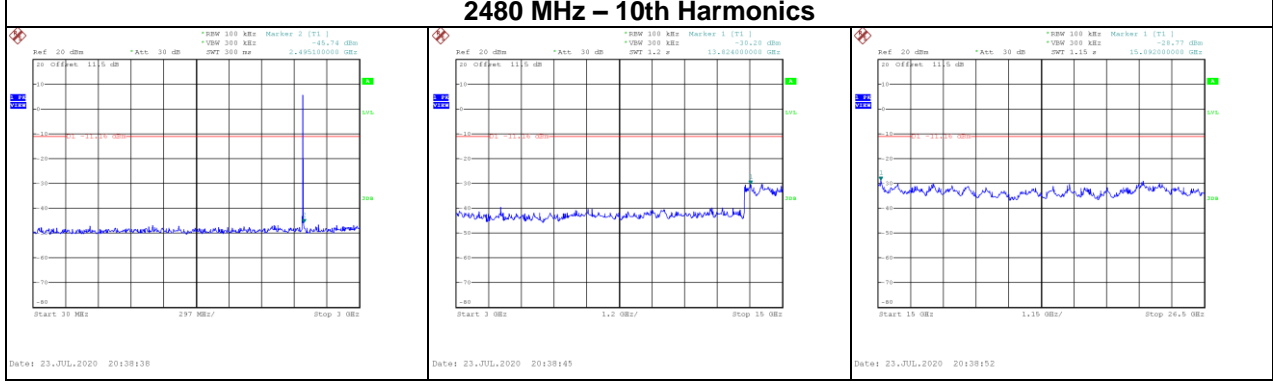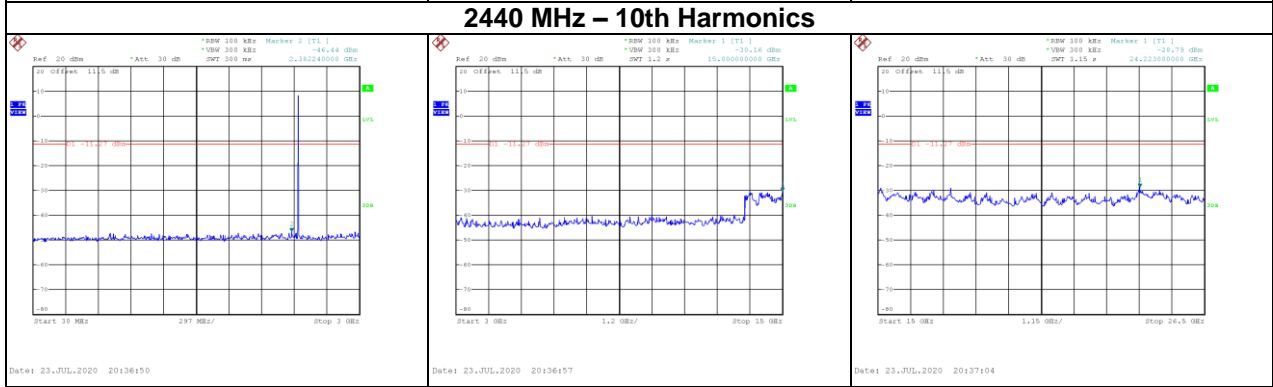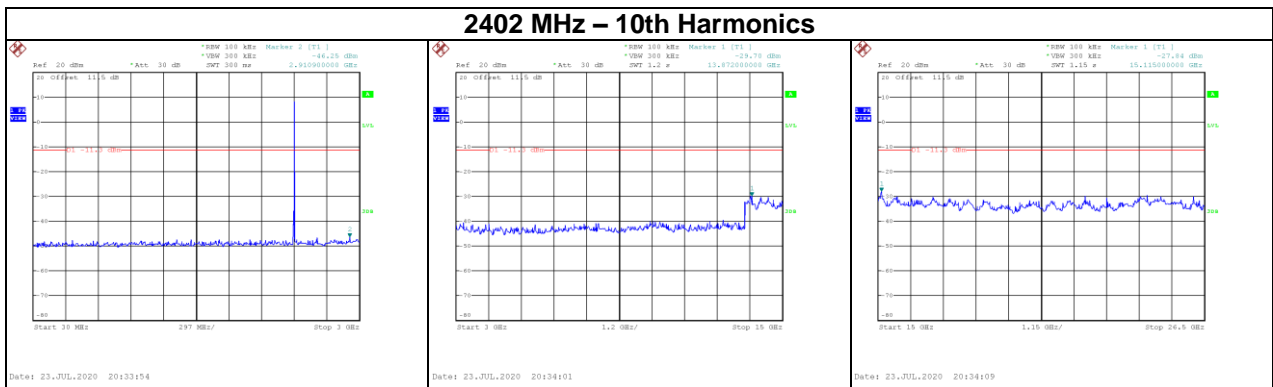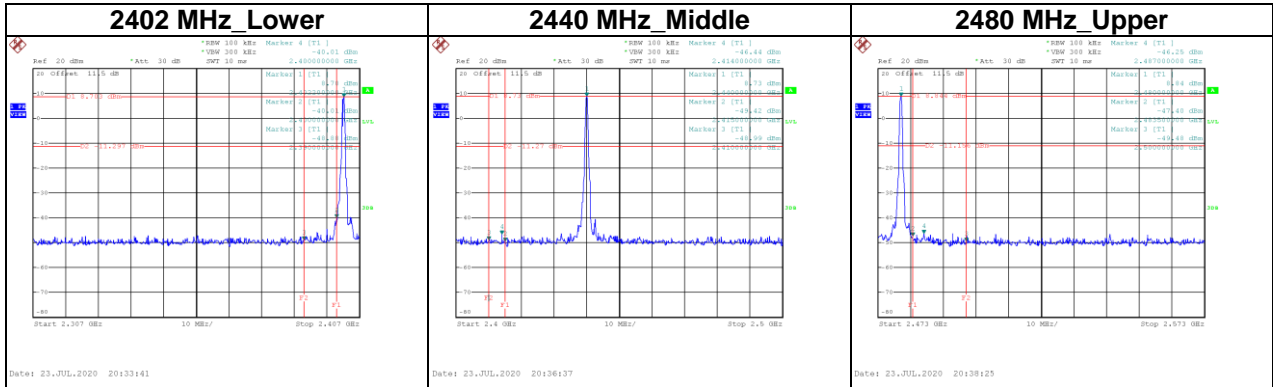

Test Mode : BLE 2 Mbps

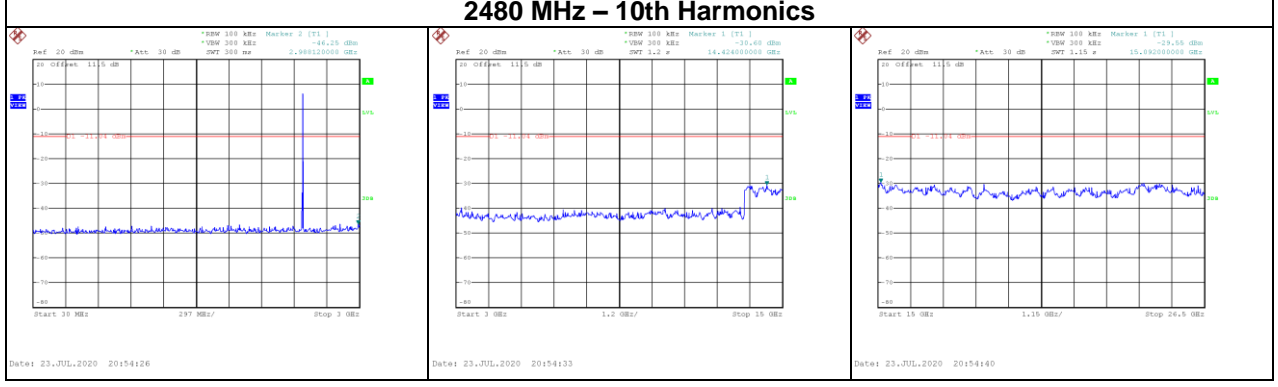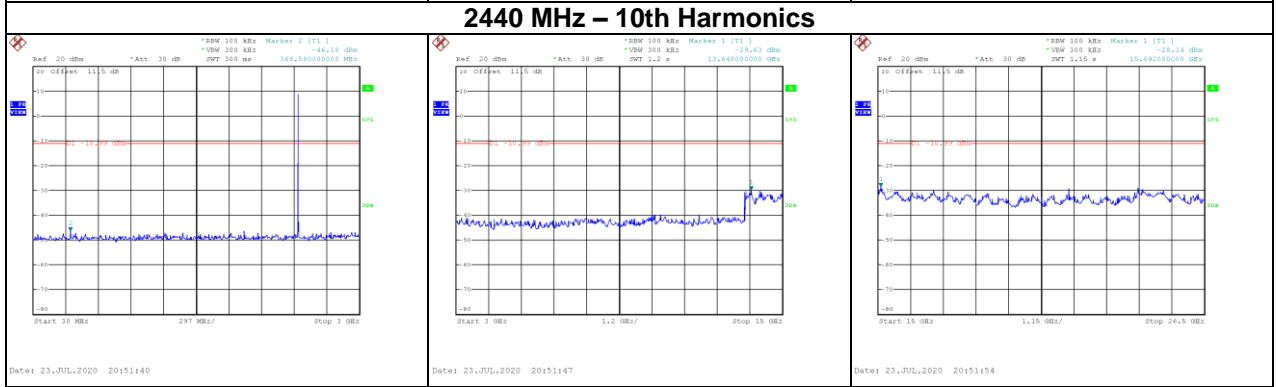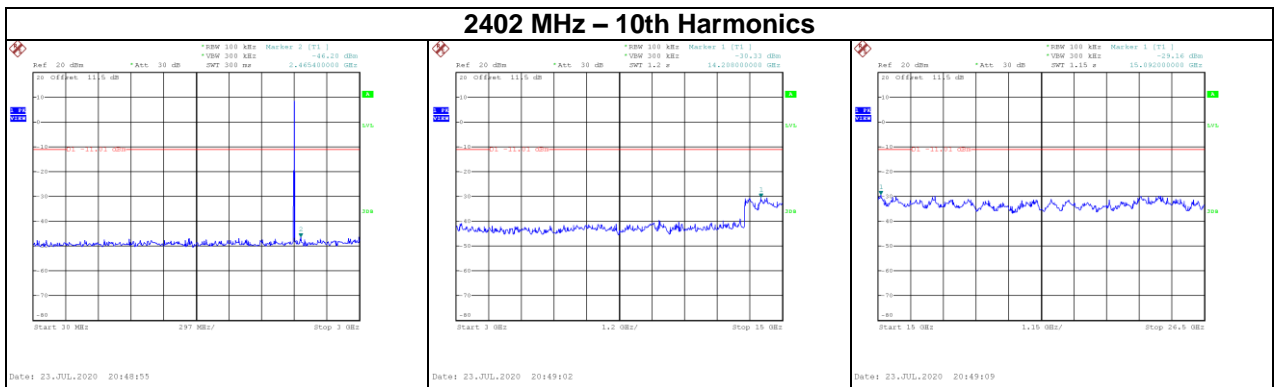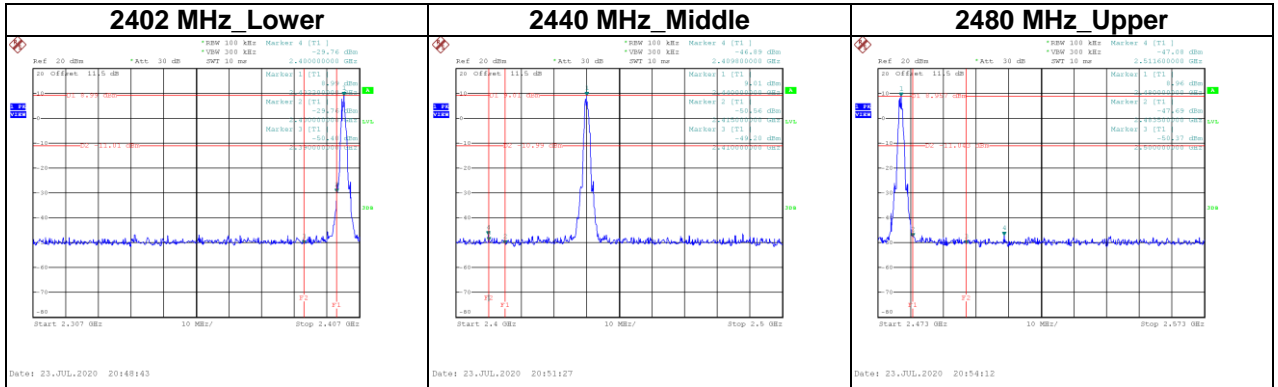

End of Test Report