



5075 (B)Plus
Multi-modes

用户手册

User Manual

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected .

- Consult the dealer or an experienced radio/TV technician for help.

RF WARNING STATEMENT

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.


Menu

Technical Specifications	11
HotKeys	12
System Commands (Windows)	13
System Commands (Mac)	14
Backlight Settings	15
Bluetooth Feature Overview	16
Bluetooth Setup Instruction 1	17
Bluetooth Setup Instruction 2	18
Key/Lighting Effects Customization Instruction	19
Akko Warranty and Service Statement	20

Technical Specifications

11

Dimensions Approximately 335*146*42mm	Weight Approximately 0.88kg	Country of Origin China	Type Mechanical Keyboard
Keycap PBT Material	Connection Bluetooth/USB/2.4Ghz	Interface Type-C To USB	Battery Capacity 2500mAh
Multimedia Keys YES	N-Key Rollover YES	Key/Lighting Effects Customization The keyboard can be customized with Akko Cloud Driver in either 2.4G or wired mode.	

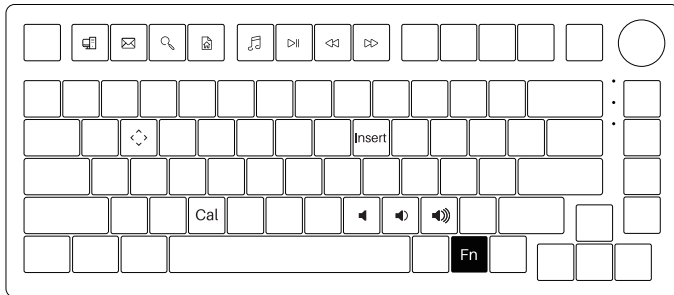


Fn+	F1	=	File Explorer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6	=	Pause /Playback
	F7		Previous Song
	F8		Next Song
	I		Insert
	C		Calculator

Fn+	M	=	Mute
	<		Decrease Volume
	>		Increase Volume
	W		Swap W A S D with ↑ ↓ ← →

System Commands (Windows)

13

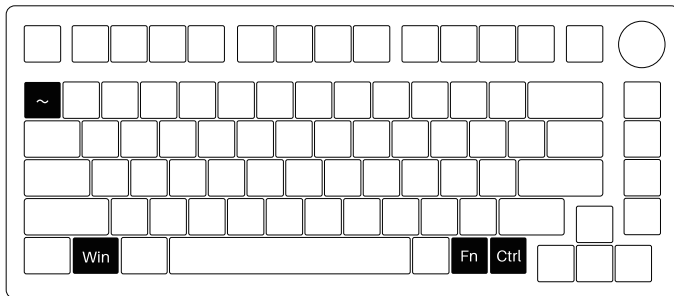

Lock Windows Key


Press Fn and left Win key

Restore Factory Settings

Hold down Fn and press ~ key for 5S

Revert Ctrl into Menu (APP) key


Hold down Fn and press right Ctrl for 3S



Adjust volume / light brightness

System Commands(Mac)

14

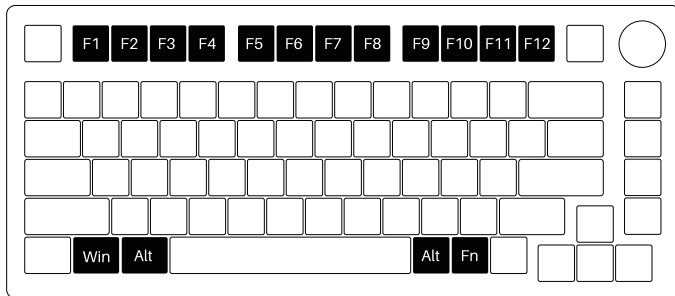

Back Switch Indicator

Users can switch to Mac mode by pushing the toggle on the back to the right.

F1	Decrease display brightness
F2	Increases display brightness
F3	Open mission control
F4	Activate Siri


F7	Skip back (Audio)
F8	Pause/Play (Audio)
F9	Skip forward (audio)
F10	Mute

F11	Volume down
F12	Volume up
Left Win	Option
Left Alt	Command

Right Alt	Command
Fn + (F1 ~ F12)	
F1 ~ F12	

Backlight Settings

15

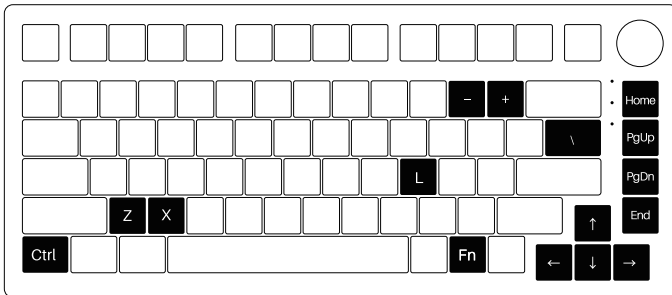

Caps Lock
Battery Level Indicator
Lock Win


Fn+	Home	=	Effect 1, Effect 2, Effect 3, Effect 4, Effect 5
	PgUp		Effect 6, Effect 7, Effect 8, Effect 9, Effect 10
	PgDn		Effect 11, Effect 12, Effect 13, Effect 14, Effect 15
	End		Effect 16, Effect 17, Effect 18, Effect 19, Effect 20
	L		Light On / Off
	\		In all lighting effects with RGB color mode, this shortcut allows you to set the backlight color to 7 single color with RGB loop effect.

Fn+	" ↑ "	=	Bright
	" ↓ "		Dim
	" ← "		Set animation direction to left
	" → "		Set animation direction to right
	" _ "		Slower Animation
	" + "		Faster Animation

Fn+Z
Case Light Brightness Change
Fn+X
Case Light Animation Speed Change
Fn+ Left Ctrl
Case Light Effect Change

Bluetooth Feature Overview

16

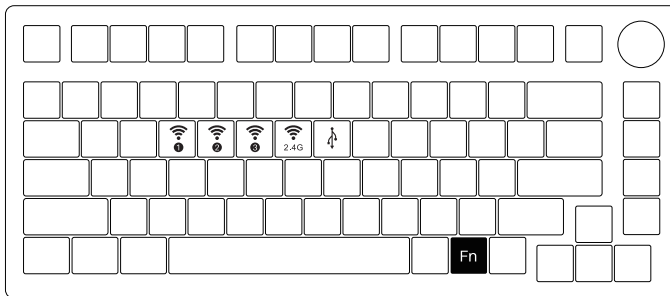

Fn+	E	=	Bluetooth device 1
	R		Bluetooth device 2
	T		Bluetooth device 3
	Y		2.4G wireless device
	U		Wired mode

Short press to connect with slow flashing blue LED;
Press and hold to pair device with fast flashing blue LED.

Short press to connect with slow flashing green LED;
The lighting effect will be restored when pairing succeeds.



Back Switch Indicator

Left : Windows

Middle: Switch to USB mode and stop charging. (Windows)

Right: Mac

1.Switch to Bluetooth mode

- ① When the keyboard remains unplugged, users can push the switch on the back to the left/right to enter Windows/Mac mode correspondingly. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
- ② When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

2.Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is 5075BP-1 / 5075BP-2 / 5075BP-3 while the device name under Bluetooth 3.0 is Akko 5075BP BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3. Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 5075BP BT3.0 (Bluetooth 3.0) and 5075BP-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

4. Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E / Fn+R / Fn+T / Fn+Y for at least 3 seconds to quickly switch between them.

5. Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;

If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

6. Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 5075 keyboard from the list of connected device.

■ Key/Lighting Effects Customization Instruction

19

1. The keyboard supports key/RGB backlit mapping in either 2.4G or wired mode.
2. The keyboard supports audio visualizer in either 2.4G or wired mode.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

