


K239_FLCMMK_MK750_说明书FCC版

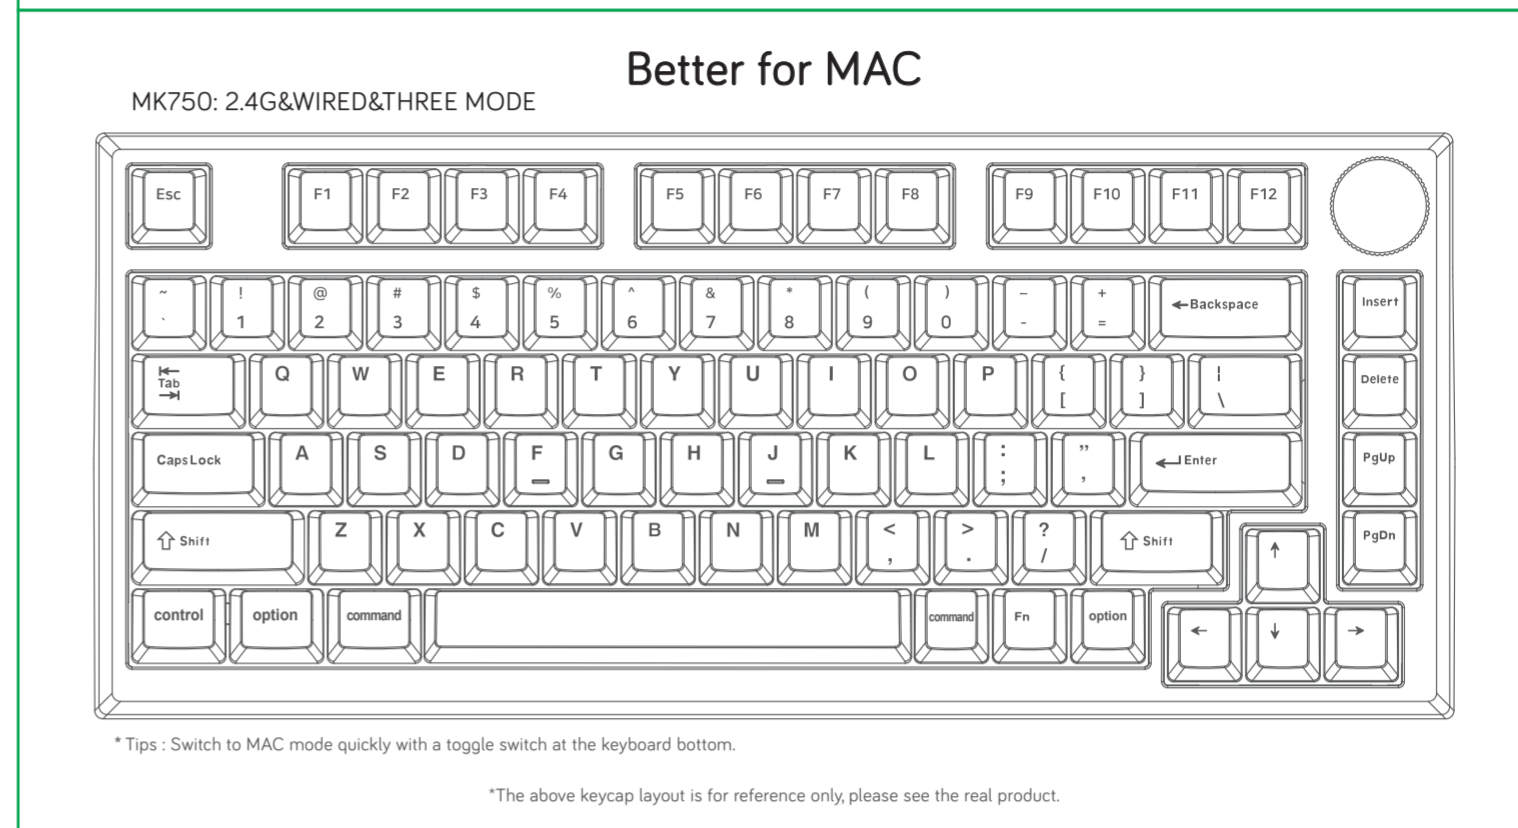

FN combination keys manual

COMMON PART

Key	Function description
FN+ESC	Long press for 3 seconds to restore factory mode
FN+Left WIN	Lock or unlock the WIN key (OS, MAC System automatically unlocked)
FN+Right CTRL	Backlight mode switch
FN+Right SHFT	Backlight color switch
FN+DEL	Go to static backlight
FN+UP/Down key	Change backlight brightness, up go brighter and down go darker
FN+Left/Right key	Change the backlight speed, left go slow and right go fast
FN+Backspace	Query the battery power under mode (only if the battery is powered separately)
FN+1	Press to switch to device 1, and press for 3S to enter the pairing
FN+2	Press to switch to device 2, and press for 3S to enter the pairing
FN+3	Press to switch to device 3, and press for 3S to enter the pairing
FN+4	Pressing FN combination key in 3seconds to enter 2.4G paired receiver mode
FN+Z/W/C	Backlight customized key 1/2/3
FN+V	Customized backlight recording save
FN+INS	Enter or exit the power saving mode

Windows_Android System model

Key	Function description
FN+F1	Display brightness -
FN+F2	Display brightness +
FN+F3	WIN+Tab (Mission control)
FN+F4	WIN+E (Turn on my computer)
FN+F5	Email
FN+F6	Homepage
FN+F7	PREV
FN+F8	Play/Pause
FN+F9	NEXT
FN+F10	Mute
FN+F11	Volume down
FN+F12	Volume up
FN+H	PRINTSC
FN+O	SCRLK
FN+P	PAUSE
FN+Left ALT	APP

IOS_MAC System model

Key	Function description
F1	Display brightness -
F2	Display brightness +
F3	Mission control
F4	Back to homepage
F5	Default
F6	Default
F7	PREV
F8	Play/Pause
F9	NEXT
F10	Mute
F11	Volume down
F12	Volume up
CTRL	control
WIN	option
ALT	command

2.4G\wired\mode indicator description

2.4G mode:

Full the switch to 2.4G mode, factory has paired receiver 1 to 1 okay, but if you need re-pair the dongle, Long press FN+4, and the green light of the ESC key will flash three times/one second to search the receiver. After successful connection, the green light will be off. When the paired dongle cannot be found for 60s, the matching code will be out and all keys light will be extinguished. The keyboard re-connection needs 10s, at the same time the green light of the ESC key will flash slowly, and the keyboard will go to sleep when the keyboard fails to connect back. After the re-connection is successful, the green light of the ESC key will be off. When the keyboard is not used, the backlight will be turned off after 120s, and the keyboard will fall asleep after 10min.

Wired mode:

Full the switch to wired mode, and white light of the ESC key will flash for three seconds, then become the present backlight effect.

mode:

Full the switch to mode, the combination key for connection is 1, 2 and 3 three key. Long press FN+1/2/3 key for 3s to broadcast, short press alone to switch three devices. Press the combination key for 3s to enter the pairing state, and the blue light of the ESC key will flash three times/one second, after the pairing is successful, the blue light will be off. When the matching device cannot be found in 60s, the pairing will be off and all keys light will be extinguished, keyboard enter into sleep mode. The keyboard re-connection needs 10s, at which time the blue light of the ESC key will flash slowly, and the keyboard will go to sleep when the keyboard fails to connect back. After the re-connection is successful, the light of the ESC key become the present backlight effect. When the keyboard is not used, the backlight will be turned off after 120s, and the keyboard will fall asleep after 10min.

Charging mode:

When the USB cable is plugged in, it means in charging mode when the blue light of the BACKSPACE key flash slowly. When the voltage up to 4.2V, the light of the BACK key will become the present backlights effect, which means the power has been fully charged. (Only could check the status of battery under 2.4G mode)

Low power mode:

When the power is less than 20%, the BACKSPACE key will alternately flash red color to prompt the user to

charge. (Note: When the battery voltage is lower than 3.7V, the keyboard will stop working directly and can not be re-activated. At this time, when you click any key, will only have the BACKSPACE key flash with red light and other keys no response, and prompt the user to plug in the USB cable to charge to 3.7V above so keyboard could be waked up.)

Matters Need Attention:

- When in broadcast, two names "SOKB" and "SOKR" will be displayed at the same time if the receiver is version 4.0 or above. In this case, "SOKR" will be preferred for connection. When the receiver version of the device is below 4.0, only one name "SOKB" will be displayed. Only "SOKB" can be selected to connect.
- When Connecting devices, pay attention to the code indicator. The device can search for the keyboard only when the indicator is flashing quickly. If it is a slow flash state, representing the keyboard in the state to back connect. At this point, the device cannot search for the keyboard, you need to press the code combination one more time (FN+1 or 2 or 3), see the light flash to focus, the equipment can normal search to the keyboard.
- It is recommended to press the combination key FN+PGUP to enter the power saving mode when the keyboard power is low, and the working current decreases to about 10mA, which greatly increases the battery life.


Product Spec Data

Product Type: MK750 RGB dual system three mode mechanical keyboard
 Product Size: 330mm (L) x 142mm (W) x 45mm (H)
 Total key number: 82 keys Switch lifespan: >50 millions
 Keyboard function: All keys anti-ghosting Conduction Travel: 15mm-2.4mm
 Working voltage: 5V Cable length: 1.6 meters
 Cable connector type: TYPE-C Keyboard connector type: USB2.0

Manufacturer: DONGGUAN FL ESPORTS ELECTRONICS CO.LTD
 Address: Building B, Wangwushou Industrial Zone, Shilong Town, Dongguan City, Guangdong, China
 Website: www.fl.esports.com



It can enter the driver for setting (including music rhythm, light adjustment, FN layer edits, sleep time, macro download, etc.) in wireless 2.4g mode (when working in wired mode is preferred)

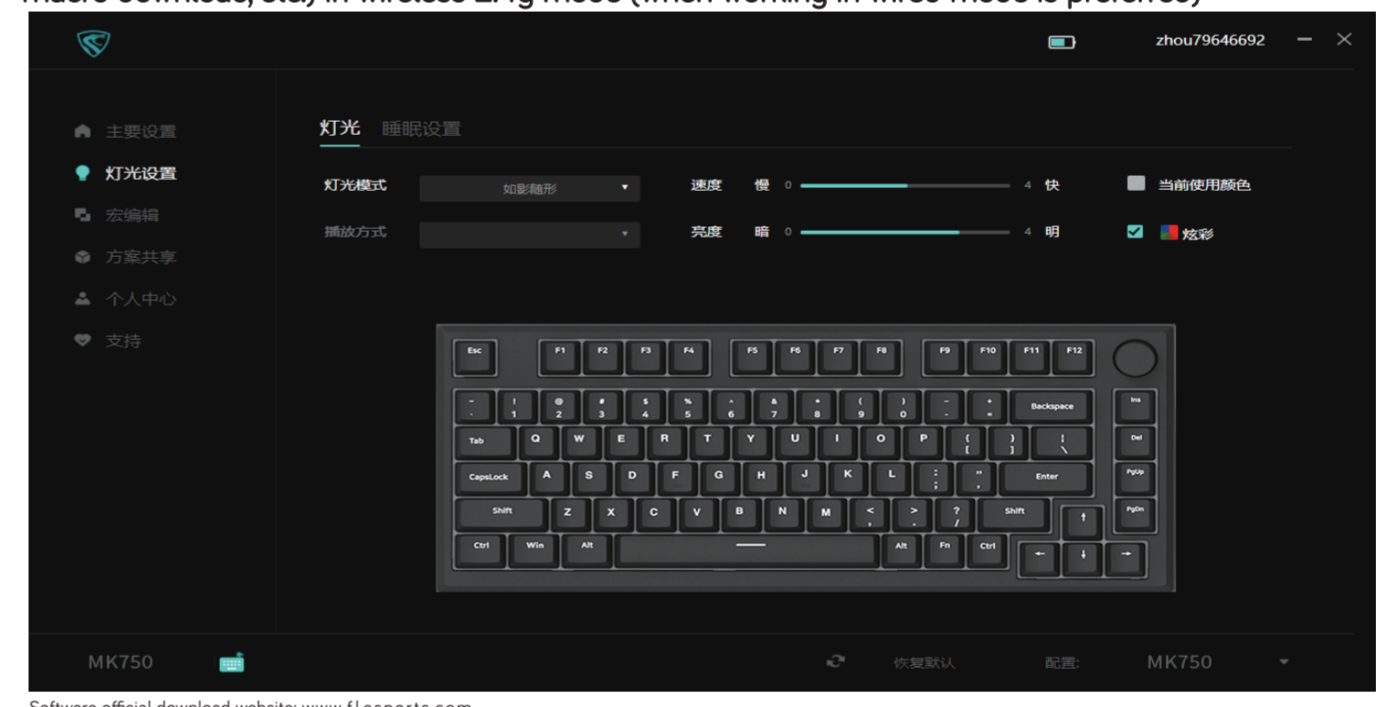

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) this device must accept any interference received, including interference that may cause undesired operation.
 Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.
 The device can be used in portable exposure condition without restriction. FCC ID : 2A4V8-MK750

东莞市腹灵竞技电子有限公司				生效日期	20240820
名称	K239_FLCMMK_MK750_说明书FCC版	产品料号			
尺寸	展开200x660mm	文件编号	版本	V0	
材质	100g铜版纸	电子工程师	结构工程师	平面工程师	审核人
工艺	双面四色印刷, 表面过光油, 风琴三折				

折后尺寸: 200x110mm