



## FCC PART 15.231

### TEST REPORT

For

### RMR Management Group

185 12 Union Turnpike, Fresh Meadows, NY 11366 United States

**FCC ID: 2AIMTF1A**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Flood Detector
<b>Report Number:</b>	<u>RXM171205054-00</u>
<b>Report Date:</b>	<u>2018-01-22</u>
<b>Reviewed By:</b>	Jerry Zhang EMC Manager
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	3
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EQUIPMENT MODIFICATIONS .....	5
EUT EXERCISE SOFTWARE .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
<b>FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS .....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
EUT SETUP .....	9
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE .....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
TEST RESULTS SUMMARY .....	10
TEST DATA .....	11
<b>FCC §15.231(C) – 20 DB BANDWIDTH TESTING.....</b>	<b>18</b>
REQUIREMENT .....	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST PROCEDURE .....	18
TEST DATA .....	18
<b>FCC §15.231(A) - DEACTIVATION TESTING .....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA .....	20

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Flood Detector
<b>EUT Model:</b>	Mini-F1A
<b>FCC ID:</b>	2AIMTF1A
<b>Rated Input Voltage:</b>	DC 3V
<b>External Dimension:</b>	9.4cm(L)*9.4cm(W)*4.4cm(H)
<b>Serial Number:</b>	171205054
<b>EUT Received Date:</b>	2017.12.05

### Objective

This report is prepared on behalf of **RMR Management Group** in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

### Related Submittal(s)/Grant(s)

Part of system submission with FCC ID: 2AIMTMINI.

### Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured in testing mode which was provided by manufacturer.

The device operation frequency is 434 MHz with ASK modulation.


### Equipment Modifications

No modifications were made to the unit tested.

### EUT Exercise Software

No software was used in test.

### Block Diagram of Test Setup

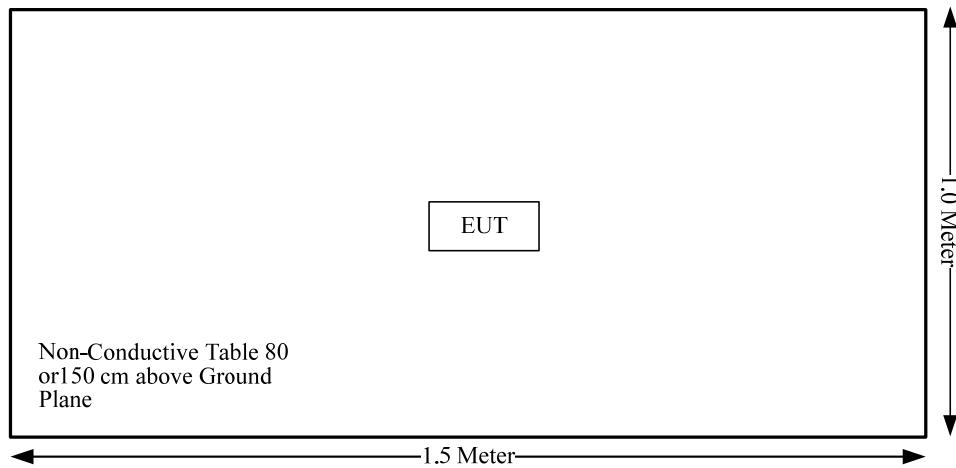

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not applicable
§15.205, §15.209, §15.231 (b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Bandwidth	Compliance
§15.231 (a)	Deactivation Testing	Compliance

Note: Not applicable, the device was powered by battery.

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:** Compliant.

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS****Applicable Standard**

FCC §15.205, §15.209, §15.231 (b)

(b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolations.


(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.


(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

## EUT Setup

### Below 1 GHz:

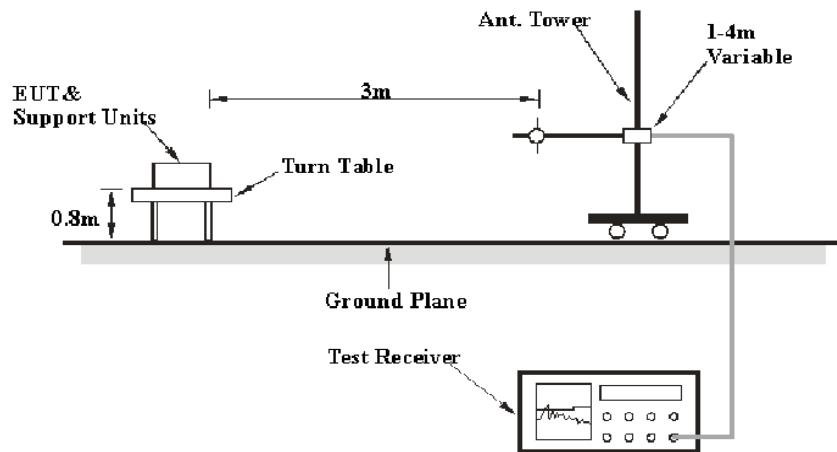

### Above 1 GHz:

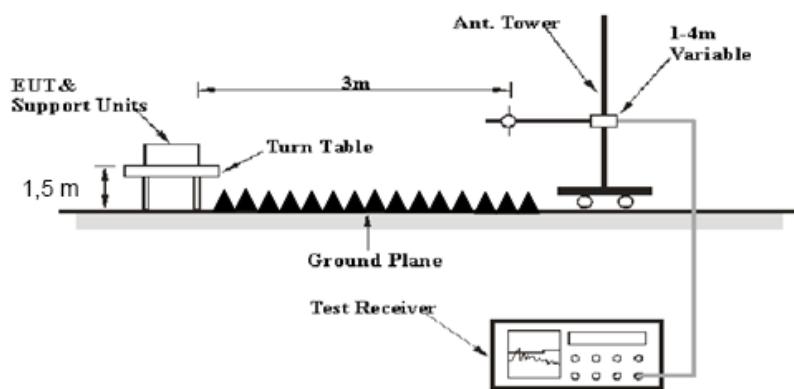

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	100 kHz	PK
1 GHz – 5 GHz	1 MHz	3 MHz	/	PK

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2018-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2017-12-08	2018-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the CFR47 §15.205, §15.209, §15.231 (b).

## Test Data

### Environmental Conditions

<b>Temperature:</b>	20.1~22.1 °C
<b>Relative Humidity:</b>	42~45 %
<b>ATM Pressure:</b>	101.3~102 kPa

The testing was performed by Blake Yang and Steven Zuo on 2018-01-09 and 2018-01-19.

Test mode: Transmitting

### Field Strength (Peak)

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	15.231(b)	
		Polar (H/V)	Factor (dB)				Limit (dB $\mu$ V/m)	Margin (dB)
Operating Frequency: 434 MHz								
434.00	71.30	H	16.48	2.65	0.00	90.43	100.83	10.40
434.00	63.30	V	16.48	2.65	0.00	82.43	100.83	18.40
868.00	27.73	H	21.76	4.09	0.00	53.58	80.83	27.25
868.00	26.98	V	21.76	4.09	0.00	52.83	80.83	28.00
1302.00	55.70	H	24.53	1.57	35.95	45.85	74.00	28.15
1302.00	58.23	V	24.53	1.57	35.95	48.38	74.00	25.62
1736.00	65.65	H	26.19	1.65	36.06	57.43	74.00	16.57
1736.00	66.78	V	26.19	1.65	36.06	58.56	74.00	15.44
2170.00	44.37	H	27.64	1.74	36.18	37.57	74.00	36.43
2170.00	45.38	V	27.64	1.74	36.18	38.58	74.00	35.42
2604.00	57.69	H	28.67	1.88	36.38	51.86	74.00	22.14
2604.00	54.55	V	28.67	1.88	36.38	48.72	74.00	25.28

## Field Strength (Average)

Frequency (MHz)	Peak Measurement @ 3m (dB $\mu$ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dB $\mu$ V/m)	15.231(b)	
					Limit (dB $\mu$ V/m)	Margin (dB)
Operating Frequency: 434 MHz						
434.00	90.43	H	-17.70	72.73	80.83	8.1
434.00	82.43	V	-17.70	64.73	80.83	16.1
868.00	53.58	H	-17.70	35.88	60.83	24.95
868.00	52.83	V	-17.70	35.13	60.83	25.7
1302.00	45.85	H	-17.70	28.15	54.00	25.85
1302.00	48.38	V	-17.70	30.68	54.00	23.32
1736.00	57.43	H	-17.70	39.73	54.00	14.27
1736.00	58.56	V	-17.70	40.86	54.00	13.14
2170.00	37.57	H	-17.70	19.87	54.00	34.13
2170.00	38.58	V	-17.70	20.88	54.00	33.12
2604.00	51.86	H	-17.70	34.16	54.00	19.84
2604.00	48.72	V	-17.70	31.02	54.00	22.98

Duty Cycle Correction Factor Calculation as below:


$$T_{on}=10*0.59+15*0.23+16*0.23=13.03 \text{ ms}$$

$$T_{on+off}=100 \text{ ms}$$

$$\text{Duty cycle} = 13.03/100*100\% = 13.03\%$$


$$\text{Duty Cycle Correction Factor} = 20*\log(\text{Duty cycle}) = -17.70 \text{ dB}$$

## Transmission duration(3.22s)

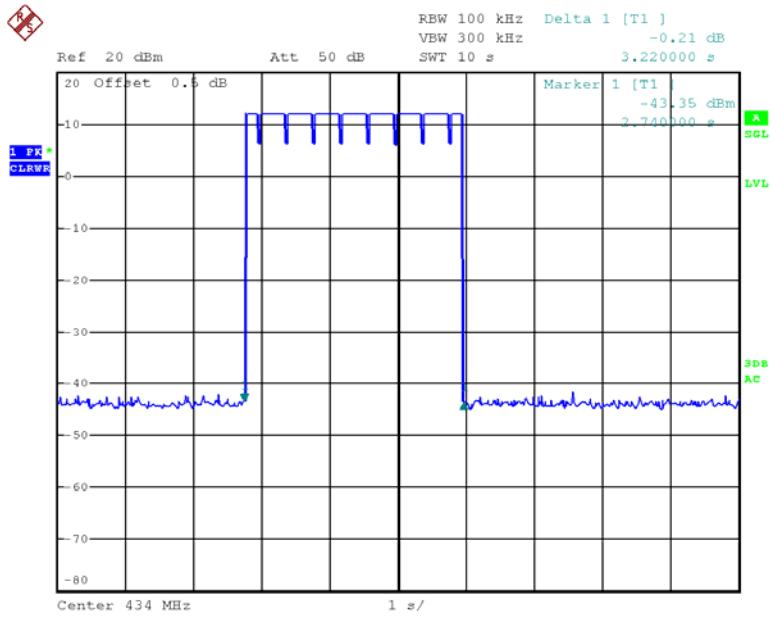


Date: 19.JAN.2018 21:36:56

## 134ms a Period In Transmission Time

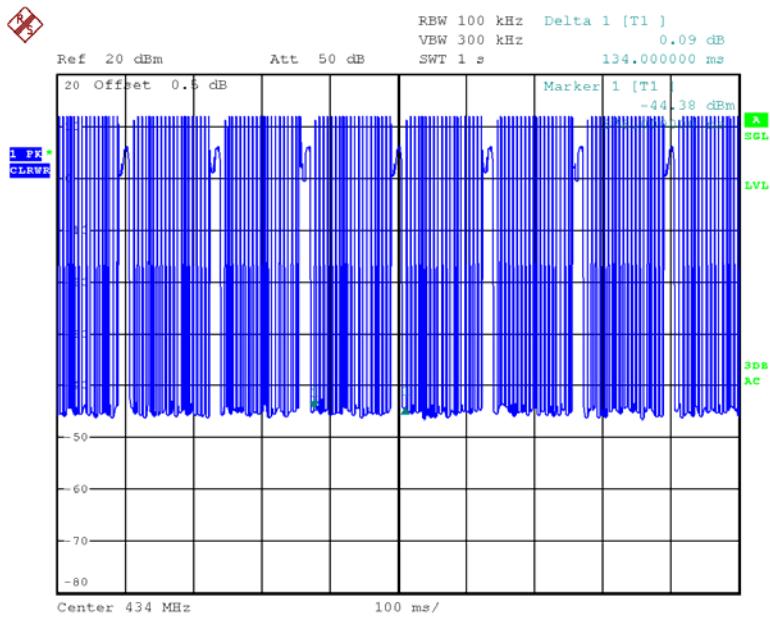


Date: 19.JAN.2018 21:38:11

Maximum duty cycle in the red frame contain 16\*pulse 2 in the double arrow range

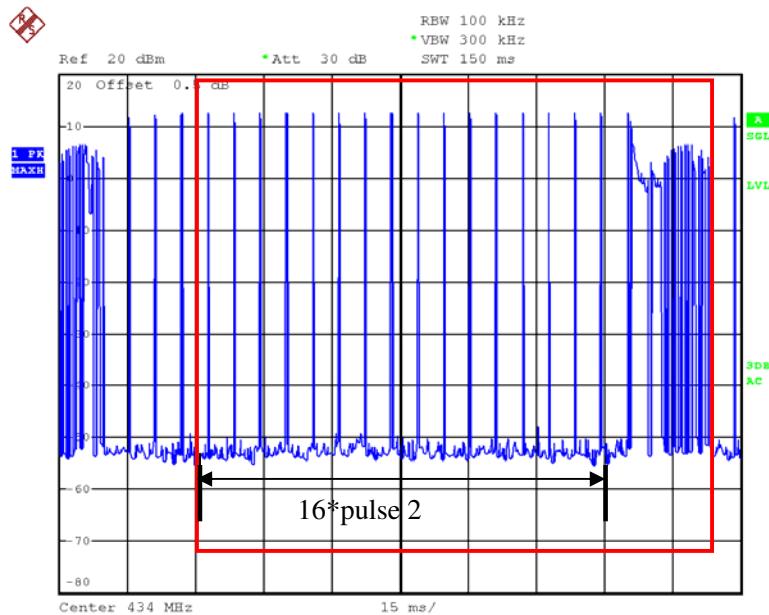


Date: 10.JAN.2018 15:16:39

10\*pulse 1 and 15\*pulse 2 in Red frame

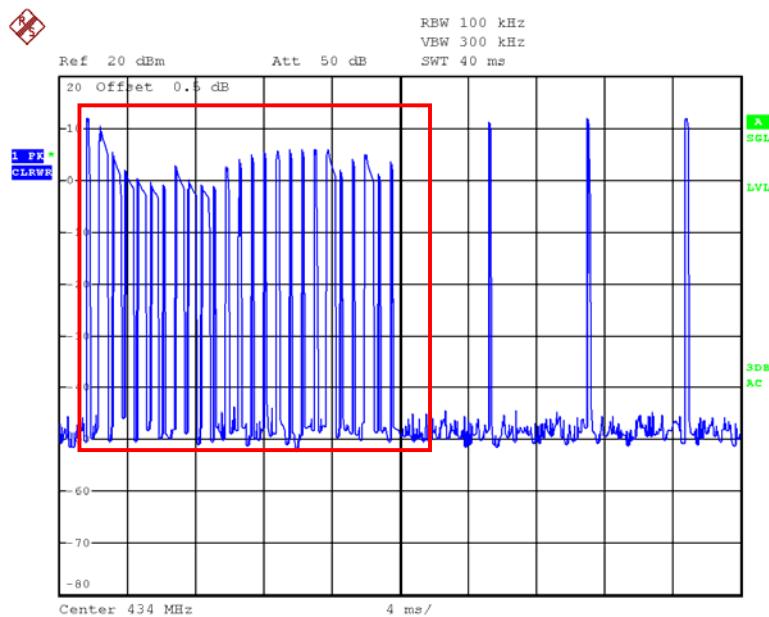


Date: 19.JAN.2018 21:39:40

## Pulse 1: 0.59ms


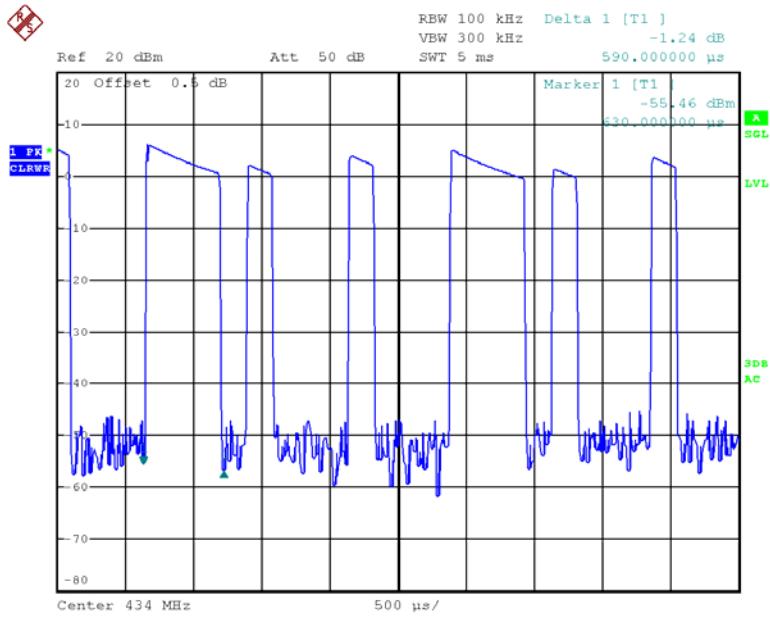



Date: 19.JAN.2018 21:41:03

## Pulse 2: 0.23ms

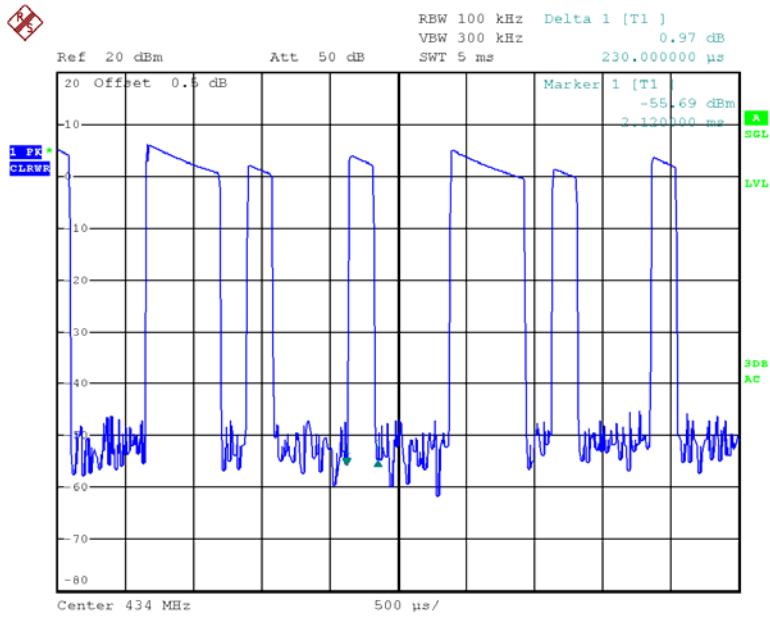

Date: 19.JAN.2018 21:40:27

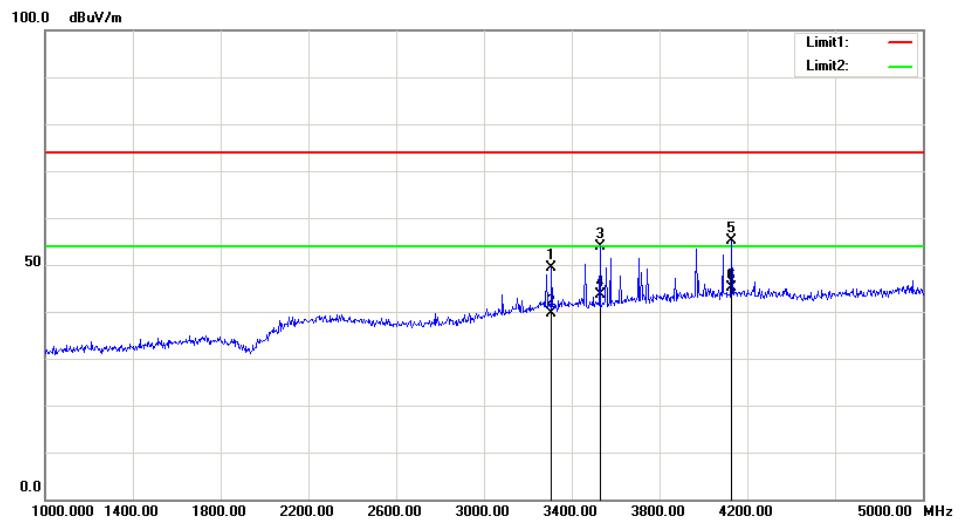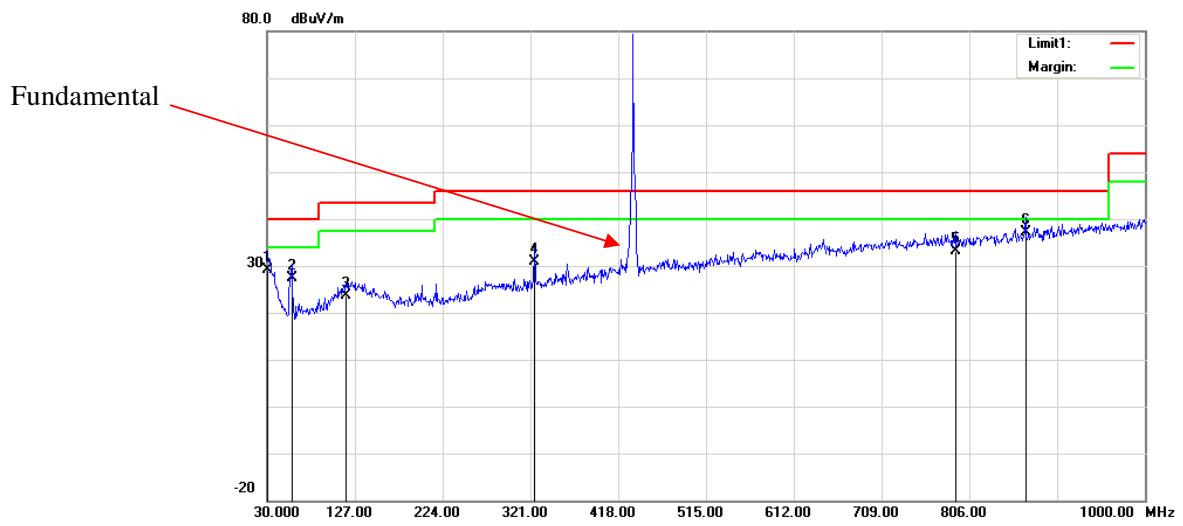*Peak Test plots***Horizontal:**

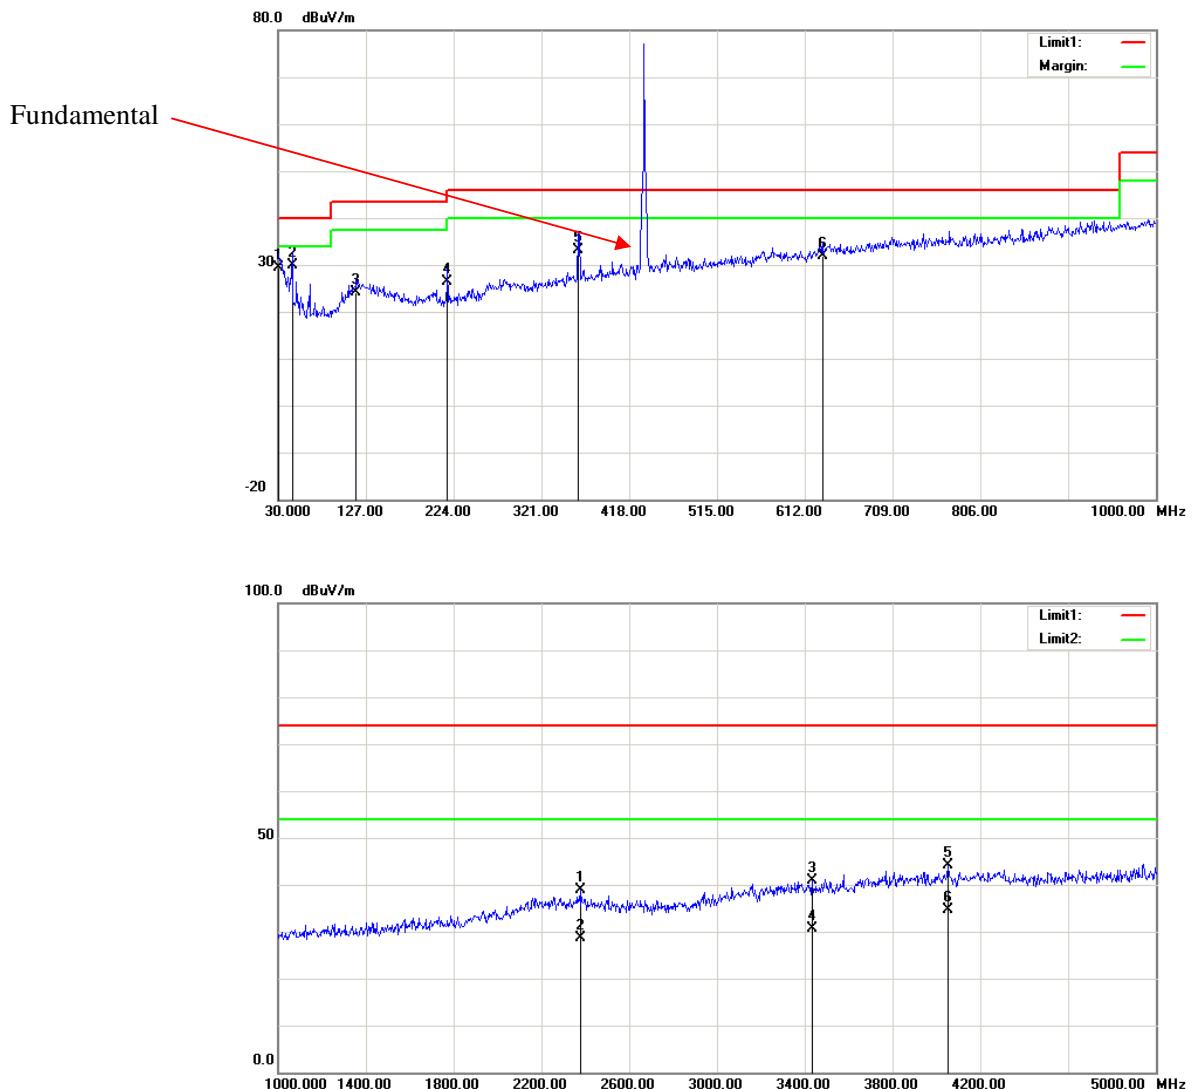**Vertical:**

## FCC §15.231(c) – 20 dB BANDWIDTH TESTING

### Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2018-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

The waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

### Test Data

#### Environmental Conditions

Temperature:	21.4
Relative Humidity:	35
ATM Pressure:	101.8kPa


*The testing was performed by David Huang on 2018-01-10*

*Test Mode: Transmitting*

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Result
434	25.2	1085	Pass

**Note:** Limit = 0.25% \* Center Frequency = 0.25%\*434Hz = 1085Hz

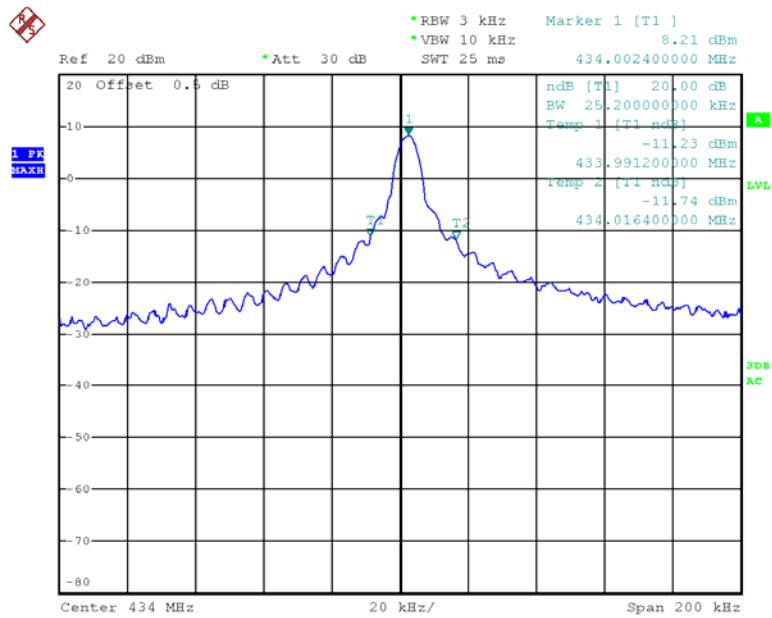**20 dB Bandwidth**

Date: 10.JAN.2018 15:43:23

## FCC §15.231(a) - DEACTIVATION TESTING

### Applicable Standard

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2018-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	25.2°C
Relative Humidity:	47%
ATM Pressure:	101.3kPa

The testing was performed by David Huang on 2018-01-19

Test Mode: Transmitting

Test Result: Compliance. Please refer to following plot.

Deactivate Time (s)	Limit	Result
3.22	<5s	Pass

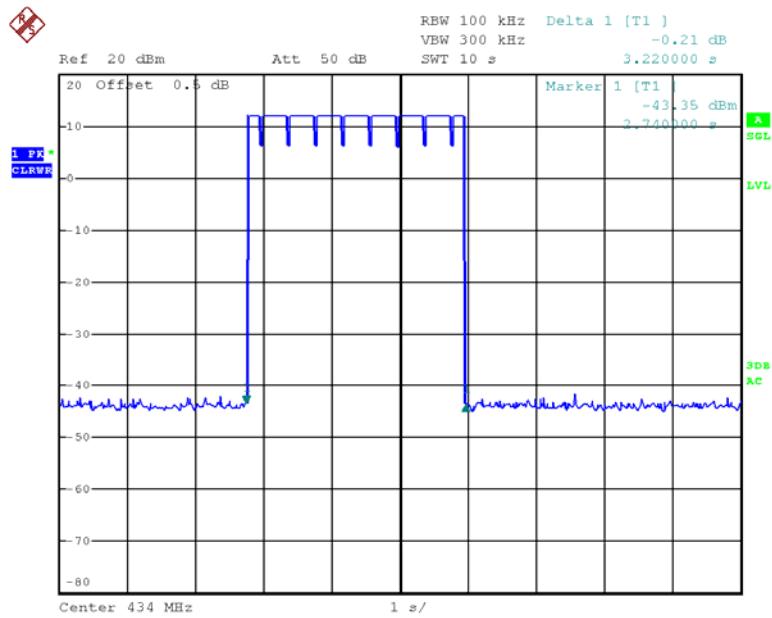*Transmission duration*

Date: 19.JAN.2018 21:36:56

**\*\*\*\*\*END OF REPORT\*\*\*\*\***