



FCC RADIO TEST REPORT

Applicant : TECHTUIT CO.,LTD.

Address : Mita International Building 26F,1-4-28 Mita Minato
Tokyo Japan.

Equipment : Electronic Performance and Tracking System
(EPTS) devices

Model No. : KS-01, MTD200


Trade Name : 

FCC ID. : 2AIRF-KS01

I HEREBY CERTIFY THAT :

The sample was received on Dec. 06, 2017 and the testing was carried out on Jan. 19, 2018 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Mark Liao / Assistant Manager

Tested by:



Spree Yei / Engineer

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels	6
2.3 Test Mode and Test Software	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements.....	10
4.1 Standard Applicable	10
4.2 Antenna Construction and Directional Gain.....	10
5. Test of AC Power Line Conducted Emission	11
5.1 Test Limit	11
5.2 Test Procedures	11
5.3 Typical Test Setup	12
5.4 Test Result and Data.....	13
5.5 Test Photographs	17
6. Test of Radiated Spurious Emission.....	19
6.1 Test Limit	19
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9kHz ~ 30MHz).....	22
6.5 Test Result and Data (30MHz ~ 1GHz).....	22
6.6 Test Result and Data (1GHz ~ 25GHz).....	28
6.7 Restricted Bands of Operation	34
6.8 Test Photographs (30MHz ~ 1GHz)	35
6.9 Test Photographs (1GHz ~ 25GHz)	38
7. Test of Spurious Emission (Conducted).....	39
7.1 Test Limit	39
7.2 Test Procedure	39
7.3 Test Setup Layout	39
7.4 Test Result and Data.....	39
8. 6dB Bandwidth Measurement Data	42
8.1 Test Limit	42
8.2 Test Procedures	42
8.3 Test Setup Layout	42
8.4 Test Result and Data.....	42
9. Maximum Peak and Average Output Power	44
9.1 Test Limit	44
9.2 Test Procedures	44
9.3 Test Setup Layout	44



9.4	Test Result and Data	44
10.	Power Spectral Density	45
10.1	Test Limit	45
10.2	Test Procedures	45
10.3	Test Setup Layout	45
10.4	Test Result and Data	45
11.	Radio Frequency Exposure	47
11.1	Applicable Standards	47
11.2	EUT Specification	47



History of this test report

Attachment No.	Issue Date	Description
TEFQ1712030	Mar. 21, 2018	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. AC Power Line Conducted Emission	Pass
15.209 15.205	. Radiated Spurious Emission	Pass
15.247(d)	. Conducted Spurious Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(e)	. Power Spectral Density	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Modulation Type	GFSK
Frequency Range	2402MHz~2480MHz
Data Rate	1Mbps
Antenna Type	Chip
Antenna Gain	0.8 dBi

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- An executive program, "nrfgo studio:V1.21.2" under WIN 8 was executed to transmit and receive data via Bluetooth.
- The following test mode was performed for the test:

AC Power Line Conducted Emission	
Test Mode	Operating Description
1	Charge from Docking
2	Charge for NB
Radiated Emission(30MHz-1GHz)	
Test Mode	Operating Description
1	Charge from Docking
2	Charge for NB
3	EUT only
Radiated Emission(Above 1GHz)	
Test Mode	Operating Description
1	EUT only

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Remote workstation			
Notebook	ASUS	P2430U	Power Cable, Unshielding, 1.8m



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4218, R-4399 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:	2402MHz~2480MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3M.	



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Receiver	R&S	ESC13	100443	2017/03/07	2018/03/06
LISN	Schwarzbeck	NSLK 8127	8127-568	2017/02/15	2018/02/14
Pulse Limiter	R&S	ESH3-Z2	101934	2017/02/14	2018/02/13
Bilog Antenna	Schwarzbeck	VULB9168	369	2017/03/15	2018/03/14
Active Loop Antenna	EMCO	6507	40855	2017/05/15	2018/05/14
Horn Antenna	EMCO	3115	31589	2017/02/18	2018/02/17
Horn Antenna	EMCO	3116	31970	2017/03/29	2018/03/28
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2017/03/17	2018/03/16
Preamplifier	EM	EM330	60660	2017/02/25	2018/02/24
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2017/09/20	2018/09/19
Preamplifier	Agilent	8449B	3008A01954	2017/02/09	2018/02/08
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2017/03/17	2018/03/16
Spectrum Analyzer	R&S	FSP40	100219	2017/07/01	2018/06/30
BLUETOOTH TESTER	R&S	CBT	101133	2017/03/10	2018/03/09
Attenuator	KEYSIGHT	8491B	MY39250703	2017/03/07	2018/03/06
Rotary Attenuator	Agilent	8495B	MY42146680	2017/03/13	2018/03/12
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2017/09/04	2018/09/03
Series Power Meter	Anritsu	ML2495A	1224005	2017/03/01	2018/02/28
Power Sensor	Anritsu	MA2411B	1207295	2017/03/01	2018/02/28
Cable	HUBER SUHNER	SUCOFLEX 102	28422/2	2017/02/25	2018/02/24
Cable	HUBER SUHNER	SUCOFLEX 102	28418/2	2017/02/25	2018/02/24
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	v2.0.0.1	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Chip
Antenna Gain	0.8 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

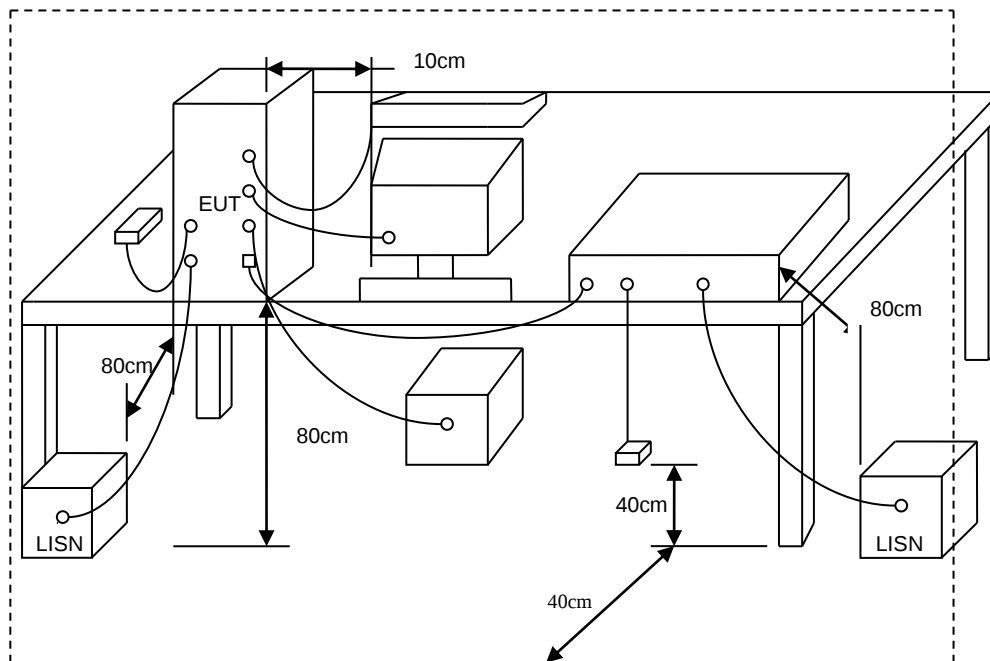



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1	Temperature	: 20 °C
Test date	: Jan. 19, 2018	Humidity	: 62 %

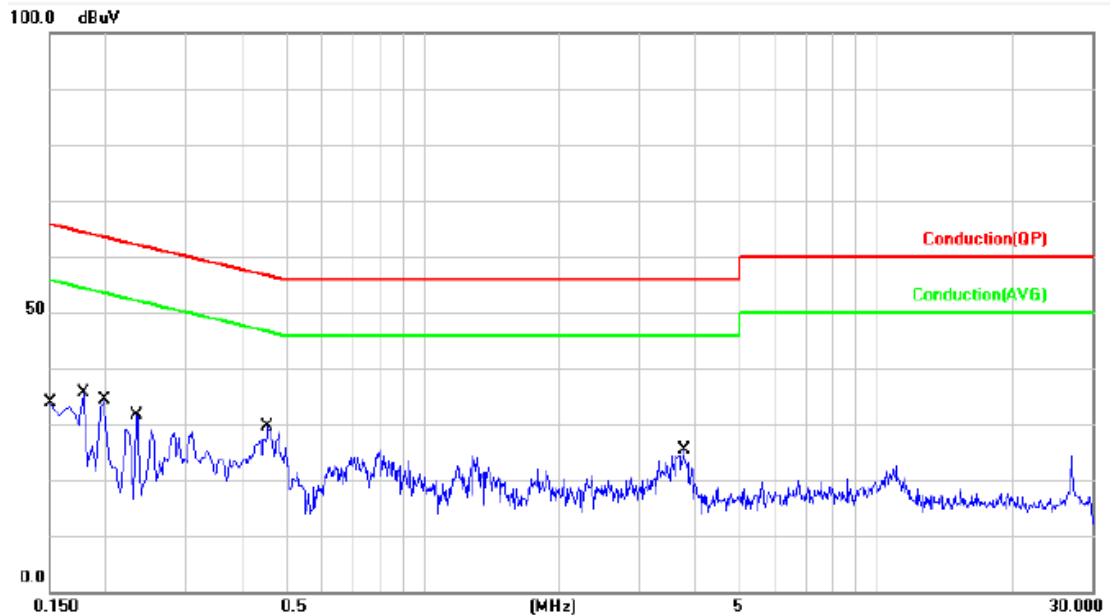

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	9.91	22.38	32.29	65.99	-33.70	QP	P
2	0.1500	9.91	10.81	20.72	55.99	-35.27	AVG	P
3	0.1780	9.91	18.74	28.65	64.57	-35.92	QP	P
4	0.1780	9.91	7.46	17.37	54.57	-37.20	AVG	P
5	0.1980	9.91	16.57	26.48	63.69	-37.21	QP	P
6	0.1980	9.91	4.72	14.63	53.69	-39.06	AVG	P
7	0.2340	9.91	14.10	24.01	62.30	-38.29	QP	P
8	0.2340	9.91	0.97	10.88	52.30	-41.42	AVG	P
9	0.4540	9.93	16.73	26.66	56.80	-30.14	QP	P
10	0.4540	9.93	7.75	17.68	46.80	-29.12	AVG	P
11	3.7700	10.08	12.76	22.84	56.00	-33.16	QP	P
12	3.7700	10.08	1.04	11.12	46.00	-34.88	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1	Temperature	: 20 °C
Test date	: Jan. 19, 2018	Humidity	: 62 %

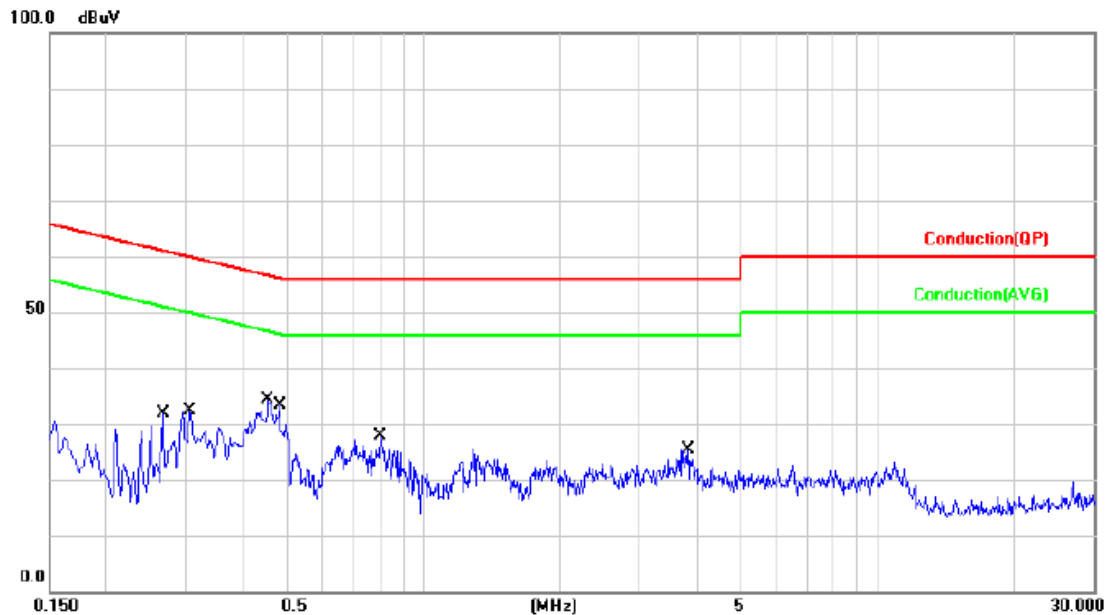

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2660	9.91	13.57	23.48	61.24	-37.76	QP	P
2	0.2660	9.91	2.31	12.22	51.24	-39.02	AVG	P
3	0.3060	9.92	15.00	24.92	60.08	-35.16	QP	P
4	0.3060	9.92	4.53	14.45	50.08	-35.63	AVG	P
5	0.4540	9.93	21.53	31.46	56.80	-25.34	QP	P
6	0.4540	9.93	10.65	20.58	46.80	-26.22	AVG	P
7	0.4820	9.93	21.28	31.21	56.30	-25.09	QP	P
8	0.4820	9.93	10.75	20.68	46.30	-25.62	AVG	P
9	0.8020	9.95	13.00	22.95	56.00	-33.05	QP	P
10	0.8020	9.95	2.80	12.75	46.00	-33.25	AVG	P
11	3.8340	10.09	9.42	19.51	56.00	-36.49	QP	P
12	3.8340	10.09	0.83	10.92	46.00	-35.08	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 2	Temperature	: 20 °C
Test date	: Jan. 19, 2018	Humidity	: 62 %

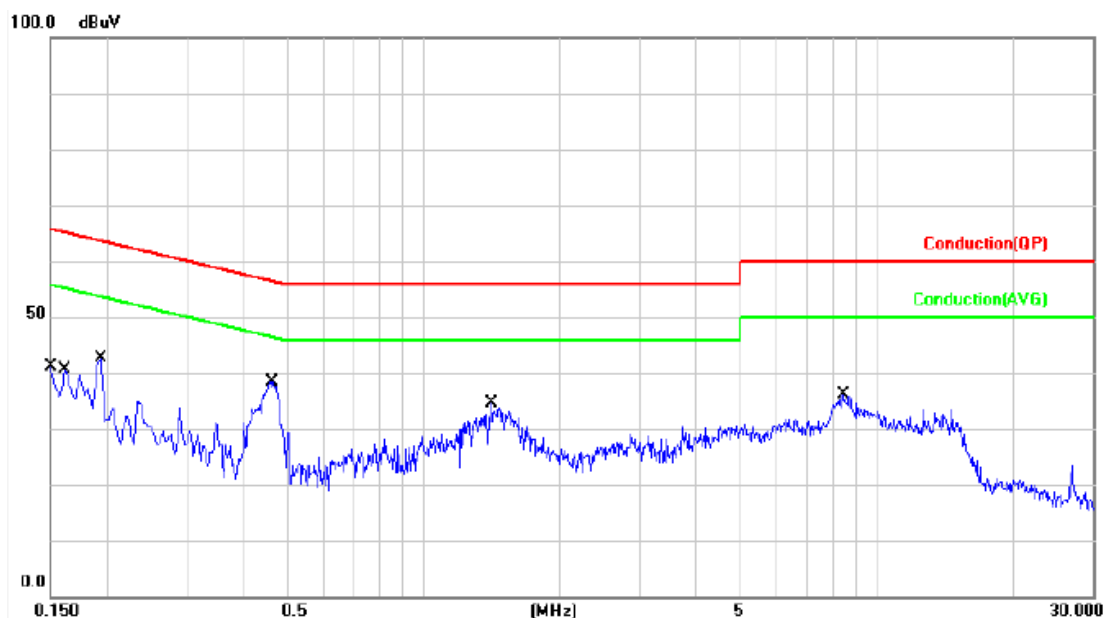

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	9.91	33.67	43.58	65.99	-22.41	QP	P
2	0.1500	9.91	19.47	29.38	55.99	-26.61	AVG	P
3	0.1620	9.91	34.07	43.98	65.36	-21.38	QP	P
4	0.1620	9.91	19.65	29.56	55.36	-25.80	AVG	P
5	0.1940	9.91	27.99	37.90	63.86	-25.96	QP	P
6	0.1940	9.91	14.66	24.57	53.86	-29.29	AVG	P
7	0.4660	9.93	27.25	37.18	56.58	-19.40	QP	P
8	0.4660	9.93	19.21	29.14	46.58	-17.44	AVG	P
9	1.4140	9.98	20.76	30.74	56.00	-25.26	QP	P
10	1.4140	9.98	15.52	25.50	46.00	-20.50	AVG	P
11	8.4300	10.21	22.11	32.32	60.00	-27.68	QP	P
12	8.4300	10.21	16.17	26.38	50.00	-23.62	AVG	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2	Temperature	: 20 °C
Test date	: Jan. 19, 2018	Humidity	: 62 %

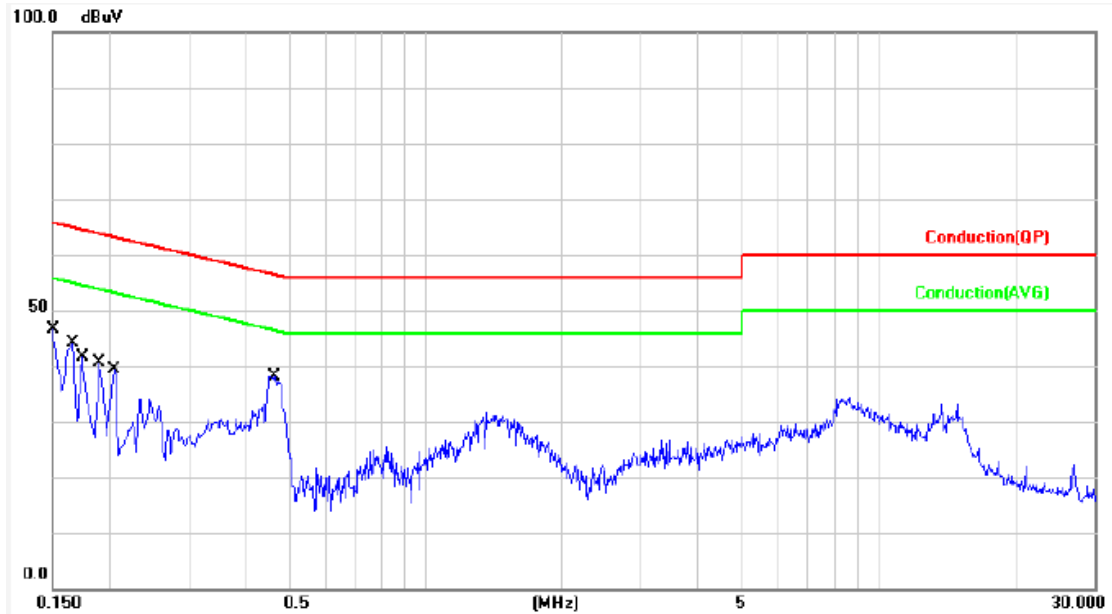

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	9.91	33.82	43.73	65.99	-22.26	QP	P
2	0.1500	9.91	19.98	29.89	55.99	-26.10	AVG	P
3	0.1660	9.91	30.27	40.18	65.15	-24.97	QP	P
4	0.1660	9.91	18.60	28.51	55.15	-26.64	AVG	P
5	0.1740	9.91	29.90	39.81	64.76	-24.95	QP	P
6	0.1740	9.91	16.50	26.41	54.76	-28.35	AVG	P
7	0.1900	9.91	27.62	37.53	64.03	-26.50	QP	P
8	0.1900	9.91	14.12	24.03	54.03	-30.00	AVG	P
9	0.2060	9.91	23.44	33.35	63.36	-30.01	QP	P
10	0.2060	9.91	10.58	20.49	53.36	-32.87	AVG	P
11	0.4660	9.93	28.00	37.93	56.58	-18.65	QP	P
12	0.4660	9.93	20.33	30.26	46.58	-16.32	AVG	P

Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

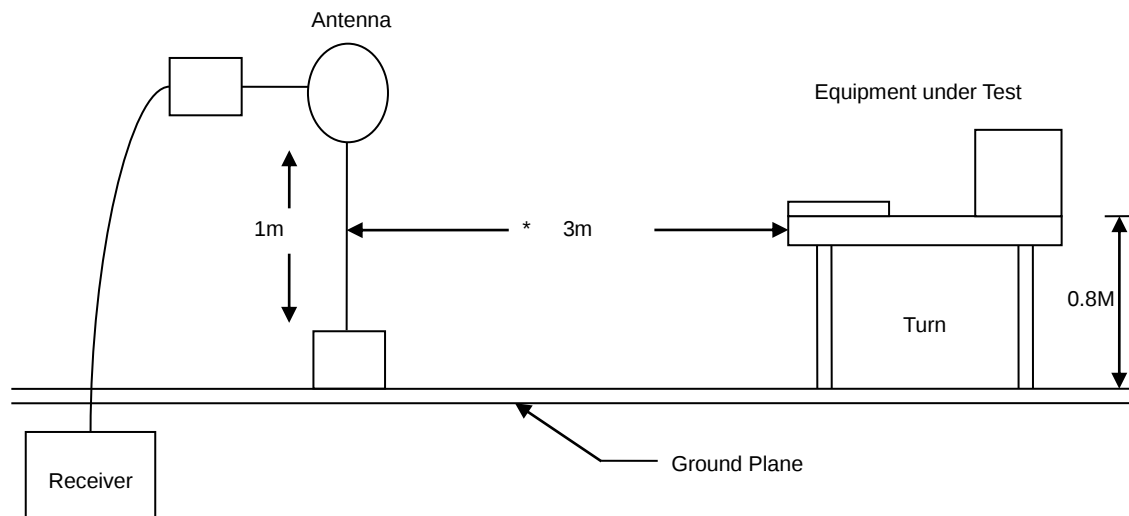

30MHz- 1GHz Test Setup

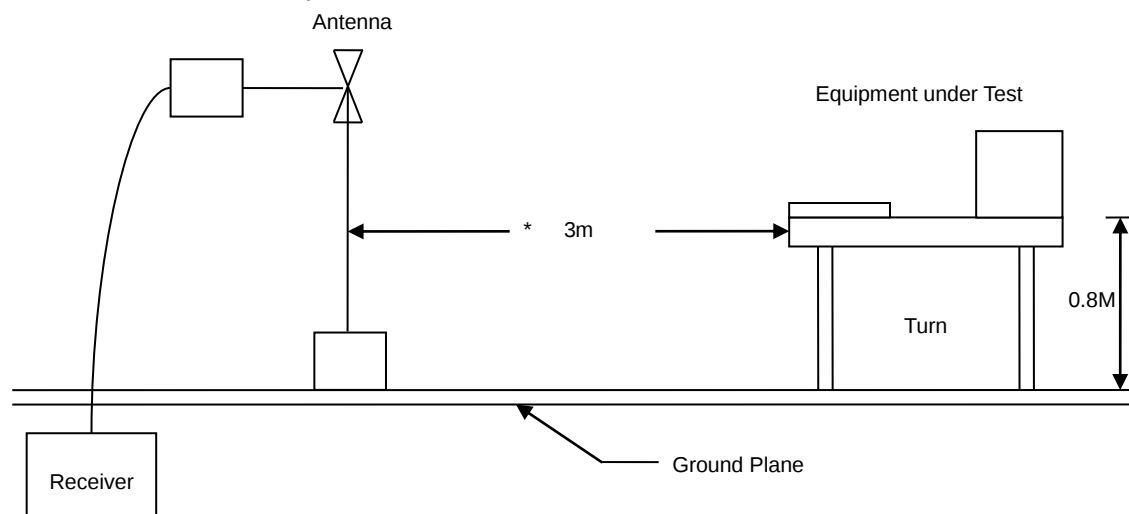

Above 1GHz Test Setup

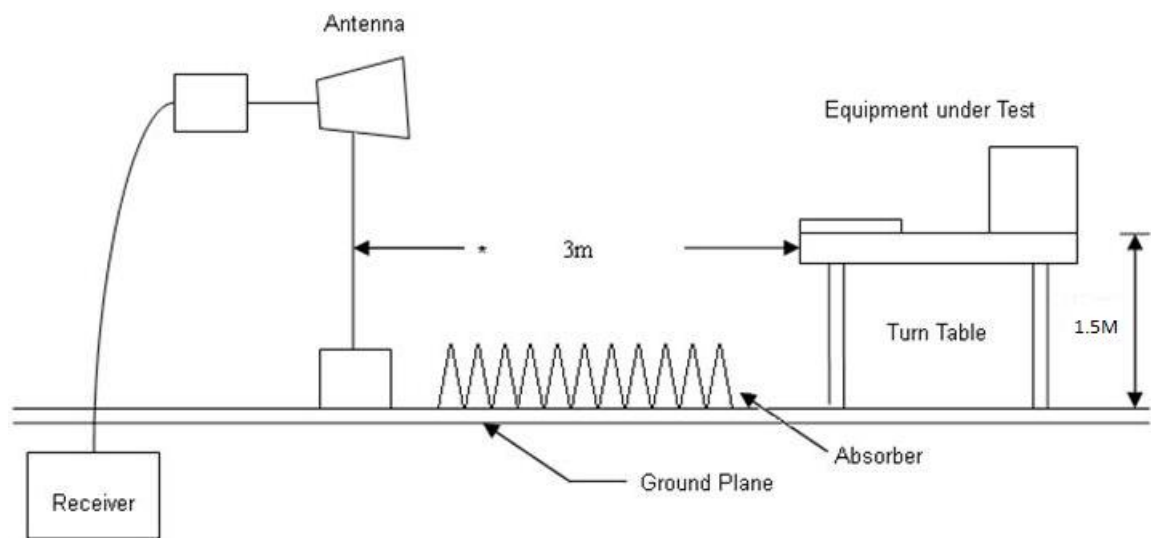




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 19 °C
Test Date	: Dec. 27, 2017	Humidity	: 59 %

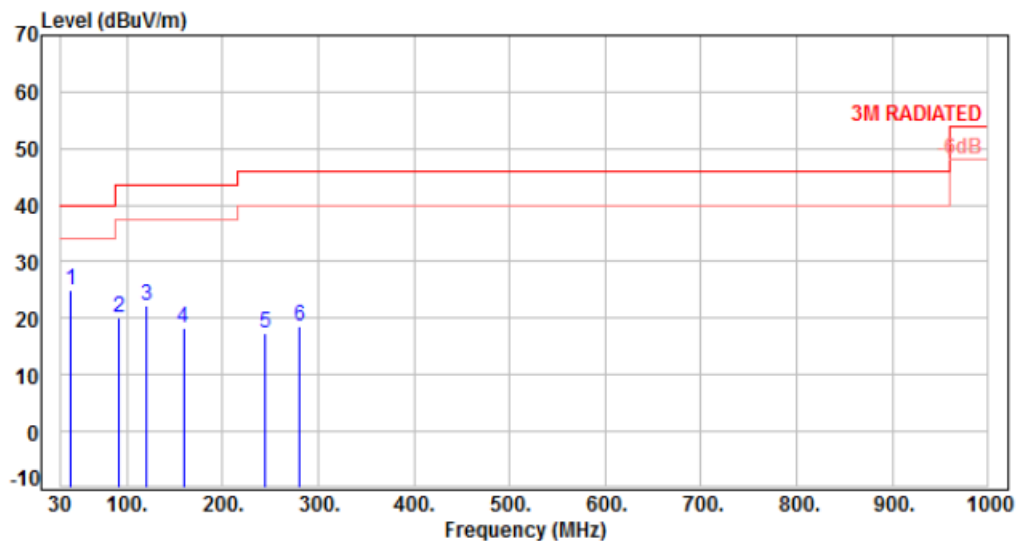

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	40.67	-10.30	35.29	24.99	40.00	-15.01	Peak	400	0	P
2	92.08	-15.64	35.77	20.13	43.50	-23.37	Peak	400	0	P
3	120.21	-12.41	34.75	22.34	43.50	-21.16	Peak	400	0	P
4	159.01	-9.85	28.13	18.28	43.50	-25.22	Peak	400	0	P
5	244.37	-10.71	27.99	17.28	46.00	-28.72	Peak	400	0	P
6	281.23	-9.37	27.90	18.53	46.00	-27.47	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 19 °C
Test Date	: Dec. 27, 2017	Humidity	: 59 %

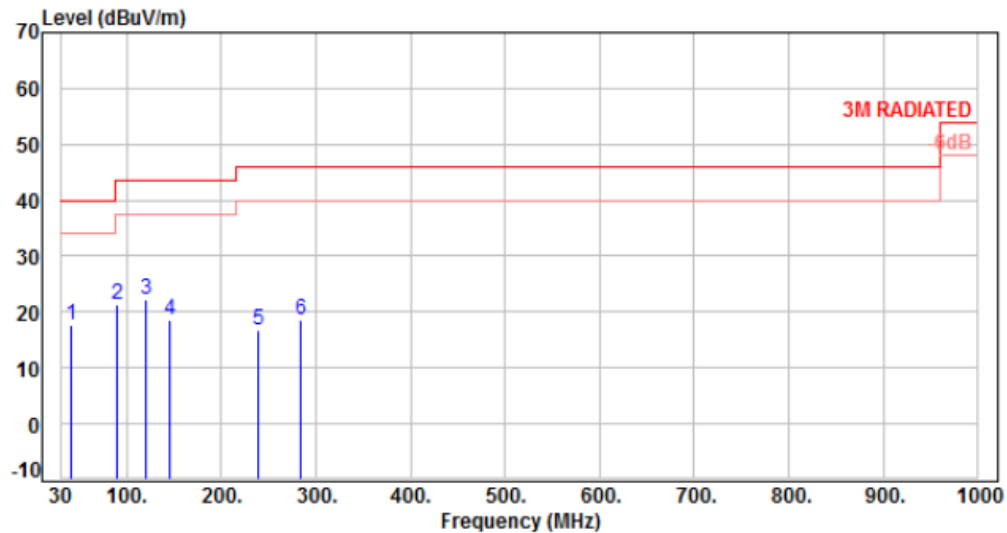

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	40.67	-10.30	28.09	17.79	40.00	-22.21	Peak	100	0	P
2	89.17	-15.67	37.08	21.41	43.50	-22.09	Peak	100	0	P
3	120.21	-12.41	34.52	22.11	43.50	-21.39	Peak	100	0	P
4	145.43	-10.19	28.65	18.46	43.50	-25.04	Peak	100	0	P
5	239.52	-10.81	27.65	16.84	46.00	-29.16	Peak	100	0	P
6	283.17	-9.32	27.95	18.63	46.00	-27.37	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 19 °C
Test Date	: Dec. 27, 2017	Humidity	: 59 %

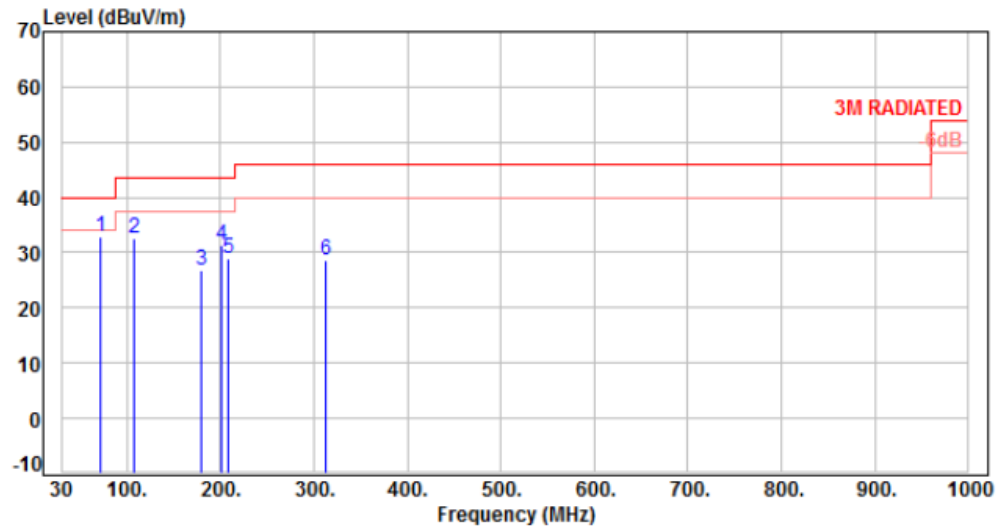

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	71.71	-12.37	45.11	32.74	40.00	-7.26	Peak	400	0	P
2	107.60	-13.72	46.32	32.60	43.50	-10.90	Peak	400	0	P
3	179.38	-11.06	37.97	26.91	43.50	-16.59	Peak	400	0	P
4	201.69	-12.00	43.52	31.52	43.50	-11.98	Peak	400	0	P
5	208.48	-11.92	40.77	28.85	43.50	-14.65	Peak	400	0	P
6	312.27	-8.48	37.02	28.54	46.00	-17.46	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 19 °C
Test Date	: Dec. 27, 2017	Humidity	: 59 %

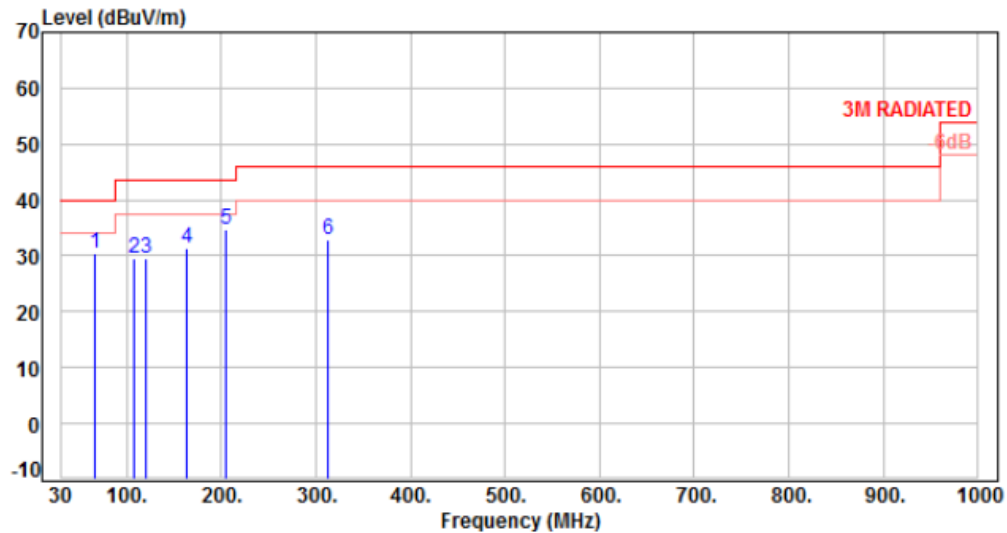

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	66.86	-11.44	41.81	30.37	40.00	-9.63	Peak	100	0	P
2	107.60	-13.72	43.25	29.53	43.50	-13.97	Peak	100	0	P
3	120.21	-12.41	41.95	29.54	43.50	-13.96	Peak	100	0	P
4	163.86	-9.93	41.29	31.36	43.50	-12.14	Peak	100	0	P
5	205.57	-11.95	46.67	34.72	43.50	-8.78	Peak	100	0	P
6	312.27	-8.48	41.52	33.04	46.00	-12.96	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 3	Temperature	: 19 °C
Test Date	: Dec. 27, 2017	Humidity	: 59 %

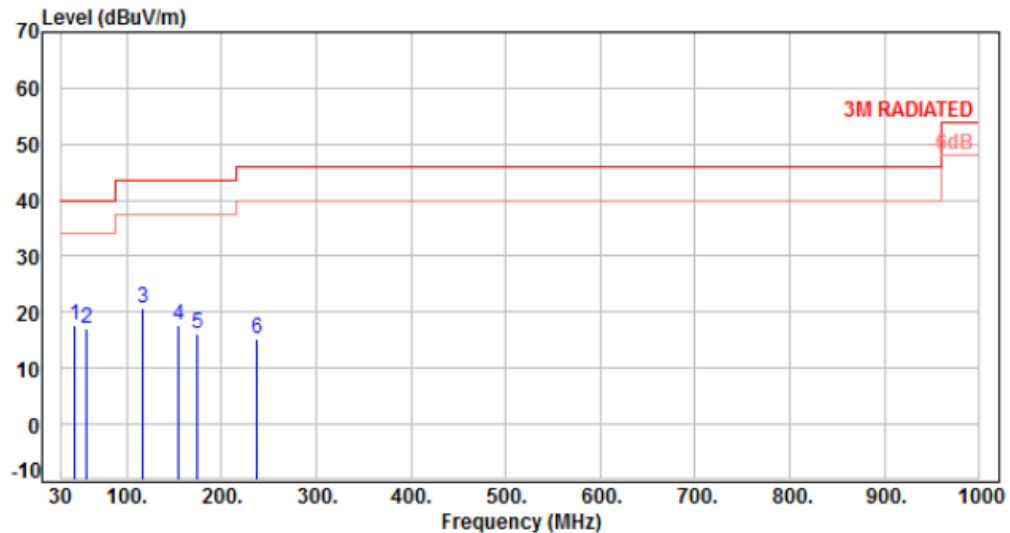

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	45.52	-9.89	27.43	17.54	40.00	-22.46	Peak	400	0	P
2	58.13	-10.15	27.27	17.12	40.00	-22.88	Peak	400	0	P
3	117.30	-12.67	33.34	20.67	43.50	-22.83	Peak	400	0	P
4	154.16	-9.98	27.52	17.54	43.50	-25.96	Peak	400	0	P
5	173.56	-10.46	26.77	16.31	43.50	-27.19	Peak	400	0	P
6	236.61	-11.11	26.33	15.22	46.00	-30.78	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3	Temperature	: 19 °C
Test Date	: Dec. 27, 2017	Humidity	: 59 %

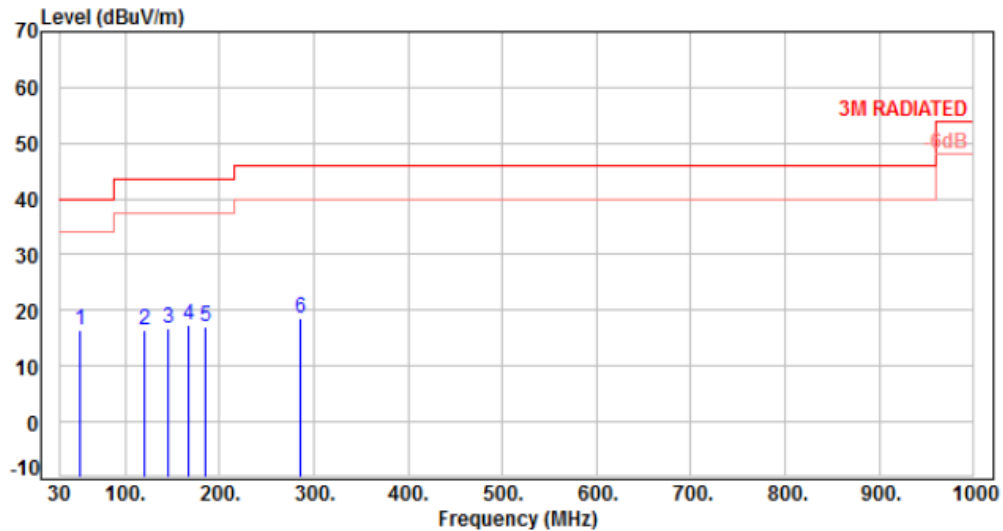

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	51.34	-9.76	26.27	16.51	40.00	-23.49	Peak	100	0	P
2	121.18	-12.31	28.75	16.44	43.50	-27.06	Peak	100	0	P
3	145.43	-10.19	26.91	16.72	43.50	-26.78	Peak	100	0	P
4	166.77	-10.00	27.25	17.25	43.50	-26.25	Peak	100	0	P
5	184.23	-11.45	28.37	16.92	43.50	-26.58	Peak	100	0	P
6	285.11	-9.26	27.80	18.54	46.00	-27.46	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Temperature	: 19 °C
Test Date	: Jan. 17, 2018	Humidity	: 59 %

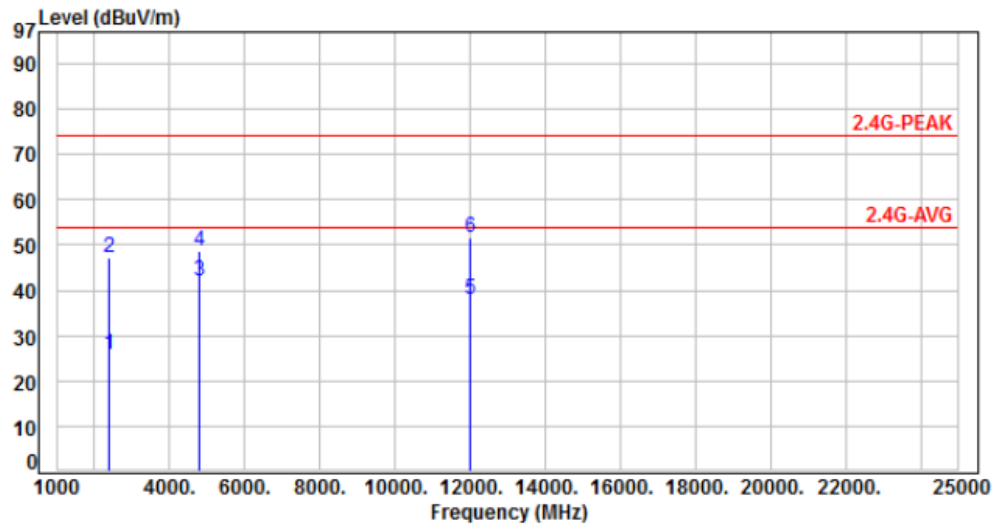

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.95	44.60	25.65	54.00	-28.35	Average	100	182	P
2	2390.00	-18.95	66.20	47.25	74.00	-26.75	Peak	100	182	P
3	4804.00	-13.28	55.33	42.05	54.00	-11.95	Average	220	175	P
4	4804.00	-13.28	62.09	48.81	74.00	-25.19	Peak	220	175	P
5	12010.00	-5.98	44.06	38.08	54.00	-15.92	Average	100	185	P
6	12010.00	-5.98	57.65	51.67	74.00	-22.33	Peak	100	185	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Temperature	: 19 °C
Test Date	: Jan. 17, 2018	Humidity	: 59 %

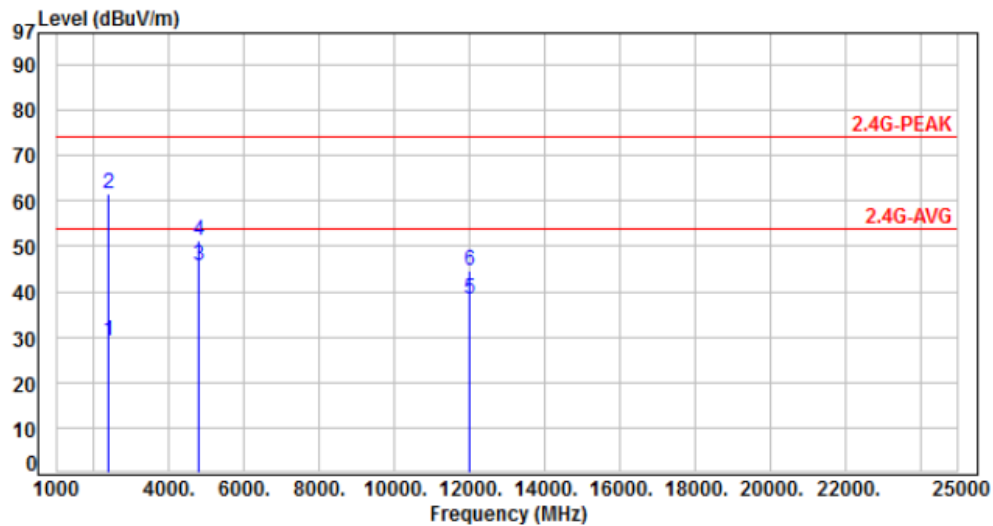

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.95	48.13	29.18	54.00	-24.82	Average	100	210	P
2	2390.00	-18.95	80.60	61.65	74.00	-12.35	Peak	100	210	P
3	4804.00	-13.28	58.86	45.58	54.00	-8.42	Average	100	36	P
4	4804.00	-13.28	64.73	51.45	74.00	-22.55	Peak	100	36	P
5	12010.00	-5.98	44.52	38.54	54.00	-15.46	Average	100	138	P
6	12010.00	-5.98	50.52	44.54	74.00	-29.46	Peak	100	138	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH19	Temperature	: 19 °C
Test Date	: Jan. 17, 2018	Humidity	: 59 %

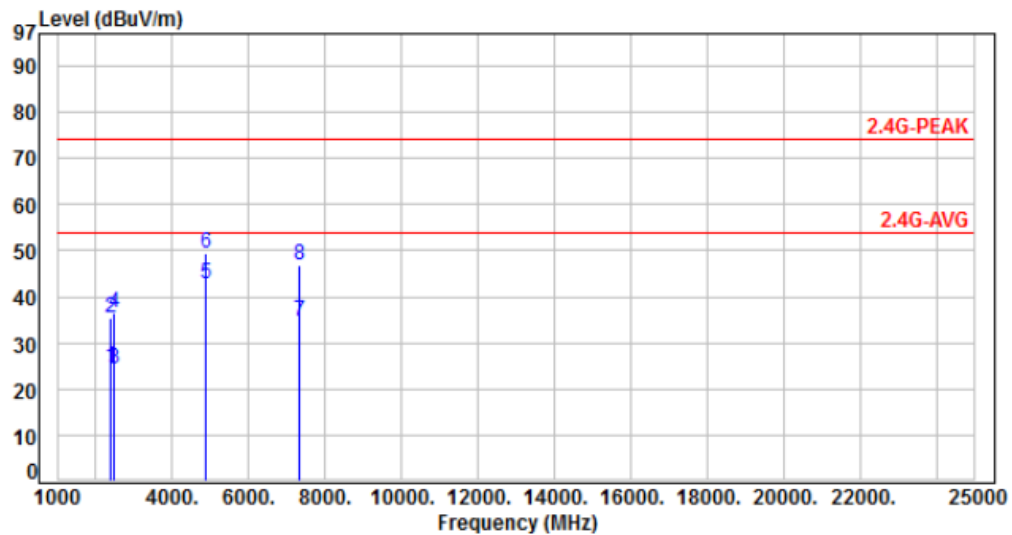

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.95	43.60	24.65	54.00	-29.35	Average	107	186	P
2	2390.00	-18.95	54.50	35.55	74.00	-38.45	Peak	107	186	P
3	2483.50	-18.71	42.90	24.19	54.00	-29.81	Average	107	186	P
4	2483.50	-18.71	55.30	36.59	74.00	-37.41	Peak	107	186	P
5	4880.00	-13.09	55.88	42.79	54.00	-11.21	Average	100	172	P
6	4880.00	-13.09	62.50	49.41	74.00	-24.59	Peak	100	172	P
7	7320.00	-10.17	44.80	34.63	54.00	-19.37	Average	107	55	P
8	7320.00	-10.17	56.84	46.67	74.00	-27.33	Peak	107	55	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH19	Temperature	: 19 °C
Test Date	: Jan. 17, 2018	Humidity	: 59 %

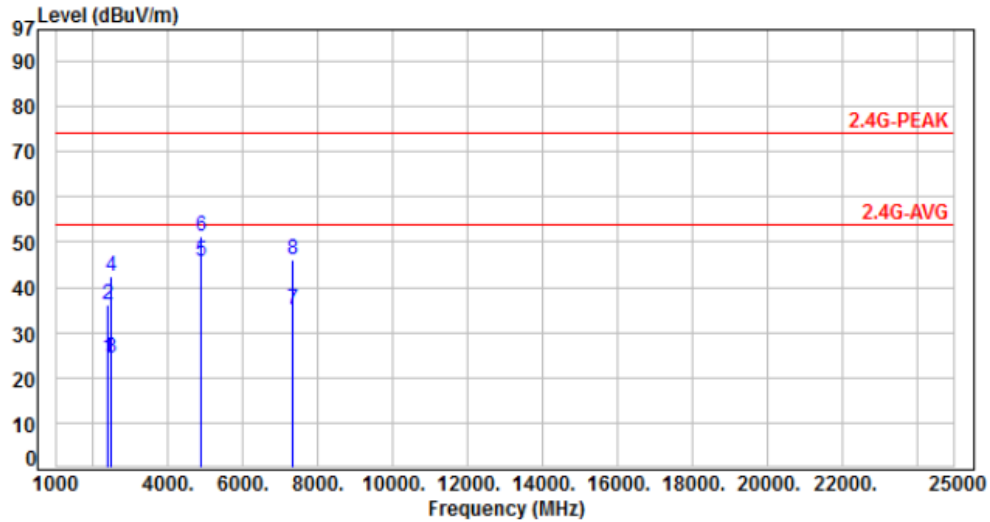

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-18.95	43.20	24.25	54.00	-29.75	Average	100	345	P
2	2390.00	-18.95	55.20	36.25	74.00	-37.75	Peak	100	345	P
3	2483.50	-18.71	43.20	24.49	54.00	-29.51	Average	100	345	P
4	2483.50	-18.71	61.00	42.29	74.00	-31.71	Peak	100	345	P
5	4880.00	-13.09	58.97	45.88	54.00	-8.12	Average	100	270	P
6	4880.00	-13.09	64.50	51.41	74.00	-22.59	Peak	100	270	P
7	7320.00	-10.17	45.20	35.03	54.00	-18.97	Average	100	126	P
8	7320.00	-10.17	56.40	46.23	74.00	-27.77	Peak	100	126	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH39	Temperature	: 19 °C
Test Date	: Jan. 17, 2018	Humidity	: 59 %

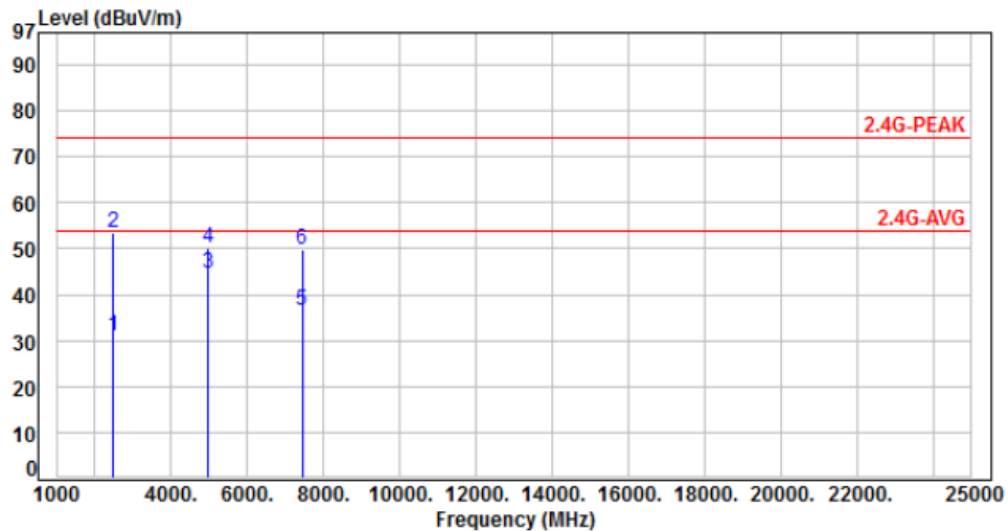

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.71	49.80	31.09	54.00	-22.91	Average	400	184	P
2	2483.50	-18.71	72.30	53.59	74.00	-20.41	Peak	400	184	P
3	4960.00	-12.89	57.40	44.51	54.00	-9.49	Average	100	170	P
4	4960.00	-12.89	63.00	50.11	74.00	-23.89	Peak	100	170	P
5	7440.00	-9.88	46.30	36.42	54.00	-17.58	Average	112	58	P
6	7440.00	-9.88	59.50	49.62	74.00	-24.38	Peak	112	58	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39	Temperature	: 19 °C
Test Date	: Jan. 17, 2018	Humidity	: 59 %

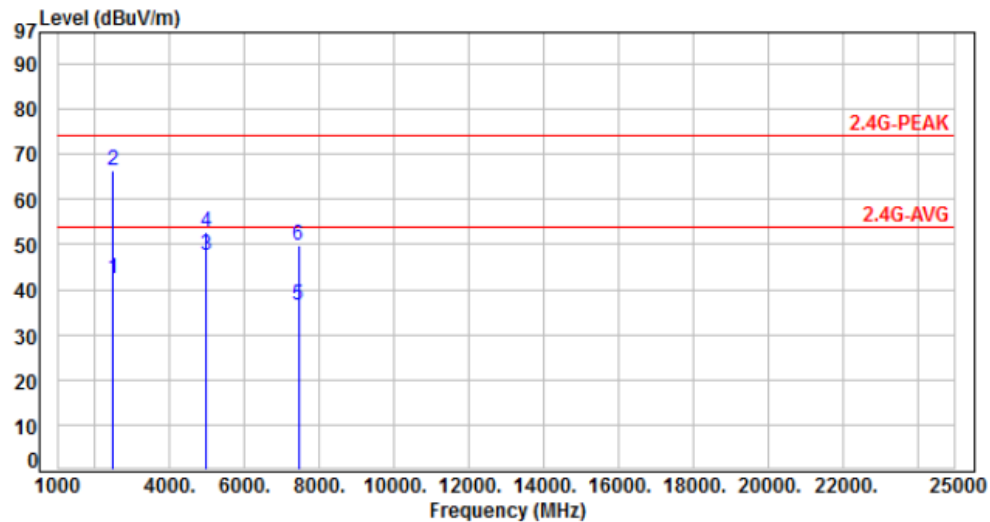

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-18.71	61.20	42.49	54.00	-11.51	Average	120	237	P
2	2483.50	-18.71	85.10	66.39	74.00	-7.61	Peak	120	237	P
3	4960.00	-12.89	60.60	47.71	54.00	-6.29	Average	100	206	P
4	4960.00	-12.89	65.50	52.61	74.00	-21.39	Peak	100	206	P
5	7440.00	-9.88	46.50	36.62	54.00	-17.38	Average	122	147	P
6	7440.00	-9.88	59.67	49.79	74.00	-24.21	Peak	122	147	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Test Result and Data


Test Result : PASS

Temperature : 21°C


Test Date : Jan. 19, 2018

Humidity : 64%


Note: Test plots refer to the following pages.

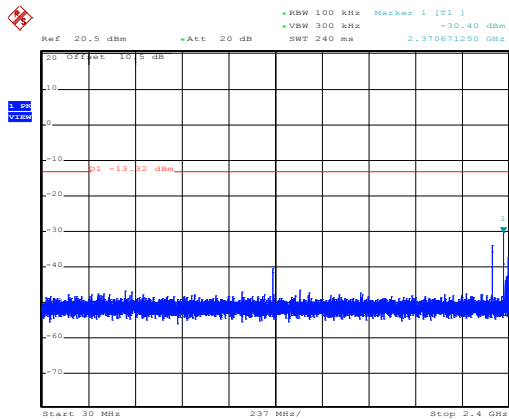Modulation Type: GFSK
CH00


Date: 25.APR.2018 19:42:50

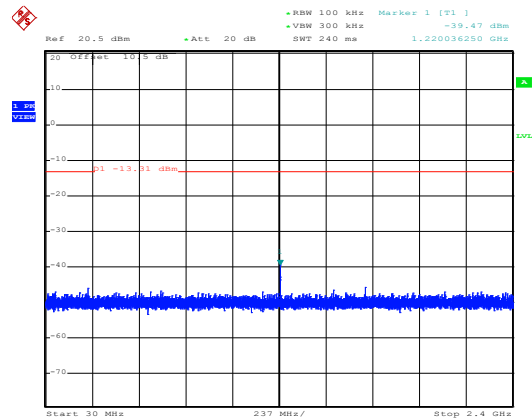Modulation Type: GFSK
CH19


Date: 25.APR.2018 19:49:11

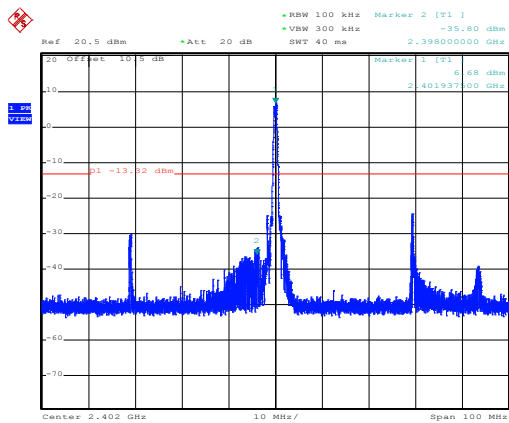


Date: 25.APR.2018 19:40:30

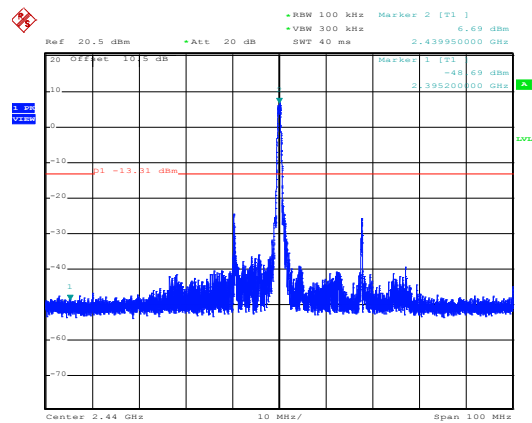

Date: 25.APR.2018 19:48:12

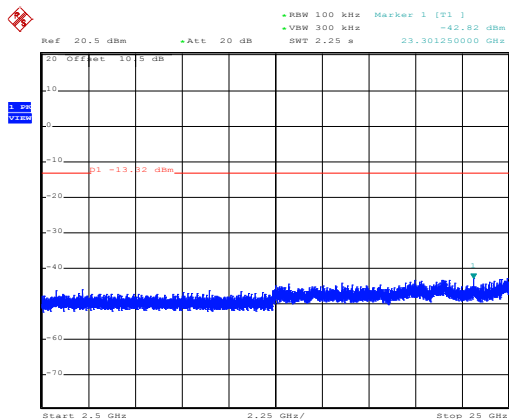


Date: 25.APR.2018 19:43:56

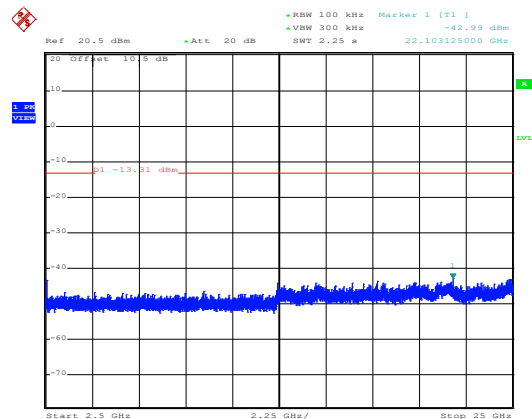


Date: 25.APR.2018 19:49:53




Modulation Type: GFSK
CH39

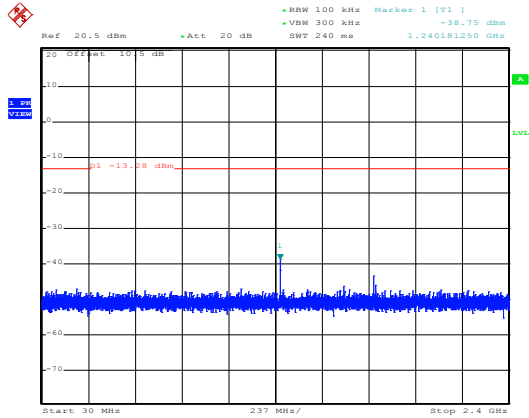

Date: 25.APR.2018 19:52:10

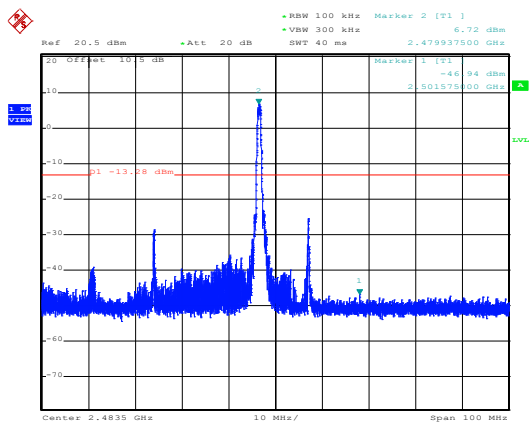

Date: 25.APR.2018 19:51:37

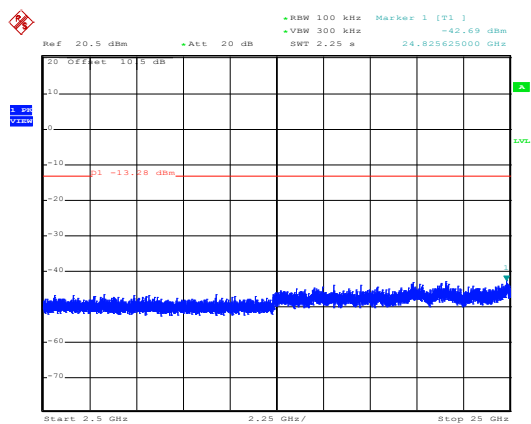

Date: 25.APR.2018 19:53:00



8. 6dB Bandwidth Measurement Data


8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

8.3 Test Setup Layout



8.4 Test Result and Data

Test Result : PASS

Temperature : 21°C


Test Date : Jan. 19, 2018

Humidity : 64%

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK	00	2402	660.00	500
	19	2440	678.00	500
	39	2480	672.00	500




Modulation Type: GFSK
CH00

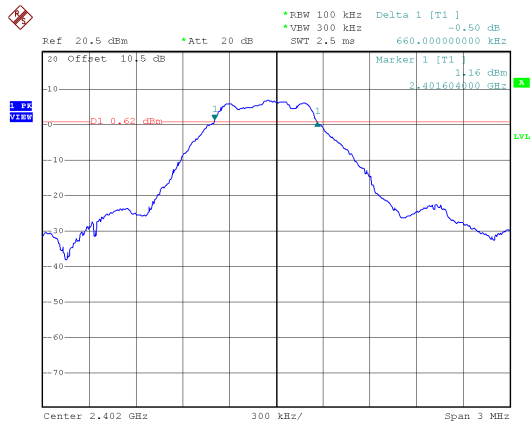


Date: 19.JAN.2018 09:28:33

CH19

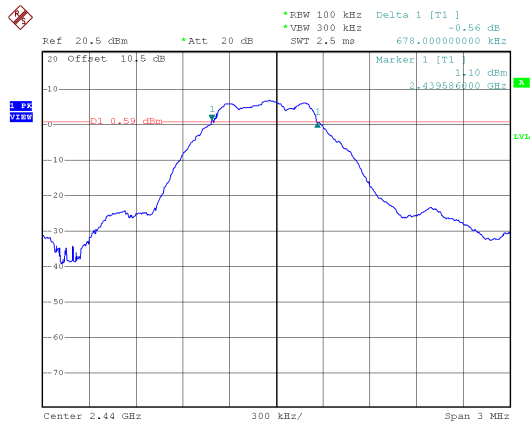

Date: 19.JAN.2018 09:29:29

CH39

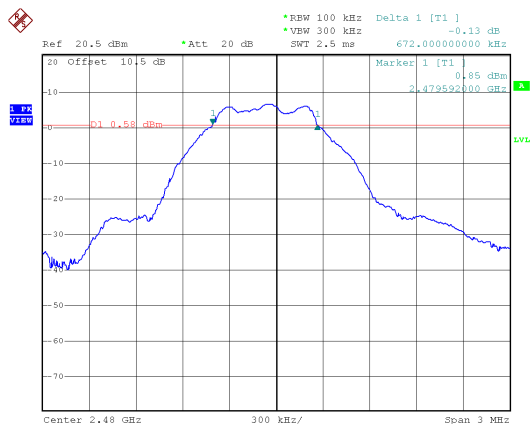

Date: 19.JAN.2018 09:30:13



9. Maximum Peak and Average Output Power


9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

9.3 Test Setup Layout



9.4 Test Result and Data

Test Result : PASS

Temperature : 21°C

Test Date : Jan. 19, 2018

Humidity : 64%

Modulation Standard	Channel	Frequency (MHz)	Power Output (dBm)		Peak Power Output (mW)	
			Peak	Average	Peak	Average
GFSK	00	2402	7.23	7.15	5.284	5.188
	19	2440	7.21	7.12	5.260	5.152
	39	2480	7.24	7.16	5.297	5.200



10. Power Spectral Density


10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

10.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

10.3 Test Setup Layout



10.4 Test Result and Data

Test Result : PASS

Temperature : 21°C


Test Date : Jan. 19, 2018

Humidity : 64%

Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	Limit
GFSK	00	2402	-7.4	8.00
	19	2440	-6.92	8.00
	39	2480	-7.17	8.00




Modulation Type: GFSK
CH00

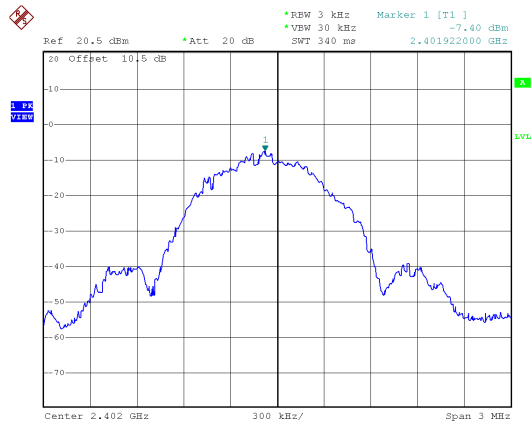


Date: 19.JAN.2018 09:36:09

CH19

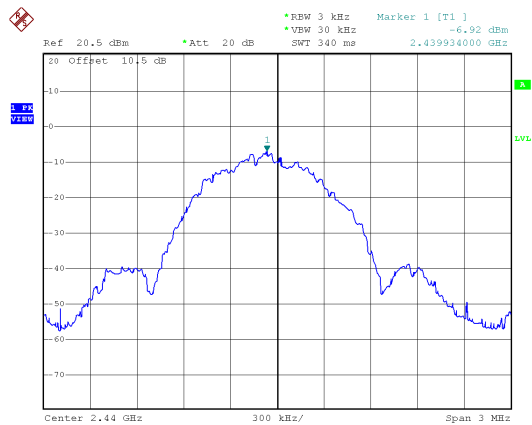

Date: 19.JAN.2018 09:40:09

CH39

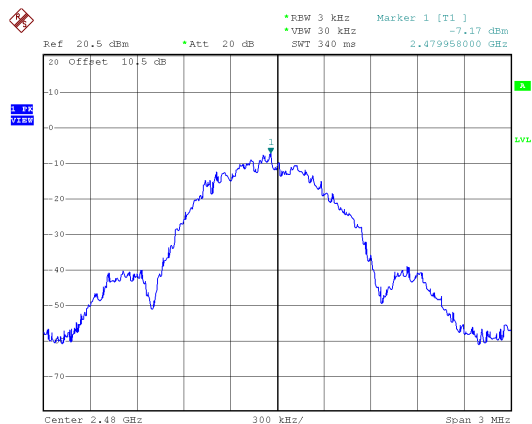

Date: 19.JAN.2018 09:40:45