TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS
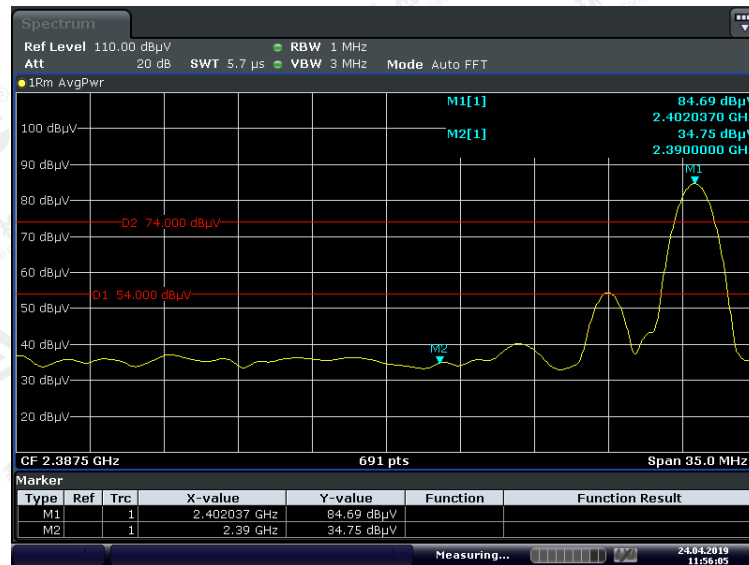
EUT	Bluetooth Speaker	Model Name	BTSPK59
Temperature	25.3°C	Relative Humidity	55.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

PK
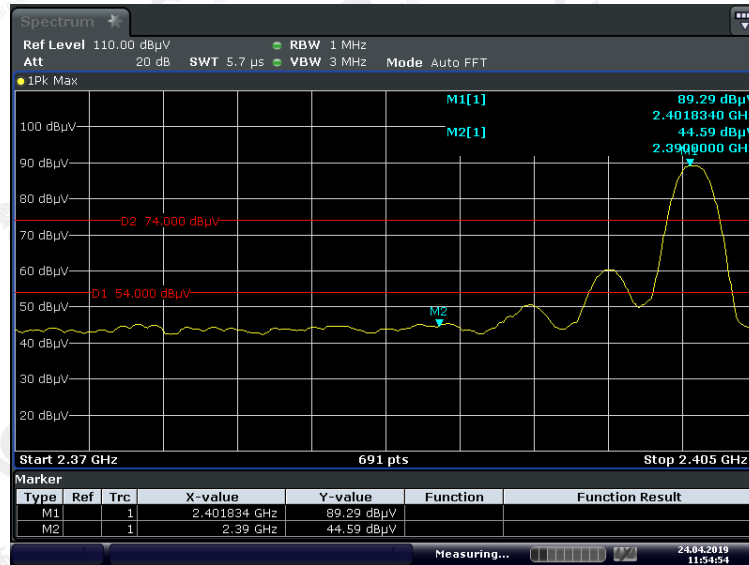
Date: 24.APR.2019 11:54:54

AV

Date: 24.APR.2019 11:56:05

RESULT: PASS

EUT	Bluetooth Speaker	Model Name	BTSPK59
Temperature	25.3℃	Relative Humidity	55.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

PK
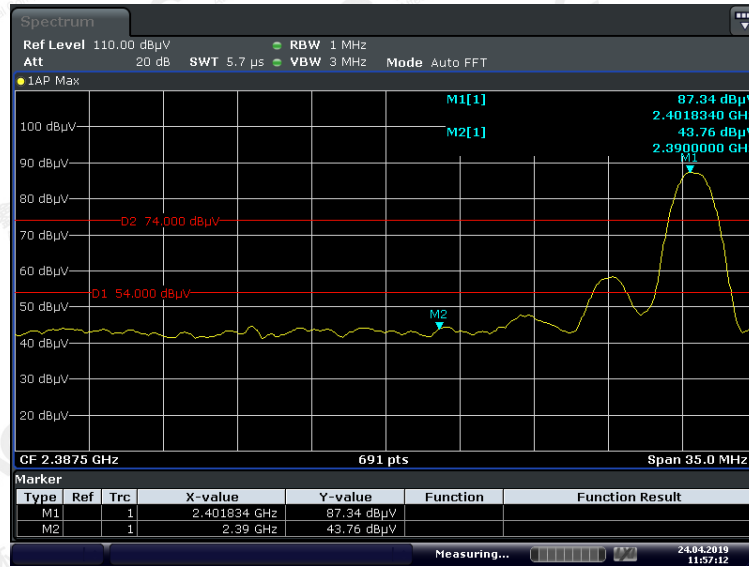
Date: 24.APR.2019 11:57:12

AV
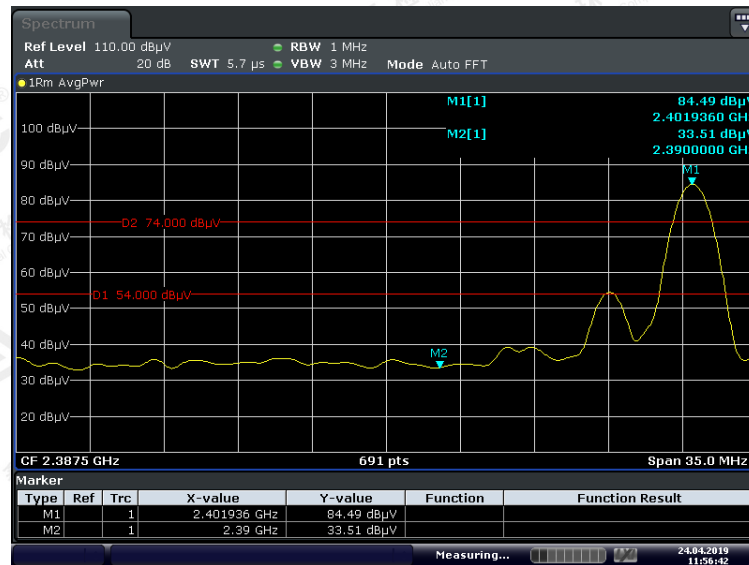
Date: 24.APR.2019 11:56:42

RESULT: PASS

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

EUT	Bluetooth Speaker	Model Name	BTSPK59
Temperature	25.3°C	Relative Humidity	55.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

PK
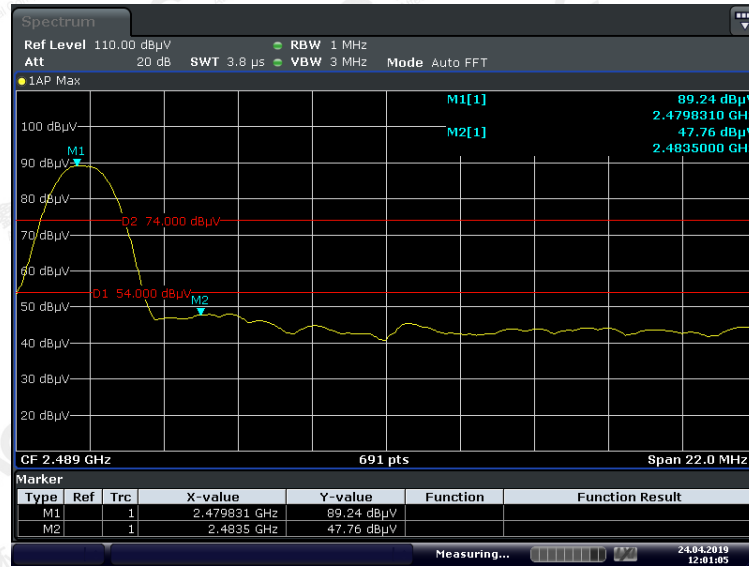
Date: 24.APR.2019 12:01:05

AV
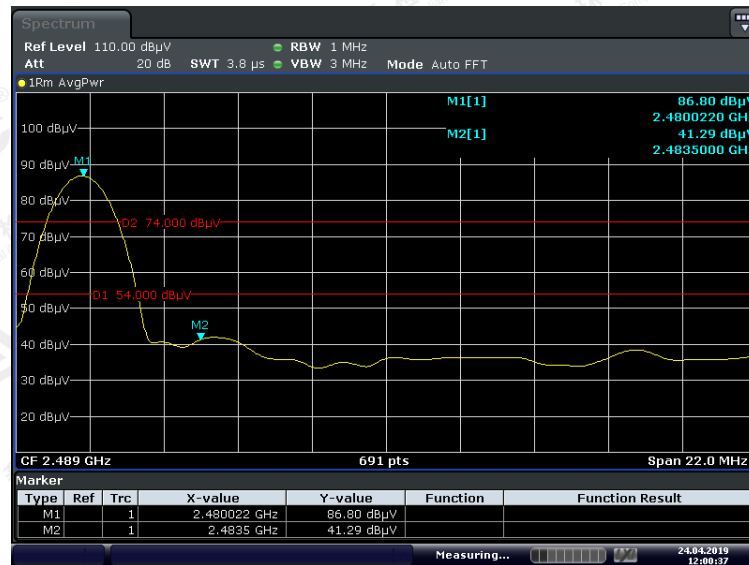
Date: 24.APR.2019 12:00:37

RESULT: PASS

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

EUT	Bluetooth Speaker	Model Name	BTSPK59
Temperature	25.3℃	Relative Humidity	55.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

PK
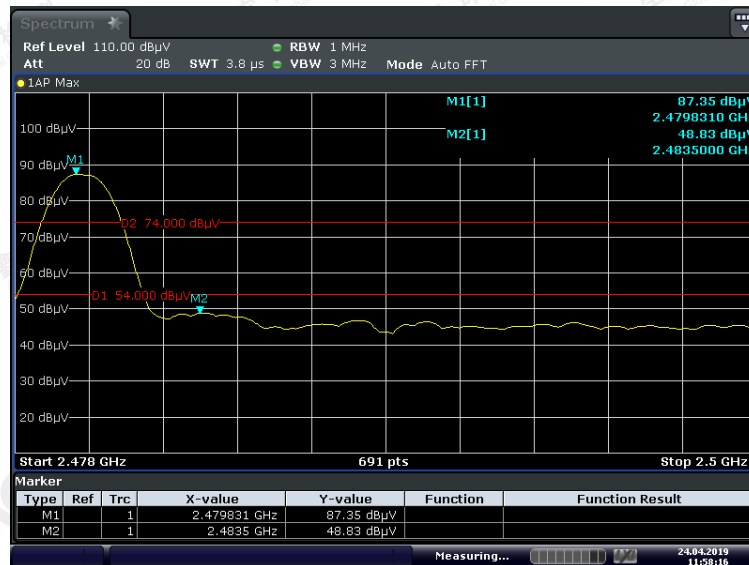
Date: 24.APR.2019 11:58:16

AV
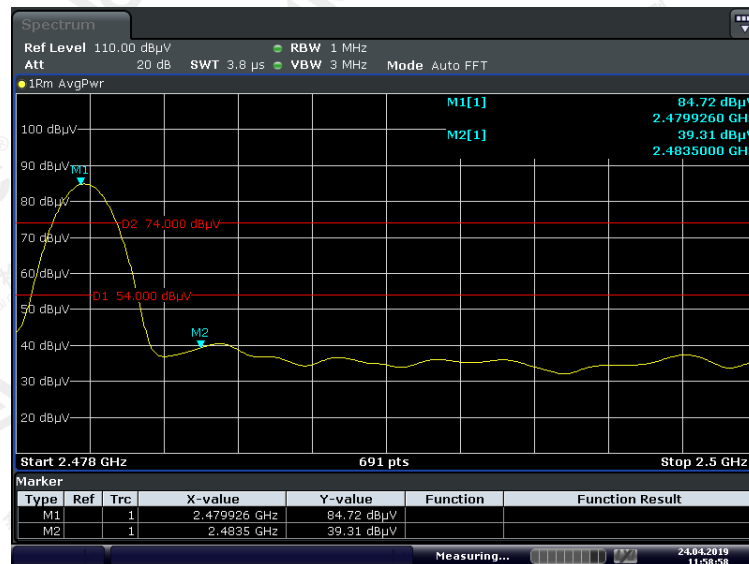
Date: 24.APR.2019 11:58:58

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μV) to represent the Amplitude. Use the F dB(μV/m) to represent the Field Strength. So A=F. All test modes had been pre-tested. The GFSK modulation is the worst case and recorded in the report.

11. NUMBER OF HOPPING FREQUENCY

11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.

2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

3. VBW ≥ RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.

4. Allow the trace to stabilize.

11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)
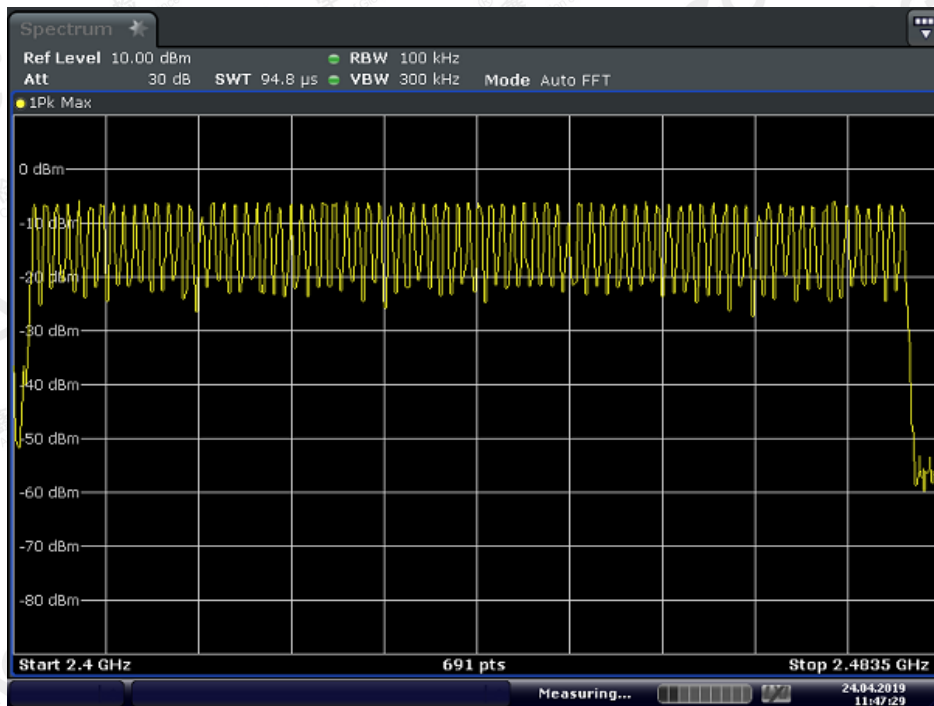
Same as described in section 8.2

11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

11.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

Date: 24.APR.2019 11:47:29

Note: The GFSK modulation is the worst case and recorded in the report.

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Zero span, centered on a hopping channel.

2. RBW shall be≤channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.

3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.

4. Detector function: Peak. Trace: Max hold.

5. Use the marker-delta function to determine the transmit time per hop.

6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) × (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

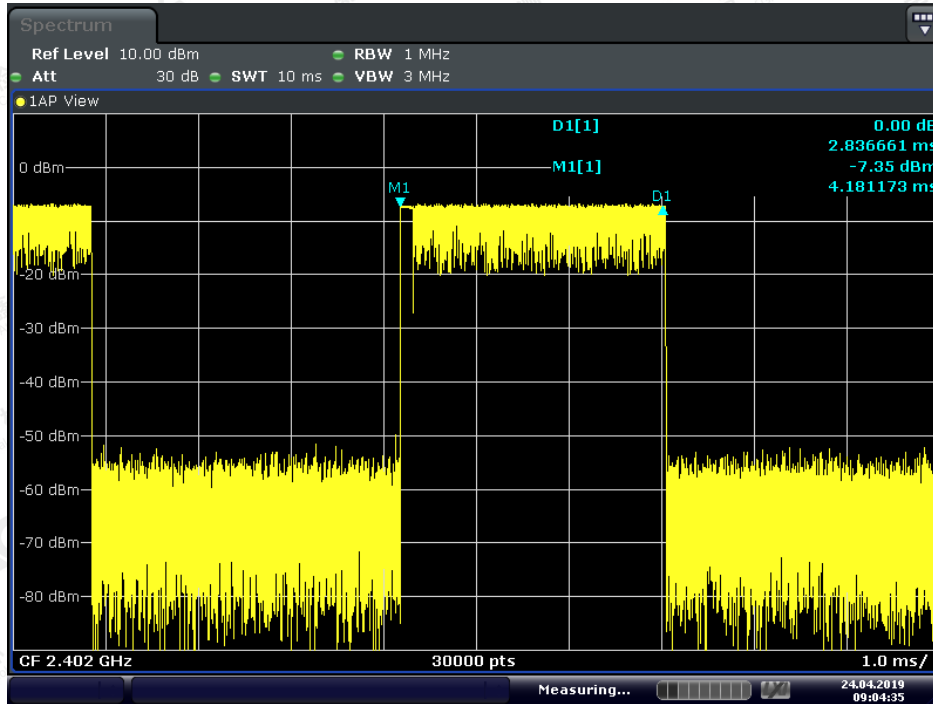Same as described in section 8.2

12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6
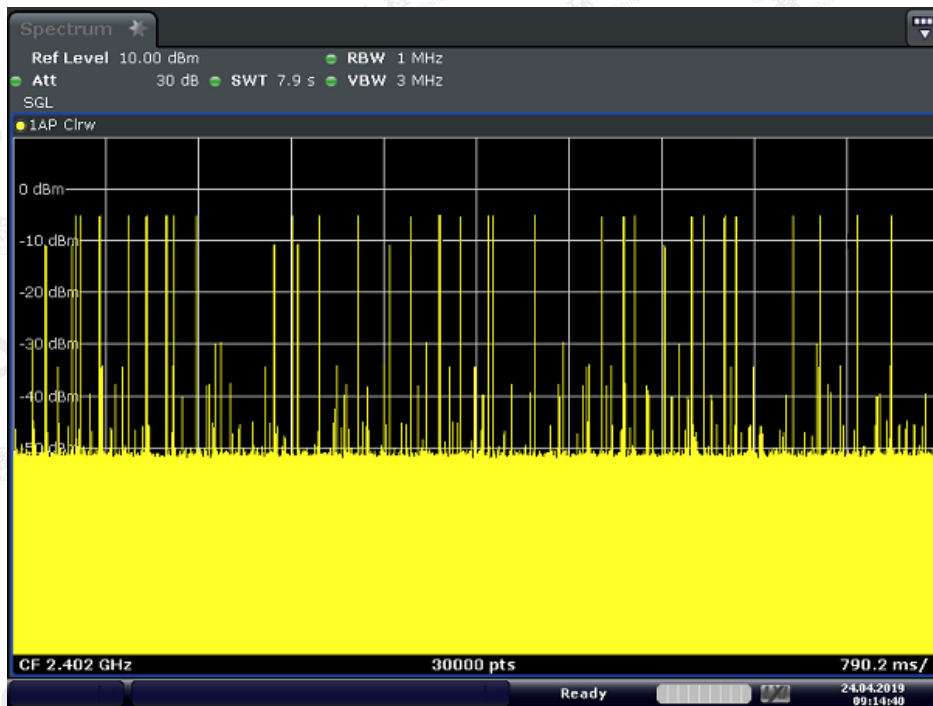
12.4. LIMITS AND MEASUREMENT RESULT

Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)
Low	2.836	27*4	306.288	400
Middle	2.853	27*4	308.124	400
High	2.854	28*4	319.648	400

Note: The π/4-DQPSK modulation is the worst case and recorded in the report.

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

TEST PLOT OF LOW CHANNEL

Date: 24.APR.2019 09:04:35

Date: 24.APR.2019 09:14:41

TEST PLOT OF MIDDLE CHANNEL
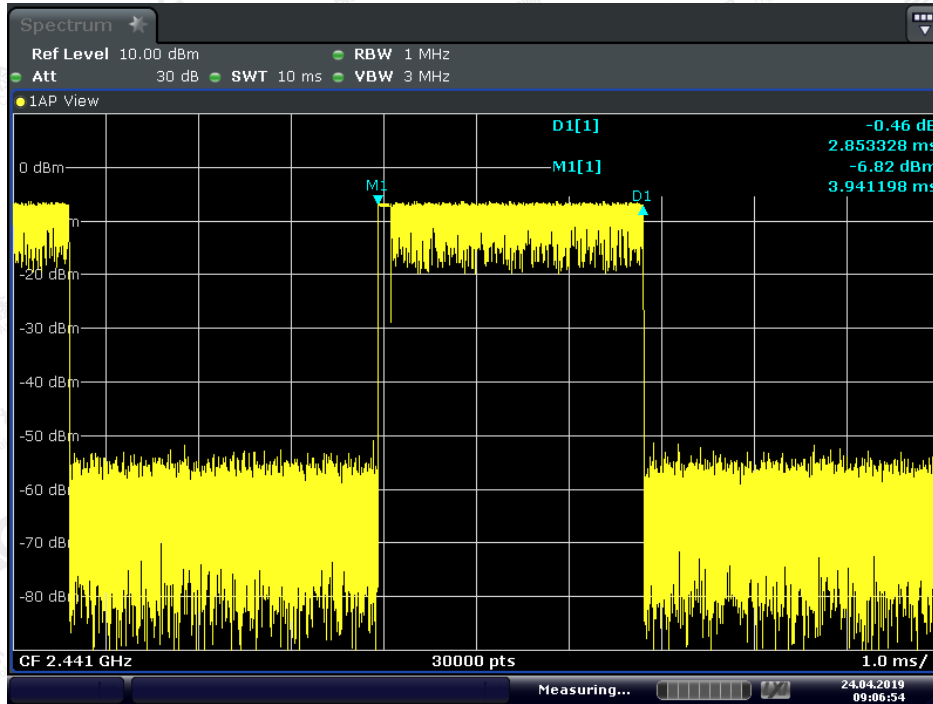
Date: 24.APR.2019 09:06:54
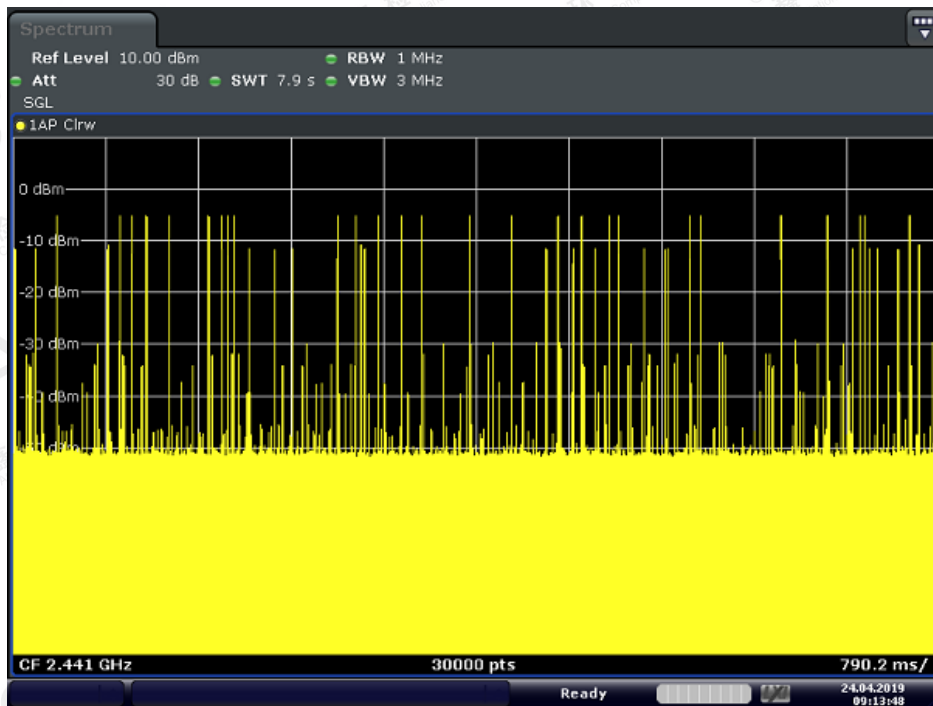
Date: 24.APR.2019 09:13:47

TEST PLOT OF HIGH CHANNEL
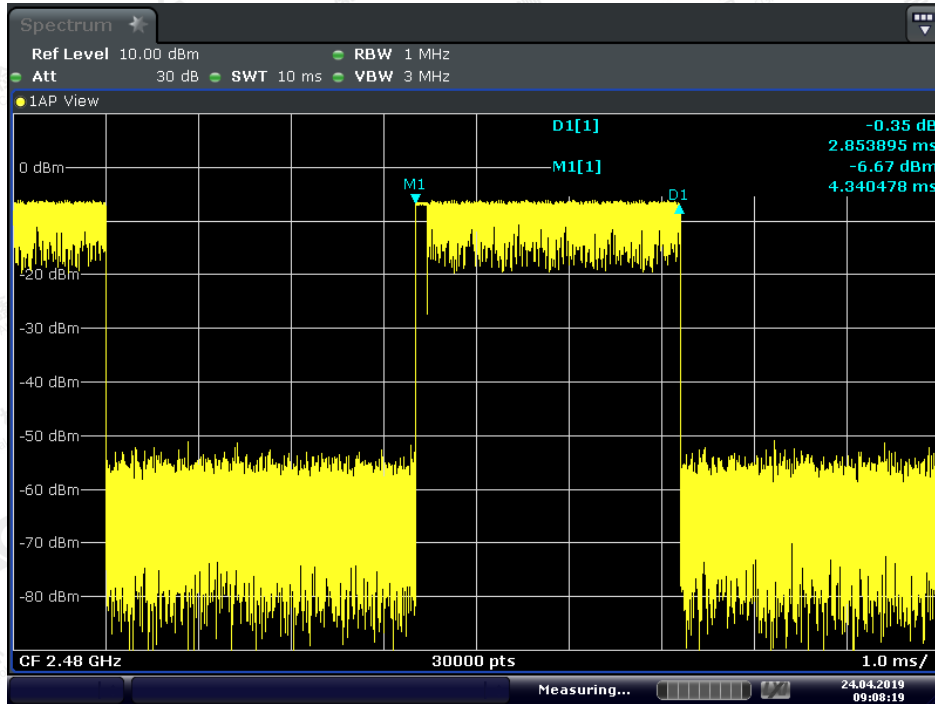
Date: 24.APR.2019   09:08:19
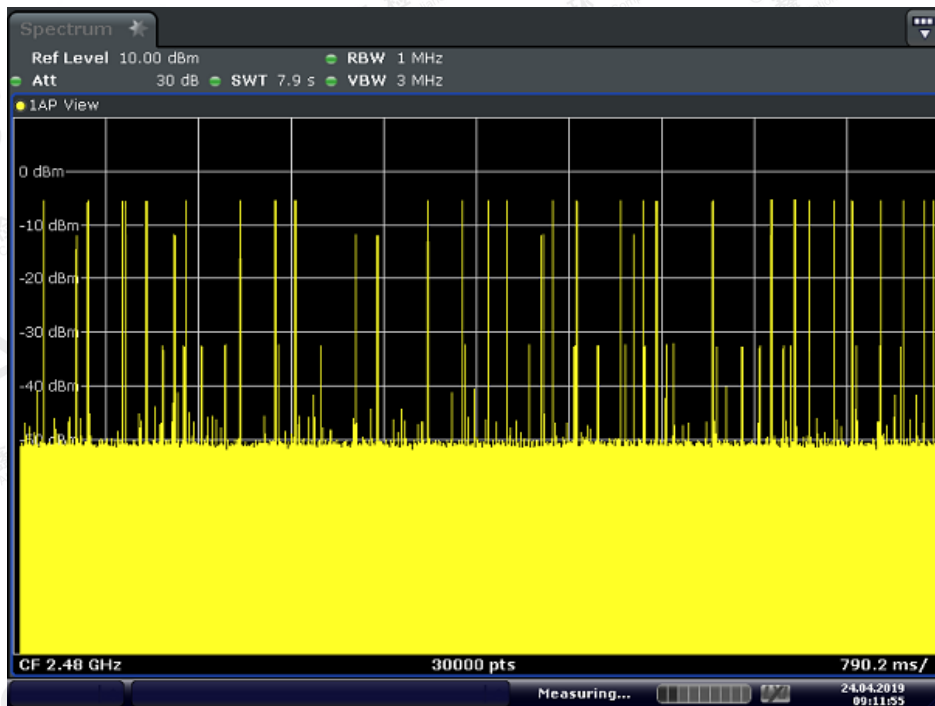
Date: 24.APR.2019   09:11:56

13. FREQUENCY SEPARATION

13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Wide enough to capture the peaks of two adjacent channels.

2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

3. Video (or average) bandwidth (VBW) $\geq$ RBW.

4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)
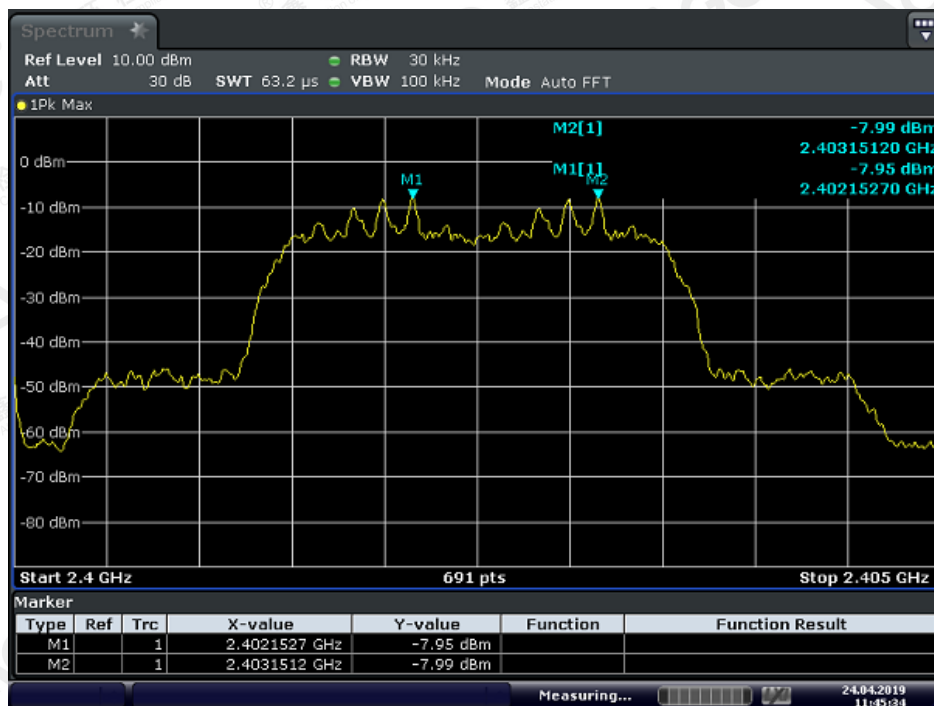
Same as described in section 6.2

13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

13.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	Pass
CH01-CH02	998.5	>=25 KHz or 2/3 20 dB BW	

TEST PLOT FOR FREQUENCY SEPARATION

Date: 24.APR.2019 11:45:34

Note: The π/4-DQPSK modulation is the worst case and recorded in the report.

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

14. FCC LINE CONDUCTED EMISSION TEST

14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST
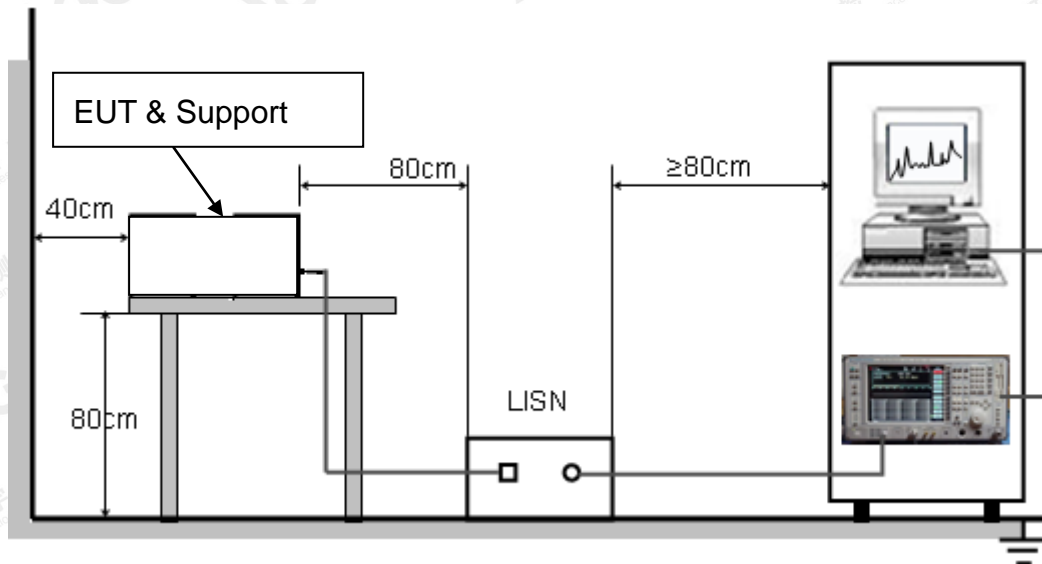
Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5.0V power from adapter which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.
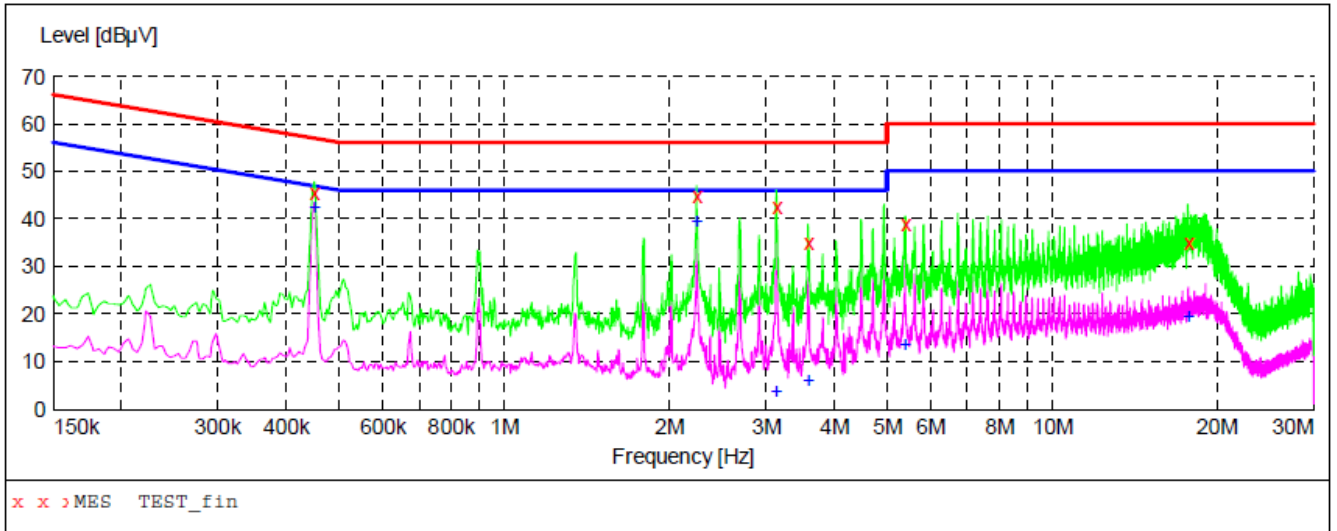
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

MEASUREMENT RESULT: "TEST_fin"

4/25/2019   11:33AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.450000	45.70	10.3	57	11.2	QP	L1	FLO
2.242000	44.80	10.4	56	11.2	QP	L1	FLO
3.142000	42.40	10.4	56	13.6	QP	L1	FLO
3.586000	34.90	10.4	56	21.1	QP	L1	FLO
5.382000	38.80	10.4	60	21.2	QP	L1	FLO
17.722000	35.00	11.0	60	25.0	QP	L1	FLO

MEASUREMENT RESULT: "TEST_fin2"

4/25/2019   11:33AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.450000	42.40	10.3	47	4.5	AV	L1	FLO
2.242000	39.60	10.4	46	6.4	AV	L1	FLO
3.142000	3.80	10.4	46	42.2	AV	L1	FLO
3.586000	6.20	10.4	46	39.8	AV	L1	FLO
5.386000	13.60	10.4	50	36.4	AV	L1	FLO
17.726000	19.80	11.0	50	30.2	AV	L1	FLO

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

Line Conducted Emission Test Line 2-N

x x ›MES TEST_fin
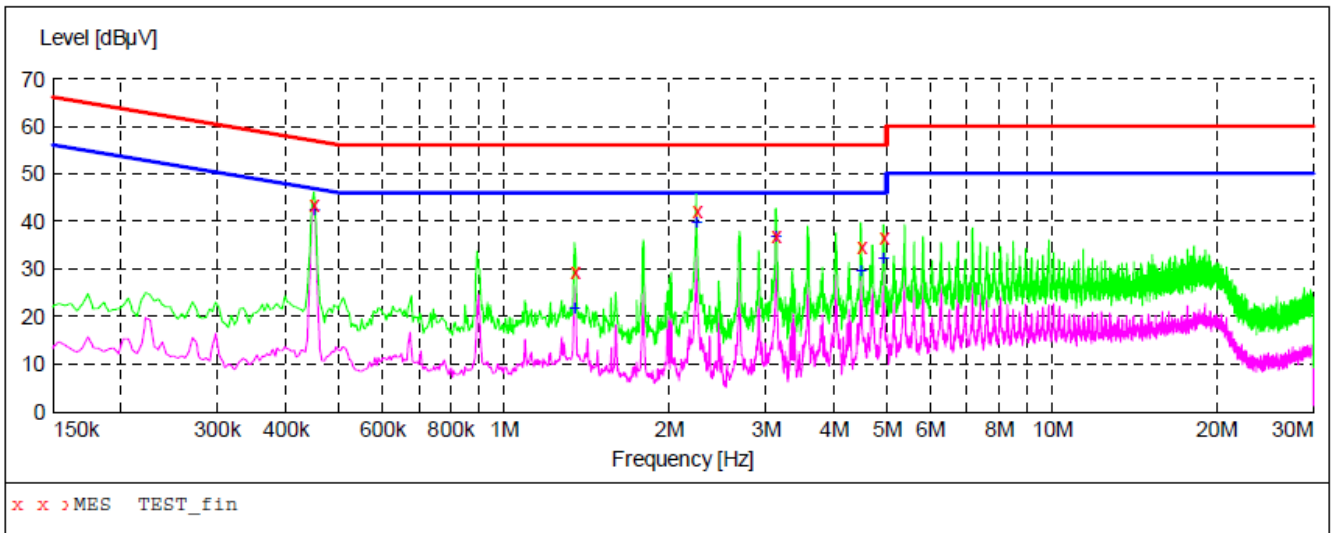
MEASUREMENT RESULT: "TEST_fin"

4/25/2019 11:29AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.450000	43.80	10.3	57	13.1	QP	N	FLO
1.346000	29.50	10.4	56	26.5	QP	N	FLO
2.246000	42.20	10.4	56	13.8	QP	N	FLO
3.134000	37.00	10.4	56	19.0	QP	N	FLO
4.486000	34.60	10.4	56	21.4	QP	N	FLO
4.934000	36.80	10.4	56	19.2	QP	N	FLO

MEASUREMENT RESULT: "TEST_fin2"

4/25/2019 11:29AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.450000	42.50	10.3	47	4.4	AV	N	FLO
1.346000	21.90	10.4	46	24.1	AV	N	FLO
2.246000	39.90	10.4	46	6.1	AV	N	FLO
3.142000	37.10	10.4	46	8.9	AV	N	FLO
4.486000	29.70	10.4	46	16.3	AV	N	FLO
4.934000	32.60	10.4	46	13.4	AV	N	FLO

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHZ
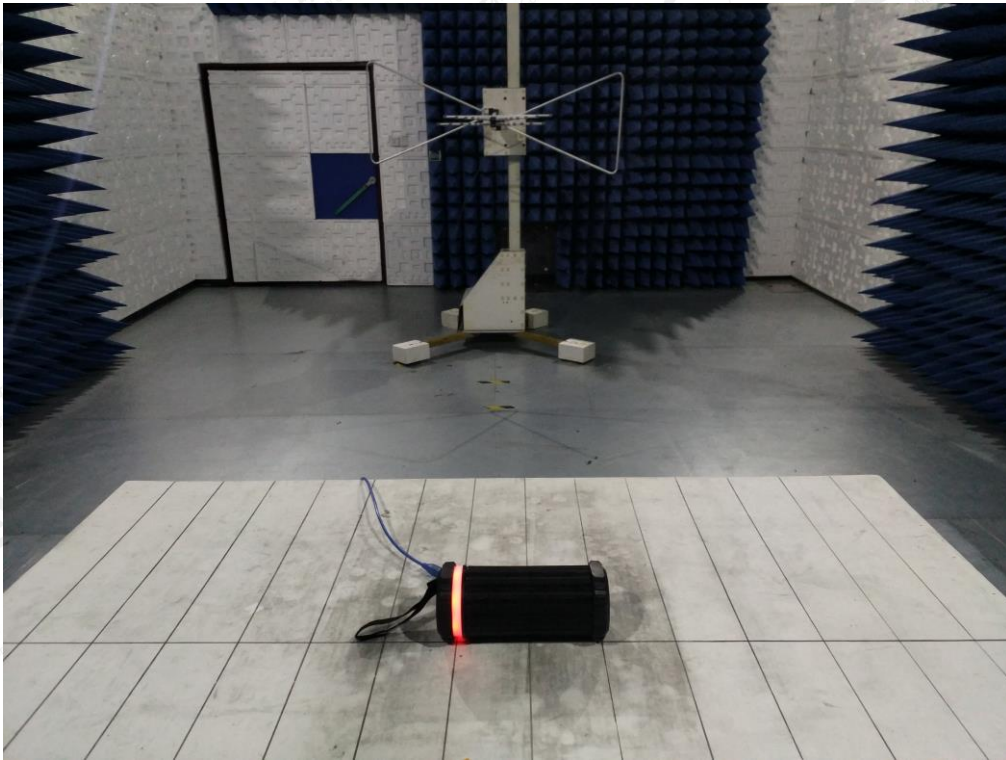
RADIATED EMISSION TEST SETUP ABOVE 1GHZ

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118

Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

CONDUCTED EMISSION TEST SETUP

Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT

TOP VIEW OF EUT

BOTTOM VIEW OF EUT

FRONT VIEW OF EUT
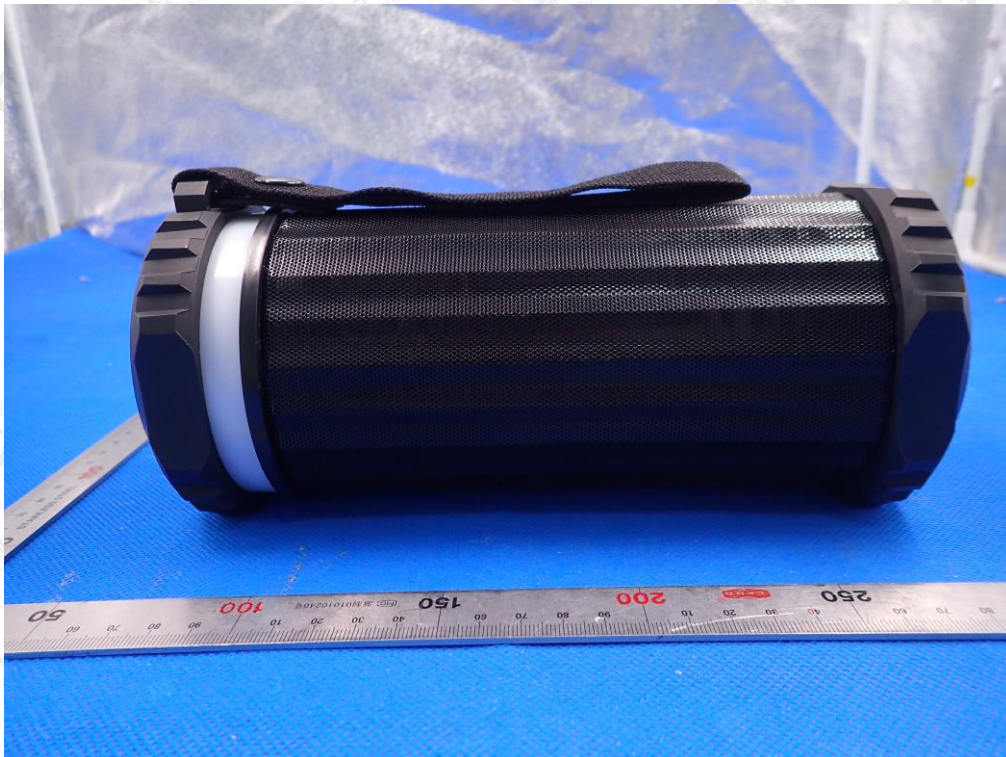
Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

BACK VIEW OF EUT

LEFT VIEW OF EUT
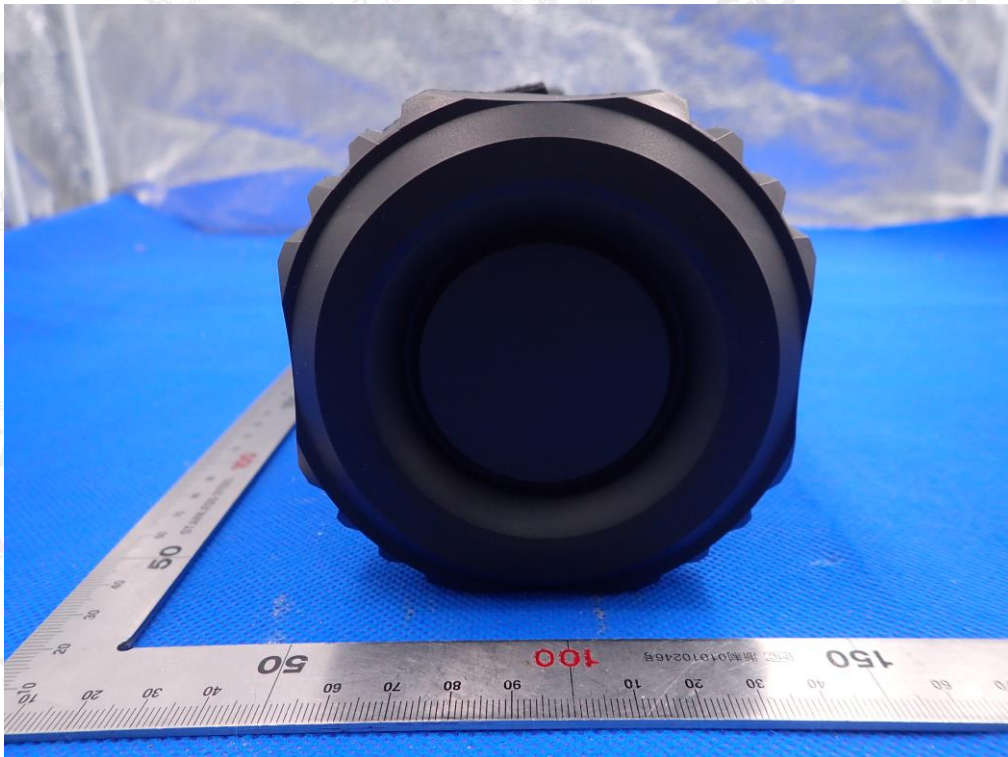
Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

RIGHT VIEW OF EUT
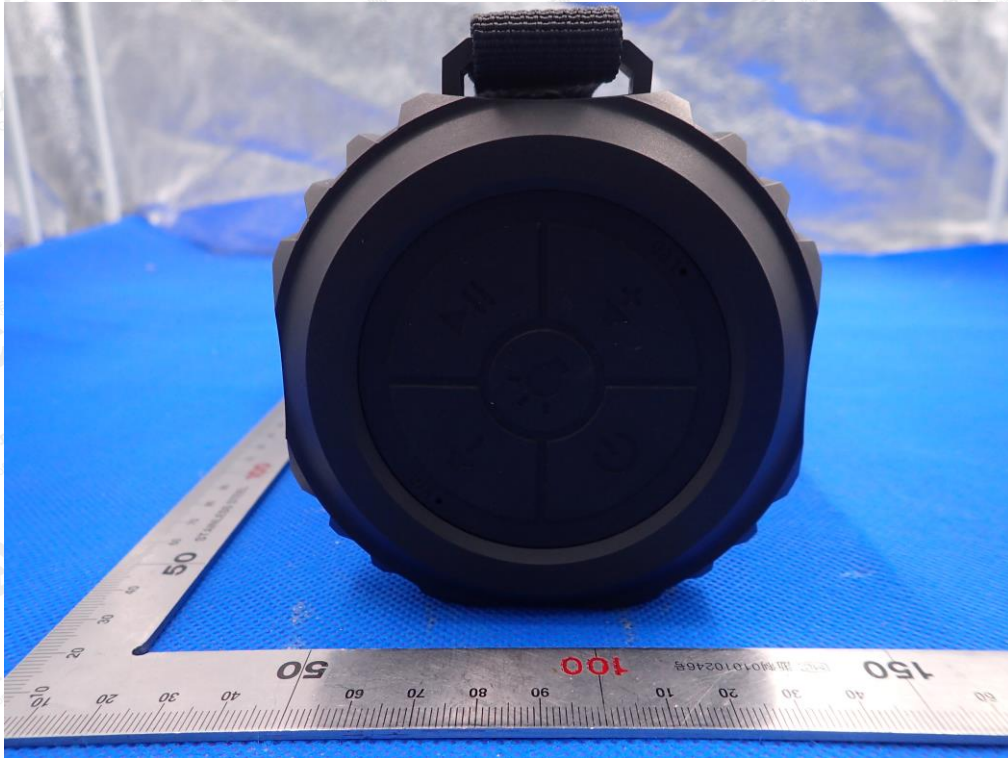
VIEW OF EUT(PORT)

OPEN VIEW OF EUT-1

OPEN VIEW OF EUT-2
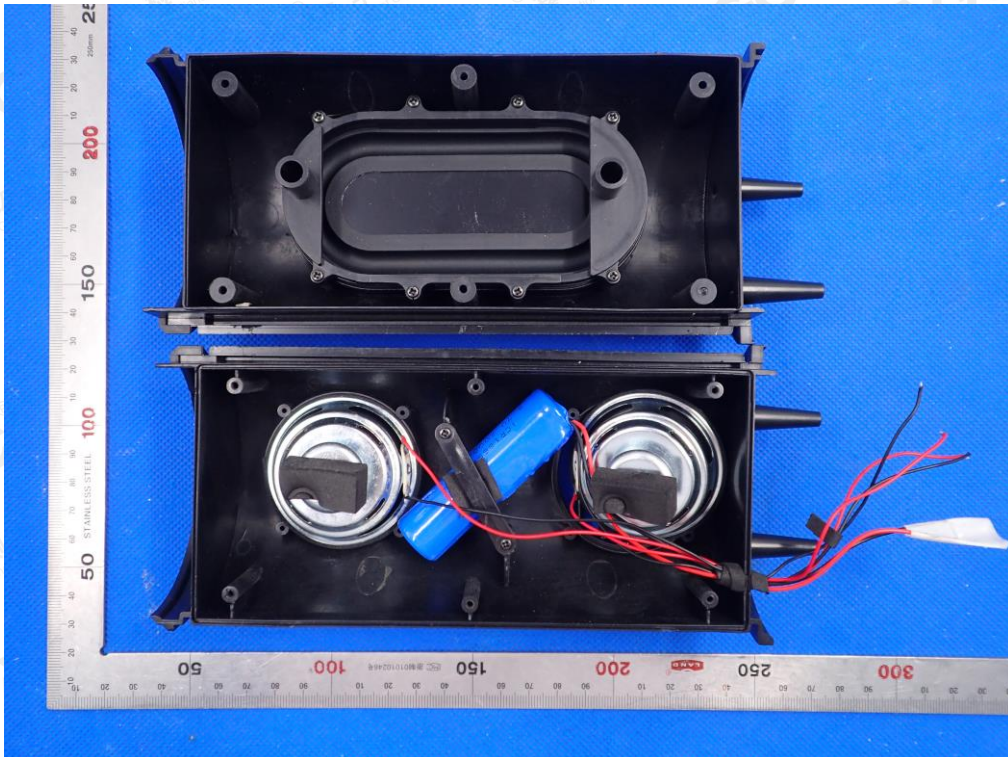
Attestation of Global Compliance

Tel: +86-755 2908 1955   Fax: +86-755 2600 8484   E-mail: agc@agc-cert.com   400 089 2118
Add: 2/F. , Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

OPEN VIEW OF EUT-3

VIEW OF BATTERY

INTERNAL VIEW OF EUT-1

Antenna
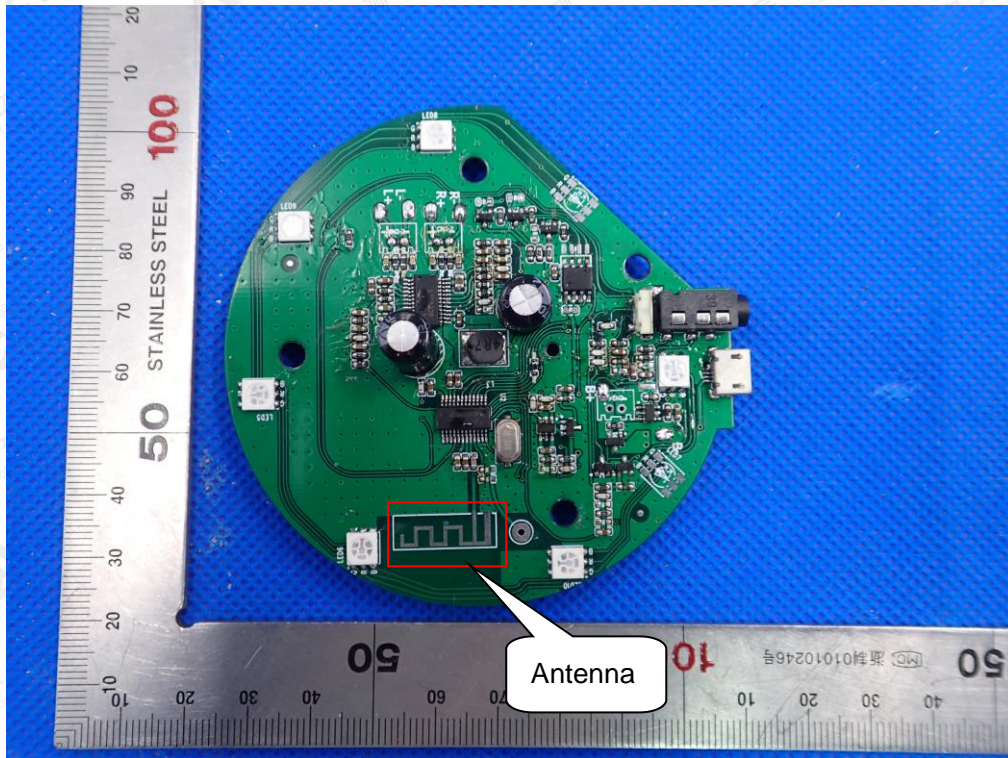
INTERNAL VIEW OF EUT-2

INTERNAL VIEW OF EUT-3

INTERNAL VIEW OF EUT-4

----END OF REPORT----