




Impedance Measurement Plot

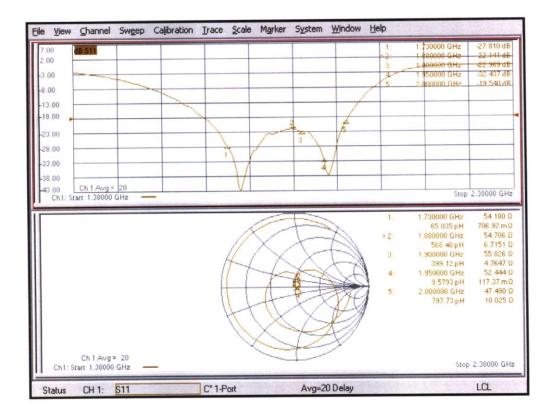

Certificate No: CD1880V3-1018_Aug22

Page 4 of 5





DASY5 E-field Result

Date: 25.08.2022

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1018

Communication System: UID 0 - CW ; Frequency: 1880 MHz Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³ Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 28.12.2021
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.12.2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm Reference Value = 157.1 V/m; Power Drift = 0.01 dB Applied MIF = 0.00 dB RF audio interference level = 38.78 dBV/m Emission category: M2

MIF scaled E-fi	eld		
Grid 1 M2 38.66 dBV/m		Grid 3 M2 38.45 dBV/m	
Grid 4 M2 36.05 dBV/m		Grid 6 M2 35.87 dBV/m	
Grid 7 M2	Grid 8 M2	Grid 9 M2	

38.7 dBV/m

38.78 dBV/m 38.49 dBV/m

dB 0 -0.92 -1.83 -2.75 -3.66 -4.58

0 dB = 86.94 V/m = 38.78 dBV/m

Certificate No: CD1880V3-1018_Aug22

Page 5 of 5





Dipole 2450 MHz

	Switzerland	Minch SC	Swiss Calibration Service
edited by the Swiss Accreditation Swiss Accreditation Service is tilateral Agreement for the reco	one of the signatories	to the EA	creditation No.: SCS 0108
nt CTTL (Auden)			CD2450V3-1021_Aug2
ALIBRATION CI	ERTIFICATE		
bject	CD2450V3 - SN:	1021	
alibration procedure(s)	QA CAL-20.v7 Calibration Proce	dure for Validation Sources in air	
alibration date:	August 25, 2022		
Il calibrations have been conducte	ed in the closed laborator	obability are given on the following pages an y facility: environment temperature $(22 \pm 3)^{\circ}$ C	
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards	ed in the closed laborator E critical for calibration)	y facility: environment temperature (22 ± 3)°C Cal Date (Certificate No.)	C and humidity < 70%. Scheduled Calibration
I calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP	ad in the closed laborator critical for calibration) ID # SN: 104778	y facility: environment temperature (22 ± 3)°C Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524)	C and humidity < 70%. Scheduled Calibration Apr-23
I calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91	ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244	y facility: environment temperature (22 ± 3)°C <u>Cal Date (Certificate No.)</u> 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03524)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23
I calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91	ad in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245	y facility: environment temperature (22 ± 3)°C <u>Cal Date (Certificate No.)</u> 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03524) 04-Apr-22 (No. 217-03525)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator	ad in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k)	y facility: environment temperature (22 ± 3)°C <u>Cal Date (Certificate No.)</u> 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination	ad in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327	y facility: environment temperature (22 ± 3)°C <u>Cal Date (Certificate No.)</u> 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23
	ad in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k)	y facility: environment temperature (22 ± 3)°C <u>Cal Date (Certificate No.)</u> 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Apr-23
Il calibrations have been conducte alibration Equipment used (M&TE <u>rimary Standards</u> ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination trobe EF3DV3 0AE4	ad in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013	y facility: environment temperature (22 ± 3)°C Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22
I calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 eference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 AE4 econdary Standards	ed in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781	y facility: environment temperature (22 ± 3)°C Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Dec-22
I calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 eference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 AE4 econdary Standards ower meter Agilent 4419B	ed in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID #	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 /AE4 secondary Standards fower meter Agilent 4419B fower sensor HP E4412A	ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 0AE4 <u>Secondary Standards</u> ower meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 10-Jan-19 (in house check Oct-20)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 VAE4 <u>iecondary Standards</u> rower meter Agilent 4419B rower sensor HP E4412A rower sensor HP 8482A RF generator R&S SMT-06	ad in the closed laborator critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: BH9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-23 In house check: Oct-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 0AE4 <u>Secondary Standards</u> ower meter Agilent 4419B Power sensor HP E4412A Power sensor HP 8482A RF generator R&S SMT-06	ed in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103245 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-23
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination trobe EF3DV3	ad in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20)	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-22 Signature
Il calibrations have been conducte alibration Equipment used (M&TE rimary Standards ower meter NRP ower sensor NRP-Z91 ower sensor NRP-Z91 leference 20 dB Attenuator ype-N mismatch combination robe EF3DV3 /AE4 secondary Standards 'ower meter Agilent 4419B 'ower sensor HP E4412A 'ower sensor HP 8482A IF generator R&S SMT-06 letwork Analyzer Agilent E8358A	ed in the closed laborator E critical for calibration) ID # SN: 104778 SN: 103245 SN: 103245 SN: 8H9394 (20k) SN: 310982 / 06327 SN: 4013 SN: 781 ID # ID # SN: GB42420191 SN: US38485102 SN: US37295597 SN: 837633/005 SN: US41080477 Name	Cal Date (Certificate No.) 04-Apr-22 (No. 217-03525/03524) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03525) 04-Apr-22 (No. 217-03527) 04-Apr-22 (No. 217-03528) 28-Dec-21 (No. EF3-4013_Dec21) 22-Dec-21 (No. DAE4-781_Dec21) Check Date (in house) 09-Oct-09 (in house check Oct-20) 05-Jan-10 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 09-Oct-09 (in house check Oct-20) 10-Jan-19 (in house check Oct-20) 31-Mar-14 (in house check Oct-20) Function	C and humidity < 70%. Scheduled Calibration Apr-23 Apr-23 Apr-23 Apr-23 Dec-22 Dec-22 Scheduled Check In house check: Oct-23 In house check: Oct-23

Certificate No: CD2450V3-1021_Aug22

Page 1 of 5





Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweiz C Service S Service Swiss C

Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

- [1] ANSI-C63.19-2019 (ANSI-C63.19-2011)
 - American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD2450V3-1021_Aug22

Page 2 of 5





Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	2450 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 2450 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	86.0 V/m = 38.69 dBV/m
Maximum measured above low end	100 mW input power	85.8 V/m = 38.67 dBV/m
Averaged maximum above arm	100 mW input power	85.9 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
2250 MHz	18.3 dB	63.2 Ω + 4.0 jΩ
2350 MHz	30.3 dB	52.1 Ω - 2.3 jΩ
2450 MHz	29.4 dB	53.1 Ω - 1.6 jΩ
2550 MHz	33.5 dB	51.0 Ω - 1.9 jΩ
2650 MHz	18.6 dB	60.7 Ω - 7.5 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.


Certificate No: CD2450V3-1021_Aug22

Page 3 of 5





Impedance Measurement Plot

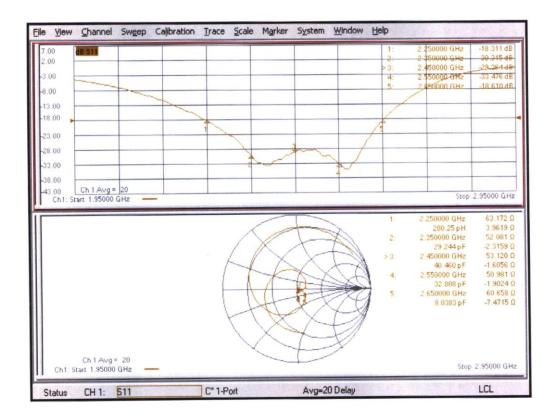

Page 4 of 5





DASY5 E-field Result

Date: 25.08.2022

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 2450 MHz; Type: CD2450V3; Serial: CD2450V3 - SN: 1021

 $\begin{array}{l} Communication \ System: \ UID \ 0 \ - \ CW \ ; \ Frequency: \ 2450 \ MHz \\ Medium \ parameters \ used: \ \sigma = 0 \ S/m, \ \epsilon_r = 1; \ \rho = 0 \ kg/m^3 \\ Phantom \ section: \ RF \ Section \\ Measurement \ Standard: \ DASY5 \ (IEEE/IEC/ANSI \ C63.19-2011) \\ \end{array}$

DASY52 Configuration:

- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 2450 MHz; Calibrated: 28.12.2021
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.12.2021
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole E-Field measurement @ 2450MHz/E-Scan - 2450MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm Reference Value = 79.61 V/m; Power Drift = 0.02 dB Applied MIF = 0.00 dB RF audio interference level = 38.69 dBV/m Emission category: M2

MIF scaled E-fi	eld	
	Grid 2 M2 38.67 dBV/m	Grid 3 M2 38.39 dBV/m
	Grid 5 M2 37.72 dBV/m	Grid 6 M2 37.53 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2

38.69 dBV/m

38.58 dBV/m

38.45 dBV/m

dB -1.22 -2.45 -3.67 -4.90 -6.12

0 dB = 86.03 V/m = 38.69 dBV/m

Certificate No: CD2450V3-1021_Aug22

Page 5 of 5

Dipole 2600 MHz





Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S

С

S

Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client **CTTL** (Auden)

Certificate No: CD2600V3-1017_Aug22 **CALIBRATION CERTIFICATE** CD2600V3 - SN: 1017 Object QA CAL-20.v7 Calibration procedure(s) Calibration Procedure for Validation Sources in air August 25, 2022 Calibration date: This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Cal Date (Certificate No.) Scheduled Calibration Primary Standards ID # 04-Apr-22 (No. 217-03525/03524) Apr-23 SN: 104778 Power meter NRP Apr-23 04-Apr-22 (No. 217-03524) Power sensor NRP-Z91 SN: 103244 SN: 103245 04-Apr-22 (No. 217-03525) Apr-23 Power sensor NRP-Z91 Apr-23 SN: BH9394 (20k) 04-Apr-22 (No. 217-03527) Reference 20 dB Attenuator Apr-23 SN: 310982 / 06327 04-Apr-22 (No. 217-03528) Type-N mismatch combination SN: 4013 28-Dec-21 (No. EF3-4013_Dec21) Dec-22 Probe EF3DV3 SN: 781 22-Dec-21 (No. DAE4-781_Dec21) Dec-22 DAE4 Scheduled Check ID # Check Date (in house) Secondary Standards SN: GB42420191 09-Oct-09 (in house check Oct-20) In house check: Oct-23 Power meter Agilent 4419B Power sensor HP E4412A SN: US38485102 05-Jan-10 (in house check Oct-20) In house check: Oct-23 Power sensor HP 8482A SN: US37295597 09-Oct-09 (in house check Oct-20) In house check: Oct-23 RF generator R&S SMT-06 SN: 837633/005 10-Jan-19 (in house check Oct-20) In house check: Oct-23 Network Analyzer Agilent E8358A SN: US41080477 31-Mar-14 (in house check Oct-20) In house check: Oct-22 Name Function Signature Laboratory Technician Calibrated by: Leif Klysner Technical Manager Approved by: Sven Kühn Issued: August 25, 2022 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD2600V3-1017_Aug22

Page 1 of 5





Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S

C

S

Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

References

- [1] ANSI-C63.19-2019 (ANSI-C63.19-2011)
 - American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All
 figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector
 is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a
 directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss: These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution: E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward
 power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the
 dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms.
 Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one
 line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any nonparallelity to the measurement plane as well as the sensor displacement. The E-field value stated as
 calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: CD2600V3-1017_Aug22

Page 2 of 5





Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	2600 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 2600 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	86.0 V/m = 38.69 dBV/m
Maximum measured above low end	100 mW input power	85.7 V/m = 38.66 dBV/m
Averaged maximum above arm	100 mW input power	85.9 V/m ± 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
2450 MHz	24.5 dB	44.6 Ω + 1.5 jΩ
2550 MHz	21.6 dB	57.9 Ω + 4.4 jΩ
2600 MHz	20.7 dB	59.4 Ω - 3.8 jΩ
2650 MHz	19.4 dB	54.9 Ω - 10.2 jΩ
2750 MHz	15.7 dB	41.4 Ω - 12.3 jΩ

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.


Certificate No: CD2600V3-1017_Aug22

Page 3 of 5





Impedance Measurement Plot

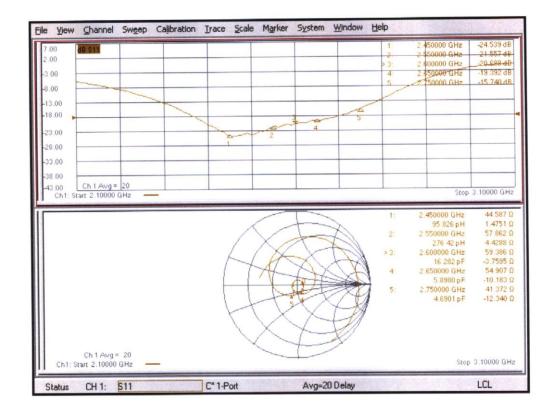

Certificate No: CD2600V3-1017_Aug22

Page 4 of 5





DASY5 E-field Result

Date: 25.08.2022

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 2600 MHz; Type: CD2600V3; Serial: CD2600V3 - SN: 1017

 $\begin{array}{l} Communication \ System: \ UID \ 0 \ - \ CW \ ; \ Frequency: \ 2600 \ MHz \\ Medium \ parameters \ used: \ \sigma = 0 \ S/m, \ \epsilon_r = 1; \ \rho = 0 \ kg/m^3 \end{array}$ Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EF3DV3 SN4013; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 28.12.2021
- . Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.12.2021 .
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070 ٠
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole E-Field measurement @ 2600MHz/E-Scan - 2600MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm Reference Value = 69.34 V/m; Power Drift = -0.03 dB Applied MIF = 0.00 dBRF audio interference level = 38.69 dBV/m Emission category: M2

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.49 dBV/m	38.66 dBV/m	38.46 dBV/m
	Grid 5 M2 37.97 dBV/m	
		Grid 9 M2
38.62 dBV/m	38.69 dBV/m	38.42 dBV/m

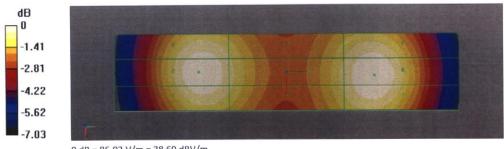

0 dB = 86.03 V/m = 38.69 dBV/m

Certificate No: CD2600V3-1017_Aug22

Page 5 of 5





The photos of HAC test are presented in the additional document:

Appendix to test report No.I22Z61849-SEM02/03

The photos of HAC test