



Appendix E

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: 10.1inch tablet

Test Model: AK10

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng





E.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant	27.908	---	Pass
NVNT	a	5300	Ant	26.507	---	Pass
NVNT	a	5320	Ant	26.819	---	Pass
NVNT	n20	5260	Ant	29.214	---	Pass
NVNT	n20	5300	Ant	26.455	---	Pass
NVNT	n20	5320	Ant	28.531	---	Pass
NVNT	n40	5270	Ant	47.634	---	Pass
NVNT	n40	5310	Ant	40.614	---	Pass
NVNT	ac20	5260	Ant	28.078	---	Pass
NVNT	ac20	5300	Ant	28.014	---	Pass
NVNT	ac20	5320	Ant	29.772	---	Pass
NVNT	ac40	5270	Ant	43.052	---	Pass
NVNT	ac40	5310	Ant	43.648	---	Pass
NVNT	ax20	5260	Ant	29.191	---	Pass
NVNT	ax20	5300	Ant	27.452	---	Pass
NVNT	ax20	5320	Ant	28.206	---	Pass
NVNT	ax40	5270	Ant	38.406	---	Pass
NVNT	ax40	5310	Ant	41.579	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant

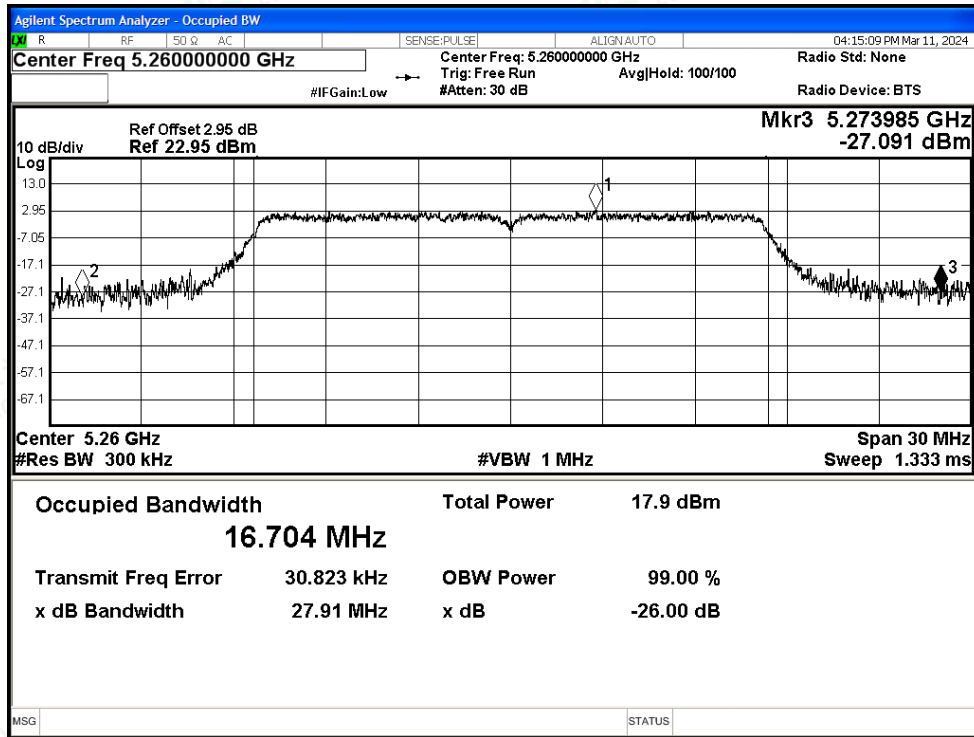


-26dB Bandwidth NVNT a 5300MHz Ant

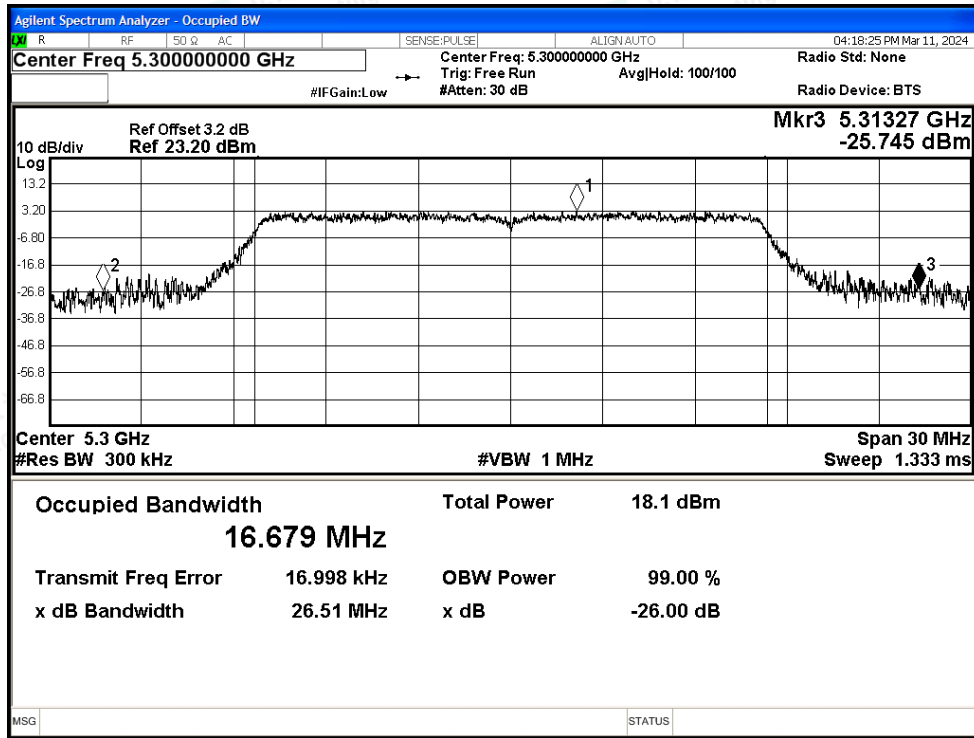




-26dB Bandwidth NVNT a 5320MHz Ant

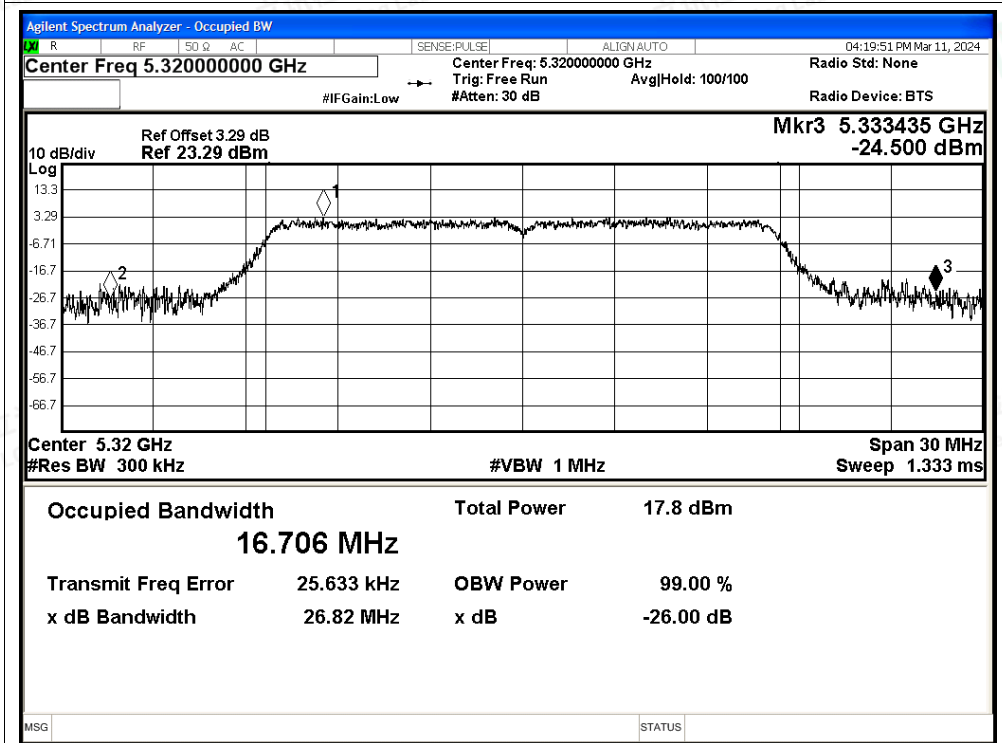


-26dB Bandwidth NVNT n20 5260MHz Ant

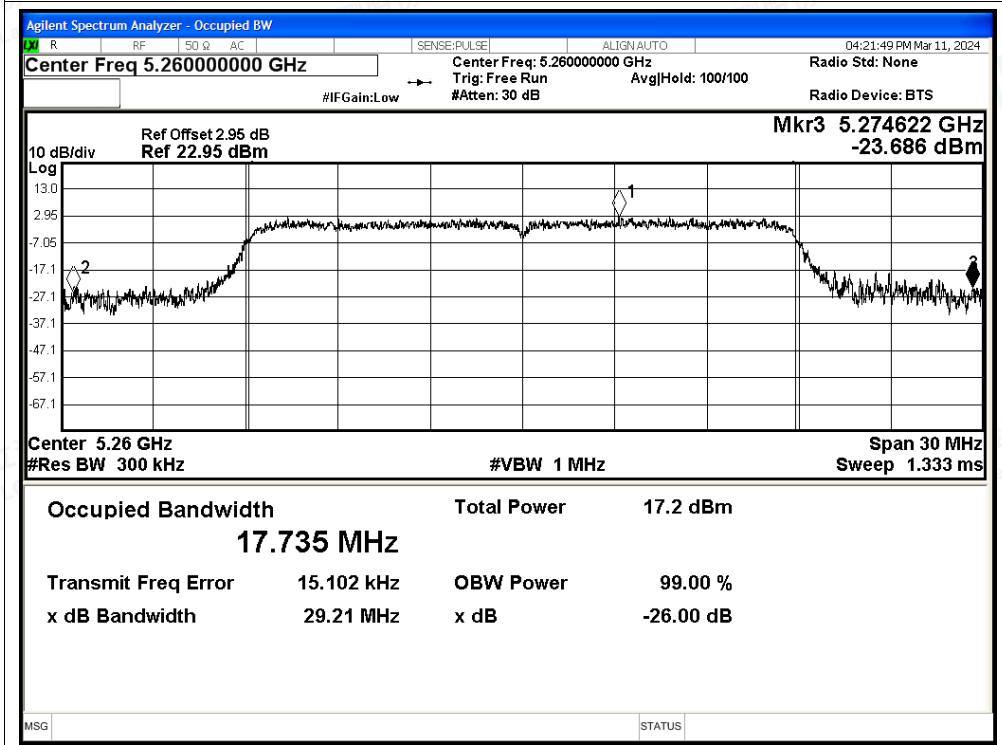




-26dB Bandwidth NVNT n20 5300MHz Ant

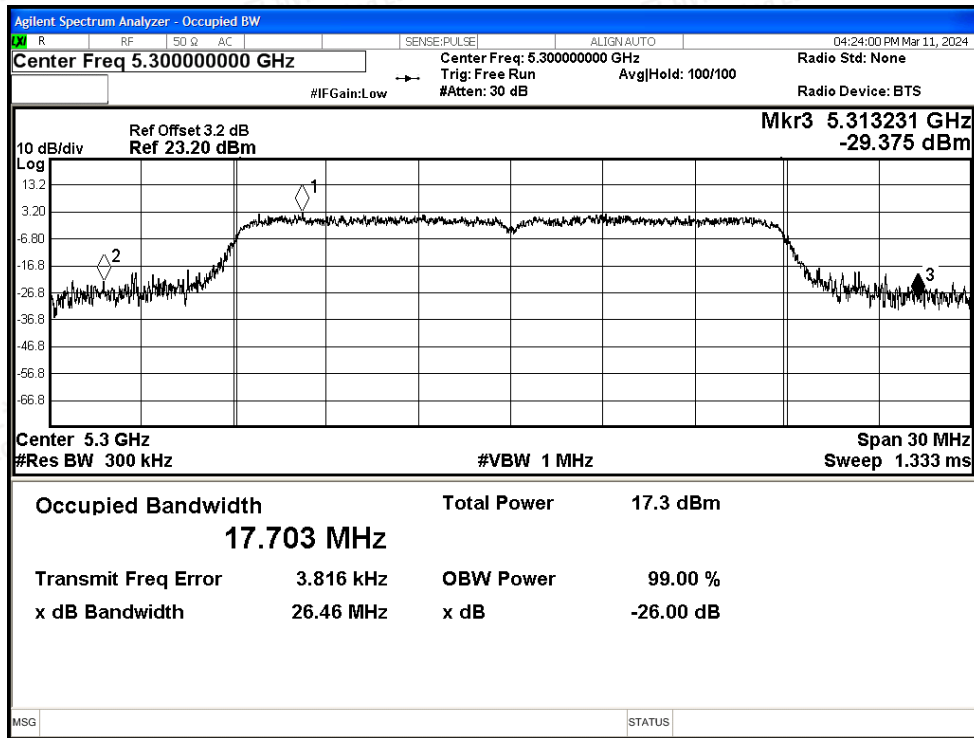


-26dB Bandwidth NVNT n20 5320MHz Ant

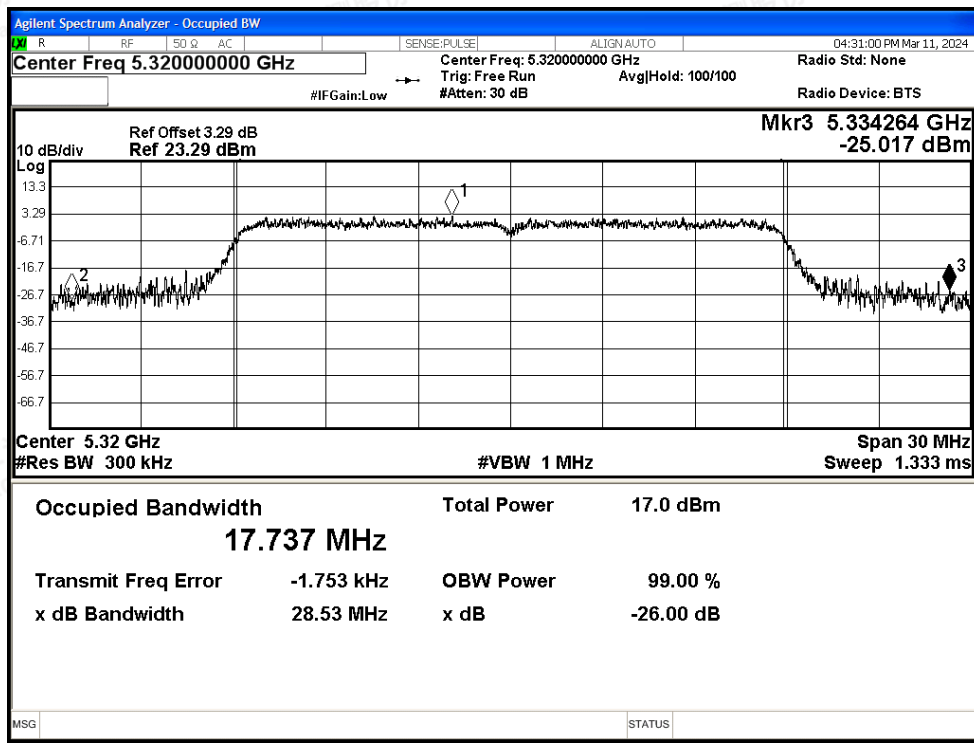




-26dB Bandwidth NVNT n40 5270MHz Ant

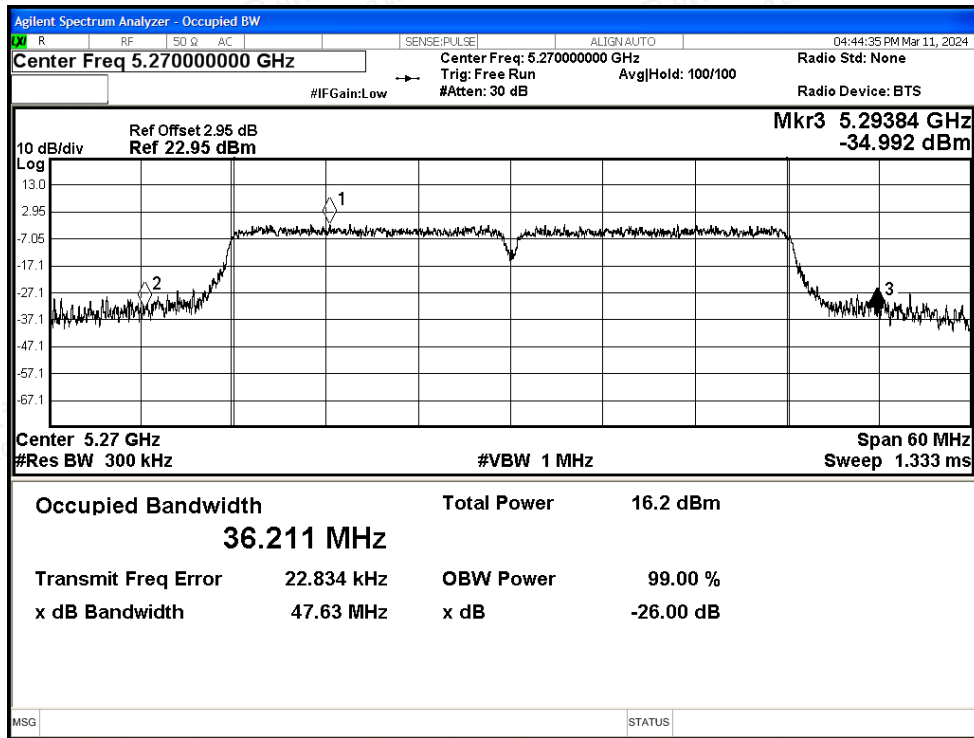


-26dB Bandwidth NVNT n40 5310MHz Ant

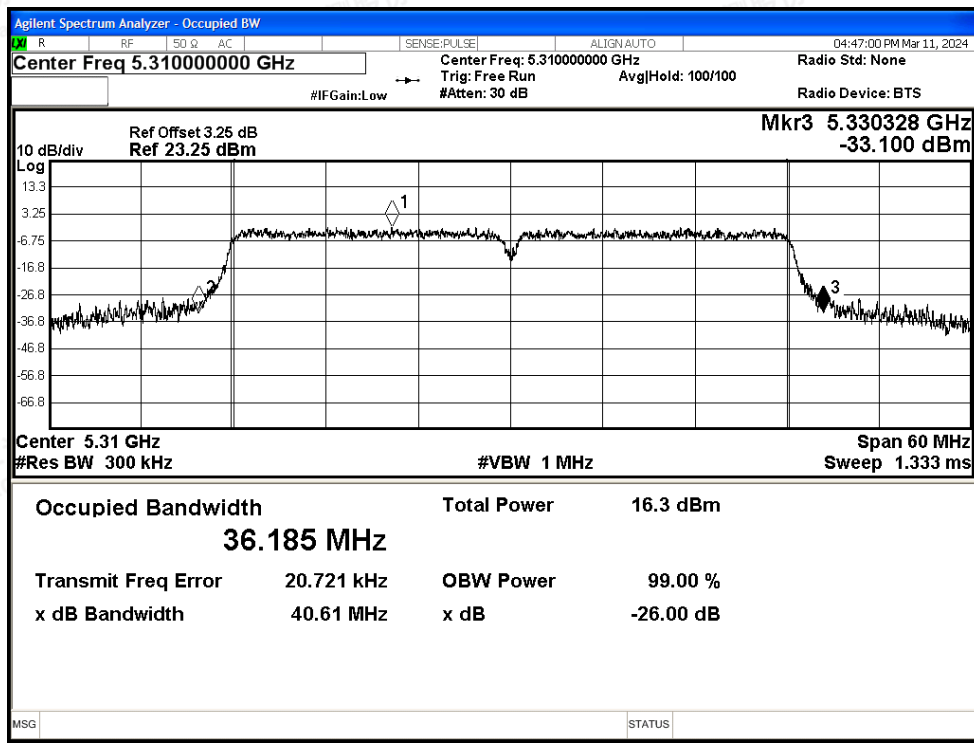




-26dB Bandwidth NVNT ac20 5260MHz Ant

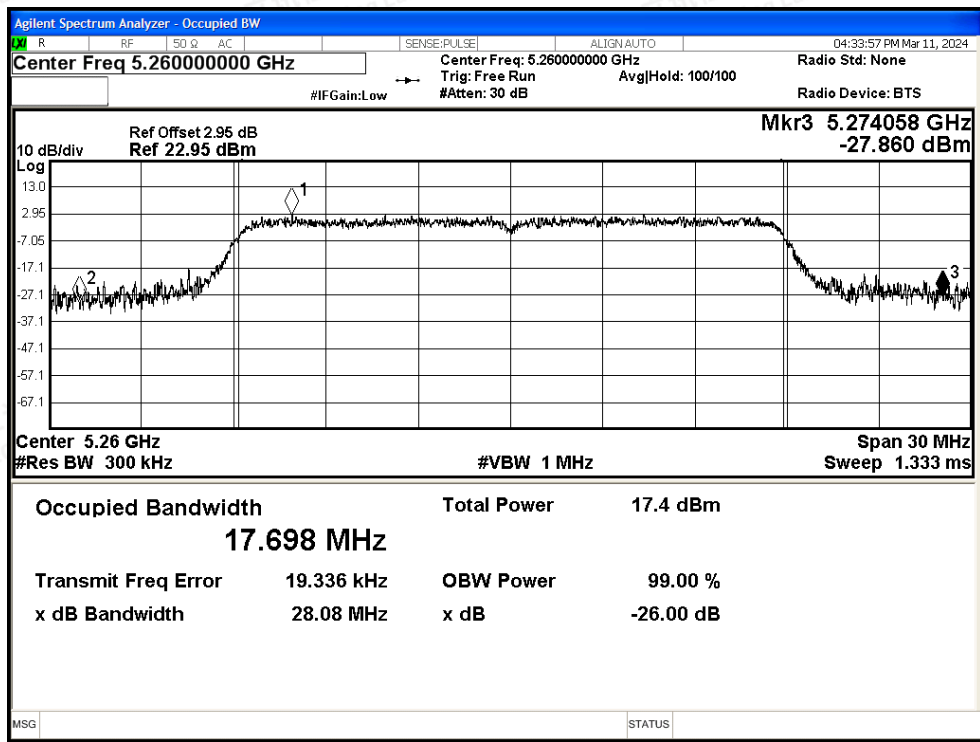


-26dB Bandwidth NVNT ac20 5300MHz Ant

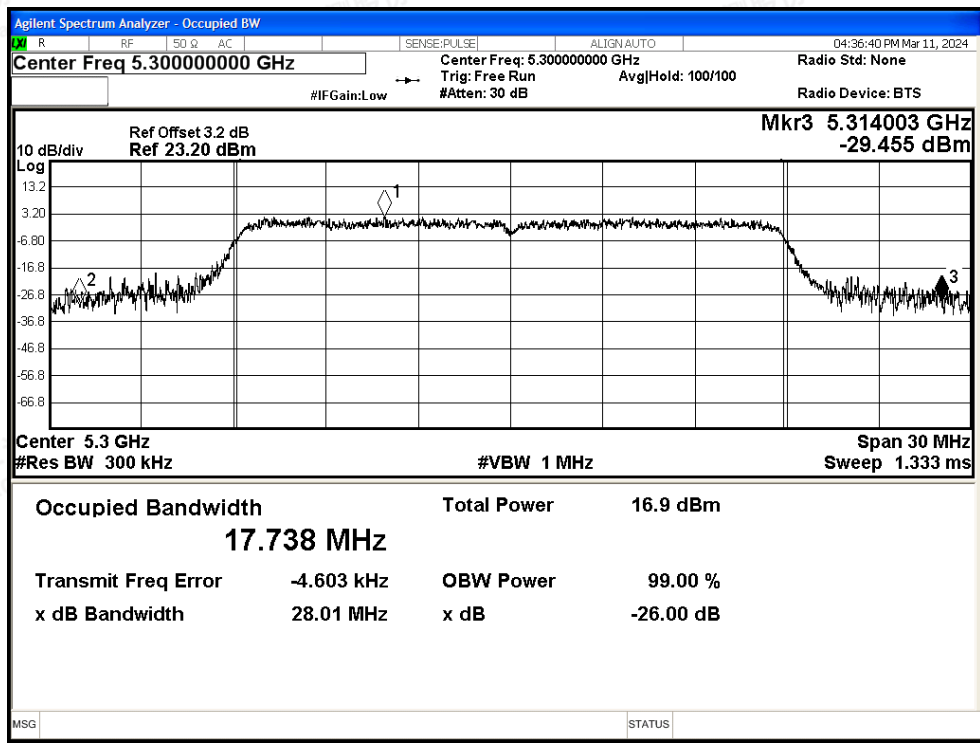





-26dB Bandwidth NVNT ac20 5320MHz Ant

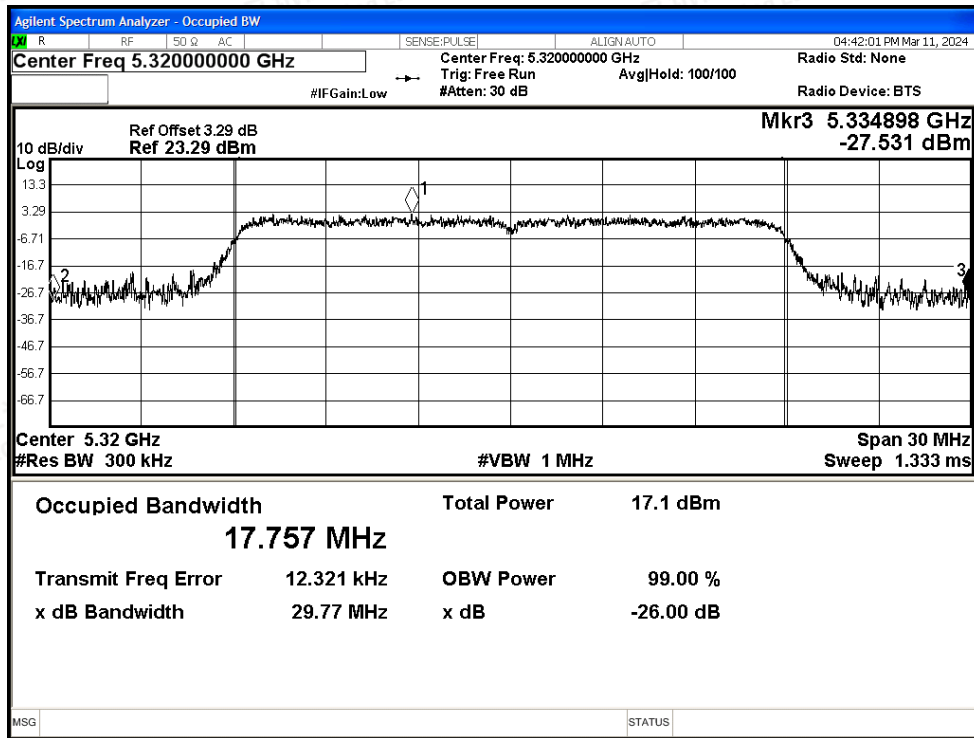

-26dB Bandwidth NVNT ac40 5270MHz Ant

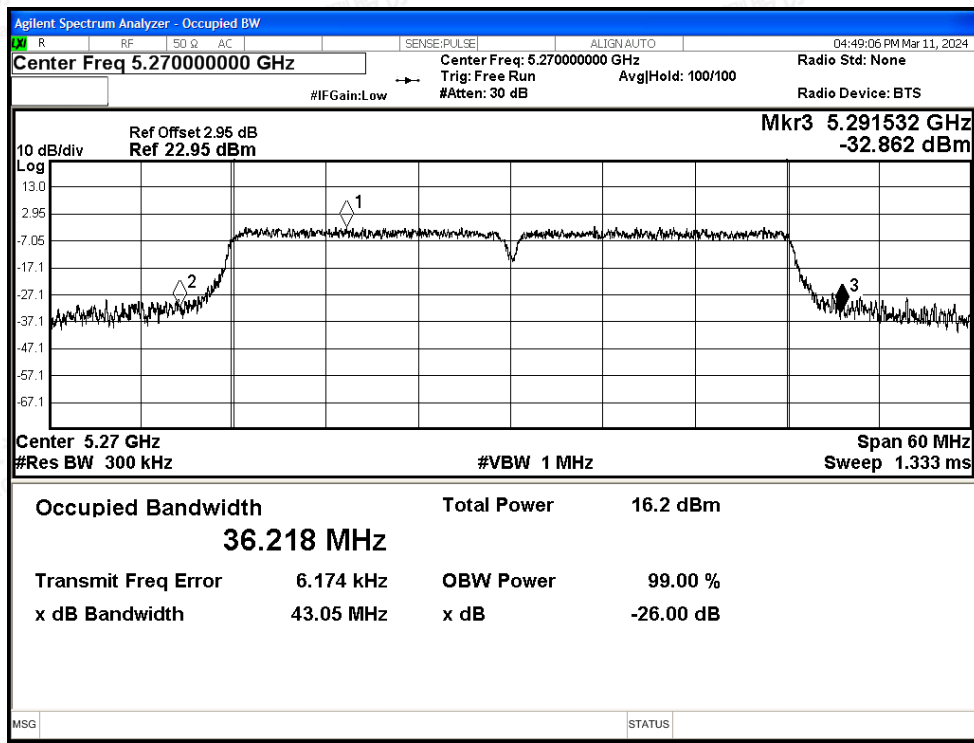


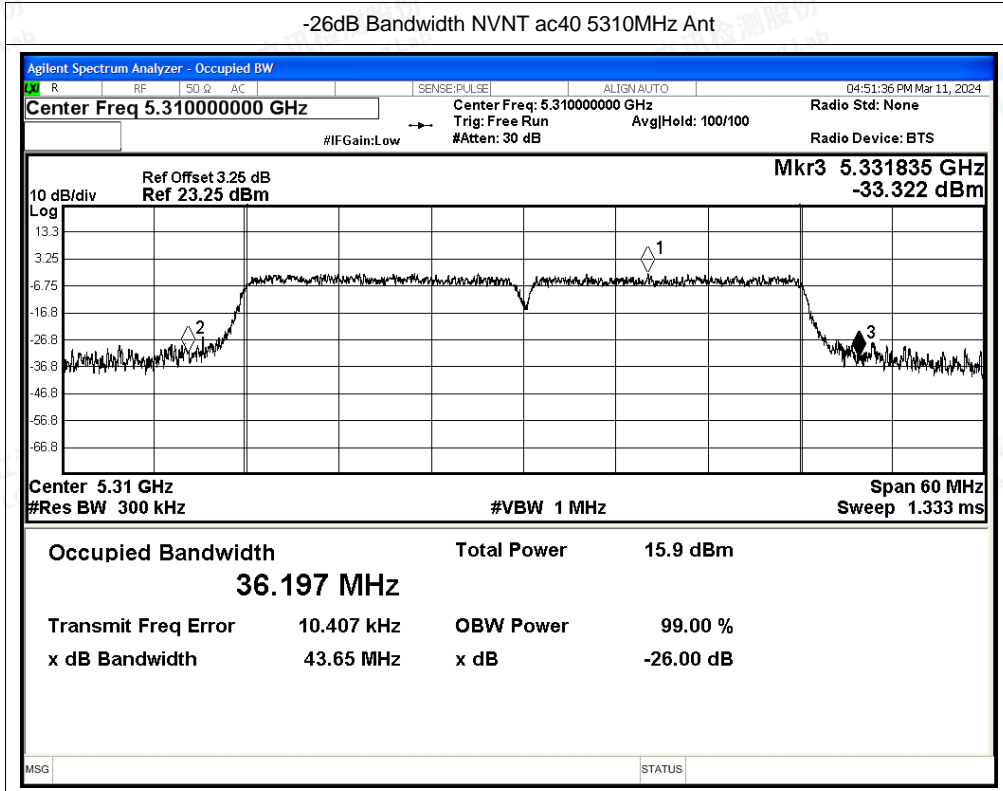




Test Graphs

-26dB Bandwidth NVNT ax20 5260MHz Ant

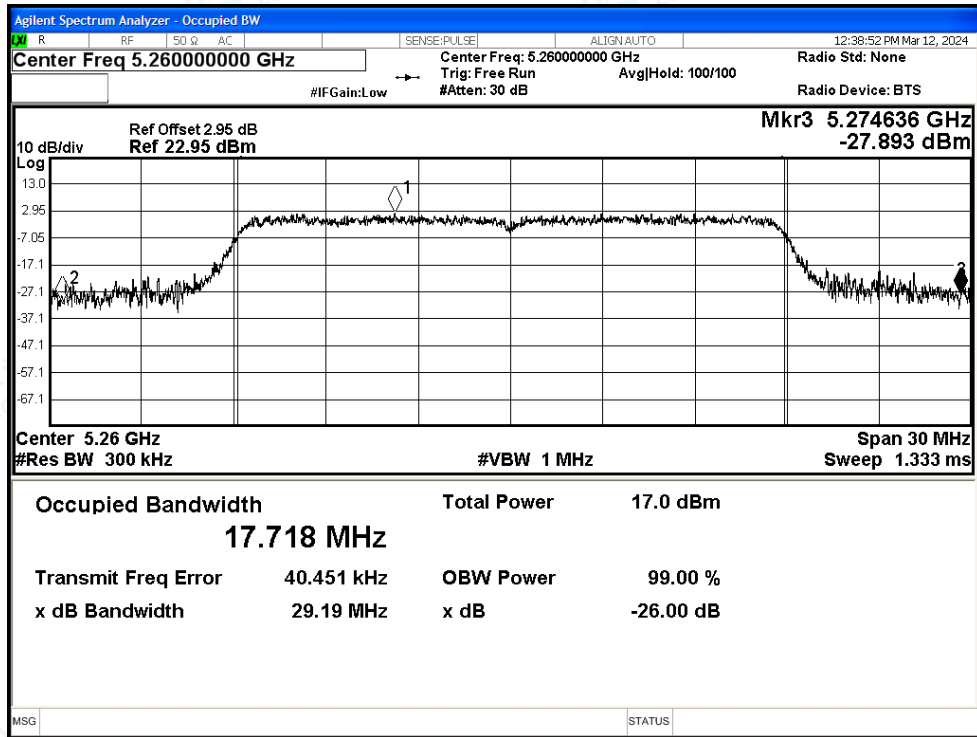


-26dB Bandwidth NVNT ax20 5300MHz Ant

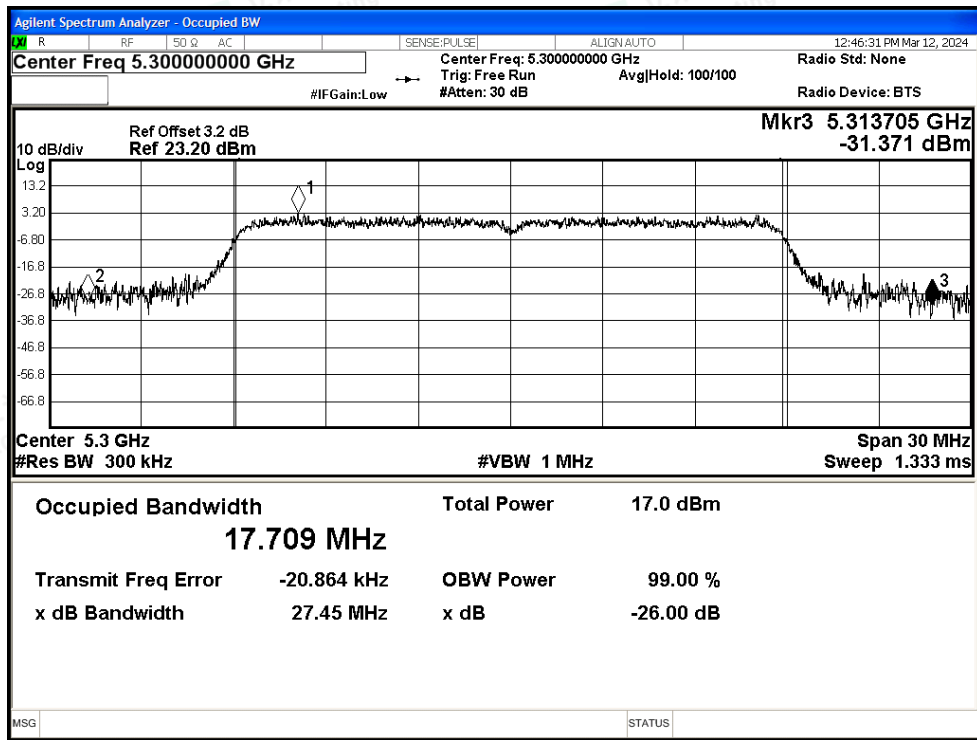





-26dB Bandwidth NVNT ax20 5320MHz Ant

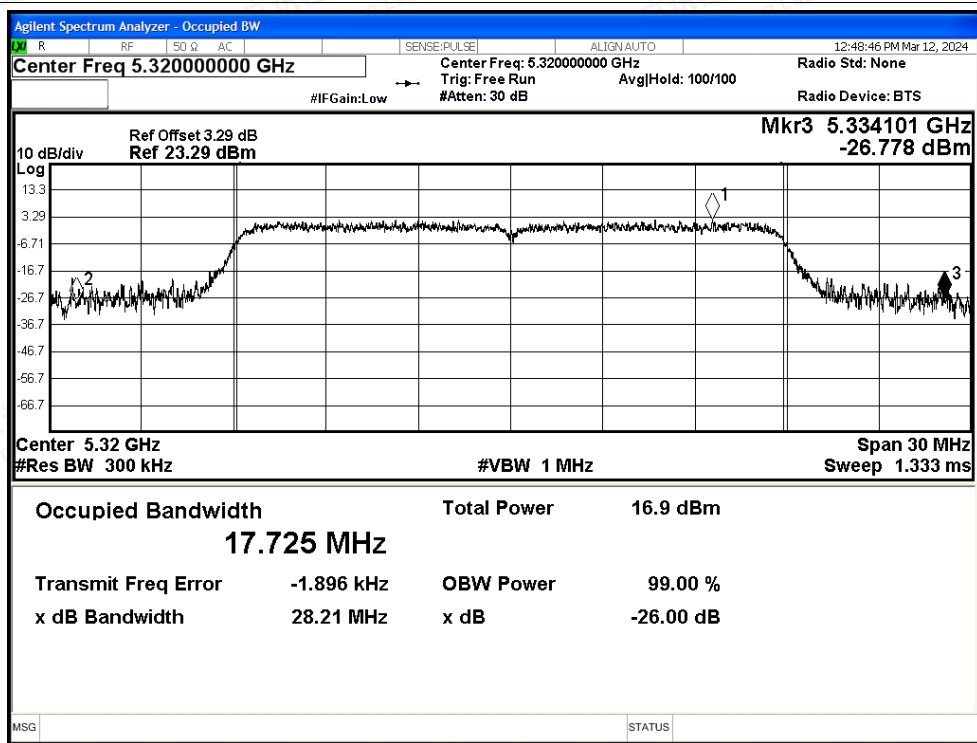

-26dB Bandwidth NVNT ax40 5270MHz Ant

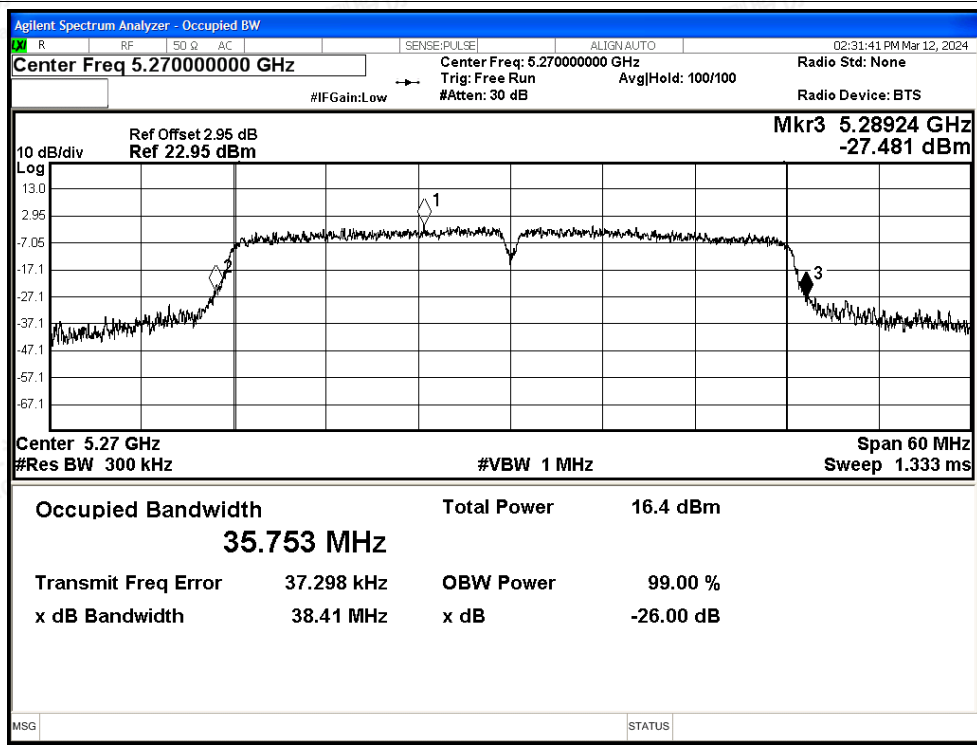

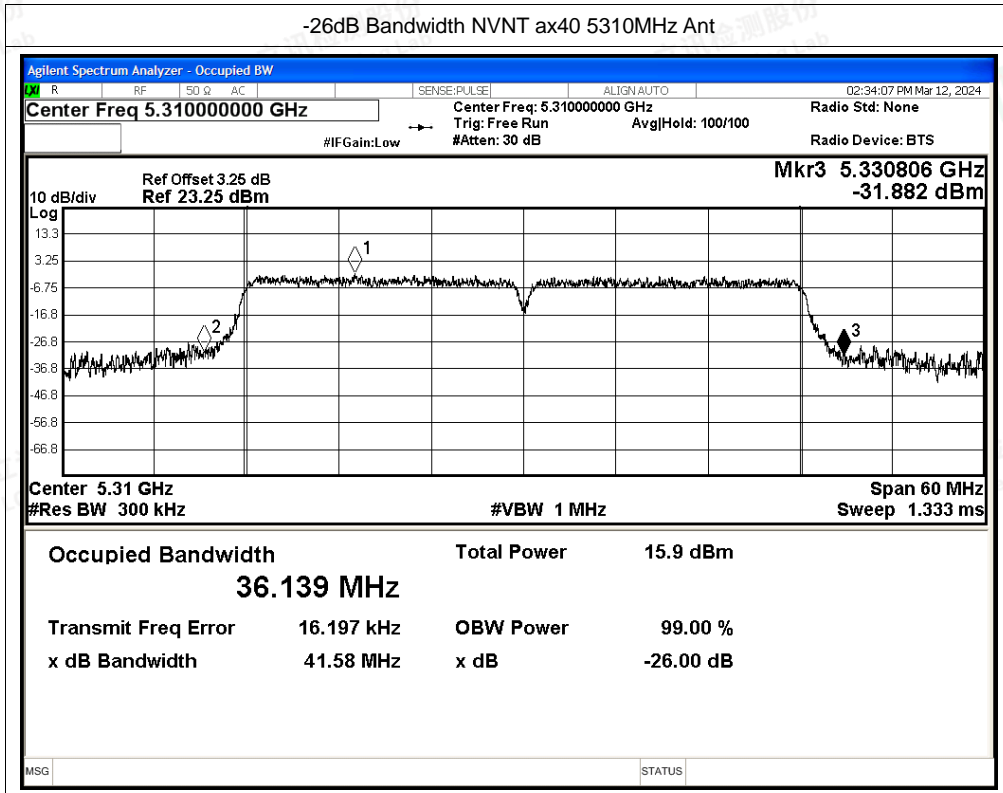



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant	12.48	0.12	12.6	24	Pass
NVNT	a	5300	Ant	12.51	0.12	12.63	24	Pass
NVNT	a	5320	Ant	12.43	0.12	12.55	24	Pass
NVNT	n20	5260	Ant	11.8	0.15	11.95	24	Pass
NVNT	n20	5300	Ant	11.78	0.15	11.93	24	Pass
NVNT	n20	5320	Ant	11.47	0.15	11.62	24	Pass
NVNT	n40	5270	Ant	10.37	0.29	10.66	24	Pass
NVNT	n40	5310	Ant	10.32	0.29	10.61	24	Pass
NVNT	ac20	5260	Ant	11.46	0.15	11.61	24	Pass
NVNT	ac20	5300	Ant	11.56	0.15	11.71	24	Pass
NVNT	ac20	5320	Ant	11.65	0.15	11.8	24	Pass
NVNT	ac40	5270	Ant	10.37	0.29	10.66	24	Pass
NVNT	ac40	5310	Ant	10.28	0.29	10.57	24	Pass
NVNT	ax20	5260	Ant	11.57	0.12	11.69	24	Pass
NVNT	ax20	5300	Ant	11.71	0.12	11.83	24	Pass
NVNT	ax20	5320	Ant	11.58	0.12	11.7	24	Pass
NVNT	ax40	5270	Ant	10.54	0.24	10.78	24	Pass
NVNT	ax40	5310	Ant	10.43	0.23	10.66	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



E.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant	1.86	0.12	1.98	11	Pass
NVNT	a	5300	Ant	2.23	0.12	2.35	11	Pass
NVNT	a	5320	Ant	1.83	0.12	1.95	11	Pass
NVNT	n20	5260	Ant	1.47	0.15	1.62	11	Pass
NVNT	n20	5300	Ant	0.85	0.15	1	11	Pass
NVNT	n20	5320	Ant	0.68	0.15	0.83	11	Pass
NVNT	n40	5270	Ant	-3.19	0.29	-2.9	11	Pass
NVNT	n40	5310	Ant	-3.48	0.29	-3.19	11	Pass
NVNT	ac20	5260	Ant	1.06	0.15	1.21	11	Pass
NVNT	ac20	5300	Ant	1.15	0.15	1.3	11	Pass
NVNT	ac20	5320	Ant	0.53	0.15	0.68	11	Pass
NVNT	ac40	5270	Ant	-3.53	0.29	-3.24	11	Pass
NVNT	ac40	5310	Ant	-3.58	0.29	-3.29	11	Pass
NVNT	ax20	5260	Ant	0.45	0.12	0.57	11	Pass
NVNT	ax20	5300	Ant	0.46	0.12	0.58	11	Pass
NVNT	ax20	5320	Ant	0.69	0.12	0.81	11	Pass
NVNT	ax40	5270	Ant	-2.5	0.24	-2.26	11	Pass
NVNT	ax40	5310	Ant	-3.4	0.23	-3.17	11	Pass






Test Graphs

PSD NVNT a 5260MHz Ant

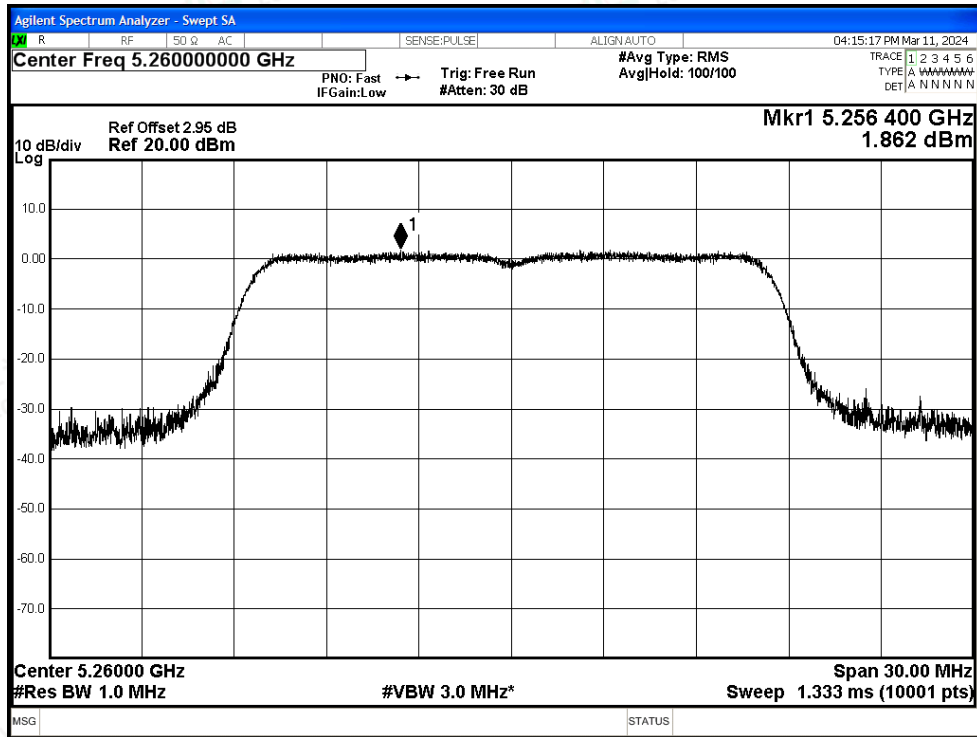


PSD NVNT a 5300MHz Ant

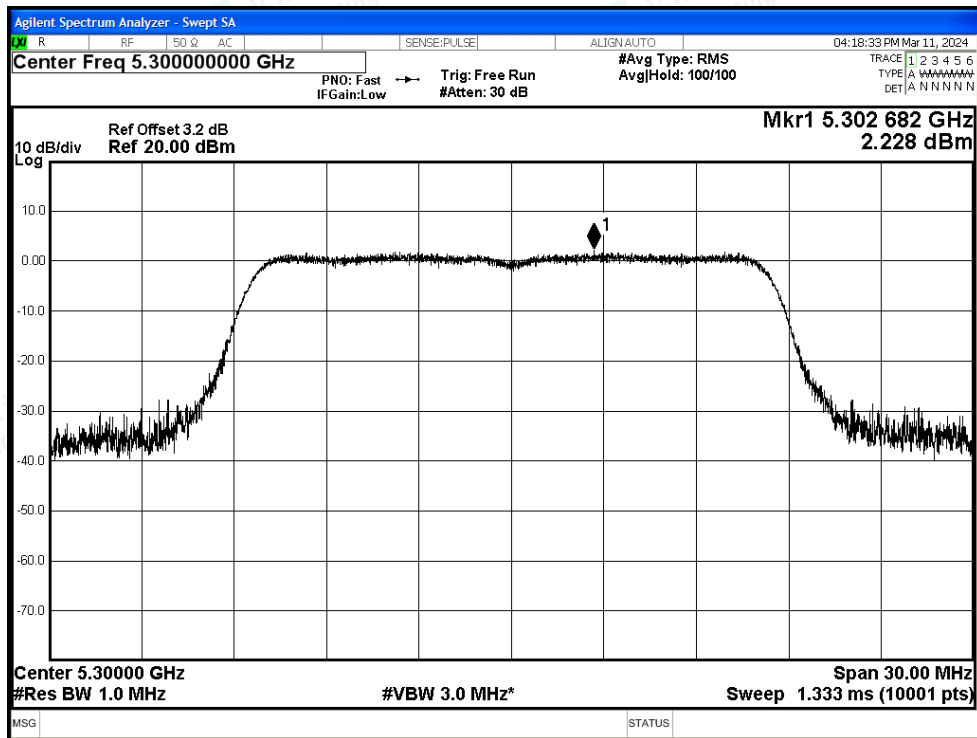






PSD NVNT a 5320MHz Ant

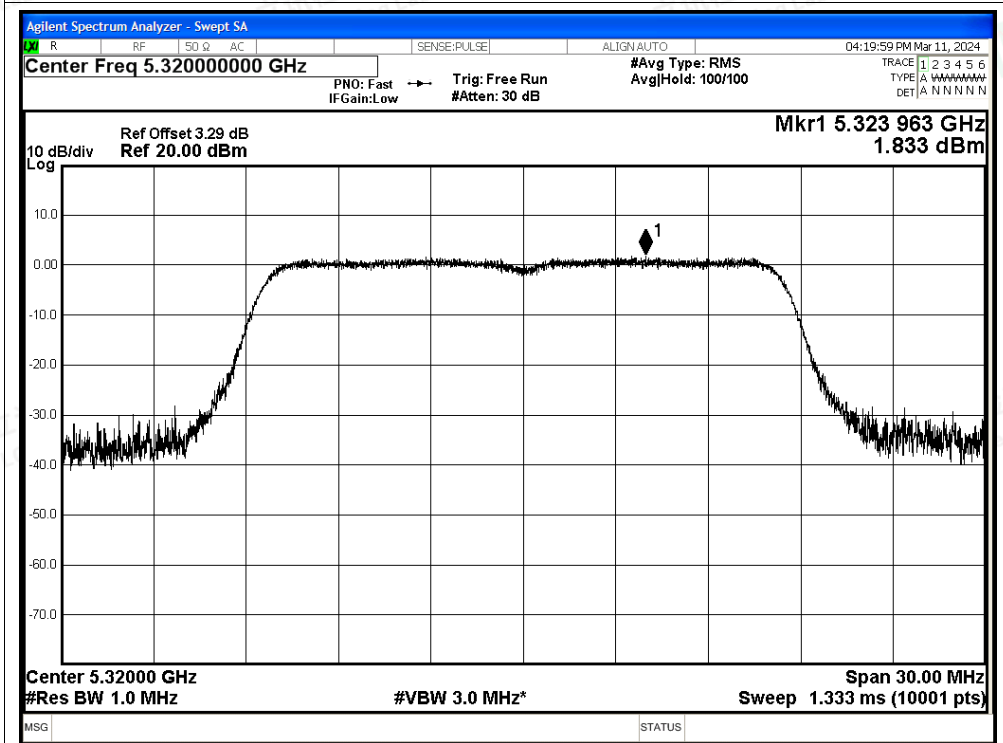


PSD NVNT n20 5260MHz Ant

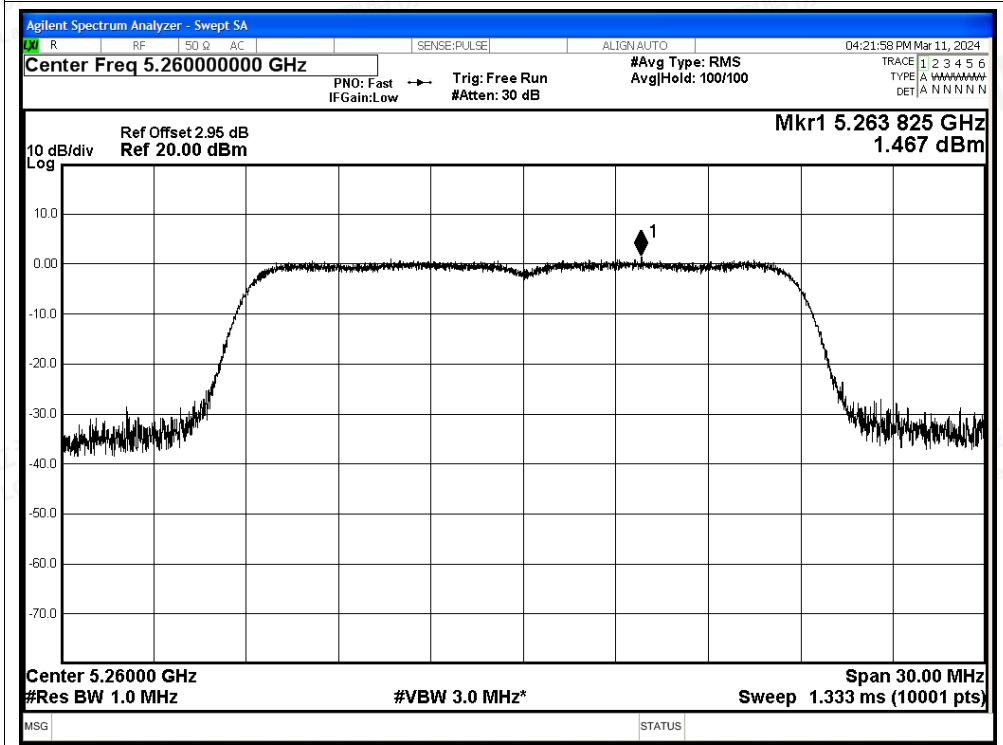

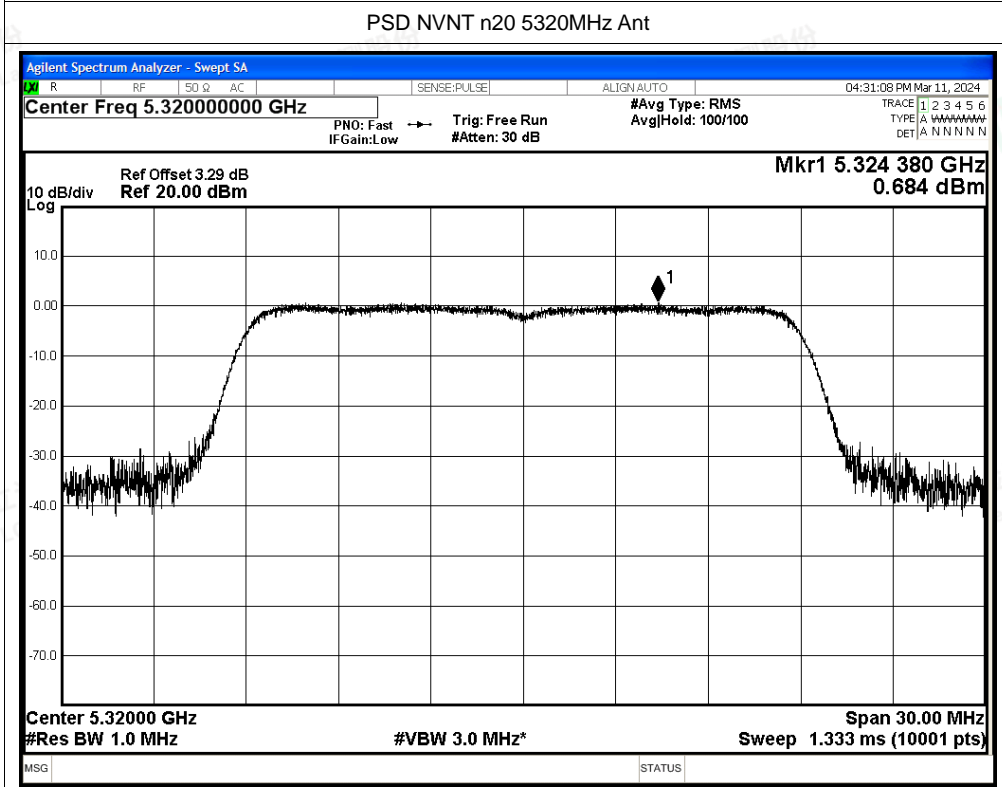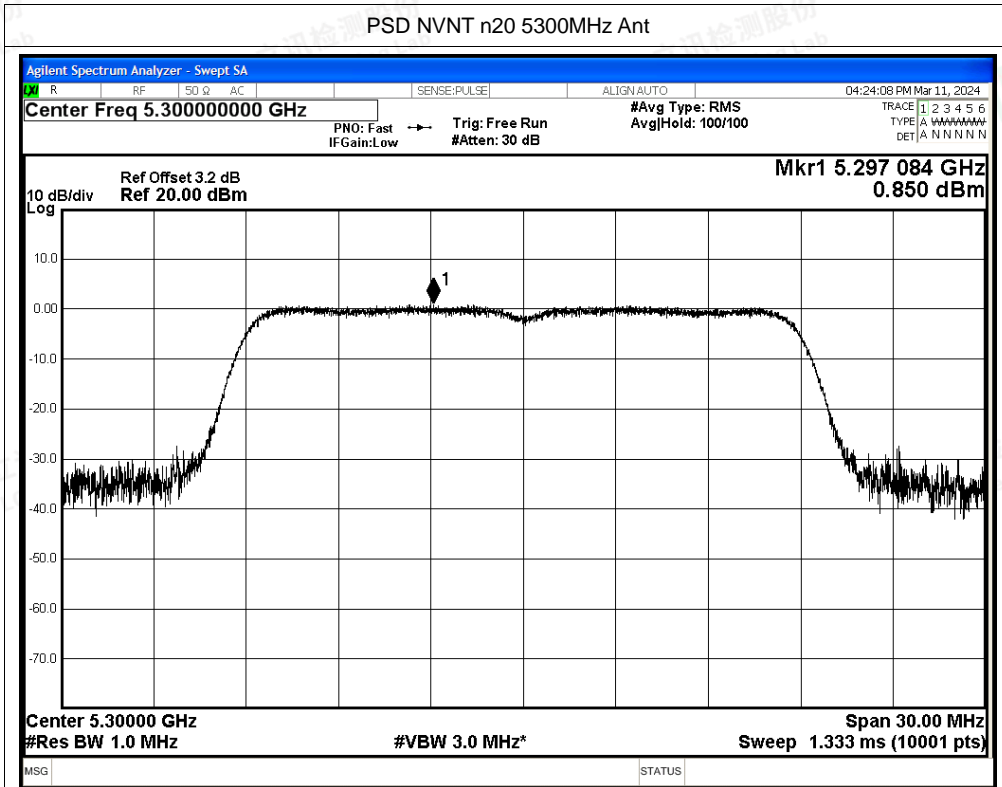








PSD NVNT n40 5270MHz Ant

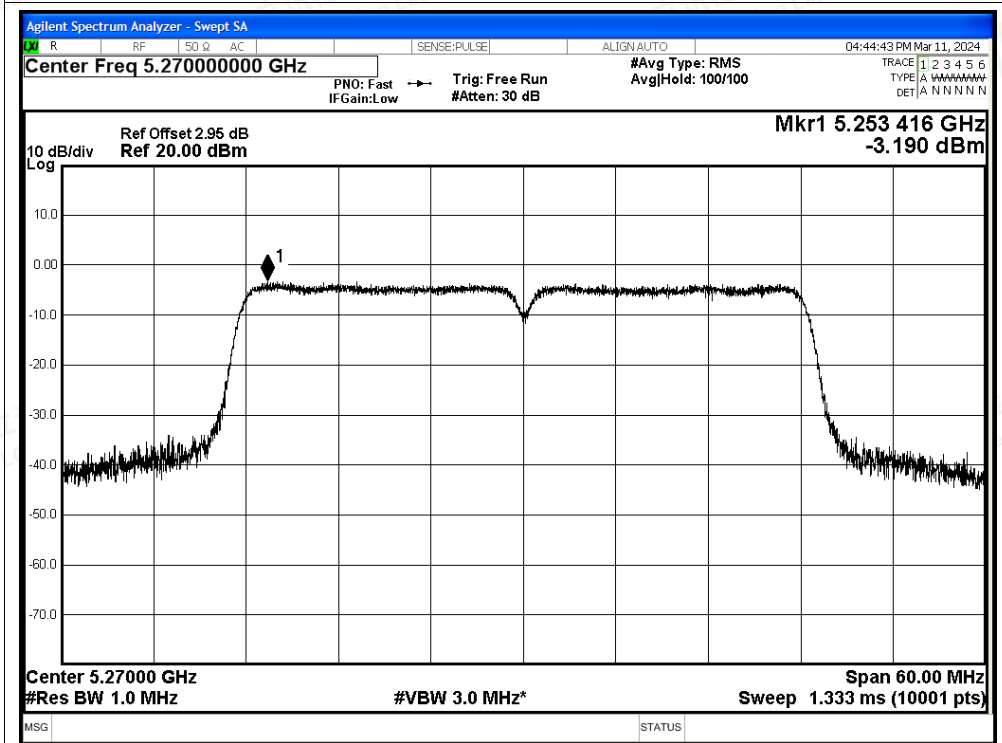


PSD NVNT n40 5310MHz Ant

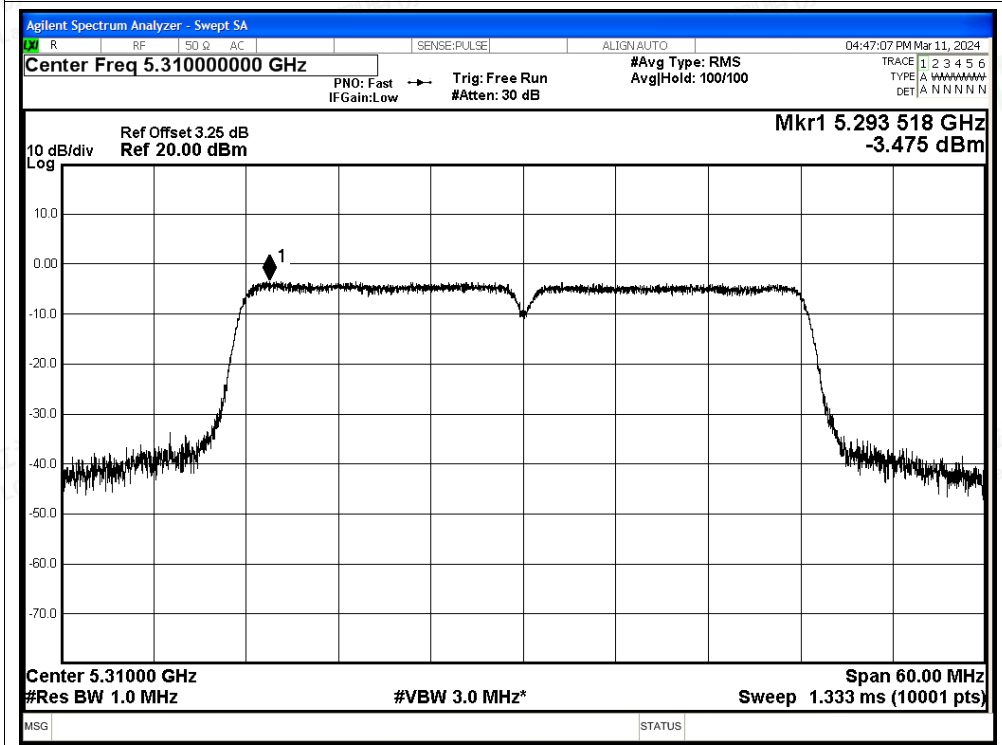

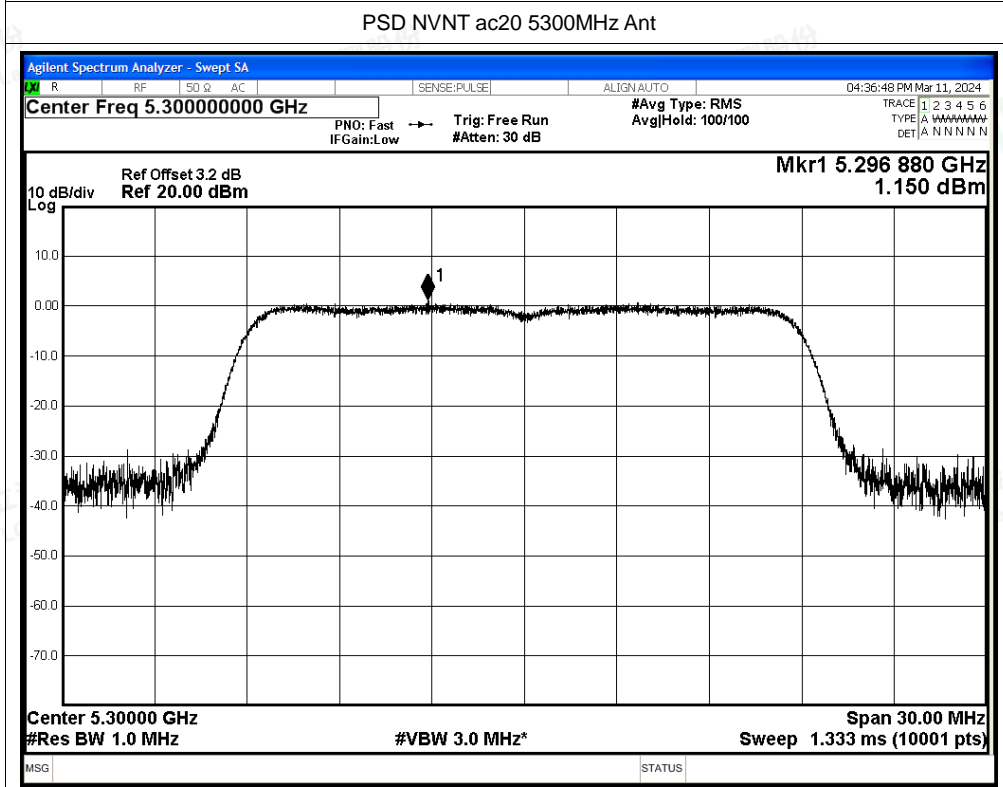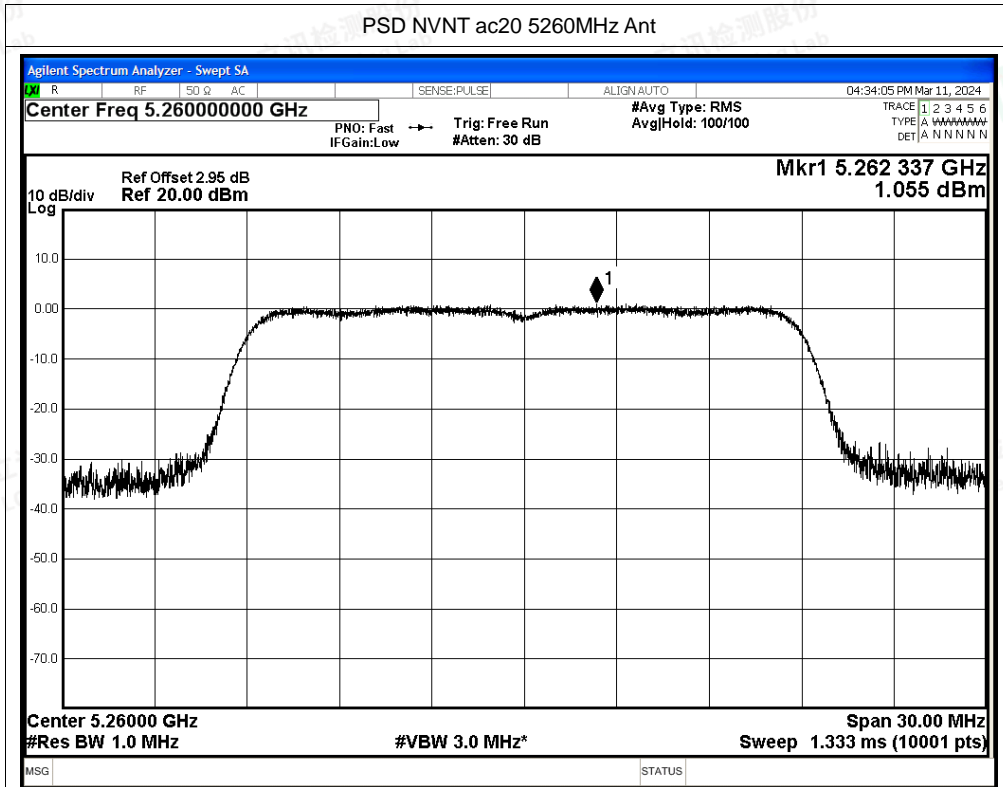

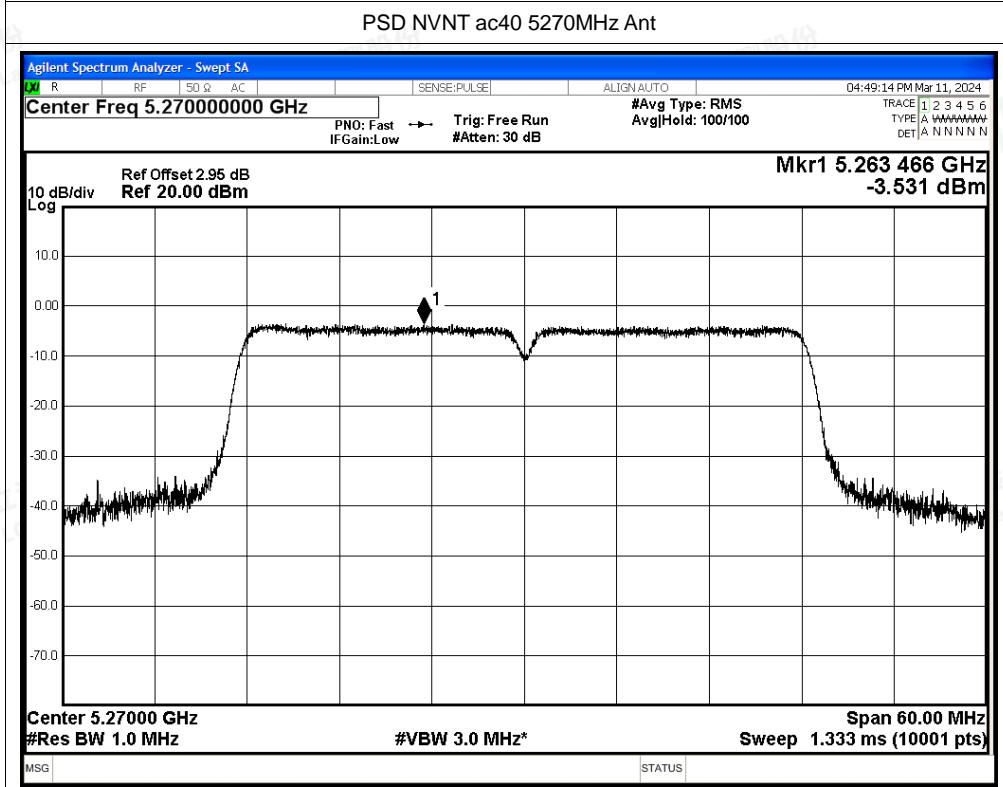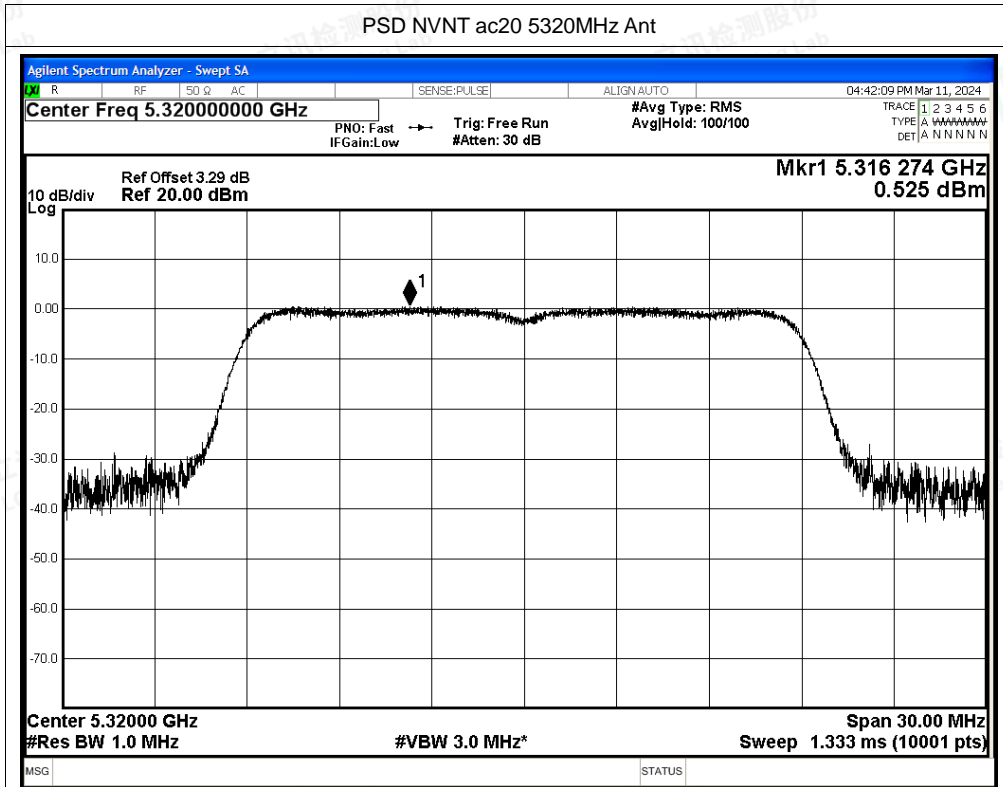


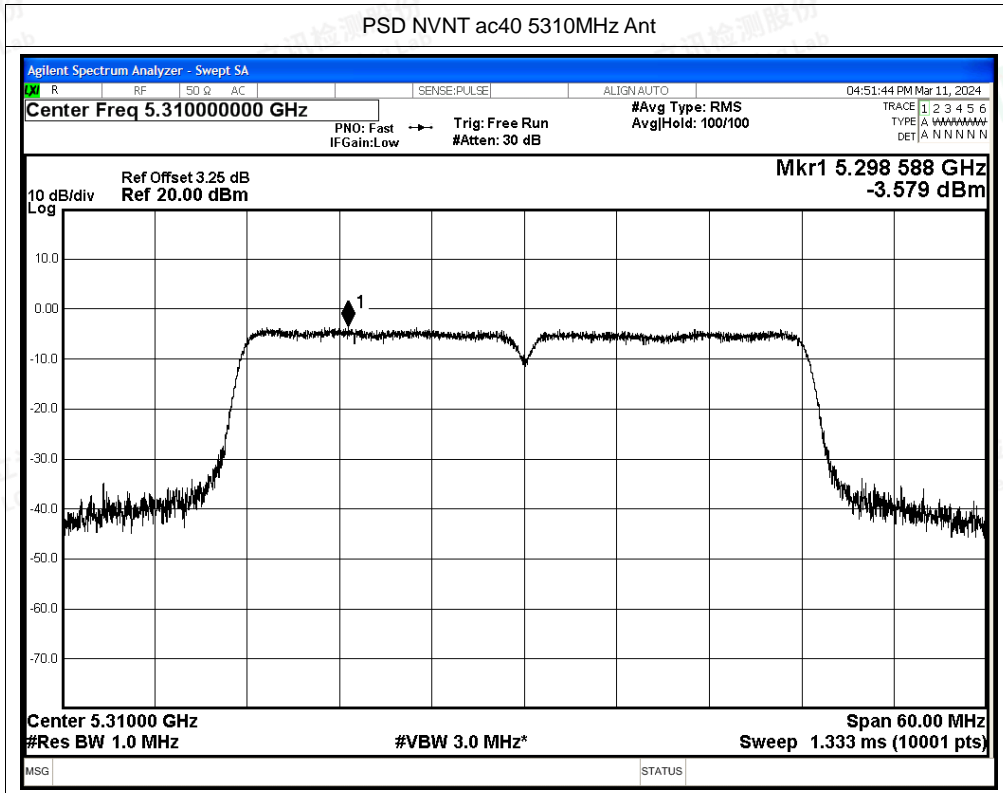




Test Graphs

PSD NVNT ax20 5260MHz Ant

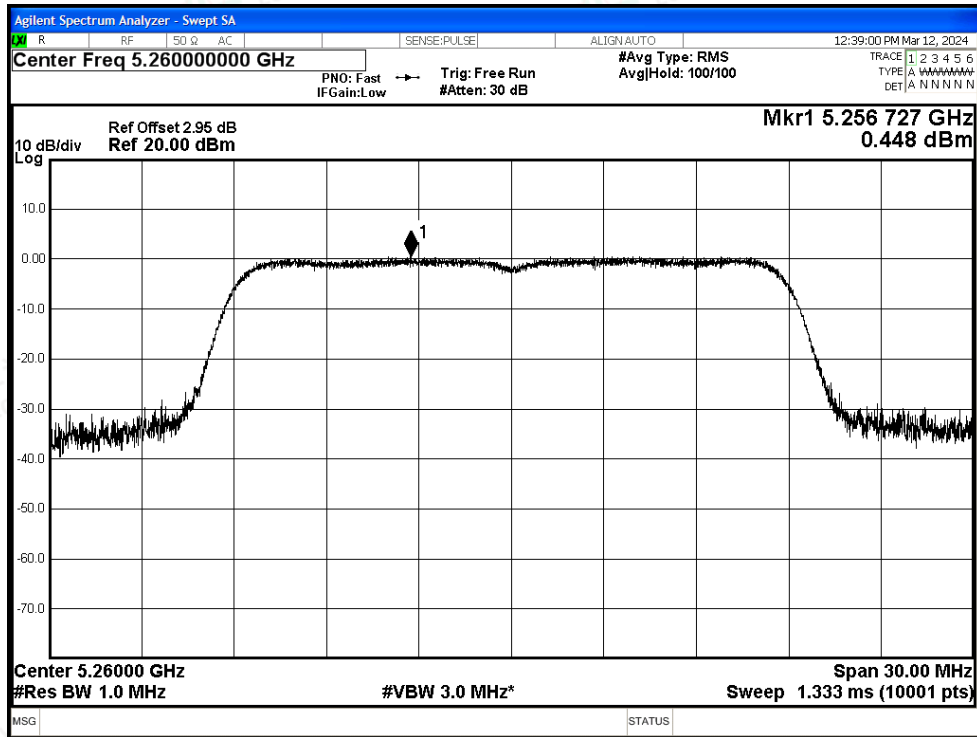


PSD NVNT ax20 5300MHz Ant

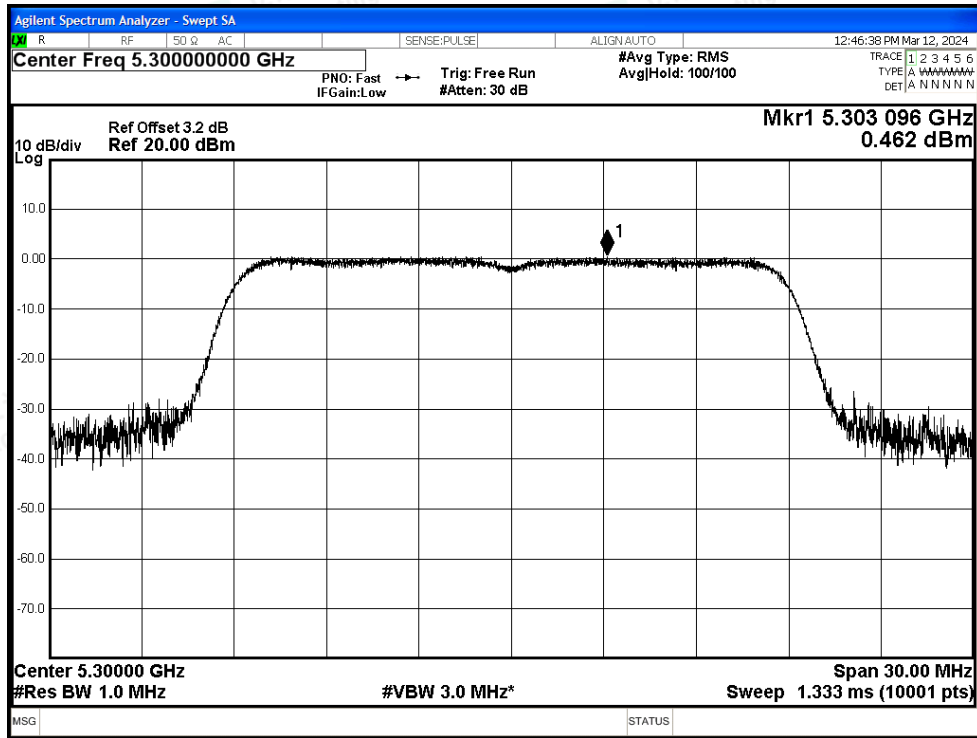





PSD NVNT ax20 5320MHz Ant

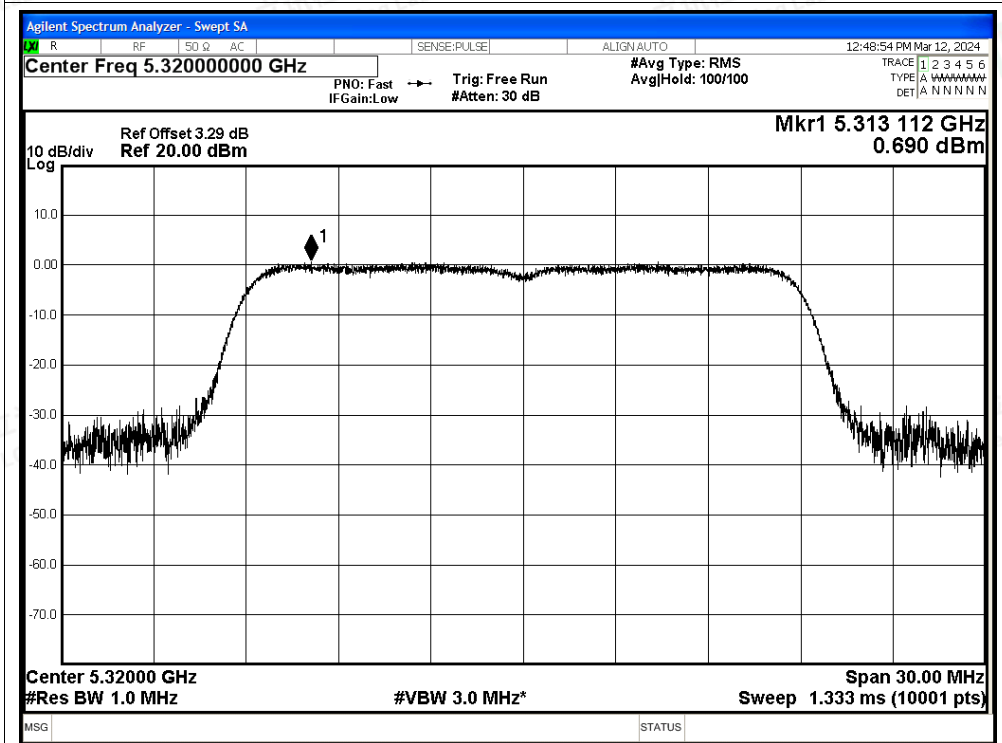

PSD NVNT ax40 5270MHz Ant

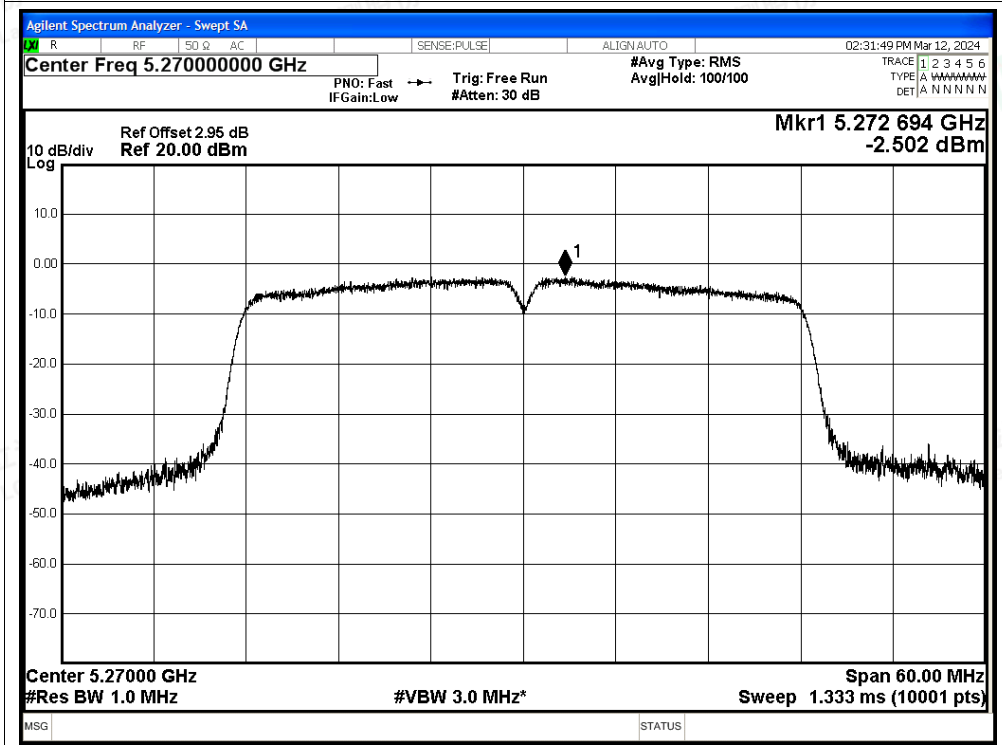

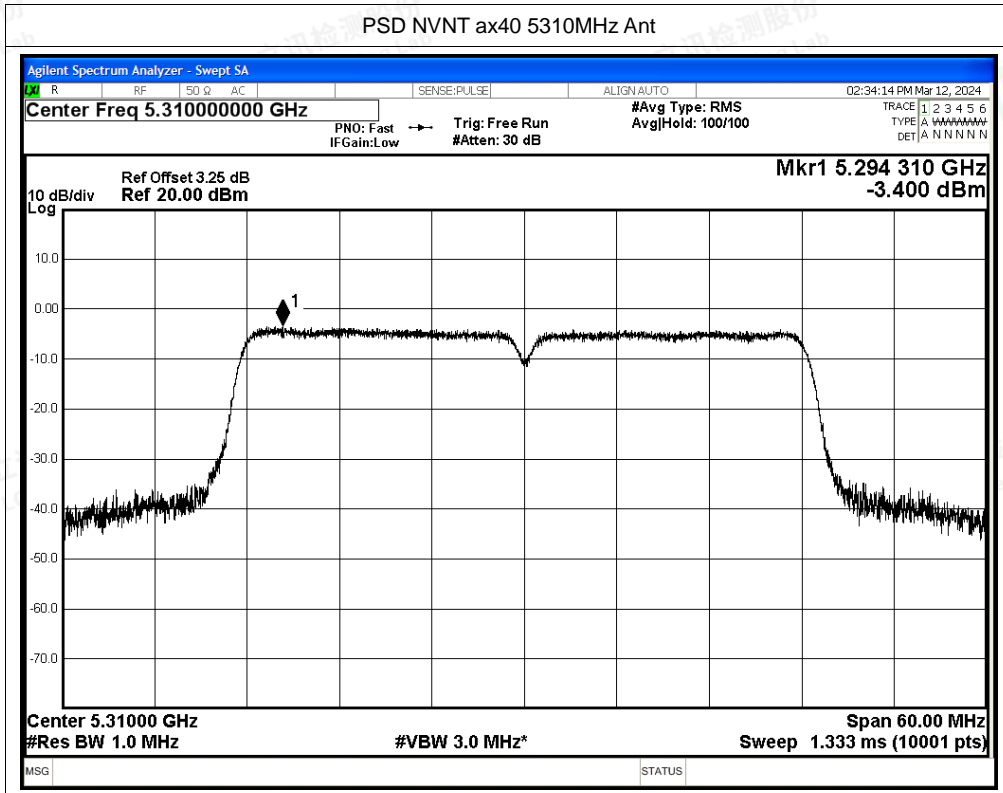



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant	4500	-50.55	2	-	46.68	Peak	68.2	Pass
NVNT	a	5260	Ant	4500	-59.35	2	0.12	38	Average	54	Pass
NVNT	a	5260	Ant	4787.82	-46.13	2	-	51.1	Peak	68.2	Pass
NVNT	a	5260	Ant	4787.04	-54.98	2	0.12	42.37	Average	54	Pass
NVNT	a	5260	Ant	5150	-47.46	2	-	49.77	Peak	68.2	Pass
NVNT	a	5260	Ant	5150	-56.35	2	0.12	41	Average	54	Pass
NVNT	a	5320	Ant	5350	-37.27	2	-	59.96	Peak	68.2	Pass
NVNT	a	5320	Ant	5350	-49.62	2	0.12	47.73	Average	54	Pass
NVNT	a	5320	Ant	5352	-35	2	-	62.23	Peak	68.2	Pass
NVNT	a	5320	Ant	5460	-50.88	2	-	46.35	Peak	68.2	Pass
NVNT	a	5320	Ant	5460	-57.5	2	0.12	39.85	Average	54	Pass
NVNT	n20	5260	Ant	4500	-50.12	2	-	47.11	Peak	68.2	Pass
NVNT	n20	5260	Ant	4500	-59.18	2	0.15	38.2	Average	54	Pass
NVNT	n20	5260	Ant	4789.38	-46.29	2	-	50.94	Peak	68.2	Pass
NVNT	n20	5260	Ant	4772.22	-55.35	2	0.15	42.03	Average	54	Pass
NVNT	n20	5260	Ant	5150	-47.97	2	-	49.26	Peak	68.2	Pass
NVNT	n20	5260	Ant	5150	-56.08	2	0.15	41.3	Average	54	Pass
NVNT	n20	5320	Ant	5350	-37.61	2	-	59.62	Peak	68.2	Pass
NVNT	n20	5320	Ant	5350	-47.93	2	0.15	49.45	Average	54	Pass
NVNT	n20	5320	Ant	5352.4	-35.43	2	-	61.8	Peak	68.2	Pass
NVNT	n20	5320	Ant	5460	-50.32	2	-	46.91	Peak	68.2	Pass
NVNT	n20	5320	Ant	5460	-57.37	2	0.15	40.01	Average	54	Pass
NVNT	n40	5270	Ant	4500	-50.09	2	-	47.14	Peak	68.2	Pass
NVNT	n40	5270	Ant	4500	-59.2	2	0.29	38.32	Average	54	Pass
NVNT	n40	5270	Ant	4806.99	-44.38	2	-	52.85	Peak	68.2	Pass
NVNT	n40	5270	Ant	4806.99	-52.62	2	0.29	44.9	Average	54	Pass
NVNT	n40	5270	Ant	5150	-47.7	2	-	49.53	Peak	68.2	Pass
NVNT	n40	5270	Ant	5150	-57.17	2	0.29	40.35	Average	54	Pass
NVNT	n40	5310	Ant	5350	-34.95	2	-	62.28	Peak	68.2	Pass
NVNT	n40	5310	Ant	5350	-49.71	2	0.29	47.81	Average	54	Pass
NVNT	n40	5310	Ant	5350.8	-49.11	2	0.29	48.41	Average	54	Pass
NVNT	n40	5310	Ant	5460	-50.15	2	-	47.08	Peak	68.2	Pass
NVNT	n40	5310	Ant	5460	-58.45	2	0.29	39.07	Average	54	Pass
NVNT	ac20	5260	Ant	4500	-51.88	2	-	45.35	Peak	68.2	Pass
NVNT	ac20	5260	Ant	4500	-59.42	2	0.15	37.96	Average	54	Pass
NVNT	ac20	5260	Ant	5149.74	-45.77	2	-	51.46	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



NVNT	ac20	5260	Ant	4787.04	-54.79	2	0.15	42.59	Average	54	Pass
NVNT	ac20	5260	Ant	5150	-45.77	2	-	51.46	Peak	68.2	Pass
NVNT	ac20	5260	Ant	5150	-56.32	2	0.15	41.06	Average	54	Pass
NVNT	ac20	5320	Ant	5350	-36.55	2	-	60.68	Peak	68.2	Pass
NVNT	ac20	5320	Ant	5350	-49.72	2	0.15	47.66	Average	54	Pass
NVNT	ac20	5320	Ant	5351.4	-32.01	2	-	65.22	Peak	68.2	Pass
NVNT	ac20	5320	Ant	5350.2	-47.57	2	0.15	49.81	Average	54	Pass
NVNT	ac20	5320	Ant	5460	-51.1	2	-	46.13	Peak	68.2	Pass
NVNT	ac20	5320	Ant	5460	-58.31	2	0.15	39.07	Average	54	Pass
NVNT	ac40	5270	Ant	4500	-51.15	2	-	46.08	Peak	68.2	Pass
NVNT	ac40	5270	Ant	4500	-58.95	2	0.29	38.57	Average	54	Pass
NVNT	ac40	5270	Ant	4807.8	-43.49	2	-	53.74	Peak	68.2	Pass
NVNT	ac40	5270	Ant	4806.99	-52.58	2	0.29	44.94	Average	54	Pass
NVNT	ac40	5270	Ant	5150	-48.29	2	-	48.94	Peak	68.2	Pass
NVNT	ac40	5270	Ant	5150	-56.9	2	0.29	40.62	Average	54	Pass
NVNT	ac40	5310	Ant	5350	-37.39	2	-	59.84	Peak	68.2	Pass
NVNT	ac40	5310	Ant	5350	-49.82	2	0.29	47.7	Average	54	Pass
NVNT	ac40	5310	Ant	5351	-31.15	2	-	66.08	Peak	68.2	Pass
NVNT	ac40	5310	Ant	5350.2	-49.27	2	0.29	48.25	Average	54	Pass
NVNT	ac40	5310	Ant	5460	-49.61	2	-	47.62	Peak	68.2	Pass
NVNT	ac40	5310	Ant	5460	-58.07	2	0.29	39.45	Average	54	Pass
NVNT	ax20	5260	Ant	4500	-50.9	2	-	46.33	Peak	68.2	Pass
NVNT	ax20	5260	Ant	4500	-59.29	2	0.12	38.06	Average	54	Pass
NVNT	ax20	5260	Ant	4787.82	-45.55	2	-	51.68	Peak	68.2	Pass
NVNT	ax20	5260	Ant	4773	-55.13	2	0.12	42.22	Average	54	Pass
NVNT	ax20	5260	Ant	5150	-49.04	2	-	48.19	Peak	68.2	Pass
NVNT	ax20	5260	Ant	5150	-56.6	2	0.12	40.75	Average	54	Pass
NVNT	ax20	5320	Ant	5350	-37.51	2	-	59.72	Peak	68.2	Pass
NVNT	ax20	5320	Ant	5350	-48.49	2	0.12	48.86	Average	54	Pass
NVNT	ax20	5320	Ant	5351	-35.53	2	-	61.7	Peak	68.2	Pass
NVNT	ax20	5320	Ant	5350.6	-48.39	2	0.12	48.96	Average	54	Pass
NVNT	ax20	5320	Ant	5460	-50.19	2	-	47.04	Peak	68.2	Pass
NVNT	ax20	5320	Ant	5460	-58	2	0.12	39.35	Average	54	Pass
NVNT	ax40	5270	Ant	4500	-51.05	2	-	46.18	Peak	68.2	Pass
NVNT	ax40	5270	Ant	4500	-59.4	2	0.24	38.07	Average	54	Pass
NVNT	ax40	5270	Ant	4806.99	-44.69	2	-	52.54	Peak	68.2	Pass
NVNT	ax40	5270	Ant	4806.18	-54.15	2	0.24	43.32	Average	54	Pass
NVNT	ax40	5270	Ant	5150	-49.77	2	-	47.46	Peak	68.2	Pass
NVNT	ax40	5270	Ant	5150	-57.05	2	0.24	40.42	Average	54	Pass
NVNT	ax40	5310	Ant	5350	-35.38	2	-	61.85	Peak	68.2	Pass
NVNT	ax40	5310	Ant	5350	-49.29	2	0.23	48.17	Average	54	Pass





NVNT	ax40	5310	Ant	5351.8	-48.57	2	0.23	48.89	Average	54	Pass
NVNT	ax40	5310	Ant	5460	-49.47	2	-	47.76	Peak	68.2	Pass
NVNT	ax40	5310	Ant	5460	-58.15	2	0.23	39.31	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5260MHz Ant Peak

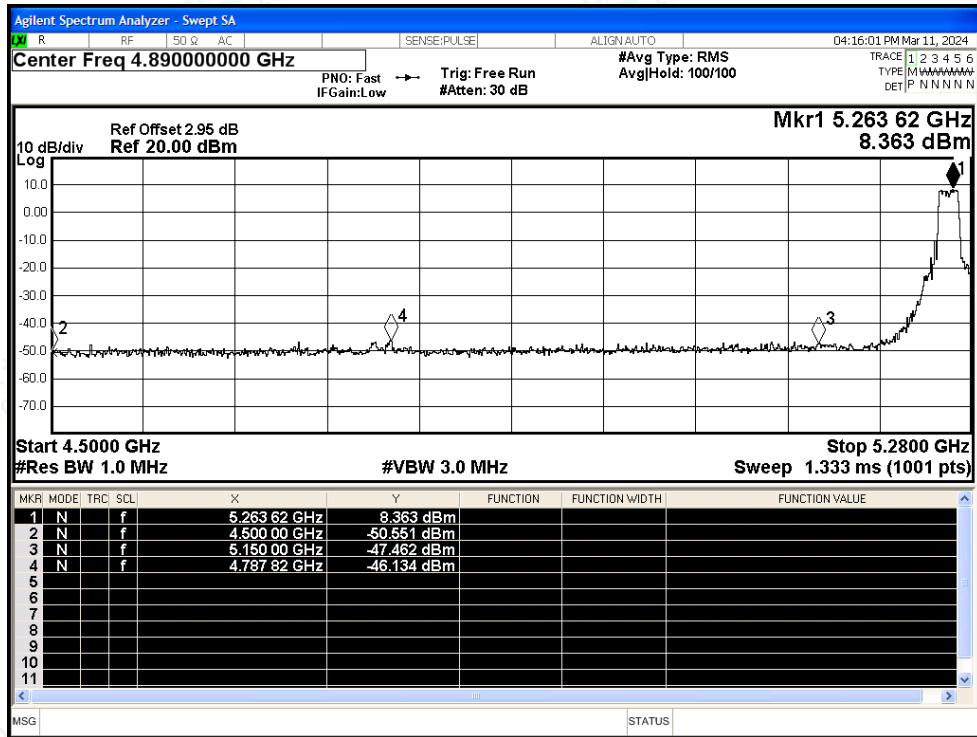


Restrict Band NVNT a 5260MHz Ant Average

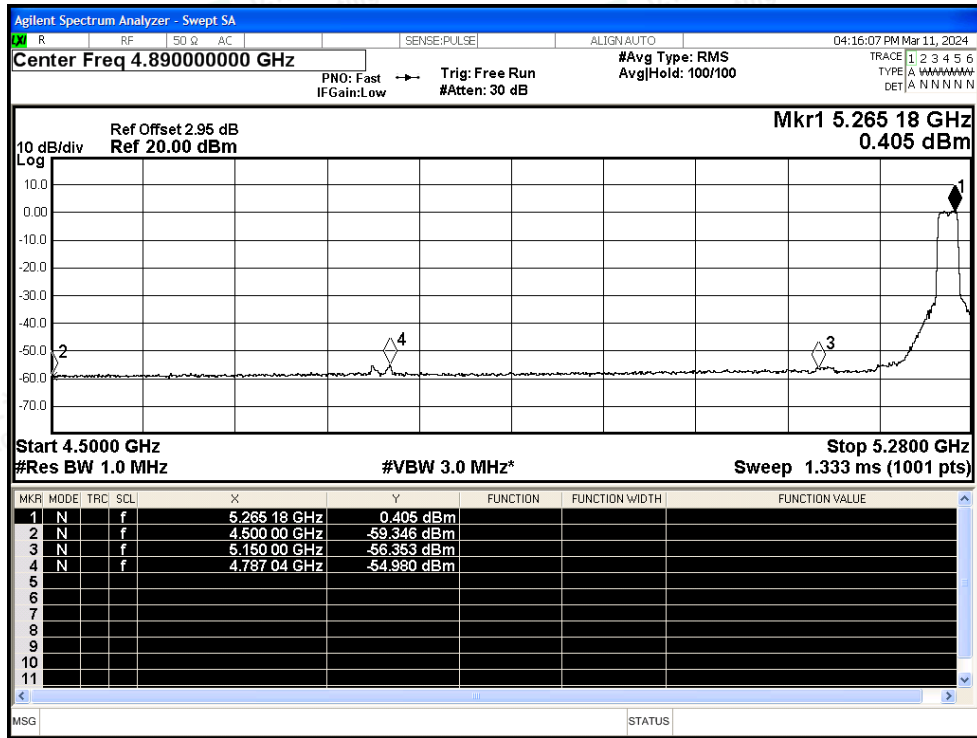




Restrict Band NVNT a 5320MHz Ant Peak

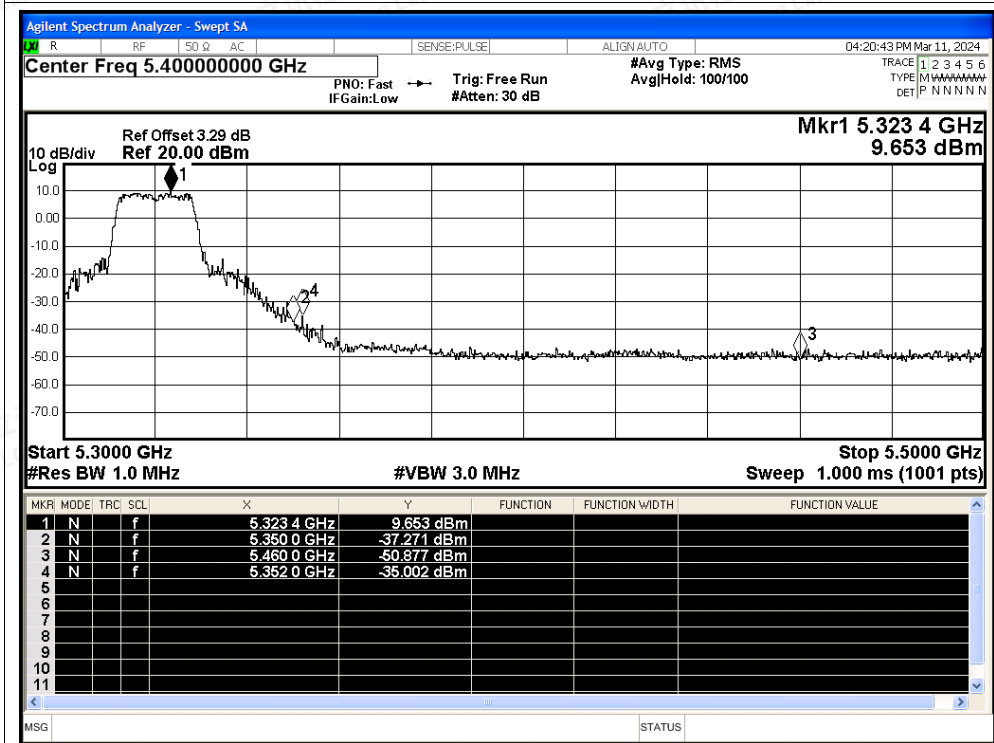


Restrict Band NVNT a 5320MHz Ant Average

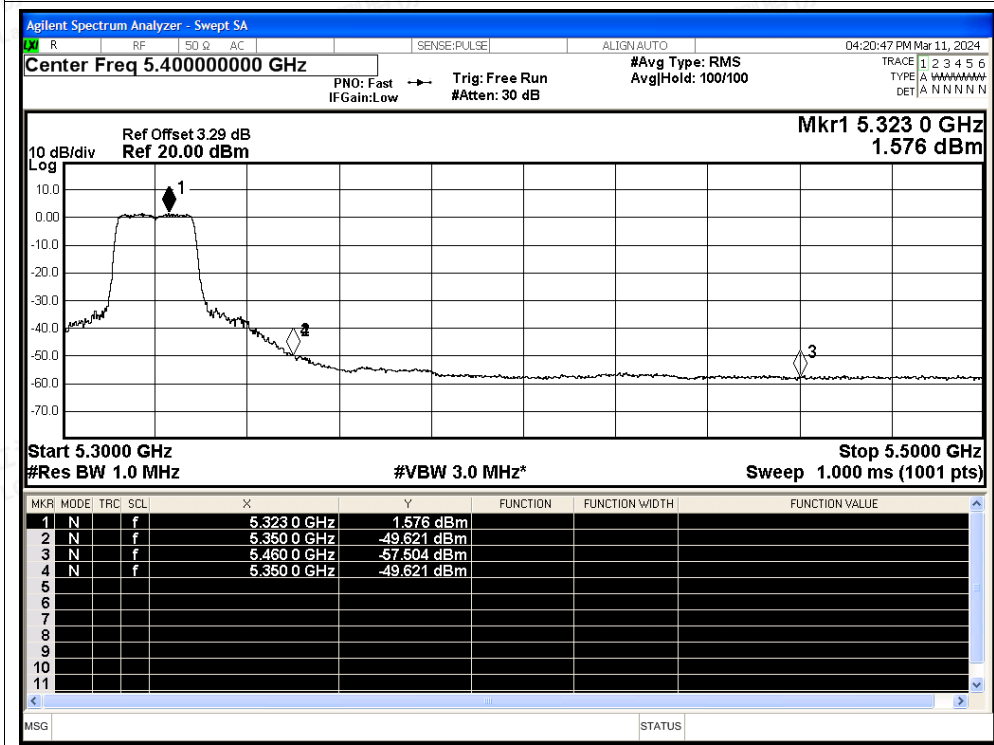




Restrict Band NVNT n20 5260MHz Ant Peak

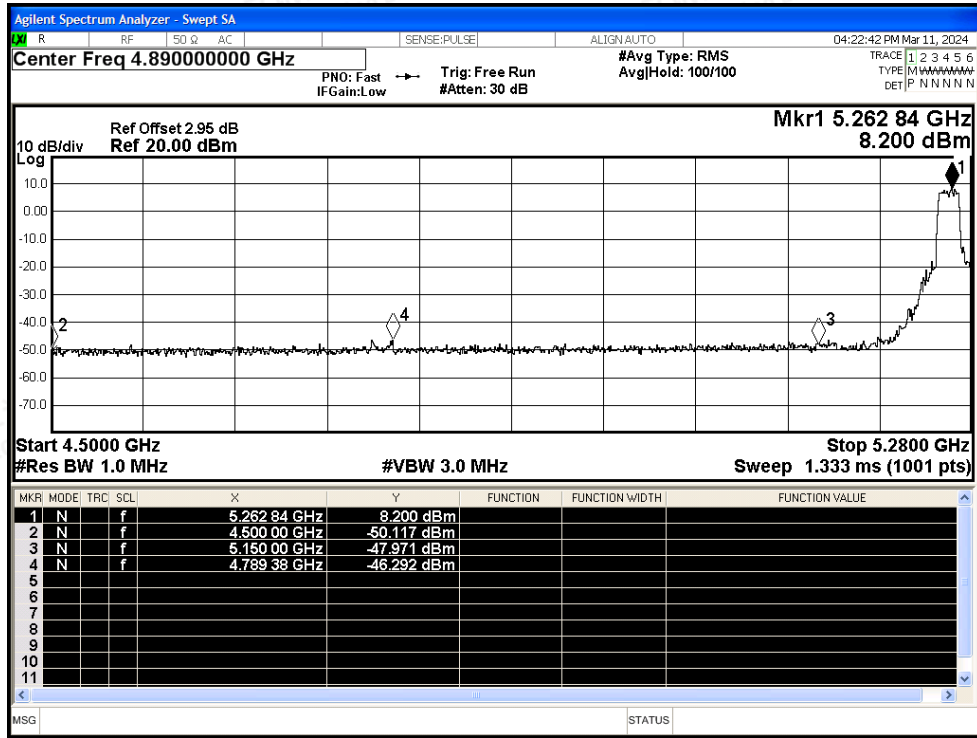


Restrict Band NVNT n20 5260MHz Ant Average

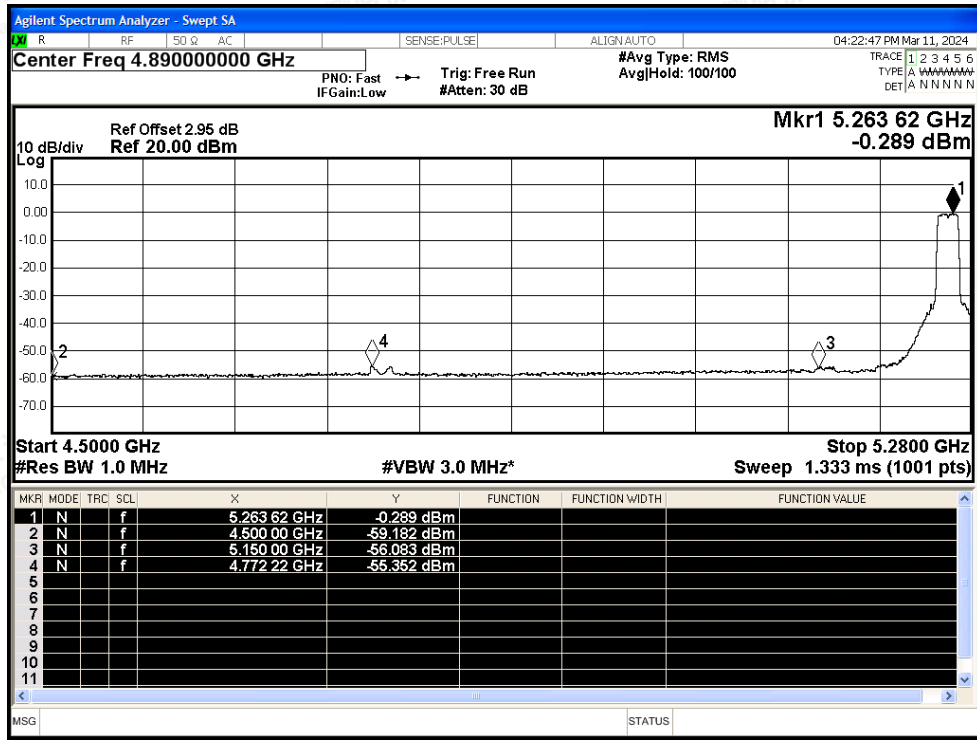




Restrict Band NVNT n20 5320MHz Ant Peak

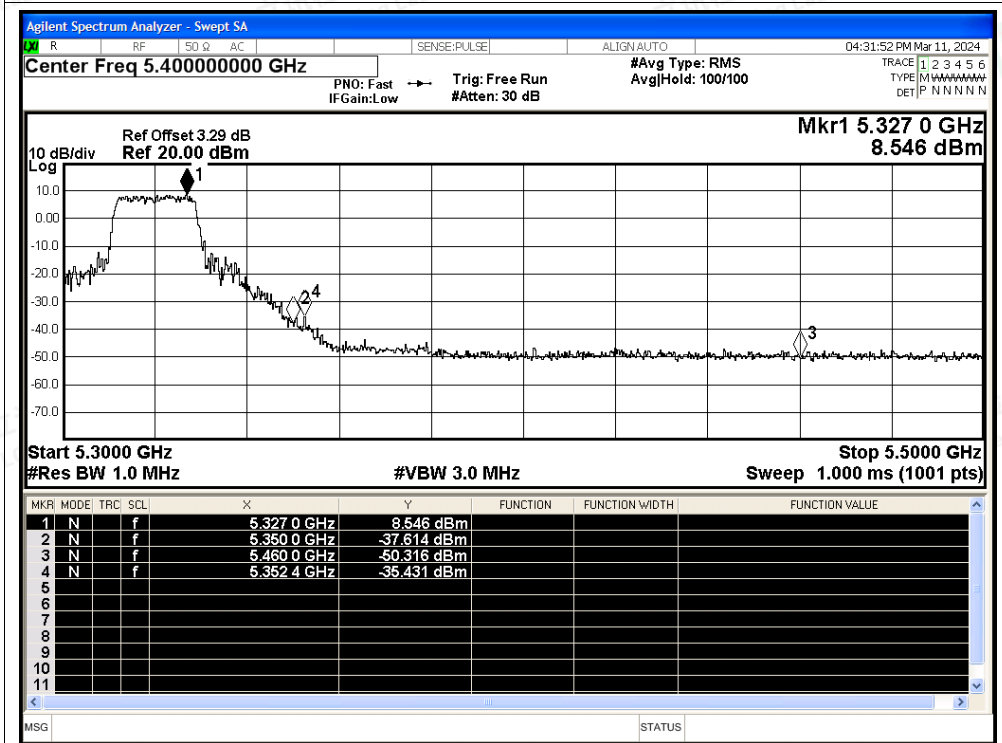


Restrict Band NVNT n20 5320MHz Ant Average

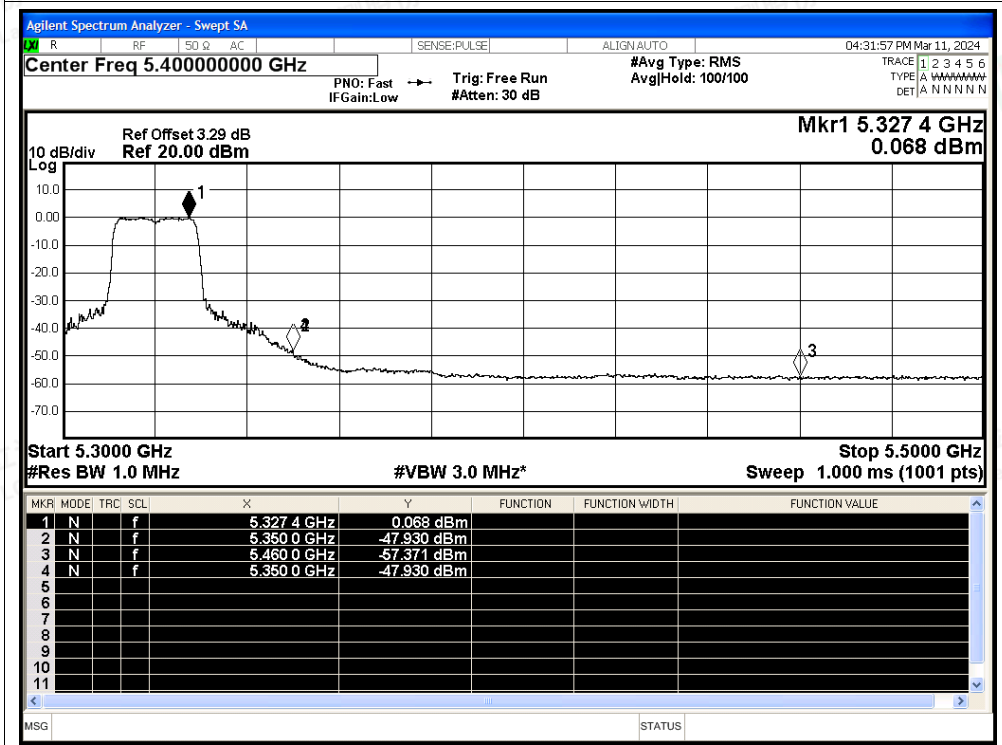




Restrict Band NVNT n40 5270MHz Ant Peak

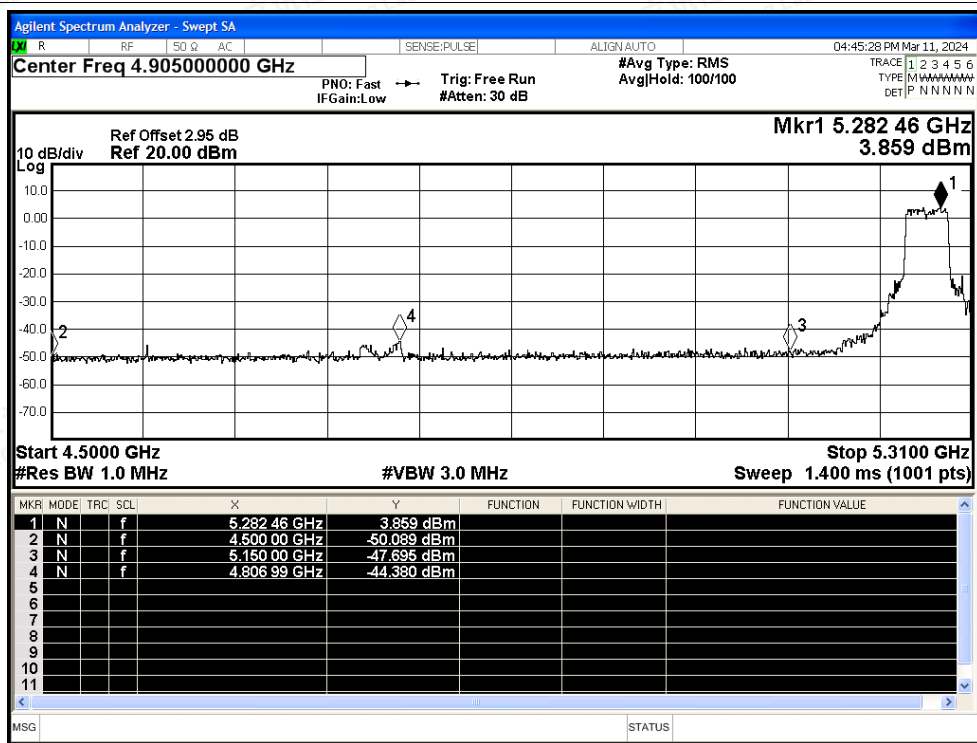


Restrict Band NVNT n40 5270MHz Ant Average

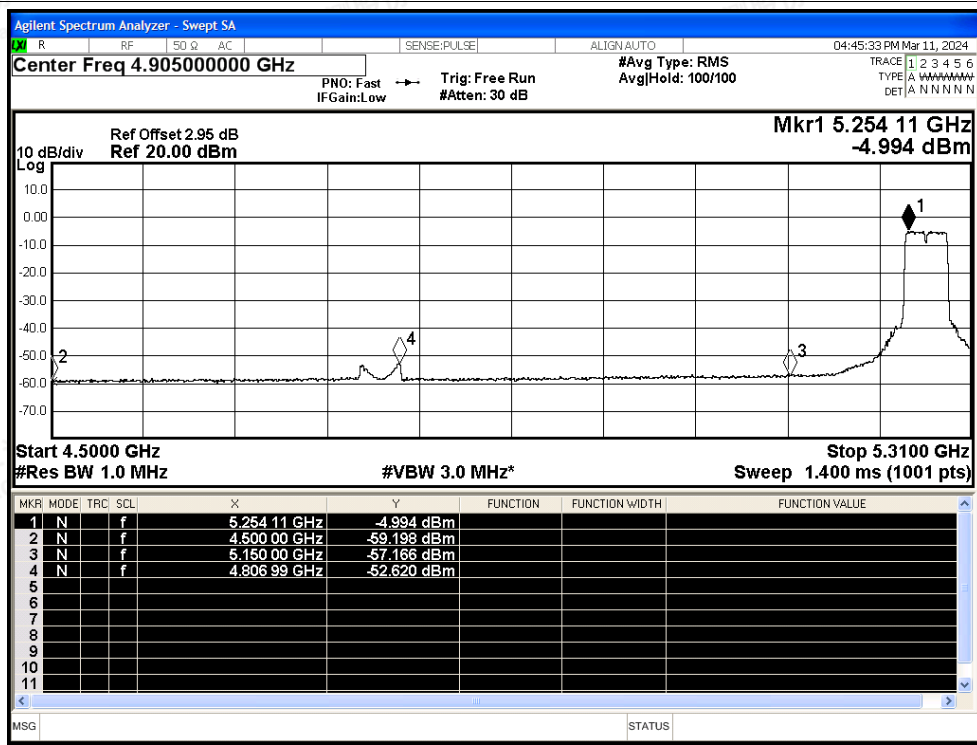




Restrict Band NVNT n40 5310MHz Ant Peak

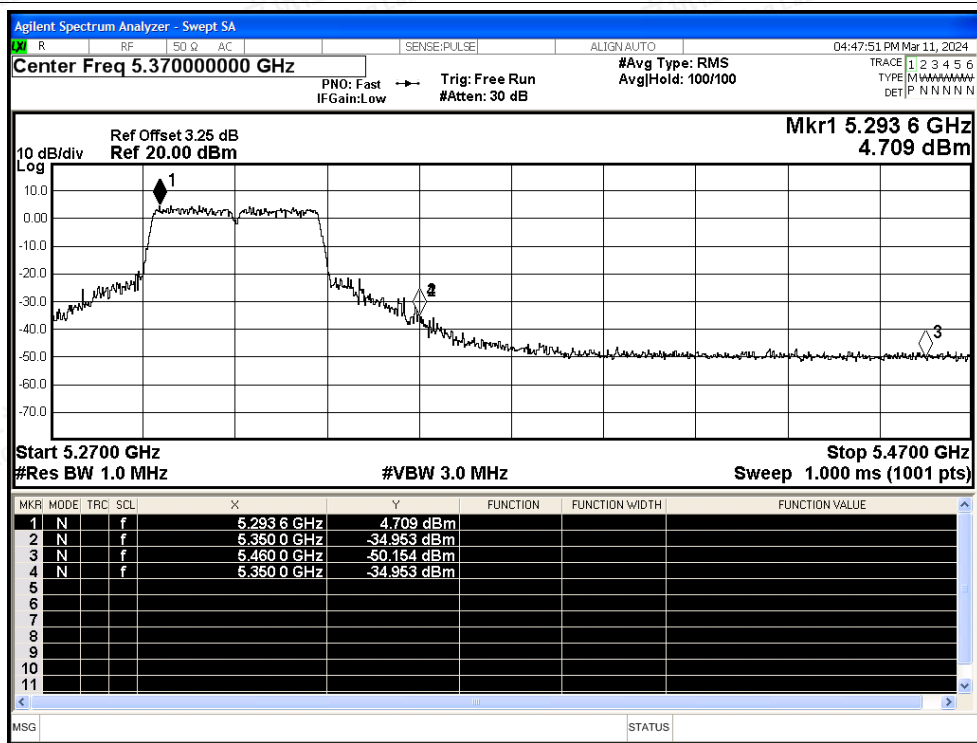


Restrict Band NVNT n40 5310MHz Ant Average

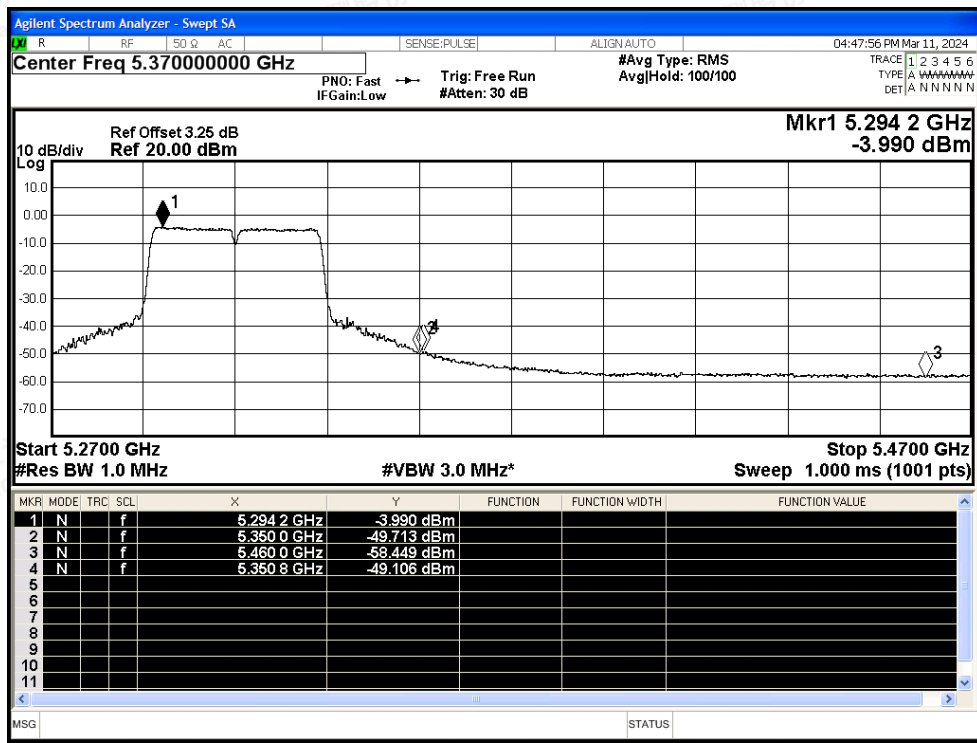




Restrict Band NVNT ac20 5260MHz Ant Peak

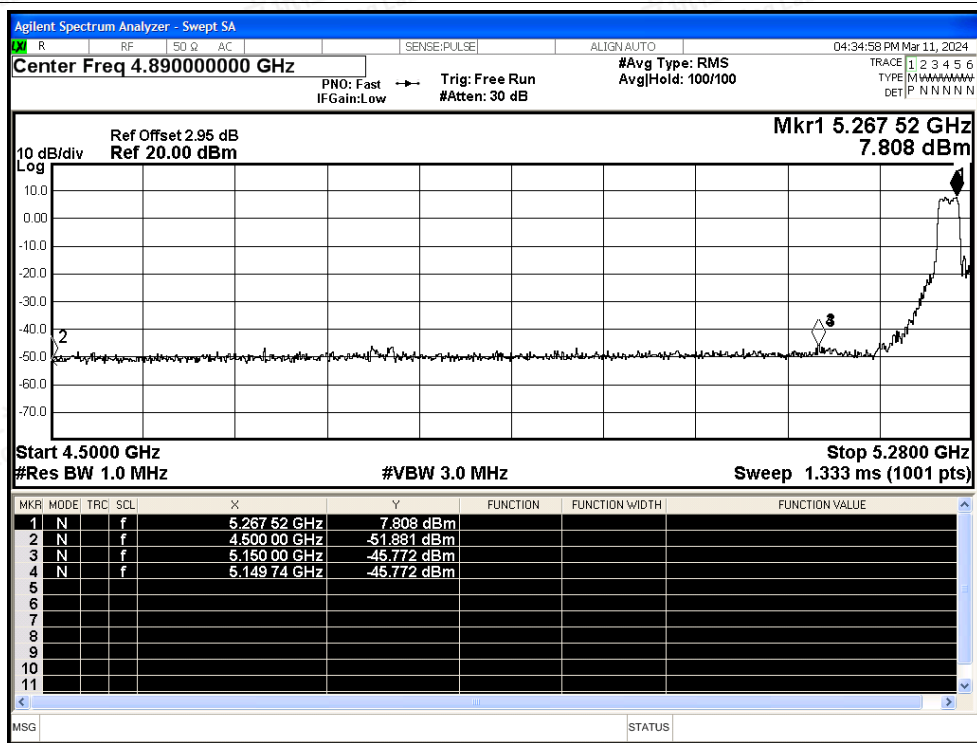


Restrict Band NVNT ac20 5260MHz Ant Average

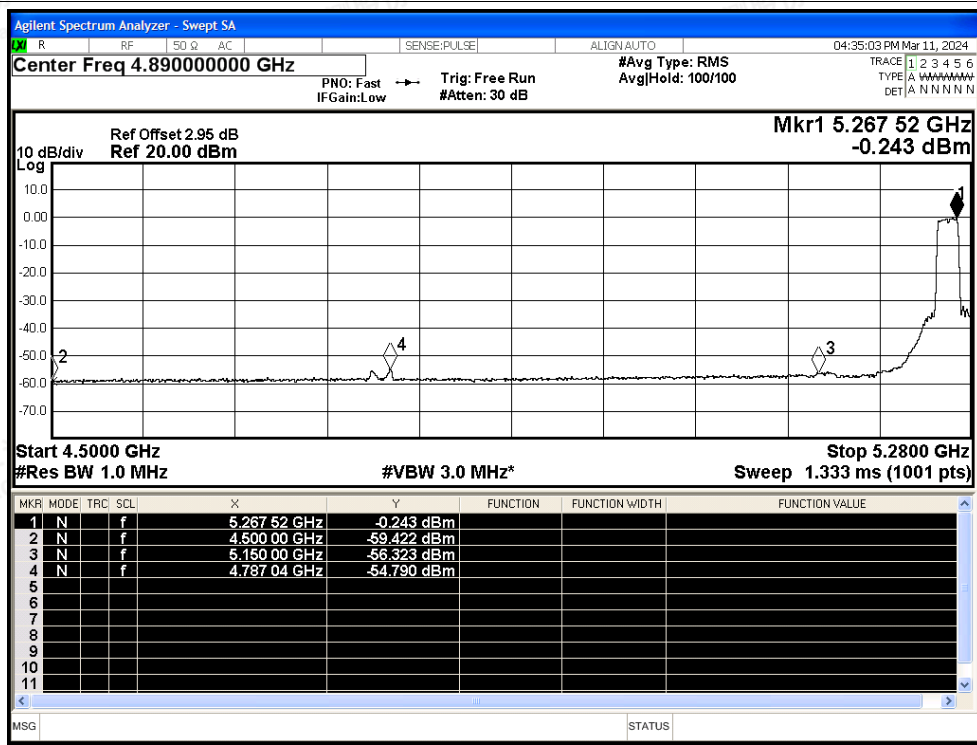




Restrict Band NVNT ac20 5320MHz Ant Peak

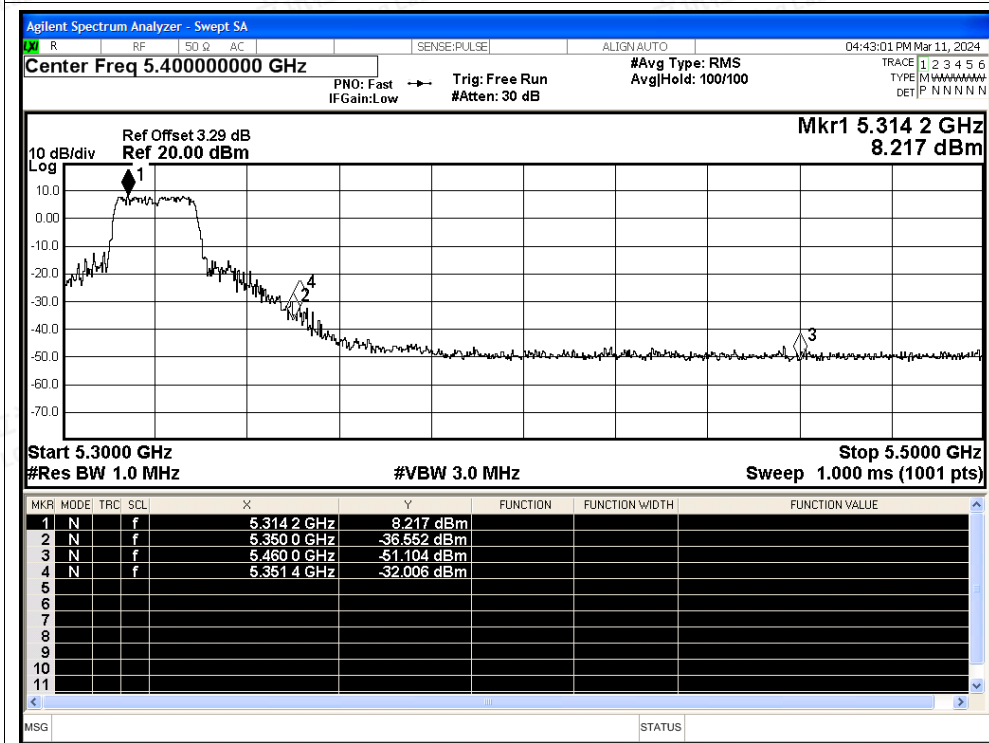


Restrict Band NVNT ac20 5320MHz Ant Average

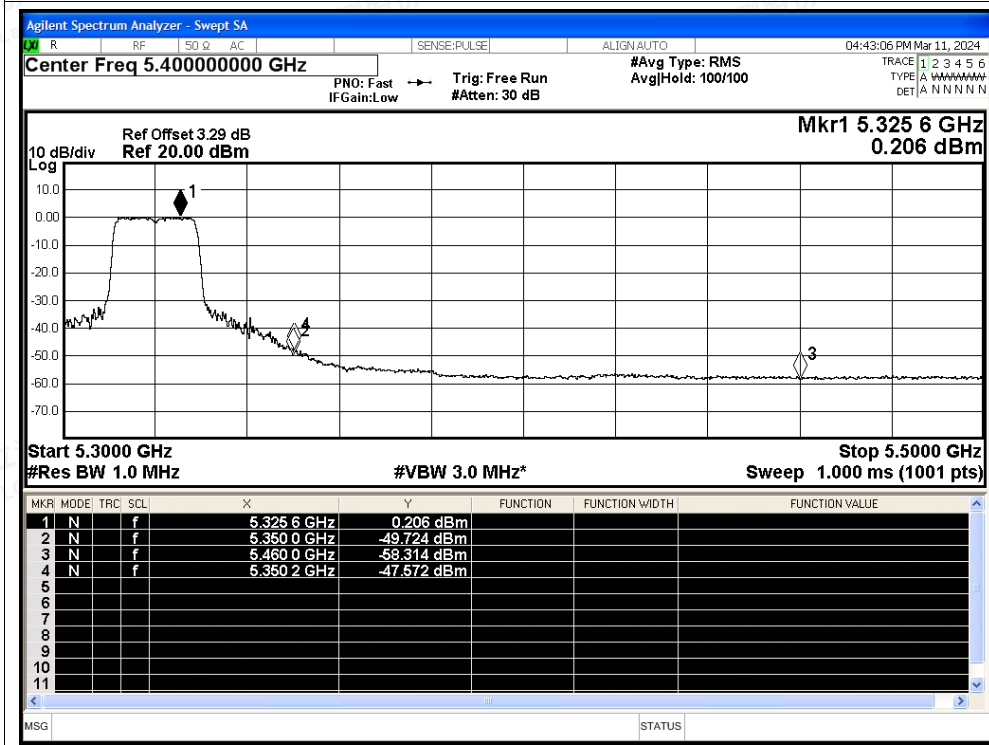




Restrict Band NVNT ac40 5270MHz Ant Peak

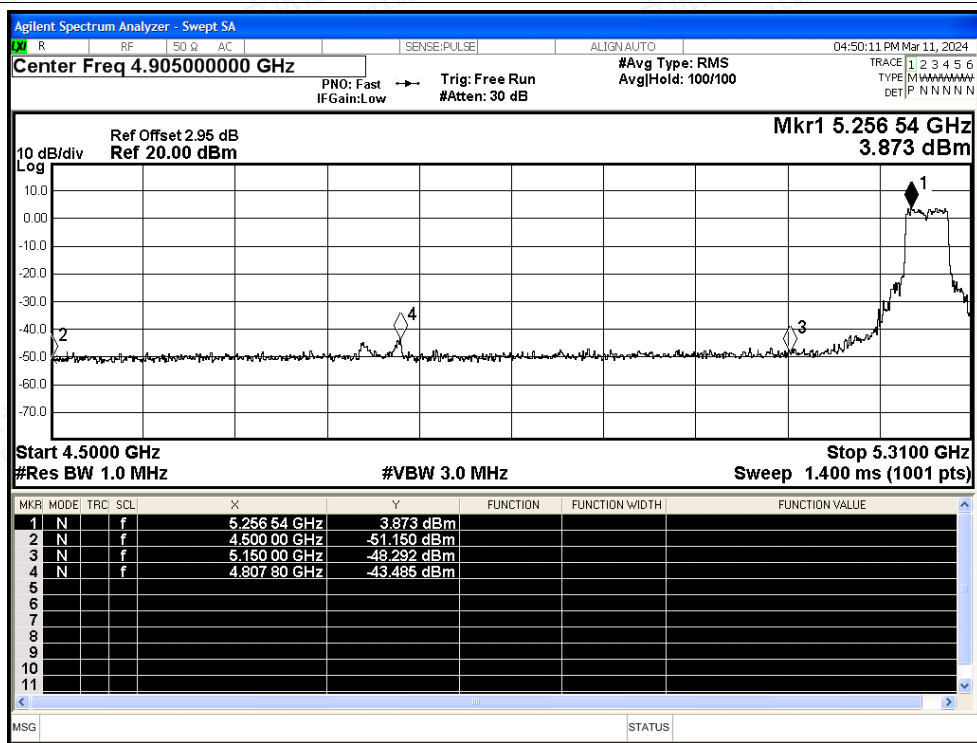


Restrict Band NVNT ac40 5270MHz Ant Average

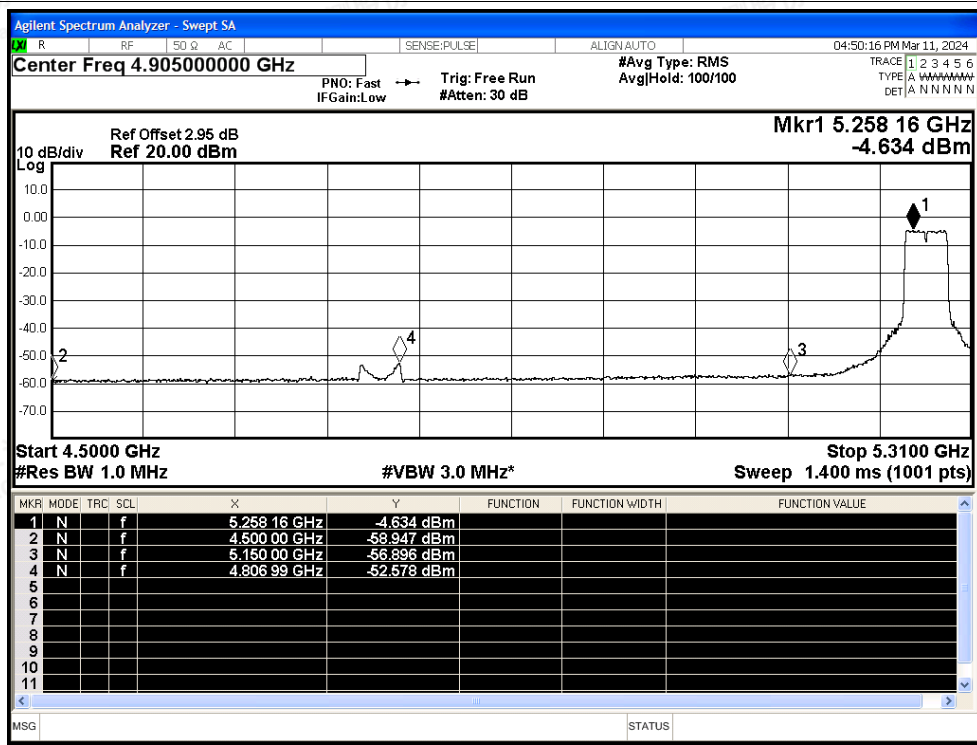




Restrict Band NVNT ac40 5310MHz Ant Peak

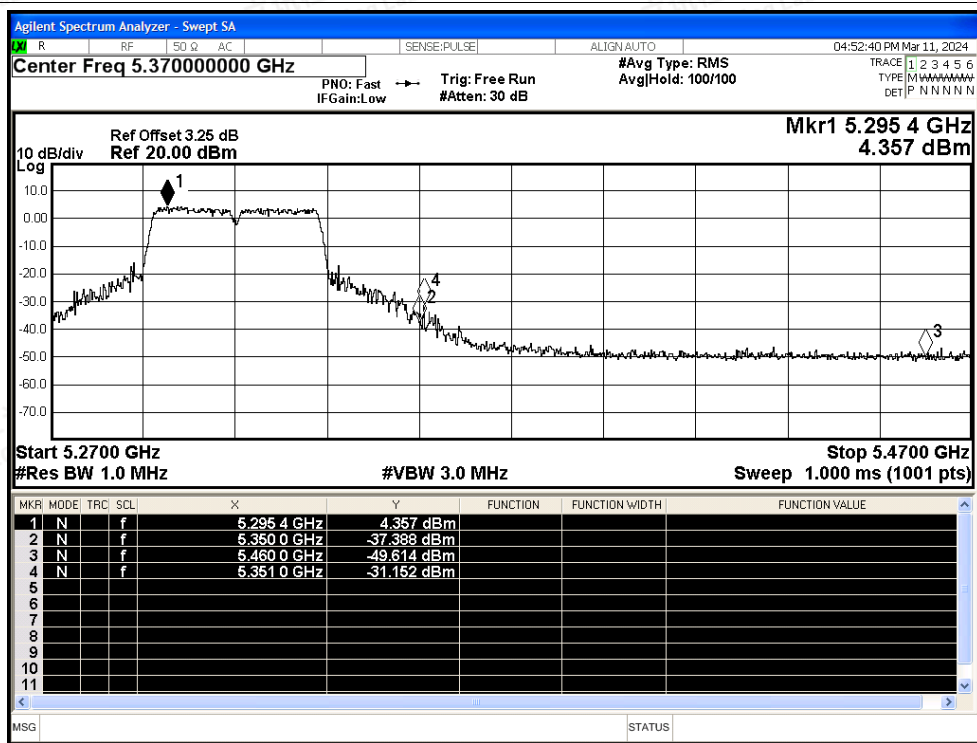


Restrict Band NVNT ac40 5310MHz Ant Average

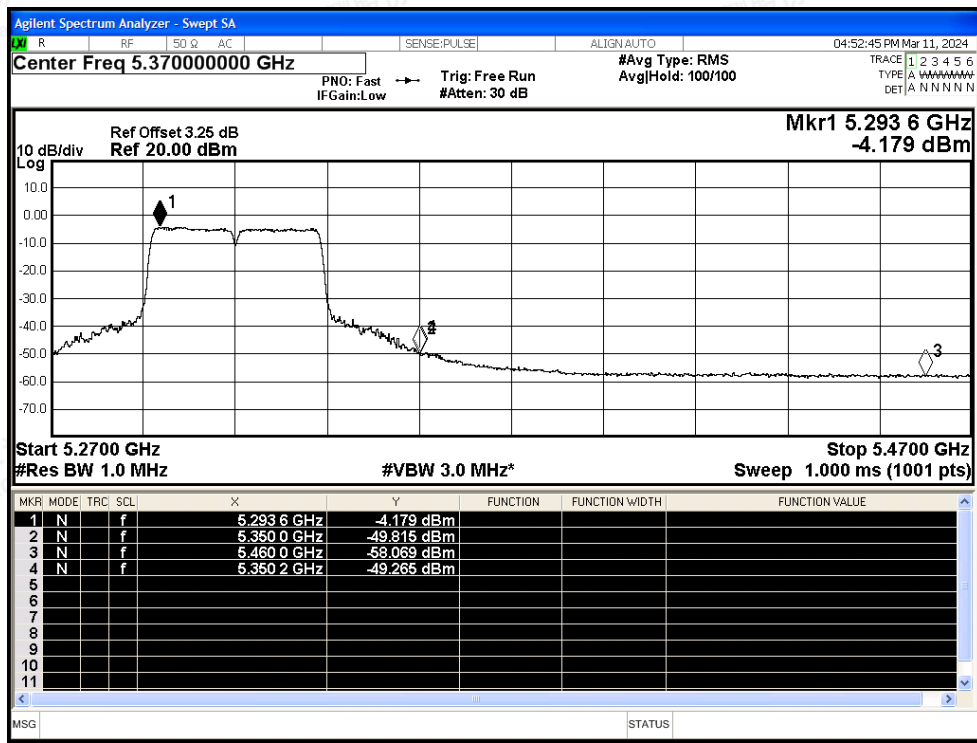




Test Graphs

Restrict Band NVNT ax20 5260MHz Ant Peak

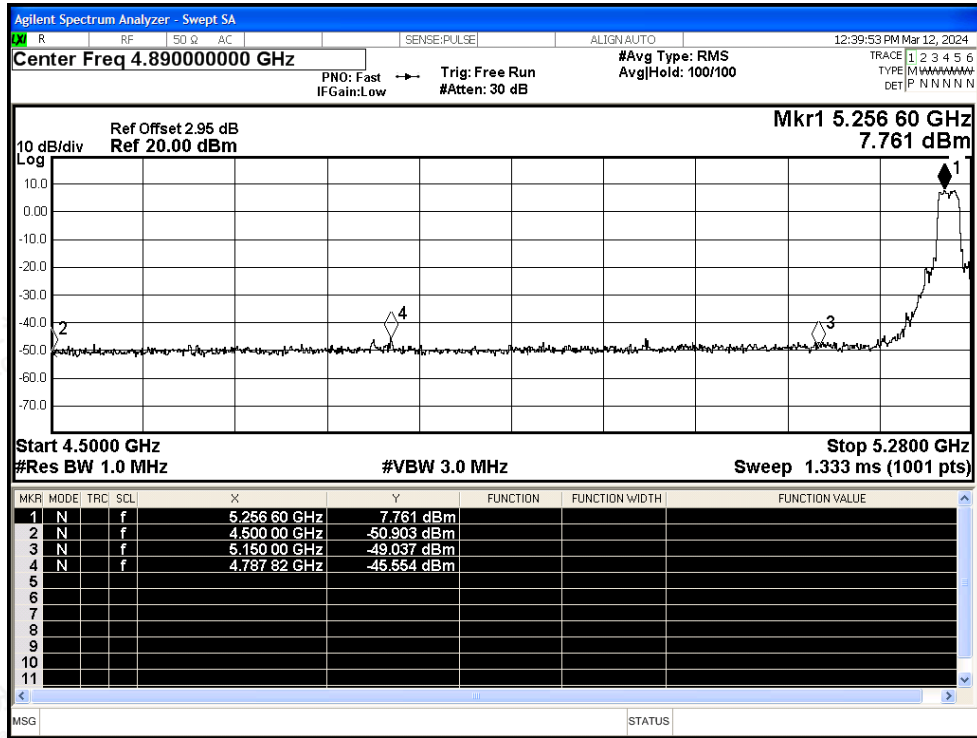


Restrict Band NVNT ax20 5260MHz Ant Average

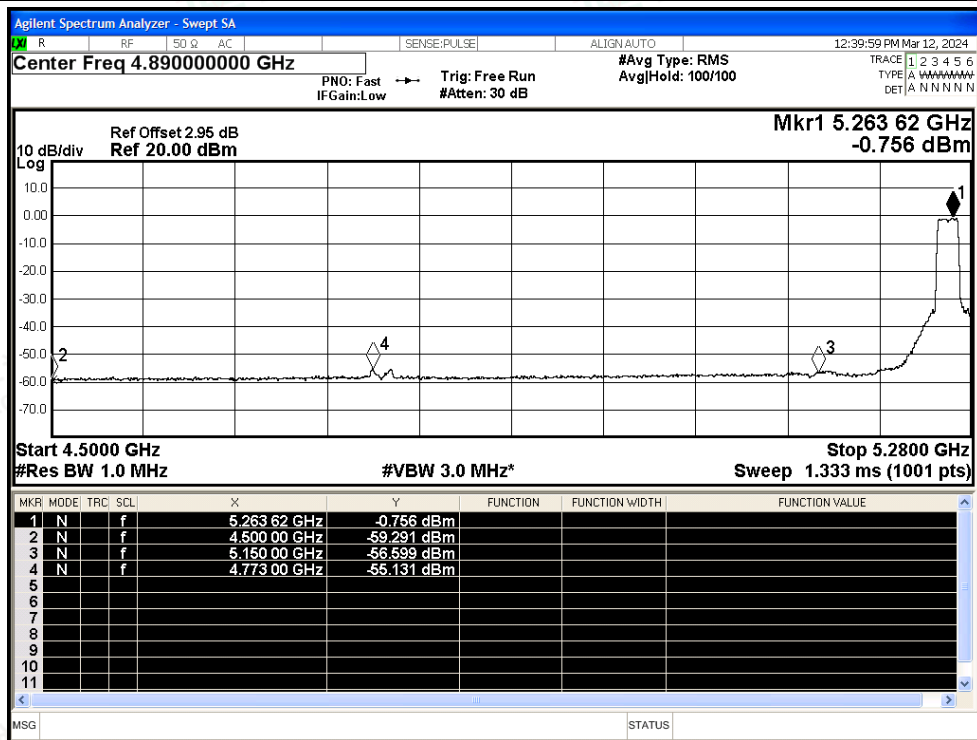




Restrict Band NVNT ax20 5320MHz Ant Peak

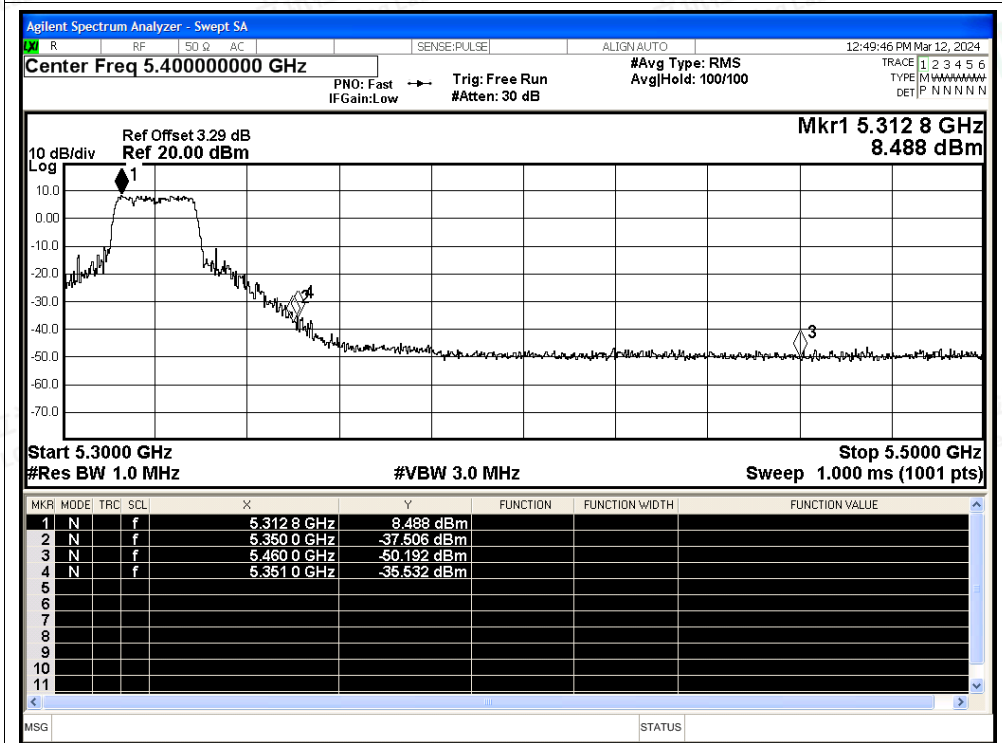


Restrict Band NVNT ax20 5320MHz Ant Average

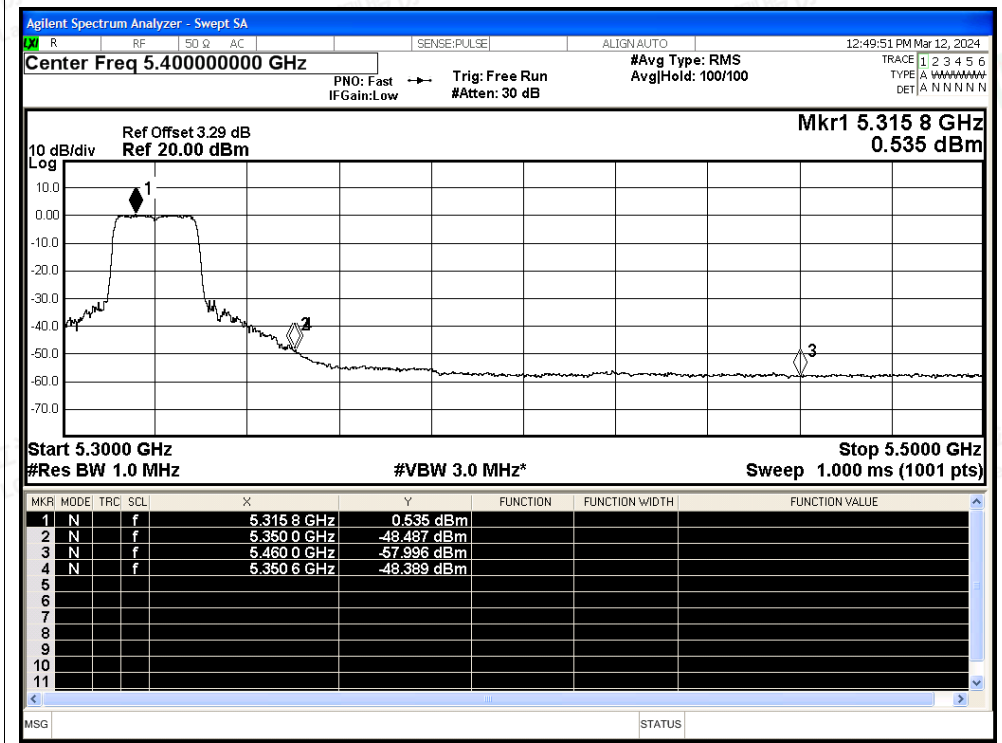




Restrict Band NVNT ax40 5270MHz Ant Peak

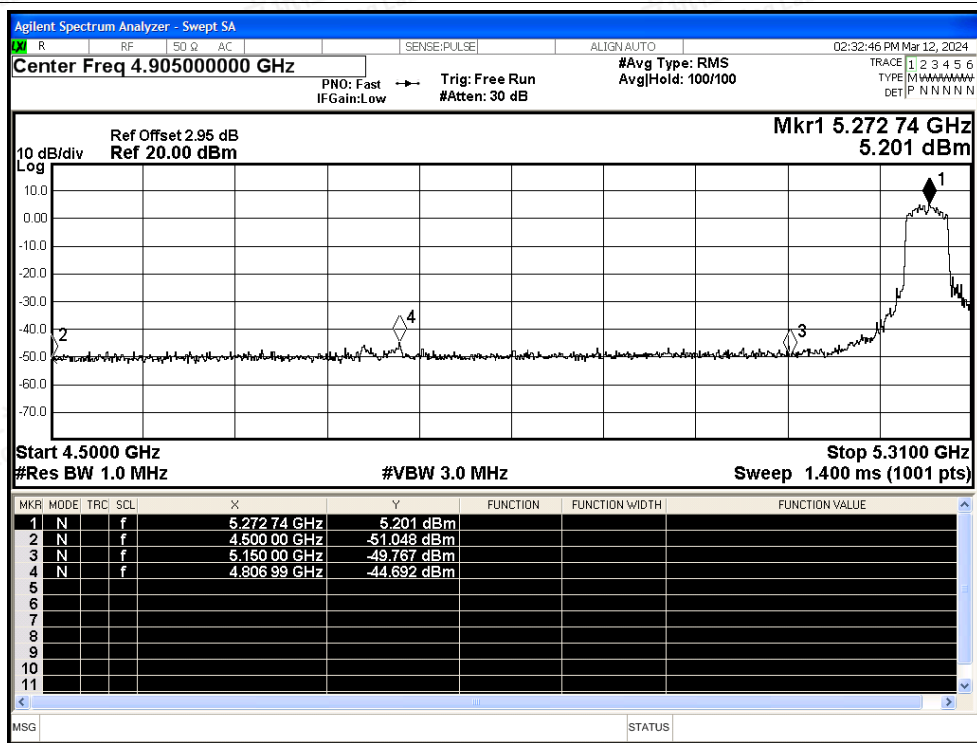


Restrict Band NVNT ax40 5270MHz Ant Average

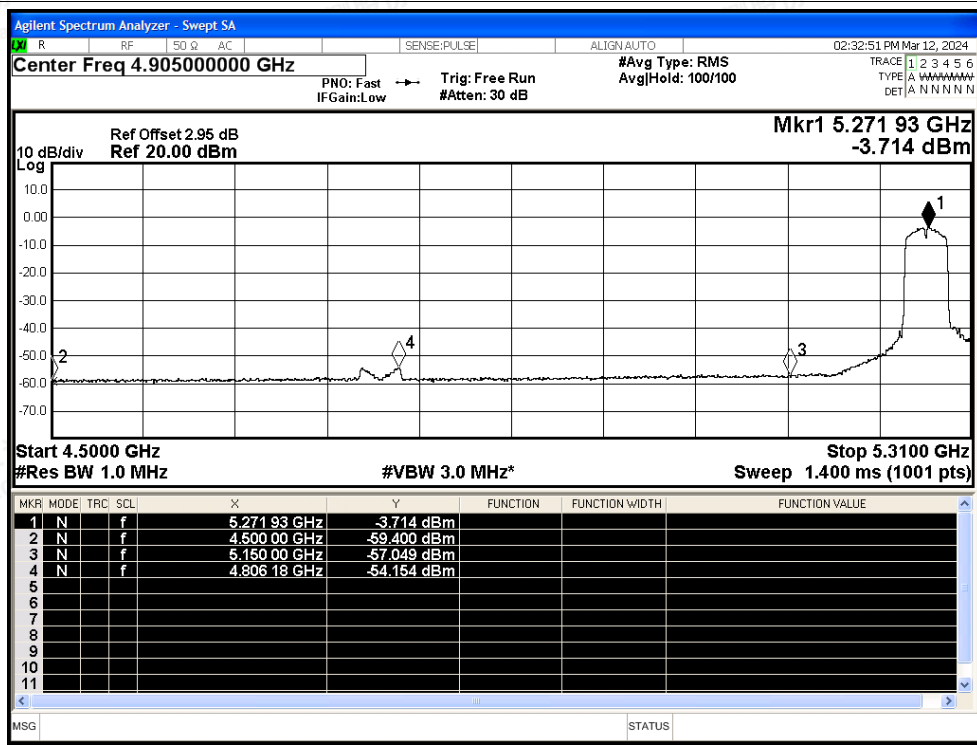




Restrict Band NVNT ax40 5310MHz Ant Peak

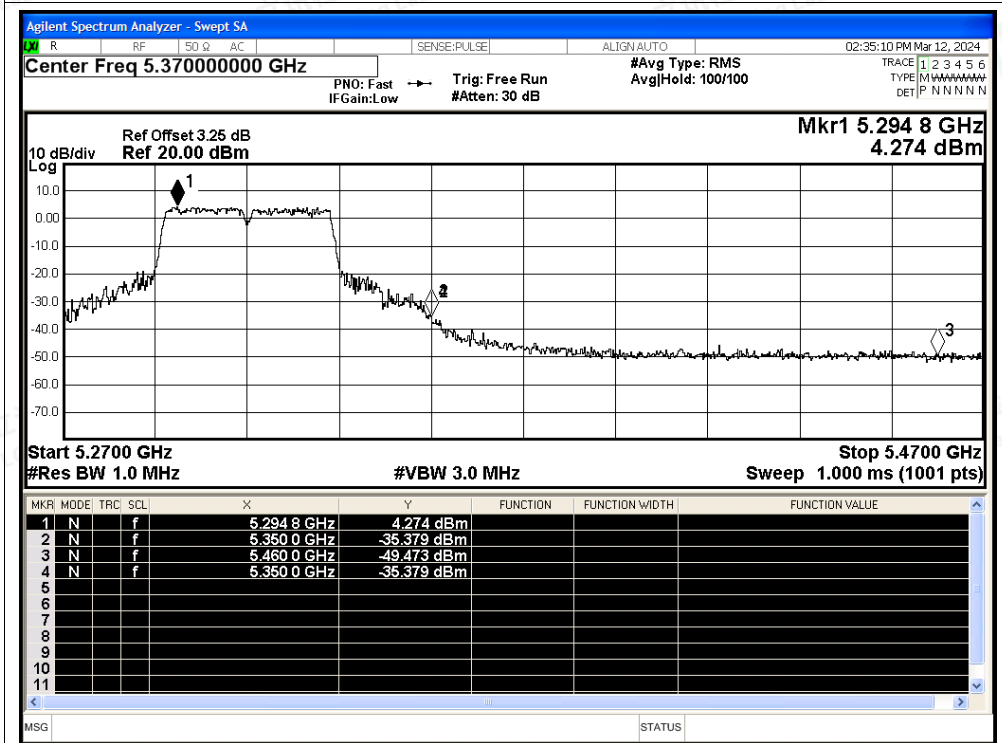

Restrict Band NVNT ax40 5310MHz Ant Average

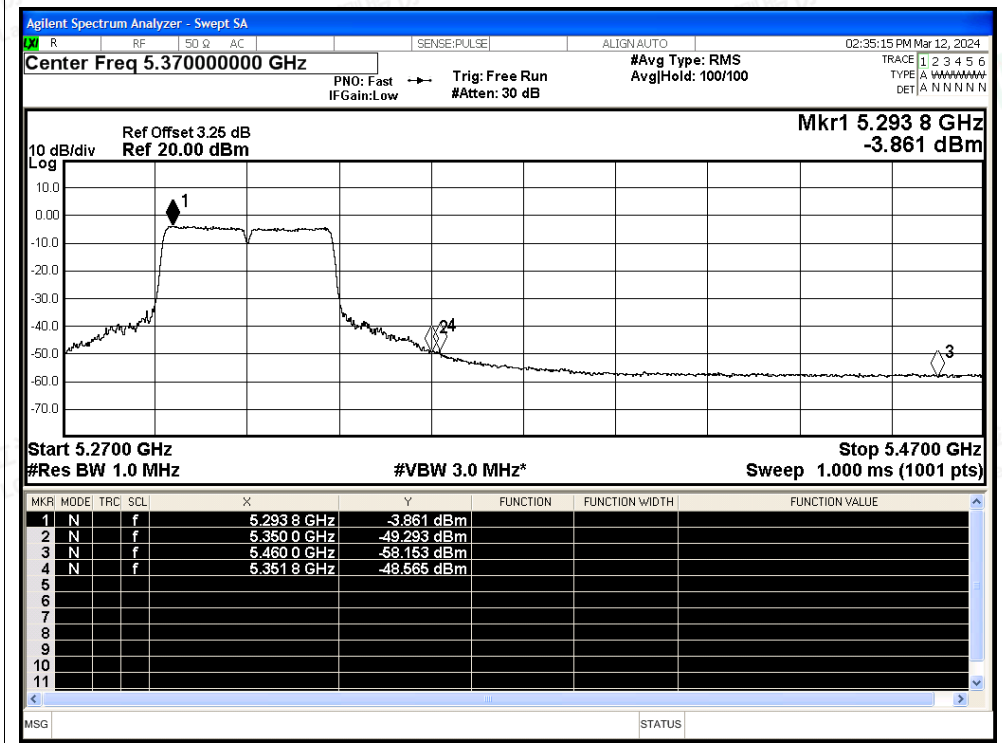



E.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5260	Ant	5260	0	0	25	Pass
NVNT	ac20	5300	Ant	5299.98	-20000	-3.77	25	Pass
NVNT	ac20	5320	Ant	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant	5270	0	0	25	Pass
NVNT	ac40	5310	Ant	5310	0	0	25	Pass
NVNT	ax20	5260	Ant	5260	0	0	25	Pass
NVNT	ax20	5300	Ant	5299.98	-20000	-3.77	25	Pass
NVNT	ax20	5320	Ant	5320	0	0	25	Pass
NVNT	ax40	5270	Ant	5269.96	-40000	-7.59	25	Pass
NVNT	ax40	5310	Ant	5309.96	-40000	-7.53	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Freq. Stability NVNT ac20 5260MHz Ant

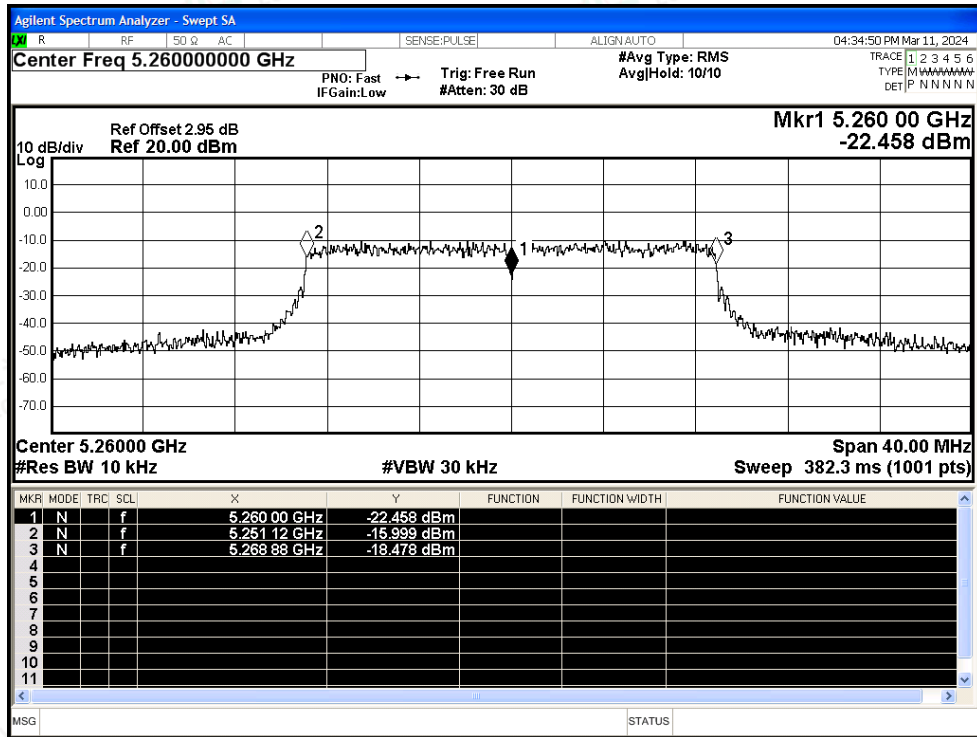


Freq. Stability NVNT ac20 5300MHz Ant

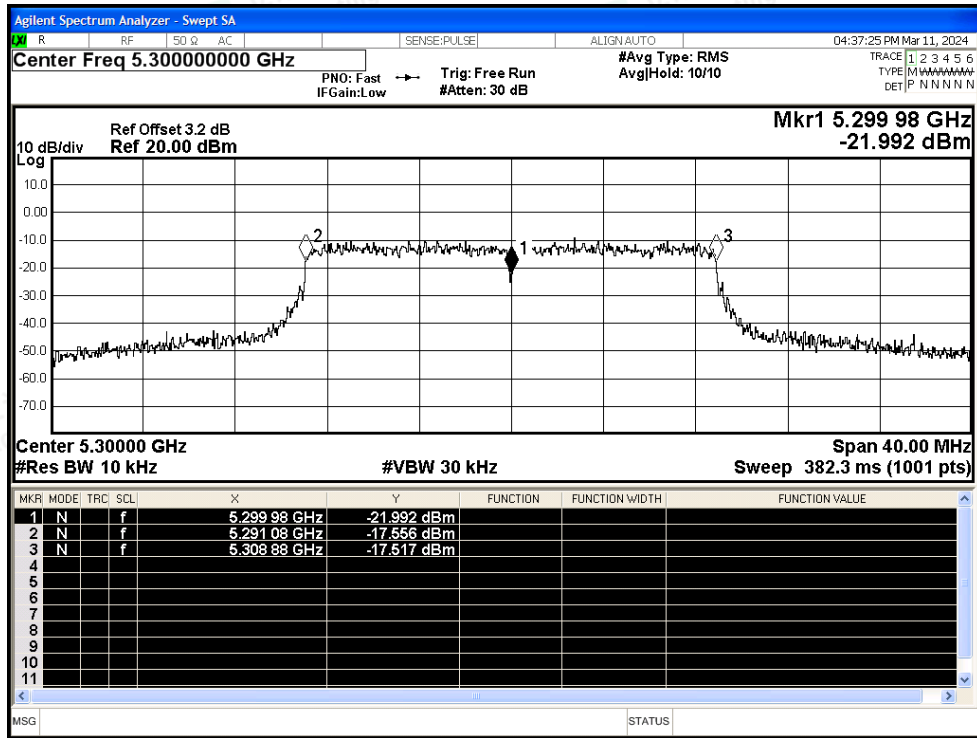




Freq. Stability NVNT ac20 5320MHz Ant

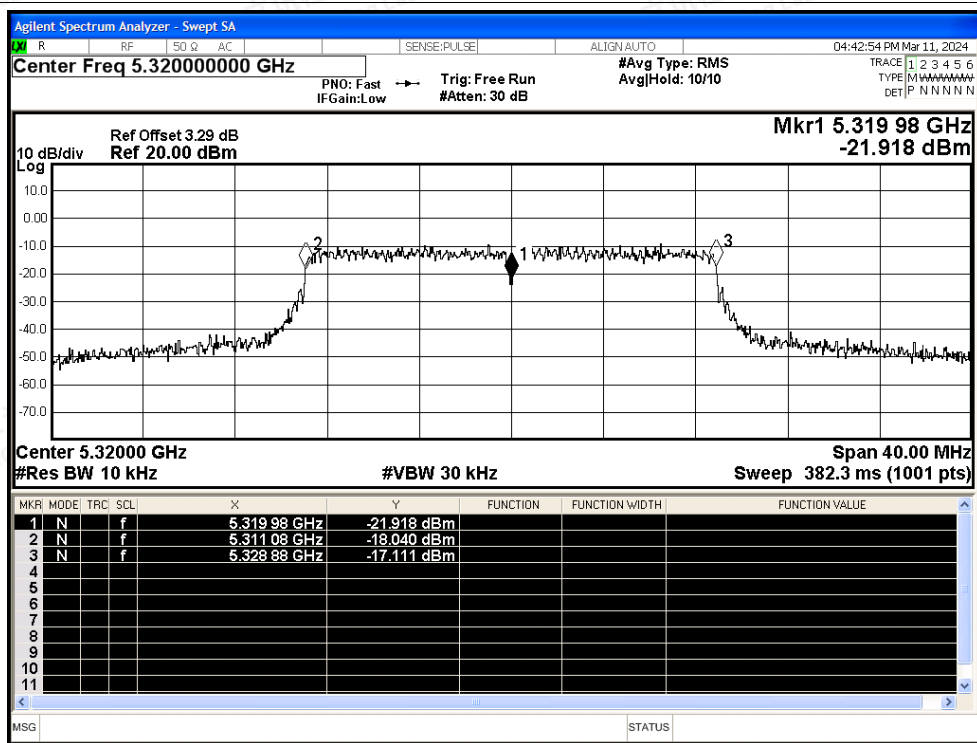


Freq. Stability NVNT ac40 5270MHz Ant

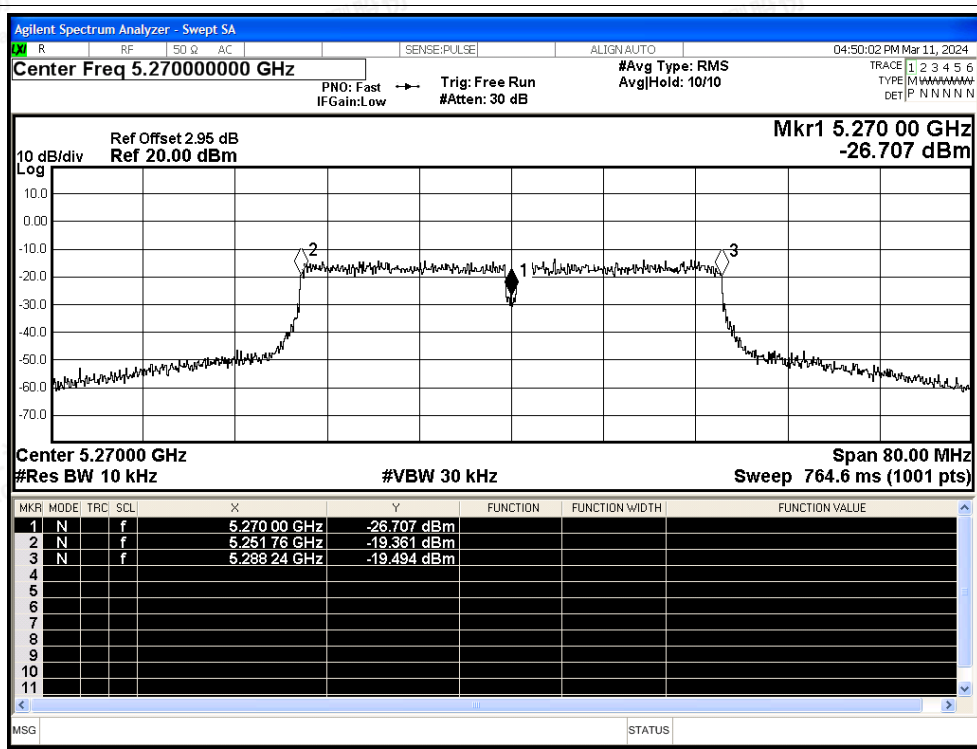




Freq. Stability NVNT ac40 5310MHz Ant

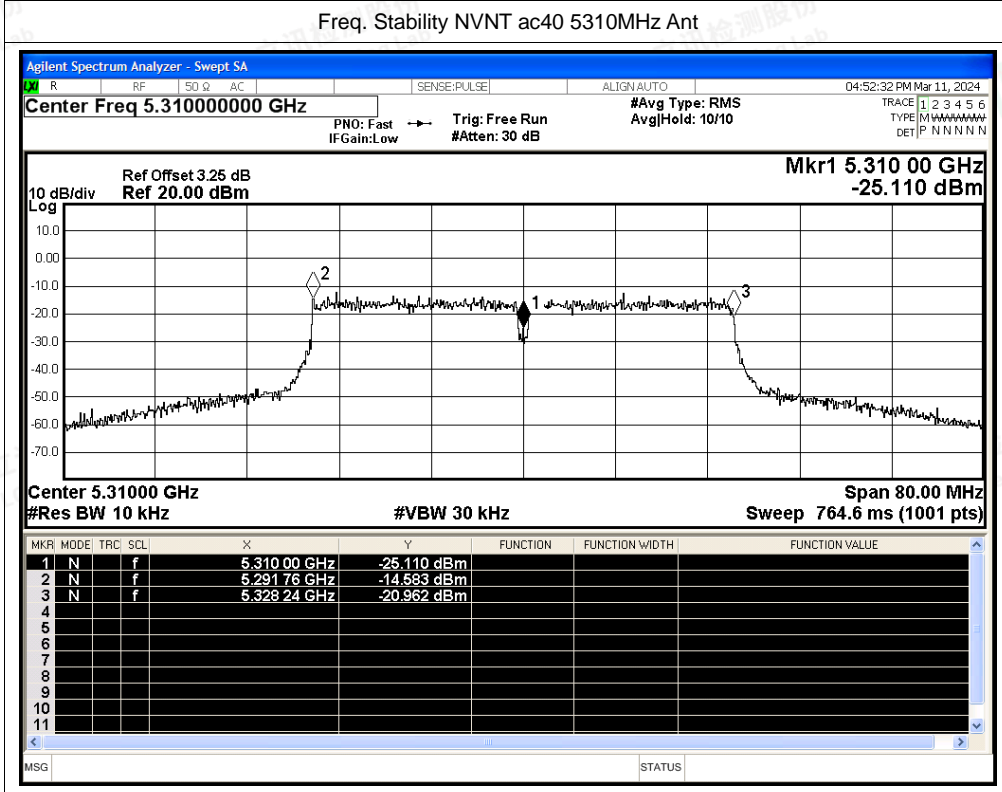




Test Graphs

Freq. Stability NVNT ax20 5260MHz Ant

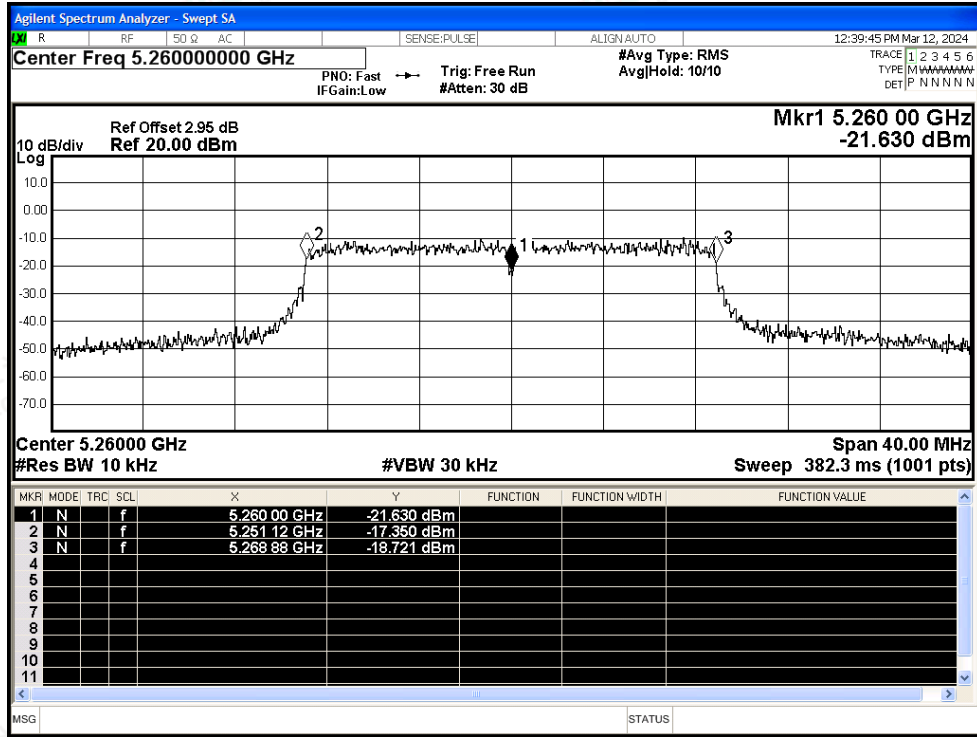


Freq. Stability NVNT ax20 5300MHz Ant

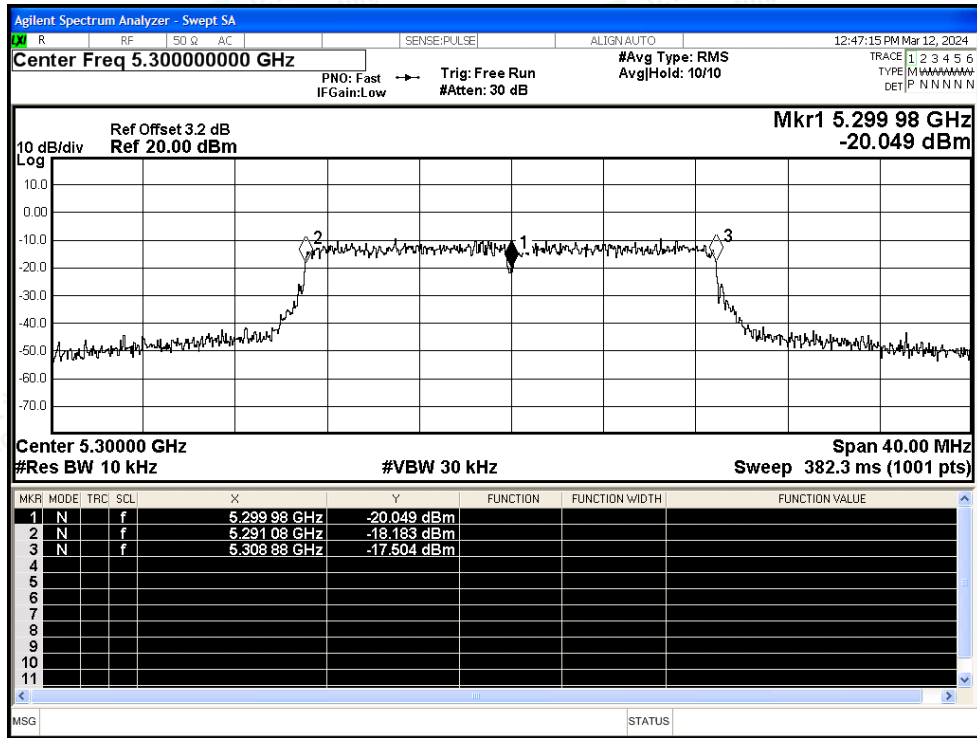




Freq. Stability NVNT ax20 5320MHz Ant

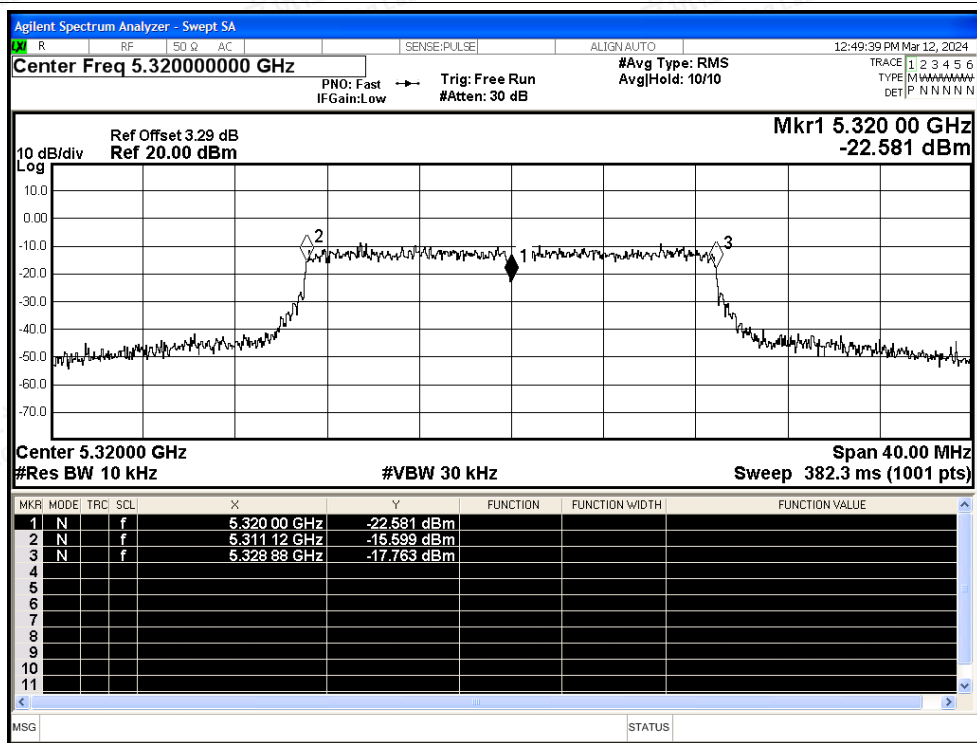


Freq. Stability NVNT ax40 5270MHz Ant

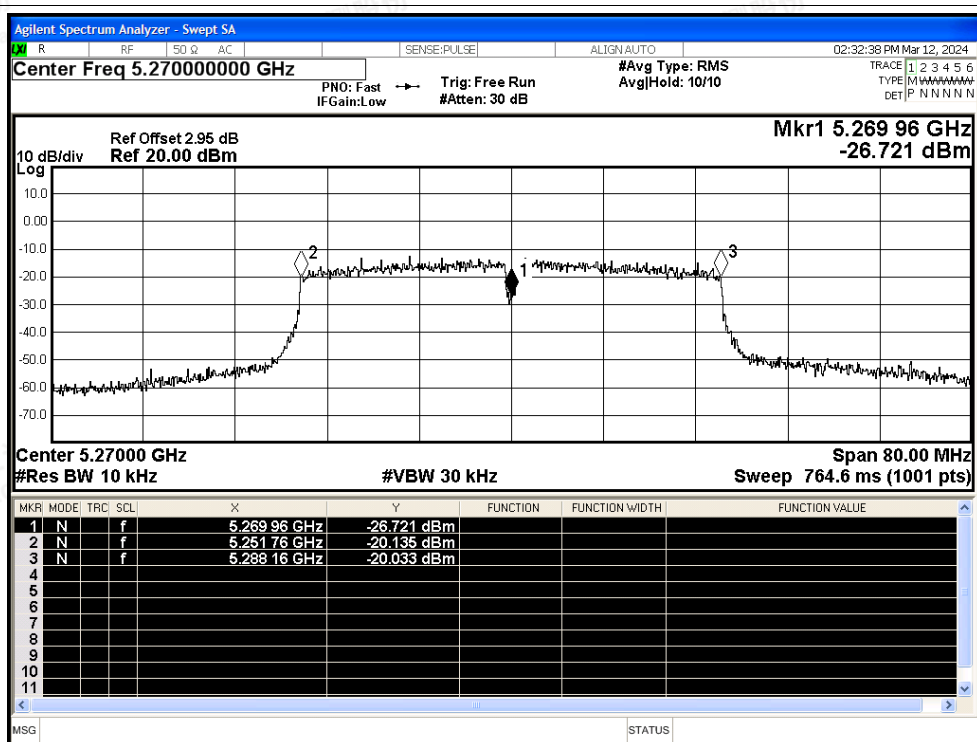



Freq. Stability NVNT ax40 5310MHz Ant

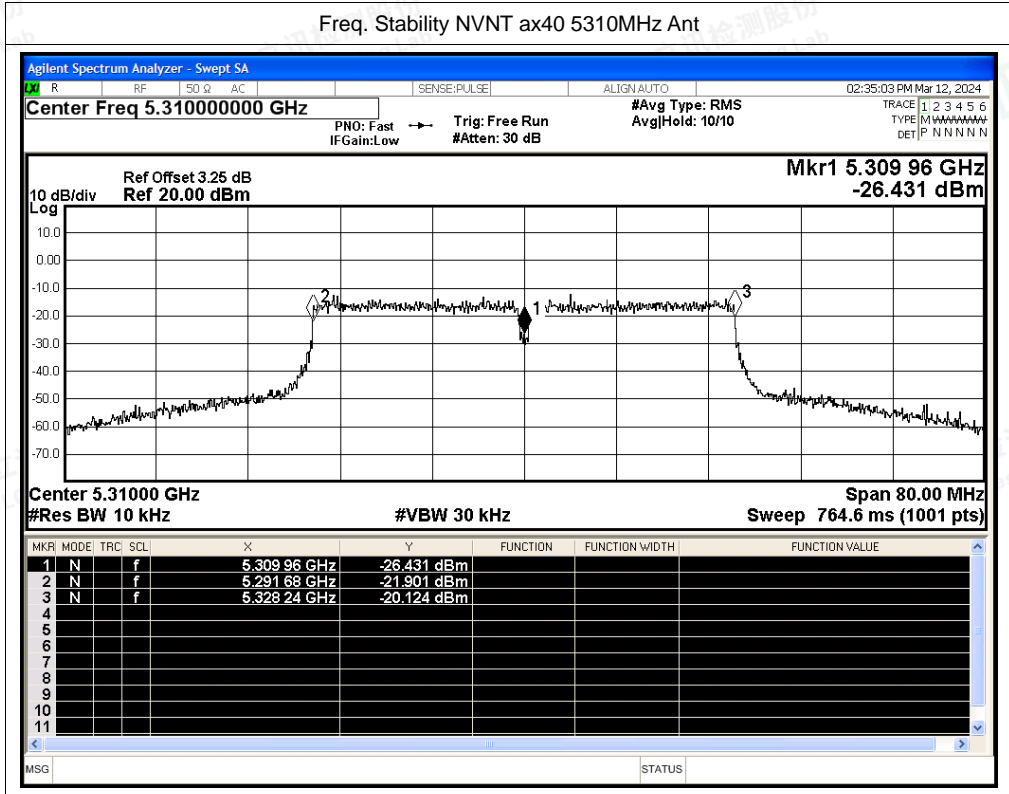



E.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant	97.17	0.12	0.46
NVNT	a	5300	Ant	97.17	0.12	0.46
NVNT	a	5320	Ant	97.17	0.12	0.46
NVNT	n20	5260	Ant	96.65	0.15	0.55
NVNT	n20	5300	Ant	96.65	0.15	0.55
NVNT	n20	5320	Ant	96.7	0.15	0.55
NVNT	n40	5270	Ant	93.53	0.29	1.11
NVNT	n40	5310	Ant	93.53	0.29	1.11
NVNT	ac20	5260	Ant	96.66	0.15	0.55
NVNT	ac20	5300	Ant	96.66	0.15	0.55
NVNT	ac20	5320	Ant	96.61	0.15	0.55
NVNT	ac40	5270	Ant	93.46	0.29	1.11
NVNT	ac40	5310	Ant	93.46	0.29	1.11
NVNT	ax20	5260	Ant	97.34	0.12	0.44
NVNT	ax20	5300	Ant	97.34	0.12	0.44
NVNT	ax20	5320	Ant	97.34	0.12	0.44
NVNT	ax40	5270	Ant	94.72	0.24	0.9
NVNT	ax40	5310	Ant	94.81	0.23	0.9




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5260MHz Ant

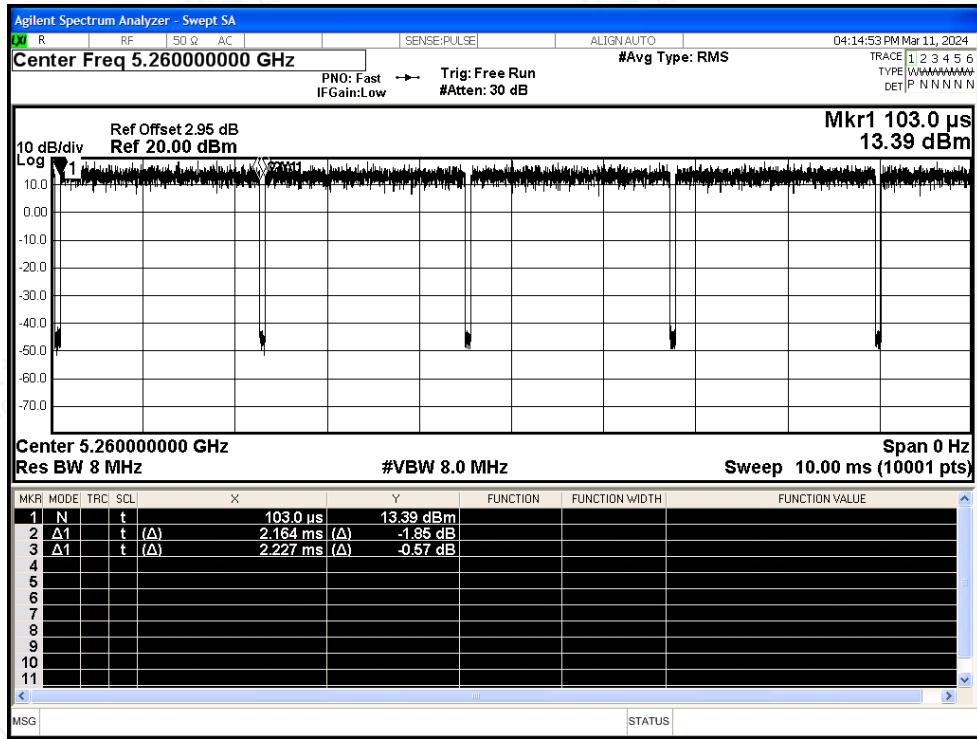


Duty Cycle NVNT a 5300MHz Ant

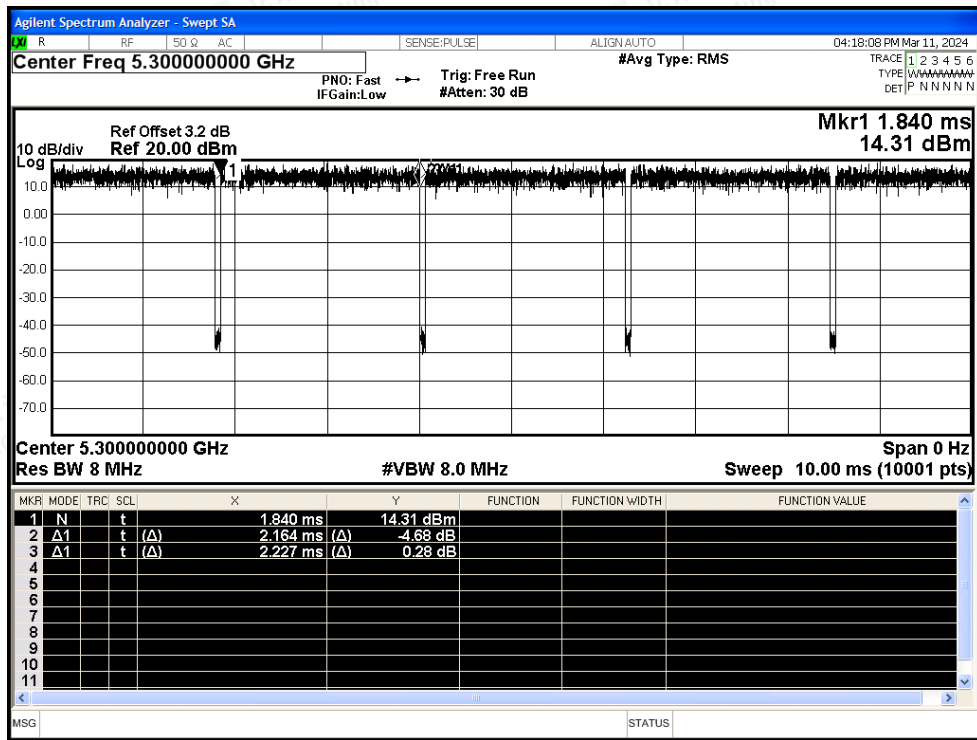




Duty Cycle NVNT n20 5260MHz Ant

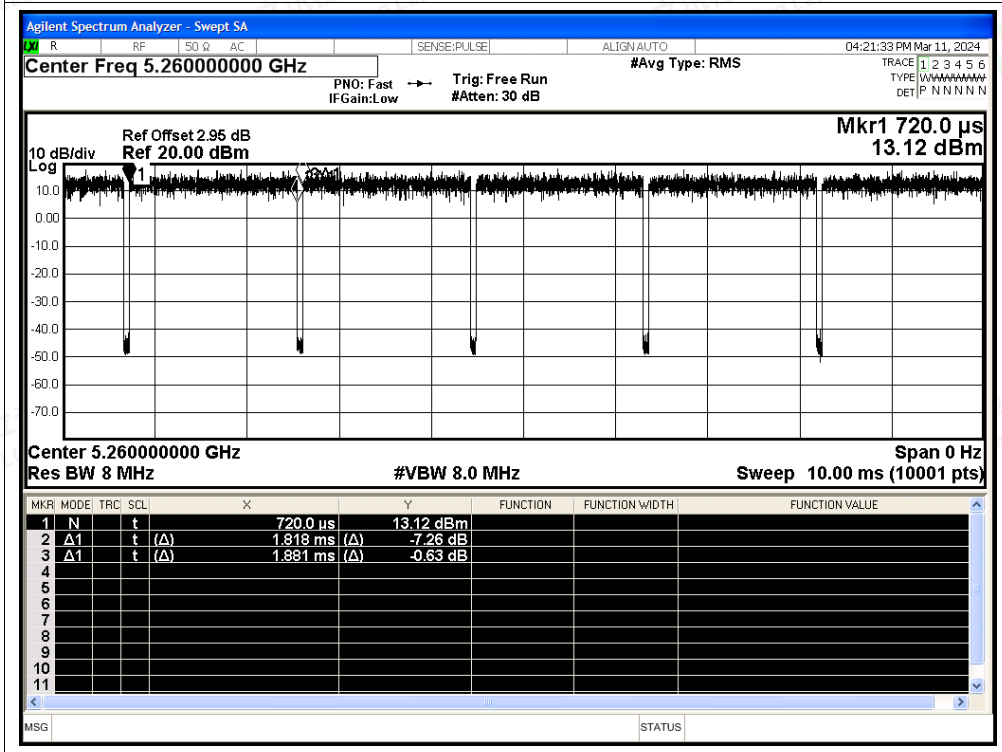


Duty Cycle NVNT n20 5300MHz Ant

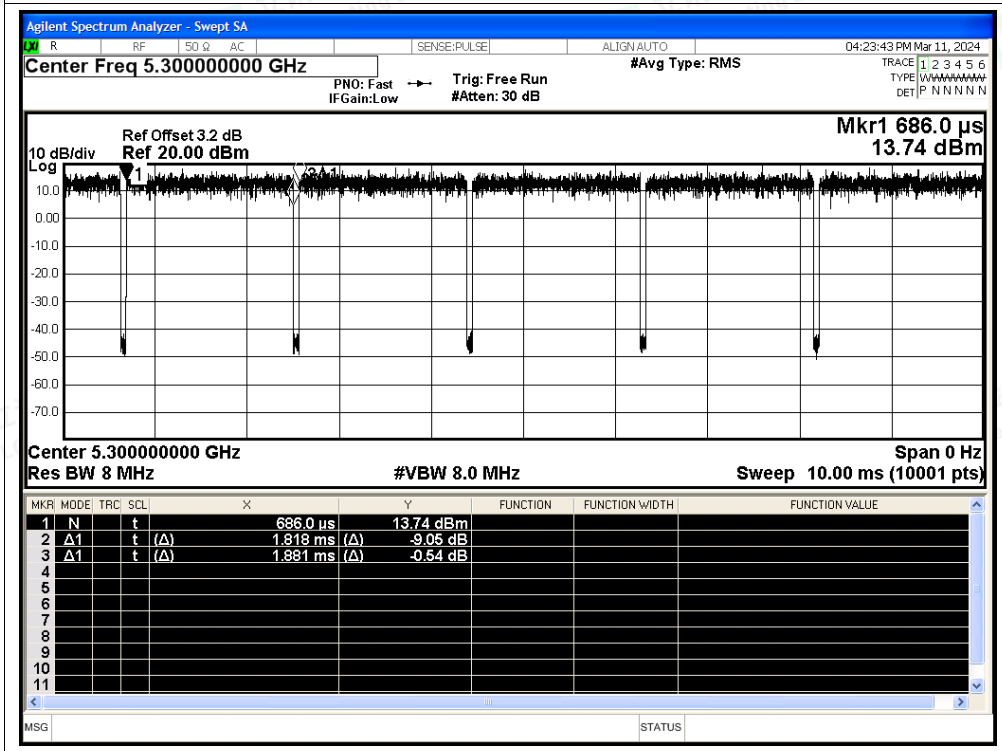


Duty Cycle NVNT n20 5320MHz Ant



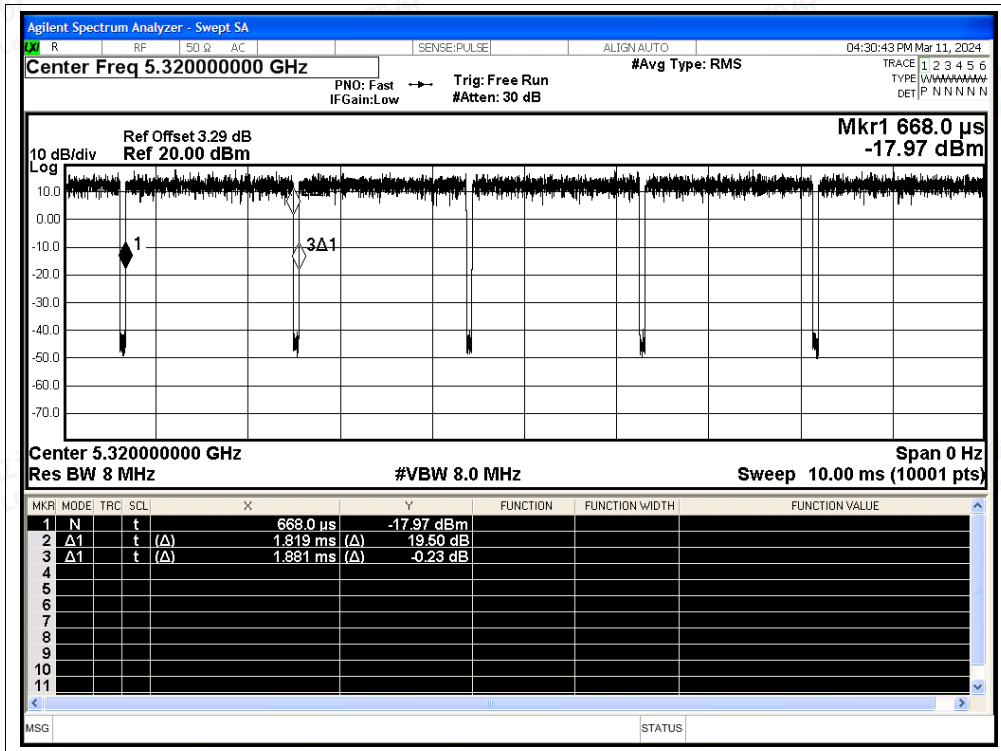




Duty Cycle NVNT n40 5270MHz Ant

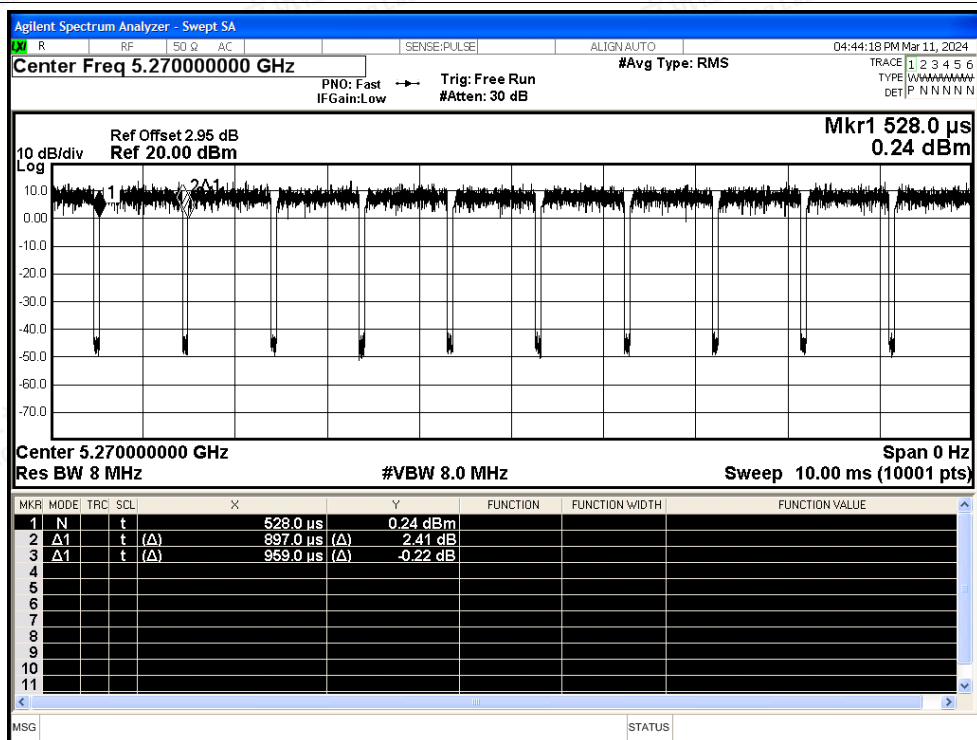


Duty Cycle NVNT n40 5310MHz Ant

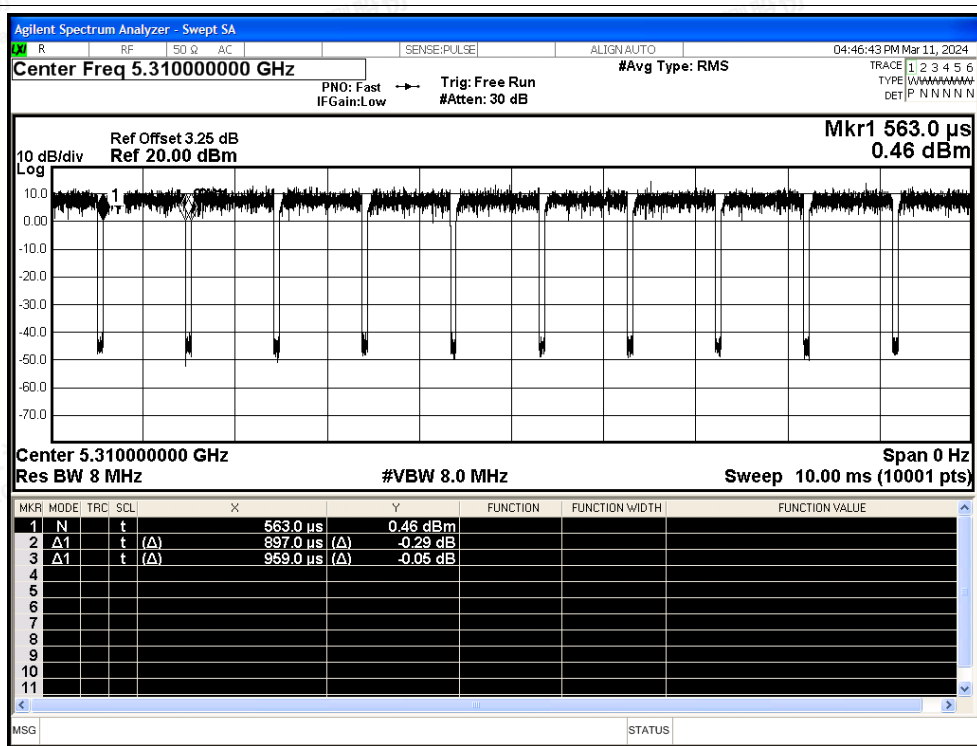




Duty Cycle NVNT ac20 5260MHz Ant

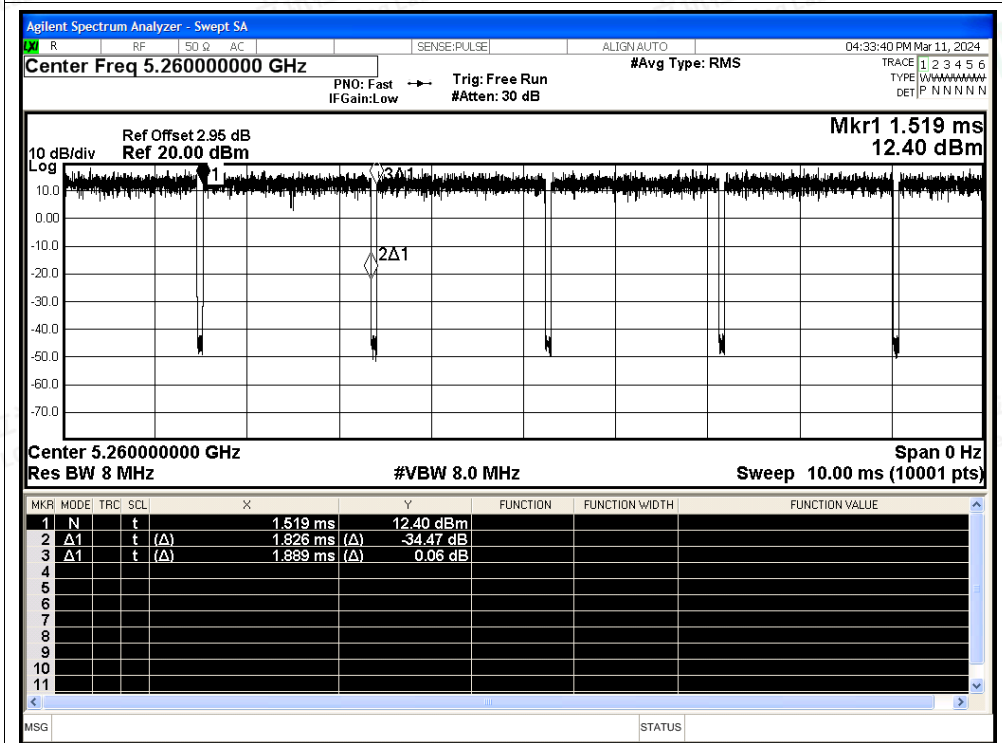


Duty Cycle NVNT ac20 5300MHz Ant

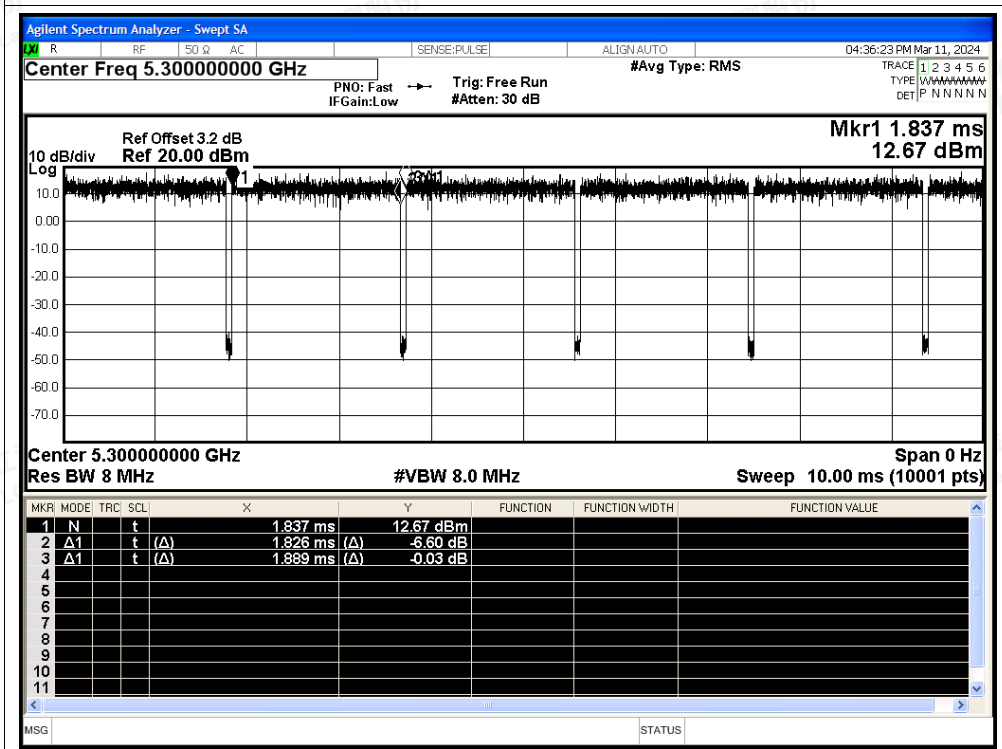





Duty Cycle NVNT ac20 5320MHz Ant

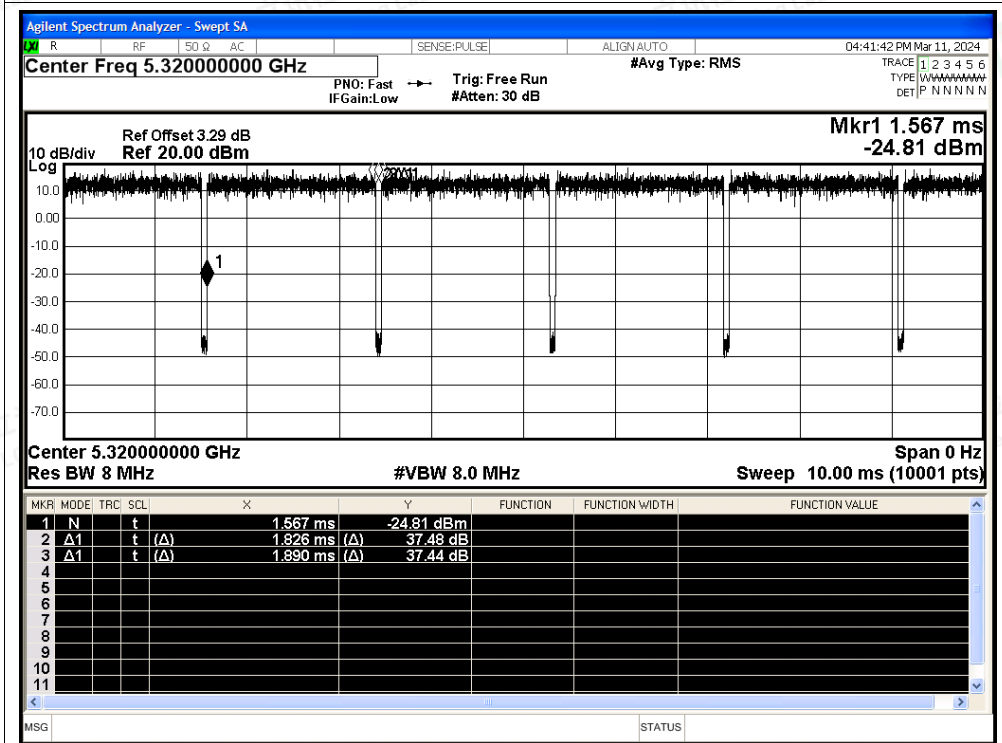

Duty Cycle NVNT ac40 5270MHz Ant

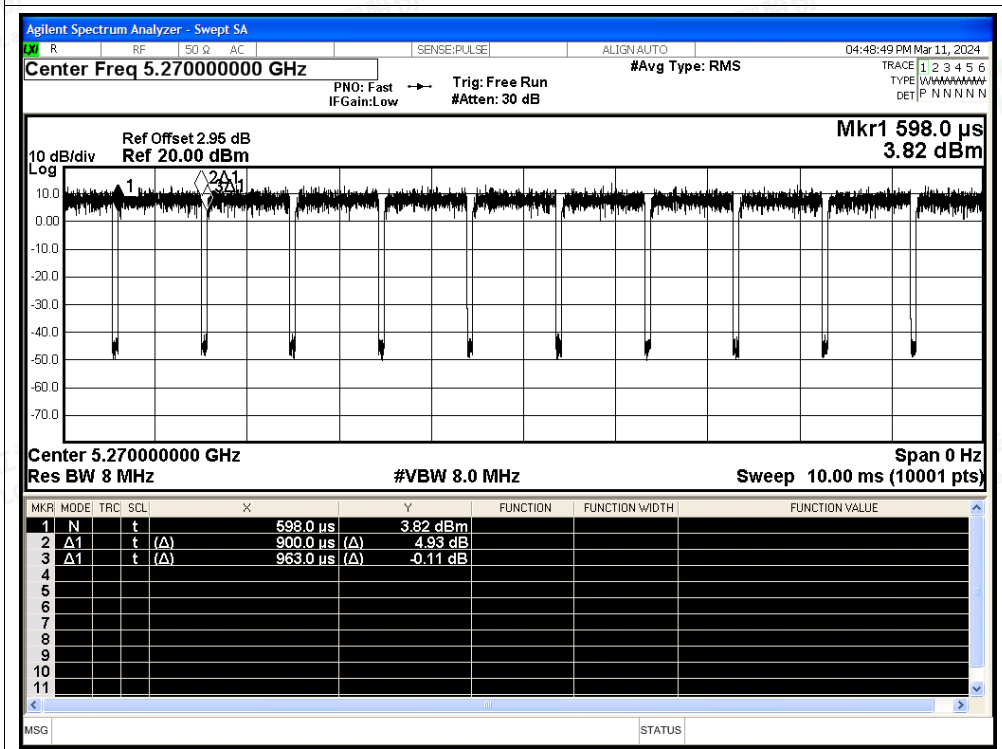


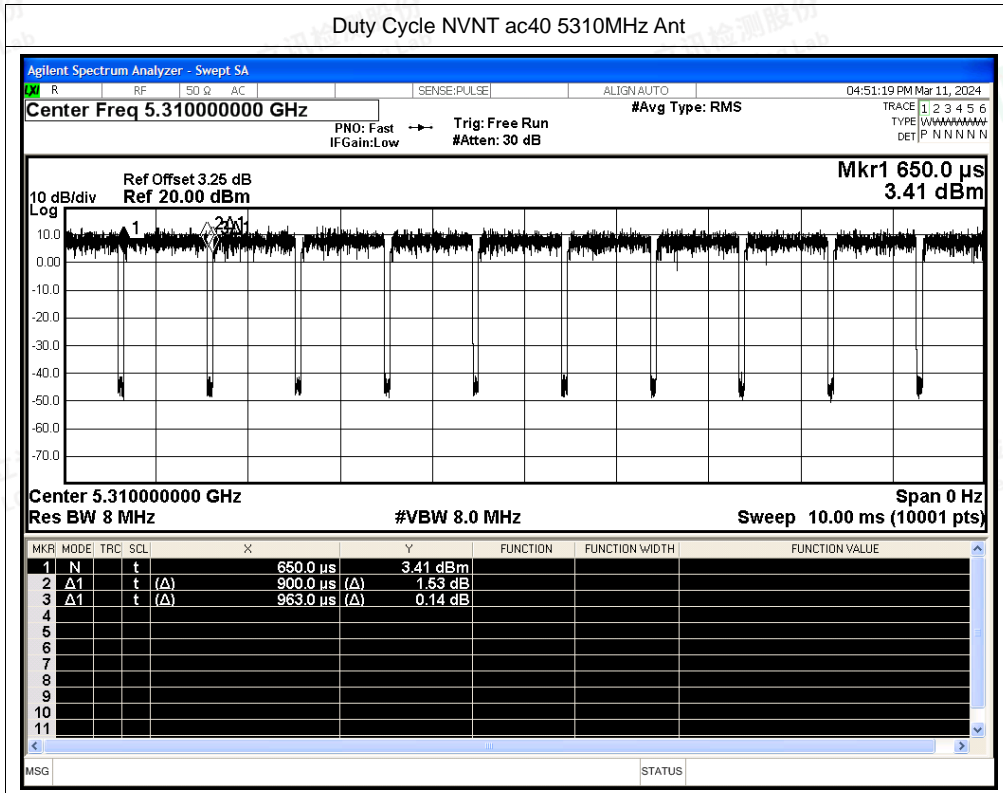



Test Graphs

Duty Cycle NVNT ax20 5260MHz Ant

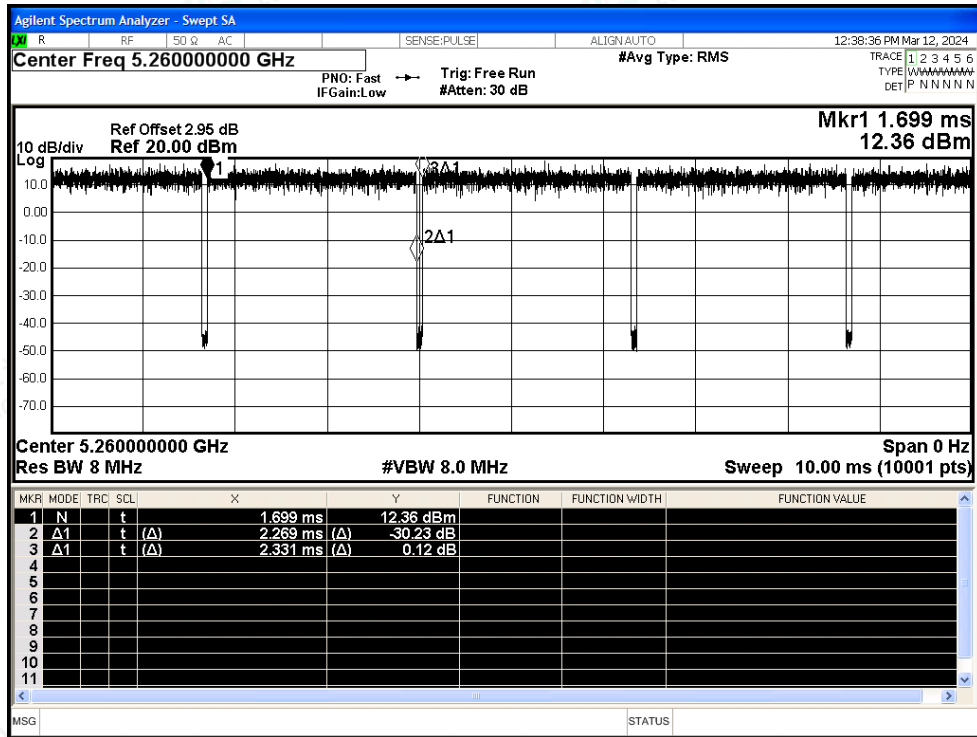

Duty Cycle NVNT ax20 5300MHz Ant

