

## EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2023-04-01\_16.53.38

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

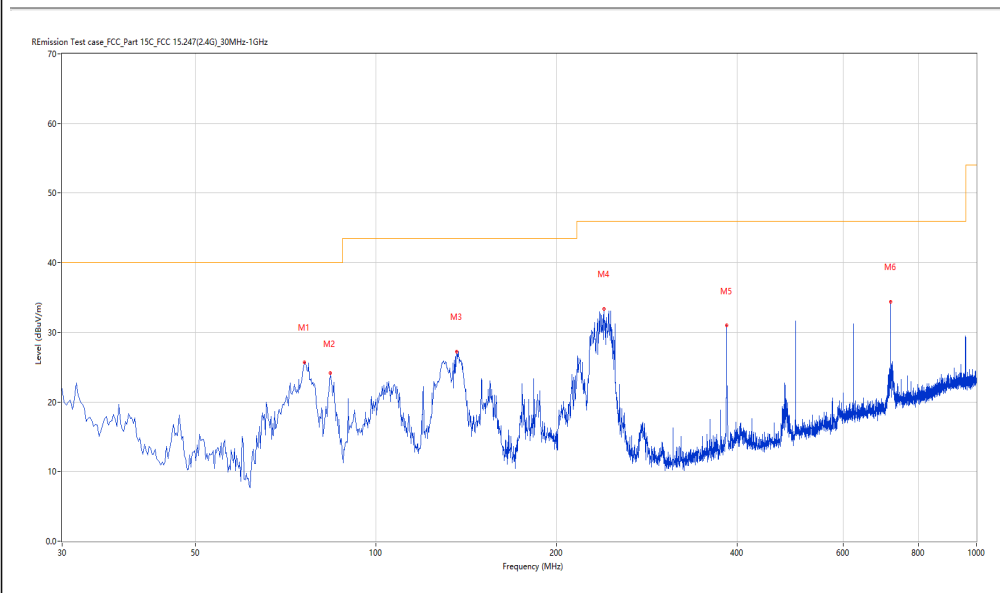

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	76.063	25.71	-31.26	40.0	14.29	Peak	196.90	200	Horizontal	Pass
2	83.822	24.19	-30.81	40.0	15.81	Peak	196.90	200	Horizontal	Pass
3	136.188	27.20	-29.92	43.5	16.30	Peak	0.00	200	Horizontal	Pass
4	239.953	33.35	-25.19	46.0	12.65	Peak	0.00	200	Horizontal	Pass
5	383.962	30.97	-21.48	46.0	15.03	Peak	0.00	200	Horizontal	Pass
6	720.467	34.42	-13.82	46.0	11.58	Peak	127.90	100	Horizontal	Pass

BLE-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2023-04-01\_16.47.09

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.5

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

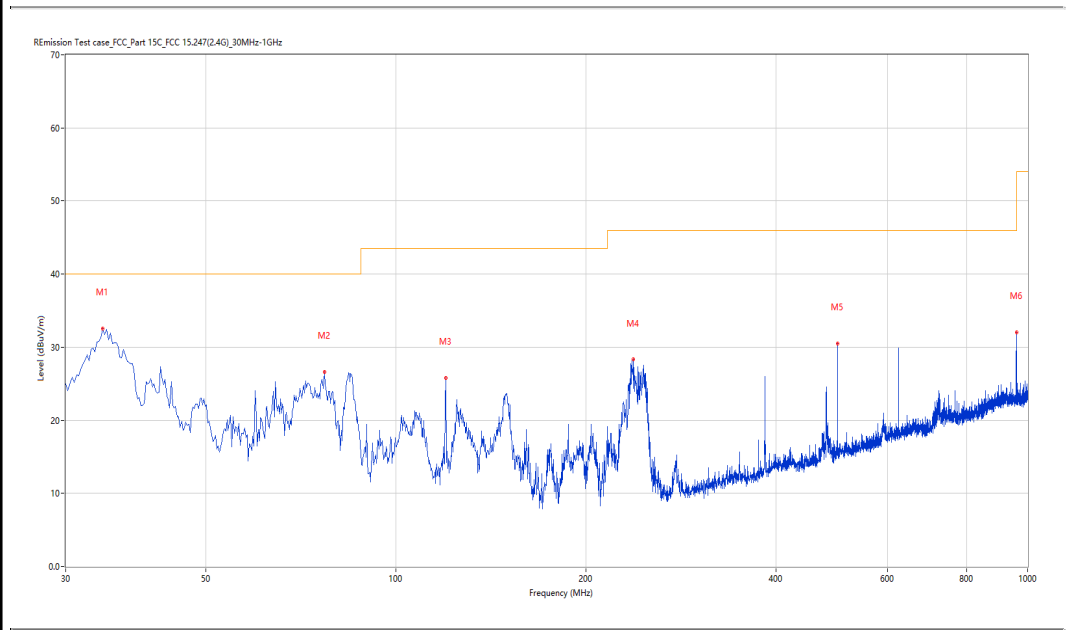

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.364	32.54	-28.28	40.0	7.46	Peak	151.50	100	Vertical	Pass
2	77.033	26.64	-31.44	40.0	13.36	Peak	29.10	100	Vertical	Pass
3	119.945	25.84	-28.31	43.5	17.66	Peak	0.00	200	Vertical	Pass
4	237.528	28.30	-25.36	46.0	17.70	Peak	72.60	100	Vertical	Pass
5	499.848	30.53	-18.59	46.0	15.47	Peak	41.70	100	Vertical	Pass
6	959.998	32.05	-9.30	46.0	13.95	Peak	352.80	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

## Test result

Project Number: Certification

Test Time: 2023-04-01\_12.57.37

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

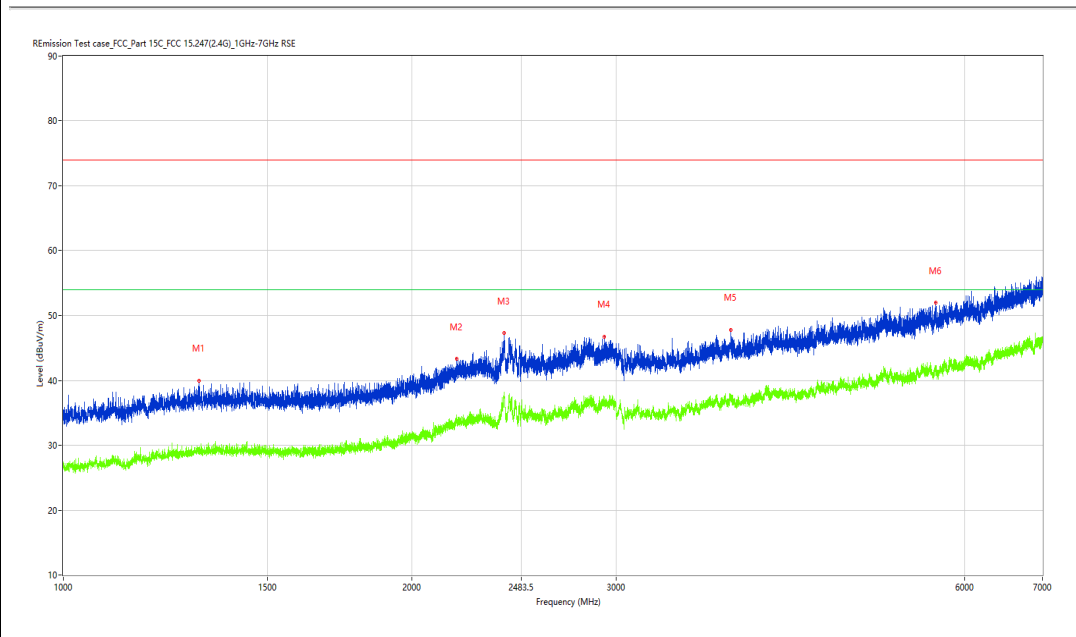

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1309.000	39.92	-12.61	74.0	34.08	Peak	108.60	100	Horizontal	Pass
1**	1309.000	29.68	-12.61	54.0	24.32	AV	108.60	100	Horizontal	Pass
2	2186.750	43.30	-8.05	74.0	30.70	Peak	96.00	100	Horizontal	Pass
2**	2186.750	33.93	-8.05	54.0	20.07	AV	96.00	100	Horizontal	Pass
3	2401.750	47.26	-4.44	74.0	26.74	Peak	200.20	100	Horizontal	Pass
3**	2401.750	37.68	-4.44	54.0	16.32	AV	200.20	100	Horizontal	Pass
4	2930.500	46.74	-4.30	74.0	27.26	Peak	108.60	100	Horizontal	Pass
4**	2930.500	36.83	-4.30	54.0	17.17	AV	108.60	100	Horizontal	Pass
5	3767.000	47.80	-1.78	74.0	26.20	Peak	300.90	100	Horizontal	Pass
5**	3767.000	37.16	-1.78	54.0	16.84	AV	300.90	100	Horizontal	Pass
6	5665.000	51.95	1.53	74.0	22.05	Peak	225.40	100	Horizontal	Pass
6**	5665.000	41.88	1.53	54.0	12.12	AV	225.40	100	Horizontal	Pass

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.11.20

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

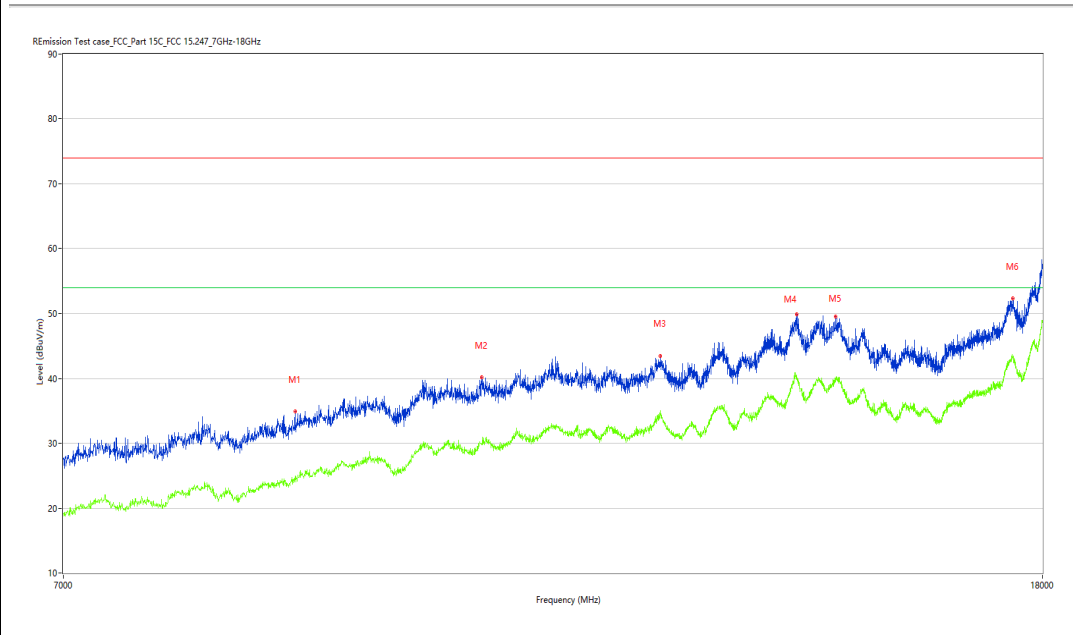

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8754.500	34.85	4.74	74.0	39.15	Peak	47.60	100	Horizontal	Pass
1**	8754.500	25.01	4.74	54.0	28.99	AV	47.60	100	Horizontal	Pass
2	10481.500	40.12	9.80	74.0	33.88	Peak	104.30	100	Horizontal	Pass
2**	10481.500	29.91	9.80	54.0	24.09	AV	104.30	100	Horizontal	Pass
3	12453.250	43.49	12.52	74.0	30.51	Peak	172.00	100	Horizontal	Pass
3**	12453.250	34.97	12.52	54.0	19.03	AV	172.00	100	Horizontal	Pass
4	14196.750	49.92	19.57	74.0	24.08	Peak	220.80	100	Horizontal	Pass
4**	14196.750	40.25	19.57	54.0	13.75	AV	220.80	100	Horizontal	Pass
5	14744.001	49.57	18.64	74.0	24.43	Peak	47.60	100	Horizontal	Pass
5**	14744.001	40.04	18.64	54.0	13.96	AV	47.60	100	Horizontal	Pass
6	17496.750	52.31	21.27	74.0	21.69	Peak	47.60	100	Horizontal	Pass
6**	17496.750	43.19	21.27	54.0	10.81	AV	47.60	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2023-04-01\_15.48.25

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

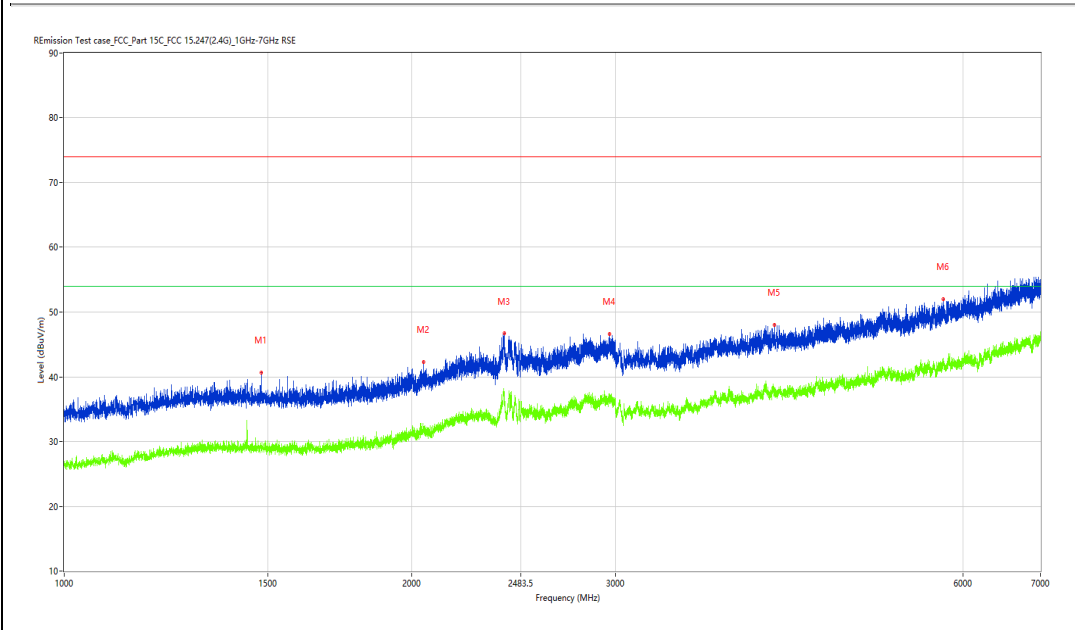

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1481.250	40.66	-13.02	74.0	33.34	Peak	360.00	100	Vertical	Pass
1**	1481.250	29.11	-13.02	54.0	24.89	AV	360.00	100	Vertical	Pass
2	2048.000	42.33	-10.31	74.0	31.67	Peak	360.00	100	Vertical	Pass
2**	2048.000	32.22	-10.31	54.0	21.78	AV	360.00	100	Vertical	Pass
3	2403.000	46.67	-4.47	74.0	27.33	Peak	105.10	100	Vertical	Pass
3**	2403.000	37.74	-4.47	54.0	16.26	AV	105.10	100	Vertical	Pass
4	2965.500	46.63	-3.35	74.0	27.37	Peak	312.60	100	Vertical	Pass
4**	2965.500	36.90	-3.35	54.0	17.10	AV	312.60	100	Vertical	Pass
5	4119.500	48.05	-1.20	74.0	25.95	Peak	0.00	100	Vertical	Pass
5**	4119.500	37.57	-1.20	54.0	16.43	AV	0.00	100	Vertical	Pass
6	5765.000	51.98	2.21	74.0	22.02	Peak	1.00	100	Vertical	Pass
6**	5765.000	42.59	2.21	54.0	11.41	AV	1.00	100	Vertical	Pass

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.16.49

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

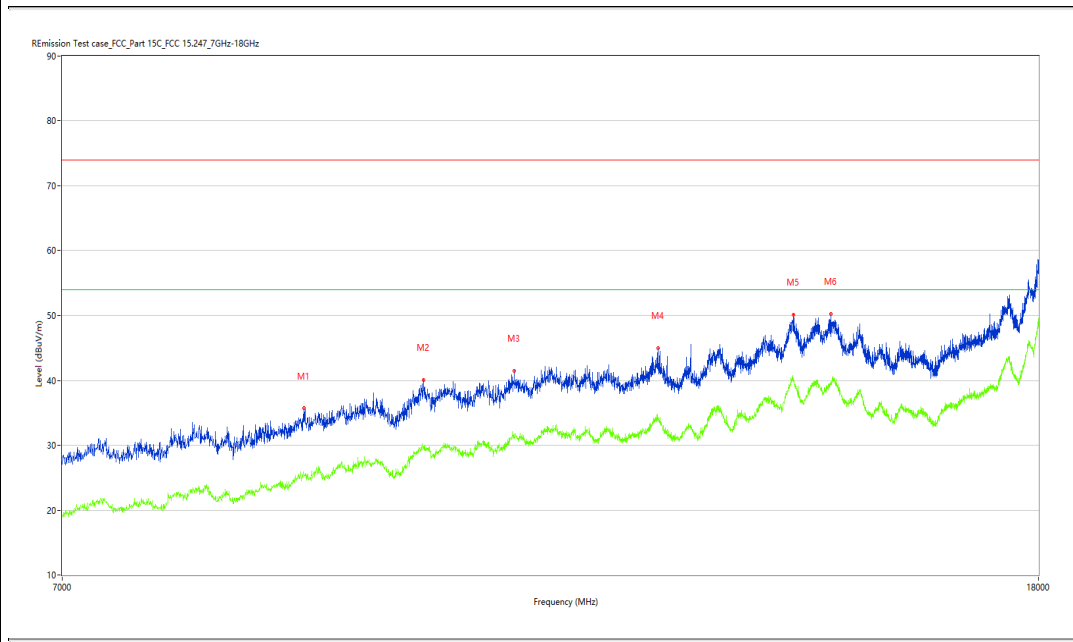

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8845.250	35.76	5.28	74.0	38.24	Peak	0.00	100	Vertical	Pass
1**	8845.250	25.11	5.28	54.0	28.89	AV	0.00	100	Vertical	Pass
2	9931.500	40.11	9.82	74.0	33.89	Peak	360.00	100	Vertical	Pass
2**	9931.500	29.82	9.82	54.0	24.18	AV	360.00	100	Vertical	Pass
3	10839.000	41.44	11.02	74.0	32.56	Peak	51.90	100	Vertical	Pass
3**	10839.000	31.47	11.02	54.0	22.53	AV	51.90	100	Vertical	Pass
4	12458.750	44.98	12.54	74.0	29.02	Peak	308.80	100	Vertical	Pass
4**	12458.750	33.96	12.54	54.0	20.04	AV	308.80	100	Vertical	Pass
5	14202.250	50.10	19.45	74.0	23.90	Peak	132.70	100	Vertical	Pass
5**	14202.250	39.90	19.45	54.0	14.10	AV	132.70	100	Vertical	Pass
6	14724.750	50.29	18.41	74.0	23.71	Peak	260.40	100	Vertical	Pass
6**	14724.750	39.64	18.41	54.0	14.36	AV	260.40	100	Vertical	Pass

BLE-Middle channel-Horizontal-TX

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.00.54

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

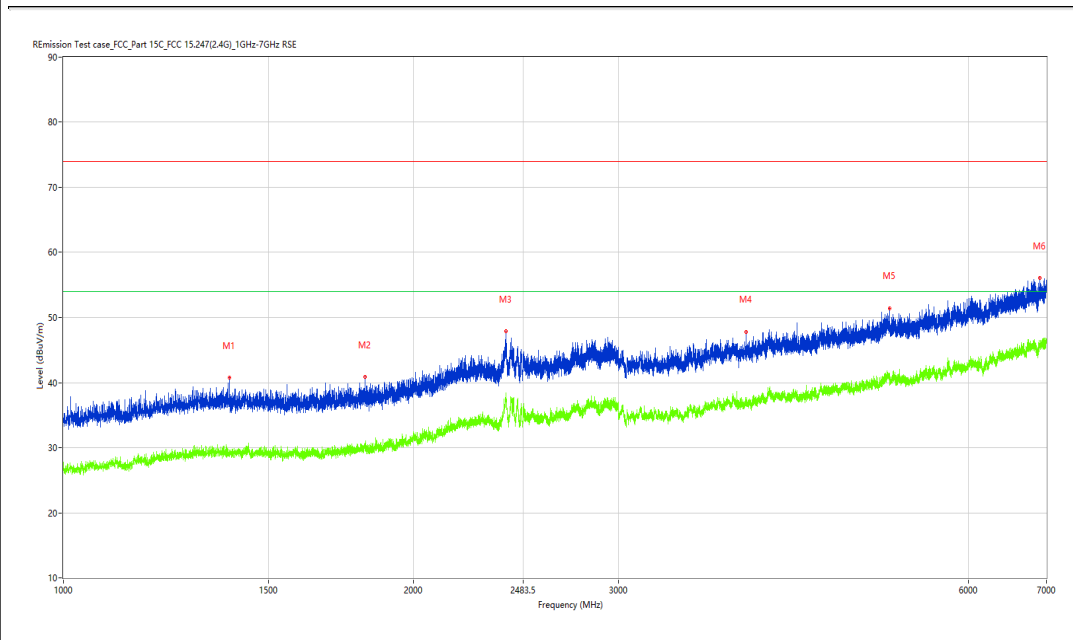

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1389.250	40.71	-12.71	74.0	33.29	Peak	316.70	100	Horizontal	Pass
1**	1389.250	28.60	-12.71	54.0	25.40	AV	316.70	100	Horizontal	Pass
2	1816.500	40.82	-12.24	74.0	33.18	Peak	59.50	100	Horizontal	Pass
2**	1816.500	30.15	-12.24	54.0	23.85	AV	59.50	100	Horizontal	Pass
3	2401.250	47.85	-4.43	74.0	26.15	Peak	152.60	100	Horizontal	Pass
3**	2401.250	38.47	-4.43	54.0	15.53	AV	152.60	100	Horizontal	Pass
4	3862.000	47.76	-2.39	74.0	26.24	Peak	172.50	100	Horizontal	Pass
4**	3862.000	36.74	-2.39	54.0	17.26	AV	172.50	100	Horizontal	Pass
5	5132.000	51.45	1.20	74.0	22.55	Peak	107.40	100	Horizontal	Pass
5**	5132.000	40.93	1.20	54.0	13.07	AV	107.40	100	Horizontal	Pass
6	6908.000	56.03	5.08	74.0	17.97	Peak	205.70	100	Horizontal	Pass
6**	6908.000	45.75	5.08	54.0	8.25	AV	205.70	100	Horizontal	Pass

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.13.22

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

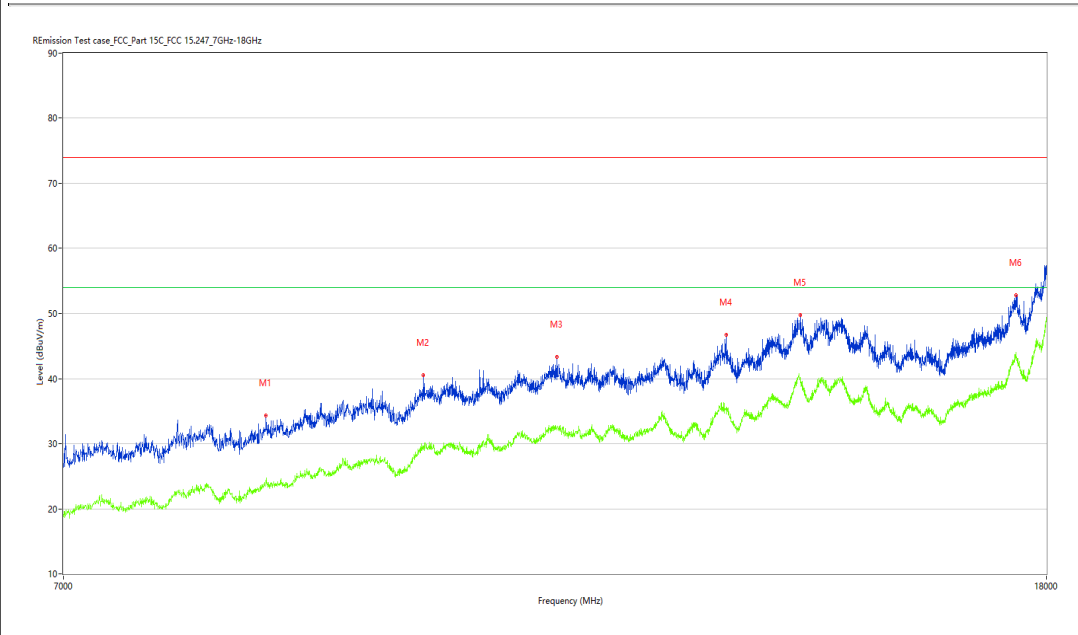

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8504.250	34.38	3.82	74.0	39.62	Peak	311.90	100	Horizontal	Pass
1**	8504.250	24.06	3.82	54.0	29.94	AV	311.90	100	Horizontal	Pass
2	9893.000	40.51	9.58	74.0	33.49	Peak	214.00	100	Horizontal	Pass
2**	9893.000	29.61	9.58	54.0	24.39	AV	214.00	100	Horizontal	Pass
3	11248.750	43.31	11.88	74.0	30.69	Peak	0.70	100	Horizontal	Pass
3**	11248.750	32.27	11.88	54.0	21.73	AV	0.70	100	Horizontal	Pass
4	13231.500	46.77	14.19	74.0	27.23	Peak	147.30	100	Horizontal	Pass
4**	13231.500	35.66	14.19	54.0	18.34	AV	147.30	100	Horizontal	Pass
5	14213.250	49.80	19.19	74.0	24.20	Peak	311.90	100	Horizontal	Pass
5**	14213.250	39.34	19.19	54.0	14.66	AV	311.90	100	Horizontal	Pass
6	17477.501	52.79	21.39	74.0	21.21	Peak	147.30	100	Horizontal	Pass
6**	17477.501	43.99	21.39	54.0	10.01	AV	147.30	100	Horizontal	Pass



BLE-Middle channel-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2023-04-01\_15.52.23

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

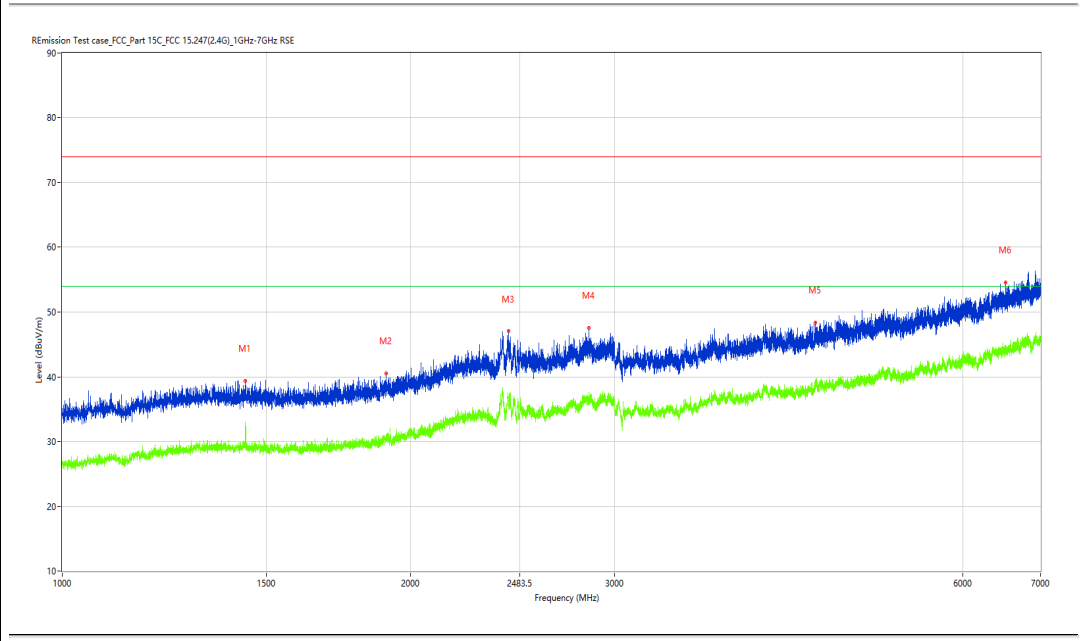

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.500	39.40	-12.72	74.0	34.60	Peak	276.10	100	Vertical	Pass
1**	1439.500	31.31	-12.72	54.0	22.69	AV	276.10	100	Vertical	Pass
2	1904.000	40.55	-11.77	74.0	33.45	Peak	168.90	100	Vertical	Pass
2**	1904.000	30.80	-11.77	54.0	23.20	AV	168.90	100	Vertical	Pass
3	2429.250	47.02	-4.94	74.0	26.98	Peak	360.00	100	Vertical	Pass
3**	2429.250	36.39	-4.94	54.0	17.61	AV	360.00	100	Vertical	Pass
4	2852.250	47.56	-3.86	74.0	26.44	Peak	360.00	100	Vertical	Pass
4**	2852.250	37.57	-3.86	54.0	16.43	AV	360.00	100	Vertical	Pass
5	4472.000	48.36	-0.81	74.0	25.64	Peak	281.60	100	Vertical	Pass
5**	4472.000	38.57	-0.81	54.0	15.43	AV	281.60	100	Vertical	Pass
6	6531.500	54.57	4.10	74.0	19.43	Peak	331.10	100	Vertical	Pass
6**	6531.500	44.74	4.10	54.0	9.26	AV	331.10	100	Vertical	Pass

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.19.19

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

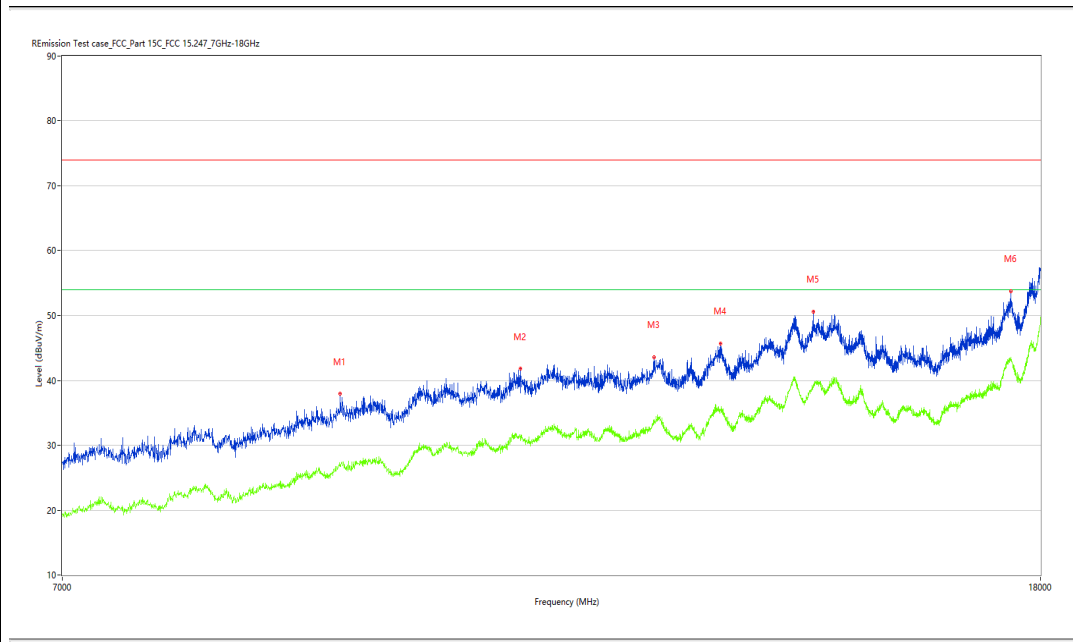

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	9156.000	38.01	7.43	74.0	35.99	Peak	94.20	100	Vertical	Pass
1**	9156.000	26.95	7.43	54.0	27.05	AV	94.20	100	Vertical	Pass
2	10891.250	41.78	11.12	74.0	32.22	Peak	199.50	100	Vertical	Pass
2**	10891.250	31.41	11.12	54.0	22.59	AV	199.50	100	Vertical	Pass
3	12398.250	43.52	12.25	74.0	30.48	Peak	199.50	100	Vertical	Pass
3**	12398.250	33.31	12.25	54.0	20.69	AV	199.50	100	Vertical	Pass
4	13220.500	45.73	14.15	74.0	28.27	Peak	94.20	100	Vertical	Pass
4**	13220.500	35.33	14.15	54.0	18.67	AV	94.20	100	Vertical	Pass
5	14452.500	50.62	17.61	74.0	23.38	Peak	360.00	100	Vertical	Pass
5**	14452.500	39.19	17.61	54.0	14.81	AV	360.00	100	Vertical	Pass
6	17494.000	53.69	21.33	74.0	20.31	Peak	296.50	100	Vertical	Pass
6**	17494.000	43.33	21.33	54.0	10.67	AV	296.50	100	Vertical	Pass

BLE-High channel-Horizontal-TX

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.03.38

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

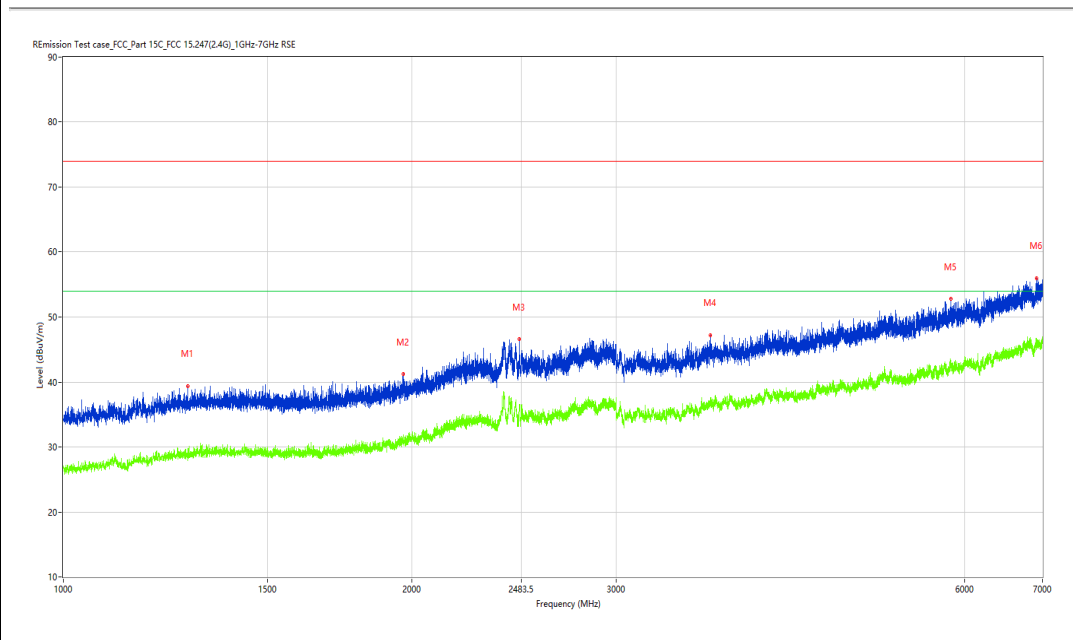

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1281.000	39.35	-12.87	74.0	34.65	Peak	128.40	100	Horizontal	Pass
1**	1281.000	29.71	-12.87	54.0	24.29	AV	128.40	100	Horizontal	Pass
2	1964.250	41.18	-11.20	74.0	32.82	Peak	268.70	100	Horizontal	Pass
2**	1964.250	31.83	-11.20	54.0	22.17	AV	268.70	100	Horizontal	Pass
3	2475.000	46.56	-5.78	74.0	27.44	Peak	0.00	100	Horizontal	Pass
3**	2475.000	36.47	-5.78	54.0	17.53	AV	0.00	100	Horizontal	Pass
4	3616.000	47.22	-1.82	74.0	26.78	Peak	131.70	100	Horizontal	Pass
4**	3616.000	36.61	-1.82	54.0	17.39	AV	131.70	100	Horizontal	Pass
5	5833.000	52.76	2.31	74.0	21.24	Peak	0.00	100	Horizontal	Pass
5**	5833.000	42.83	2.31	54.0	11.17	AV	0.00	100	Horizontal	Pass
6	6914.500	55.94	5.07	74.0	18.06	Peak	354.70	100	Horizontal	Pass
6**	6914.500	45.61	5.07	54.0	8.39	AV	354.70	100	Horizontal	Pass

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.15.18

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

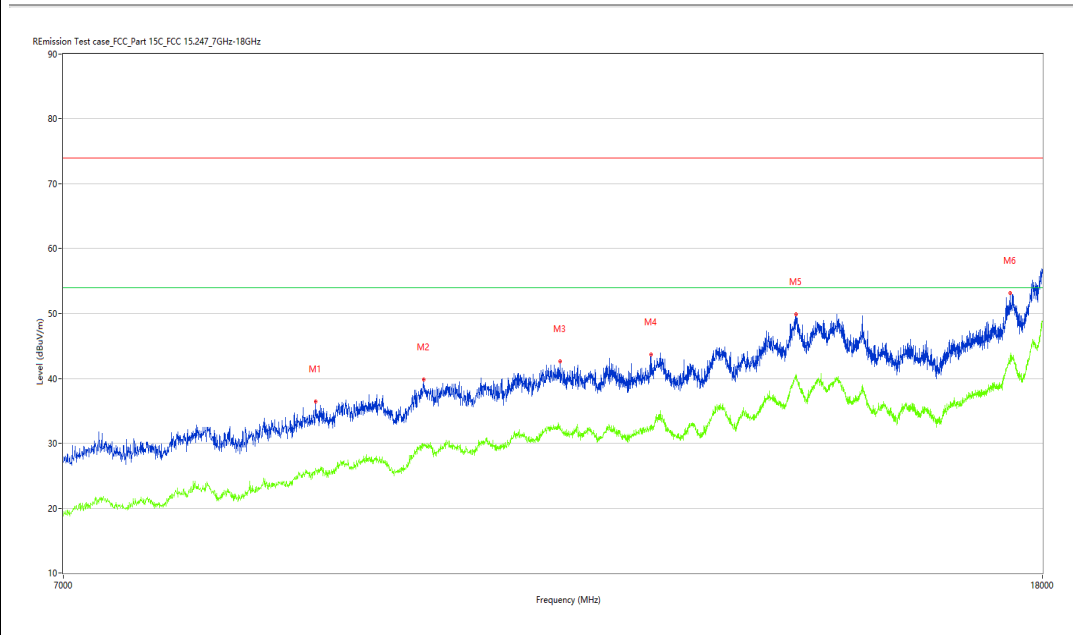

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8930.500	36.39	6.50	74.0	37.61	Peak	114.00	100	Horizontal	Pass
1**	8930.500	26.08	6.50	54.0	27.92	AV	114.00	100	Horizontal	Pass
2	9909.500	39.81	9.84	74.0	34.19	Peak	222.30	100	Horizontal	Pass
2**	9909.500	29.76	9.84	54.0	24.24	AV	222.30	100	Horizontal	Pass
3	11303.750	42.62	12.23	74.0	31.38	Peak	114.00	100	Horizontal	Pass
3**	11303.750	32.71	12.23	54.0	21.29	AV	114.00	100	Horizontal	Pass
4	12343.250	43.69	11.88	74.0	30.31	Peak	0.00	100	Horizontal	Pass
4**	12343.250	32.78	11.88	54.0	21.22	AV	0.00	100	Horizontal	Pass
5	14188.500	49.92	19.75	74.0	24.08	Peak	222.30	100	Horizontal	Pass
5**	14188.500	40.60	19.75	54.0	13.40	AV	222.30	100	Horizontal	Pass
6	17450.000	53.20	20.87	74.0	20.80	Peak	48.80	100	Horizontal	Pass
6**	17450.000	43.56	20.87	54.0	10.44	AV	48.80	100	Horizontal	Pass

BLE-High channel-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2023-04-01\_15.55.54

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

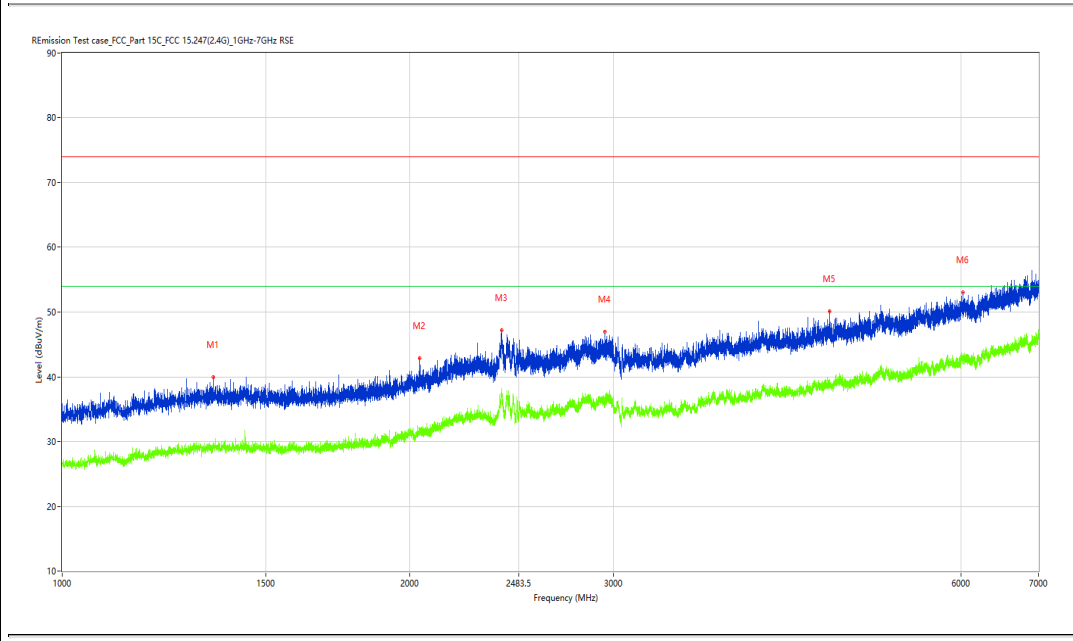

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1351.500	39.98	-12.75	74.0	34.02	Peak	24.60	100	Vertical	Pass
1**	1351.500	29.02	-12.75	54.0	24.98	AV	24.60	100	Vertical	Pass
2	2039.750	42.90	-10.52	74.0	31.10	Peak	163.20	100	Vertical	Pass
2**	2039.750	31.55	-10.52	54.0	22.45	AV	163.20	100	Vertical	Pass
3	2401.250	47.25	-4.43	74.0	26.75	Peak	163.20	100	Vertical	Pass
3**	2401.250	37.52	-4.43	54.0	16.48	AV	163.20	100	Vertical	Pass
4	2948.250	46.95	-3.76	74.0	27.05	Peak	276.80	100	Vertical	Pass
4**	2948.250	36.73	-3.76	54.0	17.27	AV	276.80	100	Vertical	Pass
5	4616.000	50.15	-0.50	74.0	23.85	Peak	186.00	100	Vertical	Pass
5**	4616.000	38.58	-0.50	54.0	15.42	AV	186.00	100	Vertical	Pass
6	6024.500	53.02	2.86	74.0	20.98	Peak	217.20	100	Vertical	Pass
6**	6024.500	43.00	2.86	54.0	11.00	AV	217.20	100	Vertical	Pass

# Test result

Project Number: Certification

Test Time: 2023-04-01\_13.21.25

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

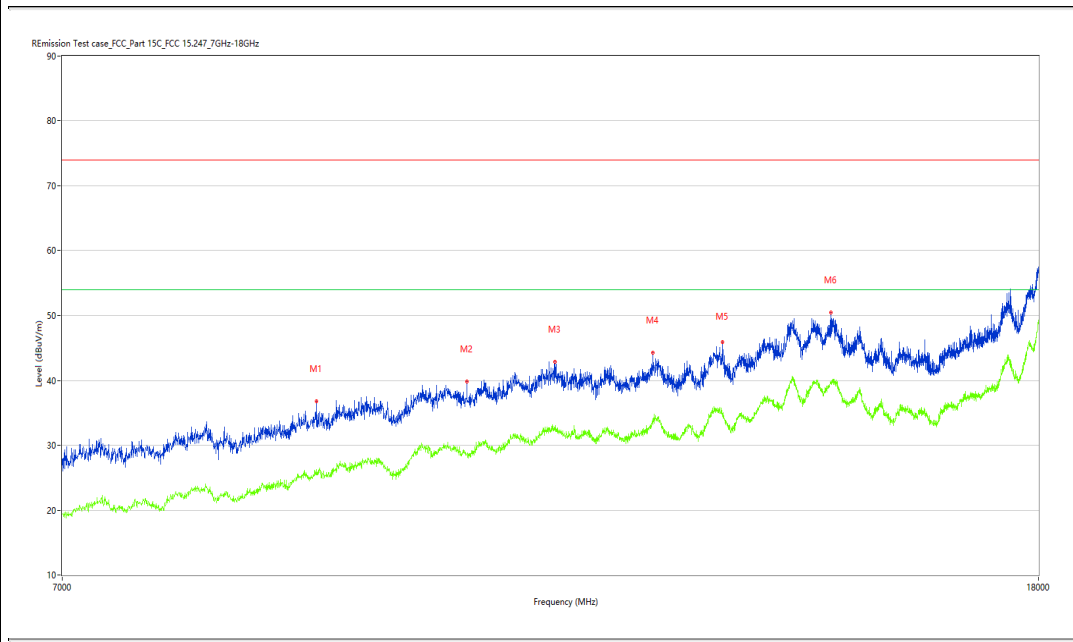

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8952.500	36.76	7.23	74.0	37.24	Peak	144.70	100	Vertical	Pass
1**	8952.500	26.23	7.23	54.0	27.77	AV	144.70	100	Vertical	Pass
2	10355.000	39.80	8.95	74.0	34.20	Peak	16.30	100	Vertical	Pass
2**	10355.000	28.76	8.95	54.0	25.24	AV	16.30	100	Vertical	Pass
3	11273.500	42.86	12.20	74.0	31.14	Peak	80.30	100	Vertical	Pass
3**	11273.500	32.37	12.20	54.0	21.63	AV	80.30	100	Vertical	Pass
4	12395.500	44.30	12.23	74.0	29.70	Peak	324.60	100	Vertical	Pass
4**	12395.500	34.06	12.23	54.0	19.94	AV	324.60	100	Vertical	Pass
5	13261.750	45.90	13.87	74.0	28.10	Peak	258.00	100	Vertical	Pass
5**	13261.750	34.39	13.87	54.0	19.61	AV	258.00	100	Vertical	Pass
6	14727.500	50.44	18.44	74.0	23.56	Peak	360.00	100	Vertical	Pass
6**	14727.500	39.63	18.44	54.0	14.37	AV	360.00	100	Vertical	Pass

## BLE-Bandedge -Low channel- Horizontal -TX

### Test result

Project Number: Certification

Test Time: 2023-04-01\_13.06.32

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

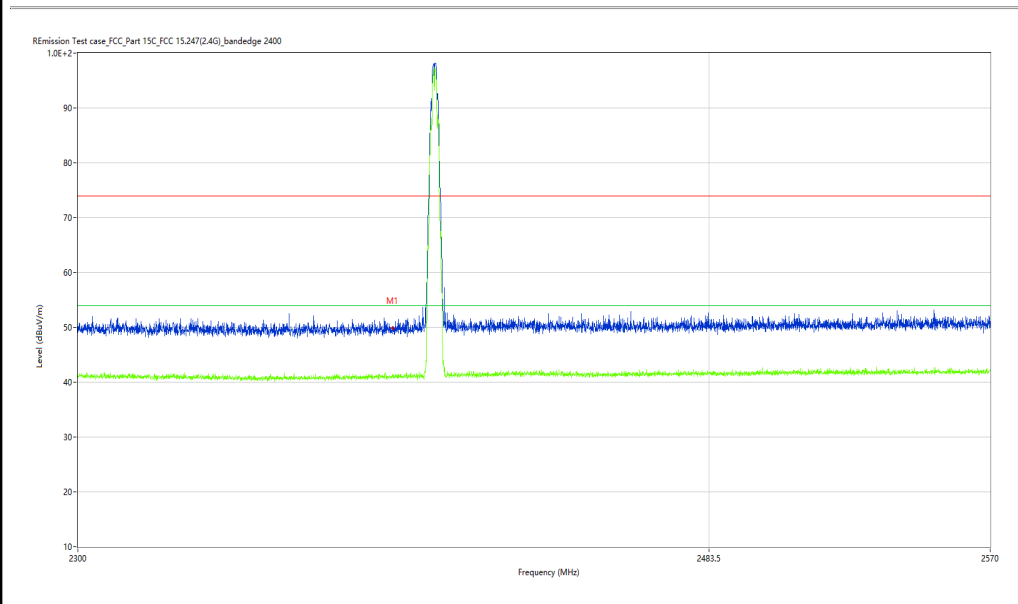

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.79	-9.96	74.0	24.21	Peak	141.34	100	H	Pass
1**	2390.000	41.01	-9.96	54.0	12.99	AV	141.34	100	H	Pass

## BLE-Bandedge -Low channel- Vertical -TX

### Test result

Project Number: Certification

Test Time: 2023-04-01\_15.46.19

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

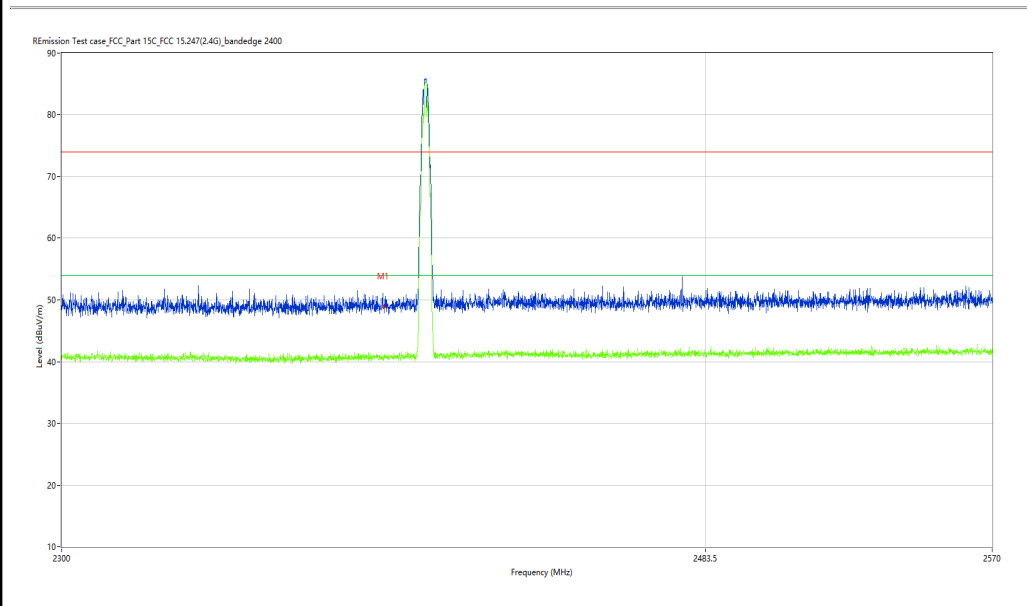

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.85	-9.96	74.0	25.15	Peak	226.82	100	V	Pass
1**	2390.000	40.30	-9.96	54.0	13.70	AV	226.82	100	V	Pass



BLE-Bandedge -High channel- Horizontal –TX

## Test result

Project Number: Certification

Test Time: 2023-04-01\_13.58.23

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

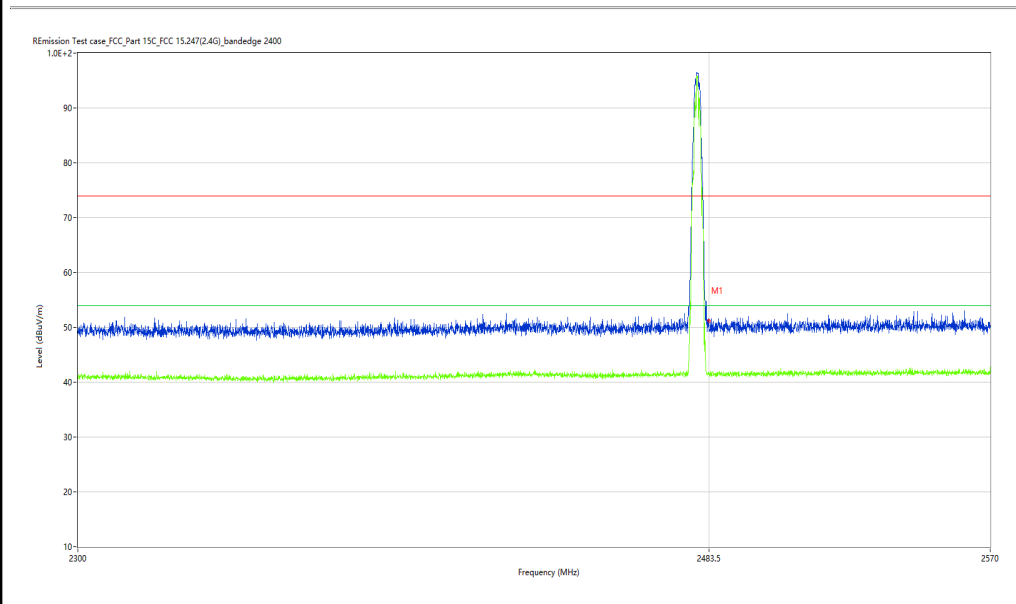

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.35	-9.51	74.0	22.65	Peak	157.65	100	H	Pass
1**	2483.500	41.70	-9.51	54.0	12.30	AV	157.65	100	H	Pass

## BLE-Bandedge -High channel- Vertical –TX

### Test result

Project Number: Certification

Test Time: 2023-04-01\_15.43.03

EUT Name: N.A

Test Engineer: LS

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 24.4

Load: Full load

Hum.: 55%

Remark: DR-RSE01-E2211054-01#08

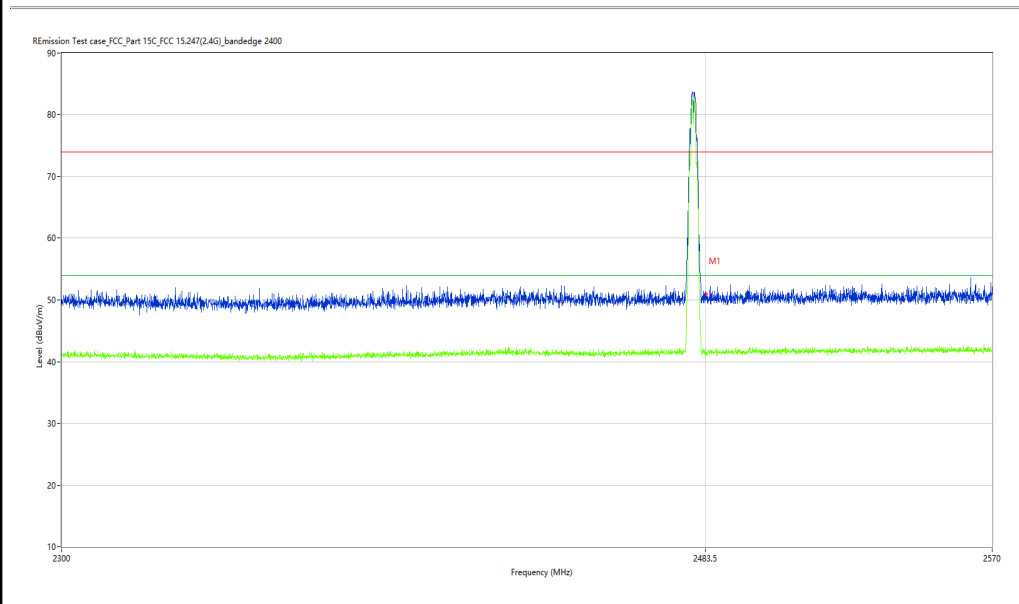

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.07	-9.51	74.0	22.93	Peak	271.60	100	V	Pass
1**	2483.500	41.50	-9.51	54.0	12.50	AV	271.60	100	V	Pass