

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →

30M-1G

BLE-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-07-24_21.12.29

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

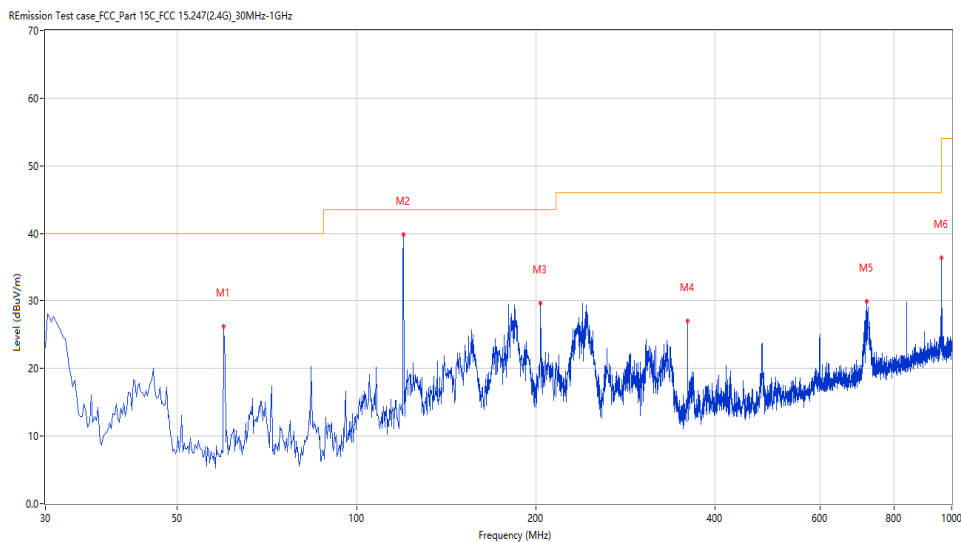

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.820	26.24	-26.24	40.0	13.76	Peak	186.20	100	Horizontal	Pass
2	119.945	39.82	-28.31	43.5	3.68	Peak	152.00	100	Horizontal	Pass
3	203.829	29.70	-26.63	43.5	13.80	Peak	156.10	100	Horizontal	Pass
4	359.960	27.05	-22.28	46.0	18.95	Peak	76.80	100	Horizontal	Pass
5	719.983	29.93	-13.84	46.0	16.07	Peak	148.60	100	Horizontal	Pass
6	959.755	36.33	-9.31	46.0	9.67	Peak	260.20	100	Horizontal	Pass

BLE-Vertical-TX


Test result

Project Number: Certification

Test Time: 2023-07-24_21.14.03

EUT Name: N.A
 Manufacturer: N.A
 Model: N.A
 Temp.(oC): 25.2
 Hum.: 53%

Test Engineer: ZY
 Test Standard: FCC
 Work Addition: TX
 Load: Full load
 Remark: DR-RSE01-E23060104-01#02

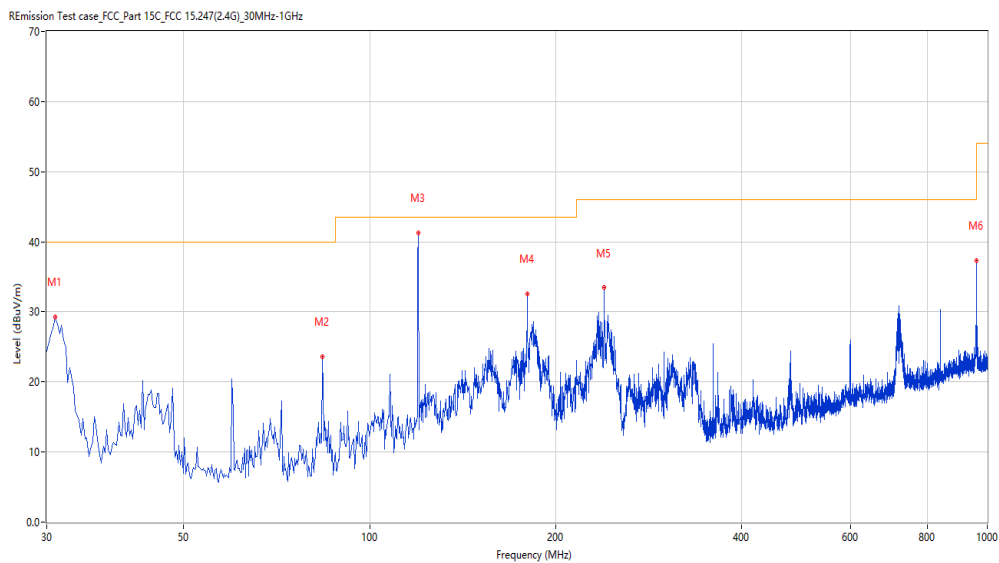

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.970	29.30	-29.51	40.0	10.70	Peak	124.70	100	Vertical	Pass
2	83.822	23.56	-30.81	40.0	16.44	Peak	301.70	100	Vertical	Pass
3	119.945	41.22	-28.31	43.5	2.28	Peak	144.40	100	Vertical	Pass
4	179.828	32.55	-28.28	43.5	10.95	Peak	174.20	100	Vertical	Pass
5	239.953	33.42	-25.19	46.0	12.58	Peak	121.70	100	Vertical	Pass
6	959.998	37.33	-9.30	46.0	8.67	Peak	256.00	100	Vertical	Pass

1-18G

BLE-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_11.27.49

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060104-01#02

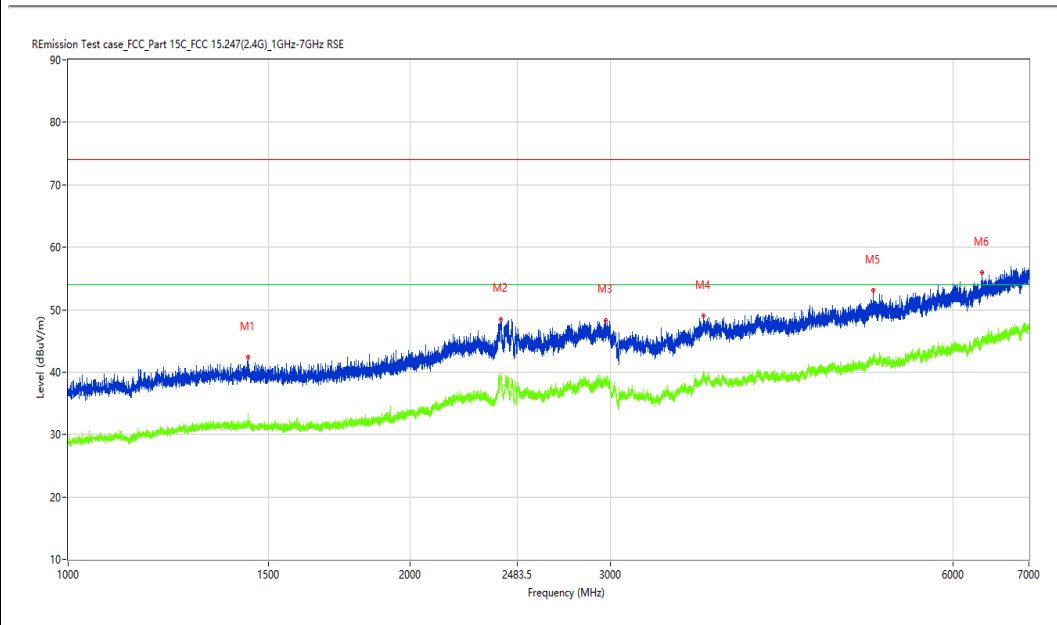

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	42.32	-12.71	74.0	31.68	Peak	144.10	100	Horizontal	Pass
1**	1440.000	32.84	-12.71	54.0	21.16	AV	144.10	100	Horizontal	Pass
2	2401.250	48.49	-4.69	74.0	25.51	Peak	0.00	100	Horizontal	Pass
2**	2401.250	39.25	-4.69	54.0	14.75	AV	0.00	100	Horizontal	Pass
3	2969.500	48.34	-3.72	74.0	25.66	Peak	344.30	100	Horizontal	Pass
3**	2969.500	37.81	-3.72	54.0	16.19	AV	344.30	100	Horizontal	Pass
4	3620.000	49.02	-2.35	74.0	24.98	Peak	340.90	100	Horizontal	Pass
4**	3620.000	39.27	-2.35	54.0	14.73	AV	340.90	100	Horizontal	Pass
5	5105.000	53.13	0.38	74.0	20.87	Peak	357.90	100	Horizontal	Pass
5**	5105.000	42.25	0.38	54.0	11.75	AV	357.90	100	Horizontal	Pass
6	6366.500	55.90	2.58	74.0	18.10	Peak	0.50	100	Horizontal	Pass
6**	6366.500	44.86	2.58	54.0	9.14	AV	0.50	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-07-24_21.03.53

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

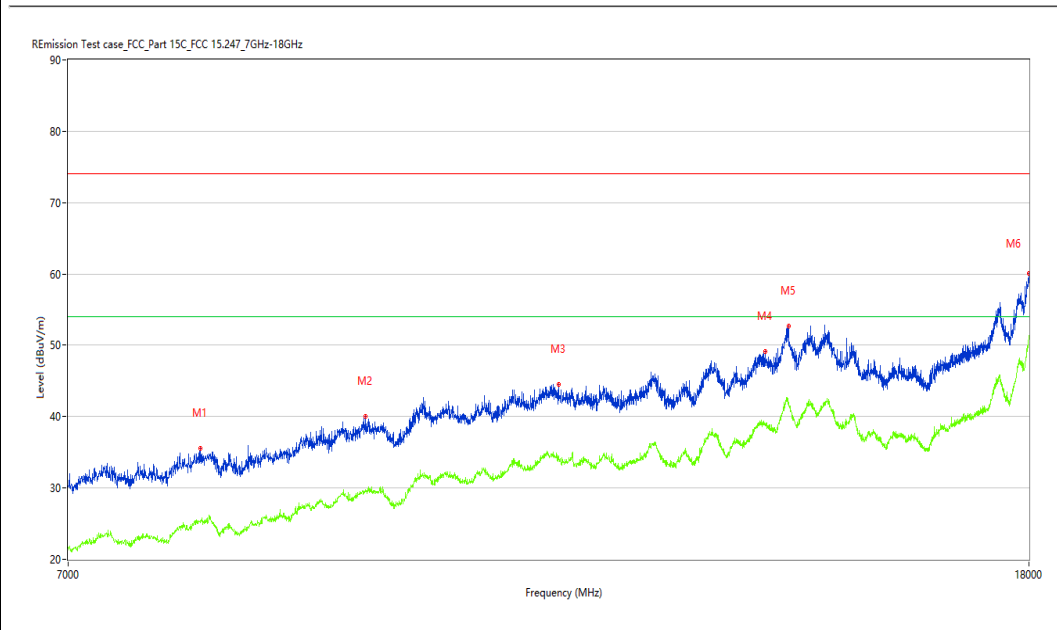

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7970.750	35.57	3.57	74.0	38.43	Peak	0.00	100	Horizontal	Pass
1**	7970.750	25.10	3.57	54.0	28.90	AV	0.00	100	Horizontal	Pass
2	9378.750	40.06	7.64	74.0	33.94	Peak	291.10	100	Horizontal	Pass
2**	9378.750	29.64	7.64	54.0	24.36	AV	291.10	100	Horizontal	Pass
3	11334.000	44.49	12.07	74.0	29.51	Peak	48.40	100	Horizontal	Pass
3**	11334.000	34.05	12.07	54.0	19.95	AV	48.40	100	Horizontal	Pass
4	13886.000	49.18	15.43	74.0	24.82	Peak	175.00	100	Horizontal	Pass
4**	13886.000	38.78	15.43	54.0	15.22	AV	175.00	100	Horizontal	Pass
5	14210.500	52.65	19.26	74.0	21.35	Peak	311.90	100	Horizontal	Pass
5**	14210.500	41.98	19.26	54.0	12.02	AV	311.90	100	Horizontal	Pass
6	17997.251	60.12	27.75	74.0	13.88	Peak	164.50	100	Horizontal	Pass
6**	17997.251	50.94	27.75	54.0	3.06	AV	164.50	100	Horizontal	Pass

BLE-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_11.20.36

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060104-01#02

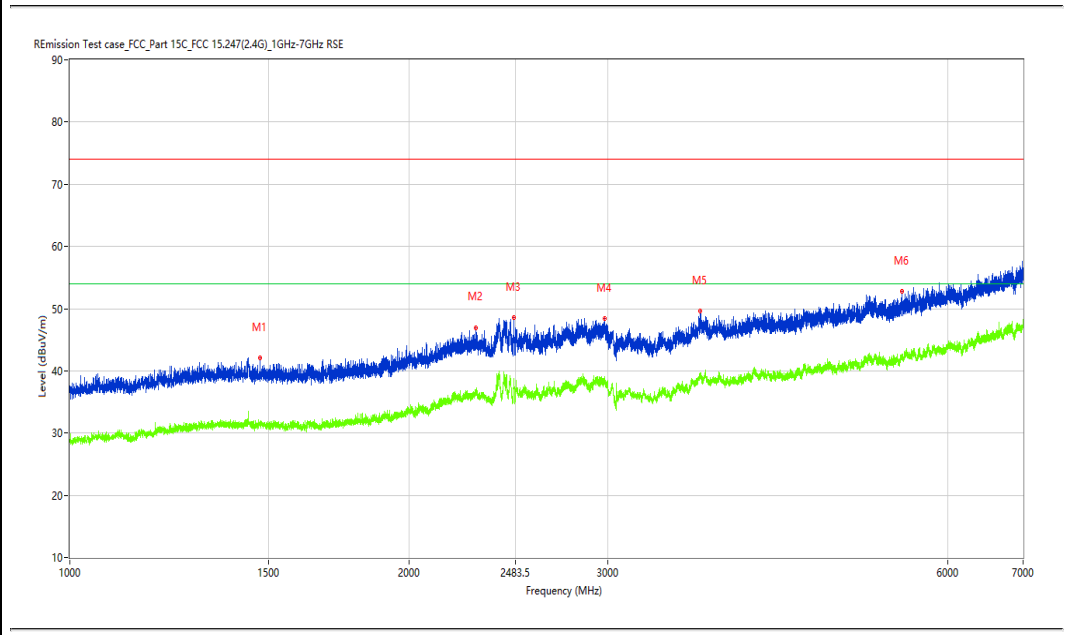

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1474.250	42.13	-12.90	74.0	31.87	Peak	269.40	100	Vertical	Pass
1**	1474.250	31.37	-12.90	54.0	22.63	AV	269.40	100	Vertical	Pass
2	2289.250	46.98	-7.65	74.0	27.02	Peak	0.00	100	Vertical	Pass
2**	2289.250	36.25	-7.65	54.0	17.75	AV	0.00	100	Vertical	Pass
3	2475.000	48.57	-6.10	74.0	25.43	Peak	26.80	100	Vertical	Pass
3**	2475.000	38.71	-6.10	54.0	15.29	AV	26.80	100	Vertical	Pass
4	2978.750	48.39	-3.65	74.0	25.61	Peak	48.00	100	Vertical	Pass
4**	2978.750	38.72	-3.65	54.0	15.28	AV	48.00	100	Vertical	Pass
5	3618.500	49.64	-2.39	74.0	24.36	Peak	359.70	100	Vertical	Pass
5**	3618.500	39.20	-2.39	54.0	14.80	AV	359.70	100	Vertical	Pass
6	5469.500	52.78	0.11	74.0	21.22	Peak	98.50	100	Vertical	Pass
6**	5469.500	41.92	0.11	54.0	12.08	AV	98.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-07-24_21.01.28

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

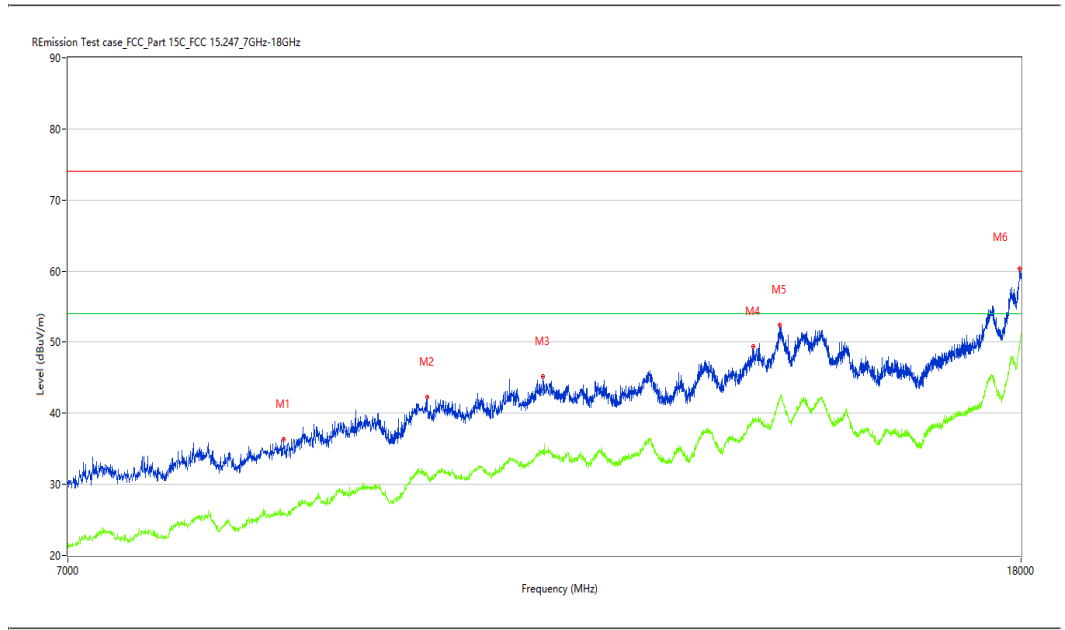

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8669.250	36.31	4.72	74.0	37.69	Peak	100.20	100	Vertical	Pass
1**	8669.250	26.07	4.72	54.0	27.93	AV	100.20	100	Vertical	Pass
2	9994.750	42.23	9.26	74.0	31.77	Peak	300.30	100	Vertical	Pass
2**	9994.750	31.49	9.26	54.0	22.51	AV	300.30	100	Vertical	Pass
3	11207.500	45.22	11.35	74.0	28.78	Peak	173.80	100	Vertical	Pass
3**	11207.500	34.27	11.35	54.0	19.73	AV	173.80	100	Vertical	Pass
4	13809.000	49.39	15.09	74.0	24.61	Peak	163.40	100	Vertical	Pass
4**	13809.000	38.86	15.09	54.0	15.14	AV	163.40	100	Vertical	Pass
5	14172.000	52.48	19.25	74.0	21.52	Peak	100.20	100	Vertical	Pass
5**	14172.000	41.90	19.25	54.0	12.10	AV	100.20	100	Vertical	Pass
6	17977.999	60.29	26.56	74.0	13.71	Peak	194.70	100	Vertical	Pass
6**	17977.999	49.94	26.56	54.0	4.06	AV	194.70	100	Vertical	Pass

BLE-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_11.30.00

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060104-01#02

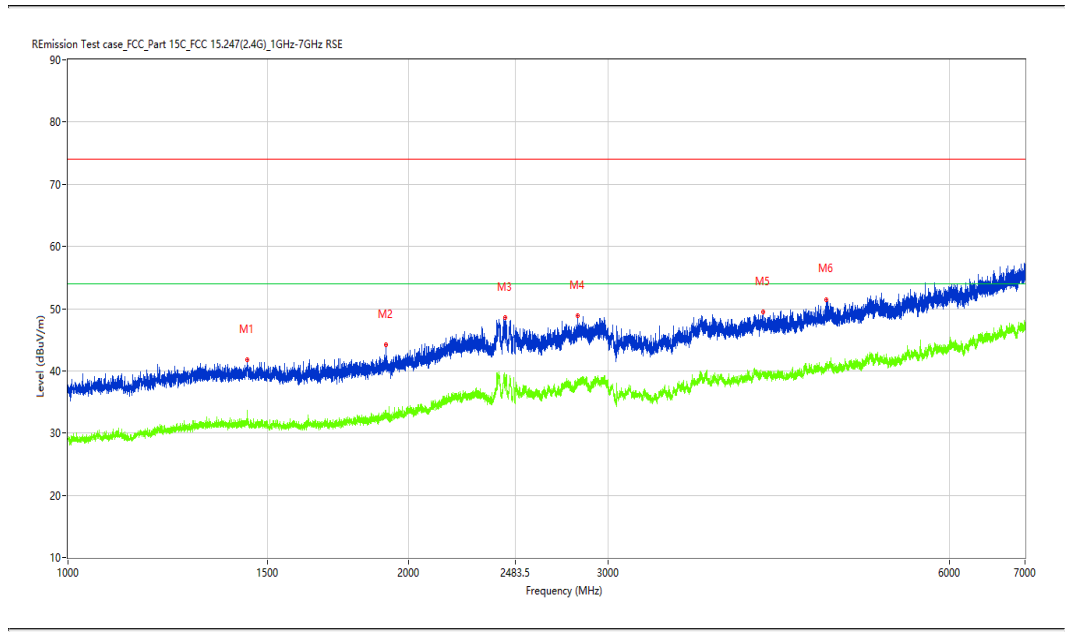

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.250	41.75	-12.71	74.0	32.25	Peak	173.80	100	Horizontal	Pass
1**	1440.250	33.65	-12.71	54.0	20.35	AV	173.80	100	Horizontal	Pass
2	1909.750	44.23	-11.66	74.0	29.77	Peak	142.20	100	Horizontal	Pass
2**	1909.750	32.66	-11.66	54.0	21.34	AV	142.20	100	Horizontal	Pass
3	2433.500	48.57	-5.34	74.0	25.43	Peak	300.30	100	Horizontal	Pass
3**	2433.500	38.78	-5.34	54.0	15.22	AV	300.30	100	Horizontal	Pass
4	2819.250	48.84	-4.77	74.0	25.16	Peak	226.60	100	Horizontal	Pass
4**	2819.250	38.48	-4.77	54.0	15.52	AV	226.60	100	Horizontal	Pass
5	4111.500	49.41	-1.76	74.0	24.59	Peak	3.30	100	Horizontal	Pass
5**	4111.500	39.57	-1.76	54.0	14.43	AV	3.30	100	Horizontal	Pass
6	4675.000	51.49	-0.91	74.0	22.51	Peak	277.40	100	Horizontal	Pass
6**	4675.000	40.76	-0.91	54.0	13.24	AV	277.40	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-07-24_20.56.12

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

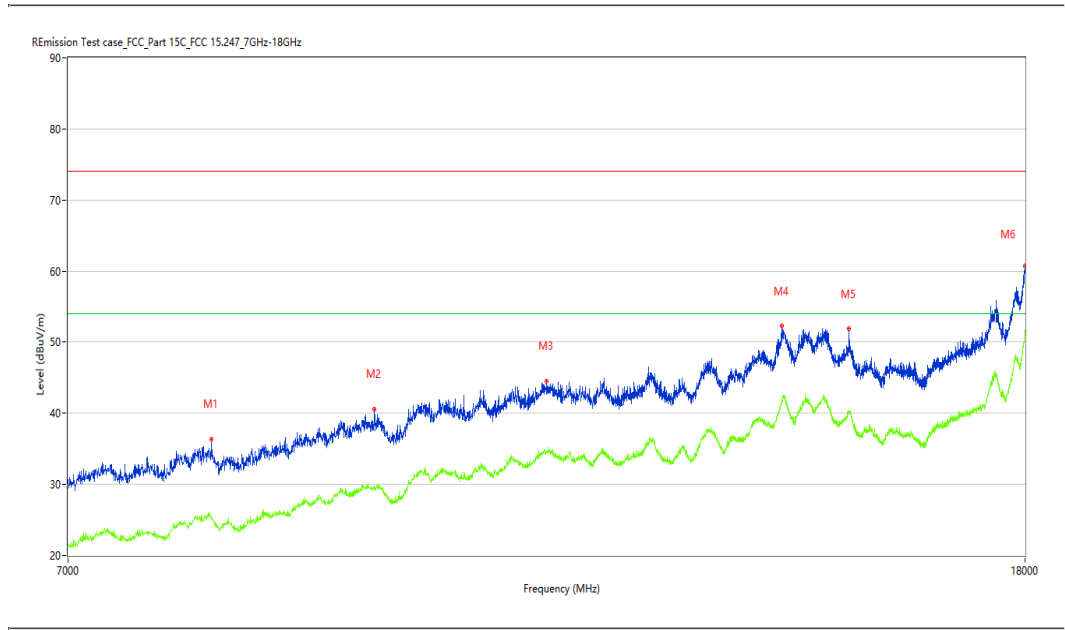

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8067.000	36.40	4.16	74.0	37.60	Peak	360.00	100	Horizontal	Pass
1**	8067.000	25.36	4.16	54.0	28.64	AV	360.00	100	Horizontal	Pass
2	9472.250	40.55	7.74	74.0	33.45	Peak	101.00	100	Horizontal	Pass
2**	9472.250	29.22	7.74	54.0	24.78	AV	101.00	100	Horizontal	Pass
3	11224.001	44.50	11.54	74.0	29.50	Peak	153.80	100	Horizontal	Pass
3**	11224.001	34.52	11.54	54.0	19.48	AV	153.80	100	Horizontal	Pass
4	14163.750	52.24	18.99	74.0	21.76	Peak	153.80	100	Horizontal	Pass
4**	14163.750	41.31	18.99	54.0	12.69	AV	153.80	100	Horizontal	Pass
5	15131.750	51.92	14.91	74.0	22.08	Peak	80.10	100	Horizontal	Pass
5**	15131.750	39.97	14.91	54.0	14.03	AV	80.10	100	Horizontal	Pass
6	17994.500	60.78	27.58	74.0	13.22	Peak	354.00	100	Horizontal	Pass
6**	17994.500	51.07	27.58	54.0	2.93	AV	354.00	100	Horizontal	Pass

BLE-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_11.23.00

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060104-01#02

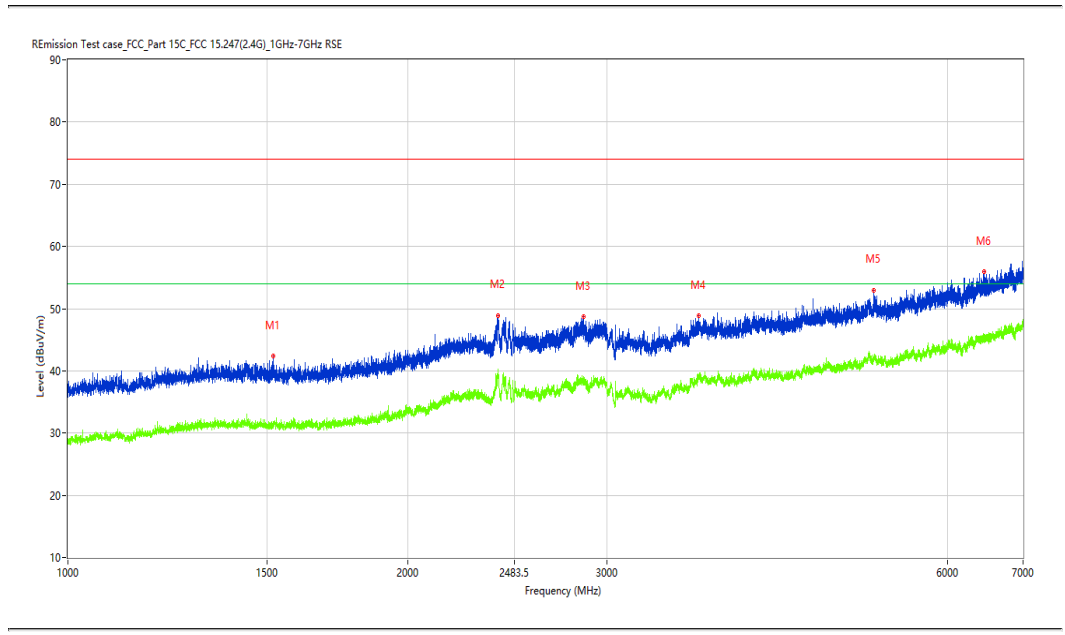

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1520.000	42.39	-13.03	74.0	31.61	Peak	154.50	100	Vertical	Pass
1**	1520.000	31.83	-13.03	54.0	22.17	AV	154.50	100	Vertical	Pass
2	2402.000	48.93	-4.71	74.0	25.07	Peak	0.00	100	Vertical	Pass
2**	2402.000	39.28	-4.71	54.0	14.72	AV	0.00	100	Vertical	Pass
3	2860.500	48.67	-4.19	74.0	25.33	Peak	26.50	100	Vertical	Pass
3**	2860.500	38.59	-4.19	54.0	15.41	AV	26.50	100	Vertical	Pass
4	3615.500	48.83	-2.47	74.0	25.17	Peak	242.10	100	Vertical	Pass
4**	3615.500	39.38	-2.47	54.0	14.62	AV	242.10	100	Vertical	Pass
5	5167.500	52.99	0.25	74.0	21.01	Peak	1.10	100	Vertical	Pass
5**	5167.500	41.62	0.25	54.0	12.38	AV	1.10	100	Vertical	Pass
6	6470.000	55.96	2.86	74.0	18.04	Peak	294.90	100	Vertical	Pass
6**	6470.000	45.33	2.86	54.0	8.67	AV	294.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-07-24_20.59.25

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

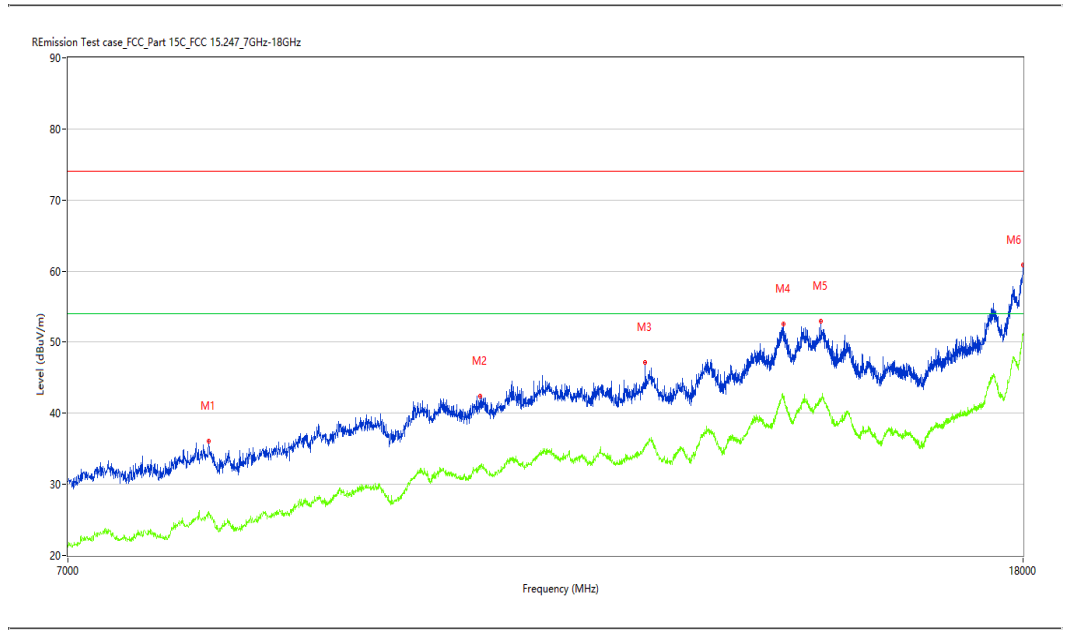

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8047.750	36.11	4.55	74.0	37.89	Peak	111.30	100	Vertical	Pass
1**	8047.750	26.00	4.55	54.0	28.00	AV	111.30	100	Vertical	Pass
2	10522.750	42.46	10.21	74.0	31.54	Peak	205.90	100	Vertical	Pass
2**	10522.750	32.33	10.21	54.0	21.67	AV	205.90	100	Vertical	Pass
3	12390.000	47.12	12.20	74.0	26.88	Peak	279.90	100	Vertical	Pass
3**	12390.000	35.56	12.20	54.0	18.44	AV	279.90	100	Vertical	Pass
4	14207.750	52.52	19.32	74.0	21.48	Peak	227.10	100	Vertical	Pass
4**	14207.750	41.87	19.32	54.0	12.13	AV	227.10	100	Vertical	Pass
5	14741.250	52.94	18.61	74.0	21.06	Peak	290.30	100	Vertical	Pass
5**	14741.250	41.86	18.61	54.0	12.14	AV	290.30	100	Vertical	Pass
6	17997.251	60.84	27.75	74.0	13.16	Peak	237.90	100	Vertical	Pass
6**	17997.251	51.26	27.75	54.0	2.74	AV	237.90	100	Vertical	Pass

BLE-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_11.32.10

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060104-01#02

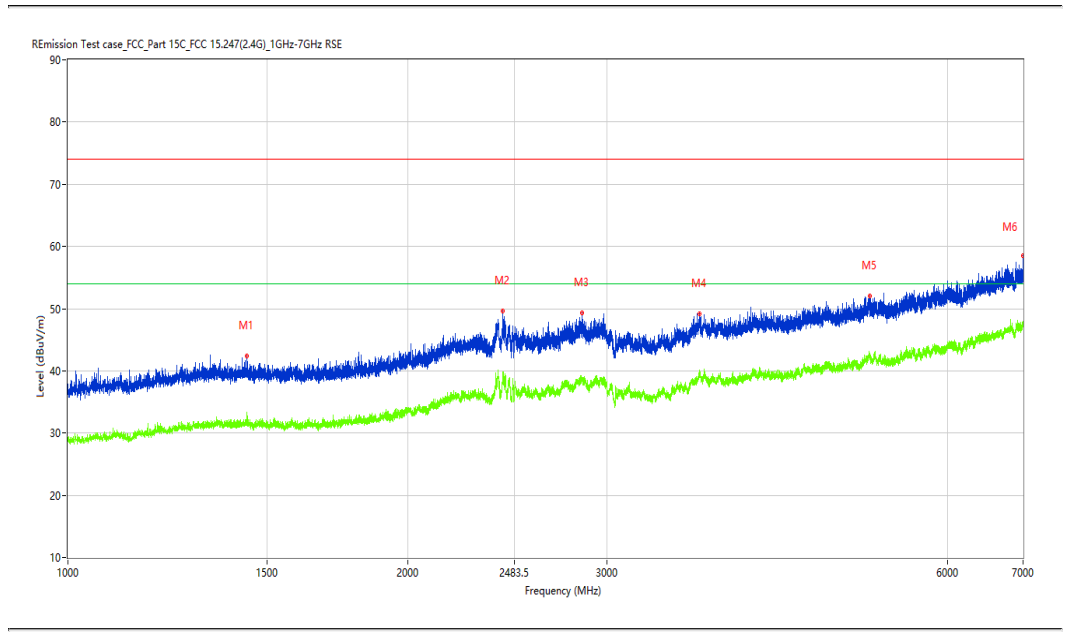

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	42.45	-12.71	74.0	31.55	Peak	153.40	100	Horizontal	Pass
1**	1440.000	32.90	-12.71	54.0	21.10	AV	153.40	100	Horizontal	Pass
2	2425.750	49.58	-5.18	74.0	24.42	Peak	269.10	100	Horizontal	Pass
2**	2425.750	39.09	-5.18	54.0	14.91	AV	269.10	100	Horizontal	Pass
3	2852.500	49.28	-4.24	74.0	24.72	Peak	205.80	100	Horizontal	Pass
3**	2852.500	38.94	-4.24	54.0	15.06	AV	205.80	100	Horizontal	Pass
4	3623.000	49.21	-2.26	74.0	24.79	Peak	210.10	100	Horizontal	Pass
4**	3623.000	39.24	-2.26	54.0	14.76	AV	210.10	100	Horizontal	Pass
5	5119.500	51.97	0.38	74.0	22.03	Peak	359.70	100	Horizontal	Pass
5**	5119.500	42.83	0.38	54.0	11.17	AV	359.70	100	Horizontal	Pass
6	6997.000	58.52	4.72	74.0	15.48	Peak	337.70	100	Horizontal	Pass
6**	6997.000	47.34	4.72	54.0	6.66	AV	337.70	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2023-07-24_21.06.09

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

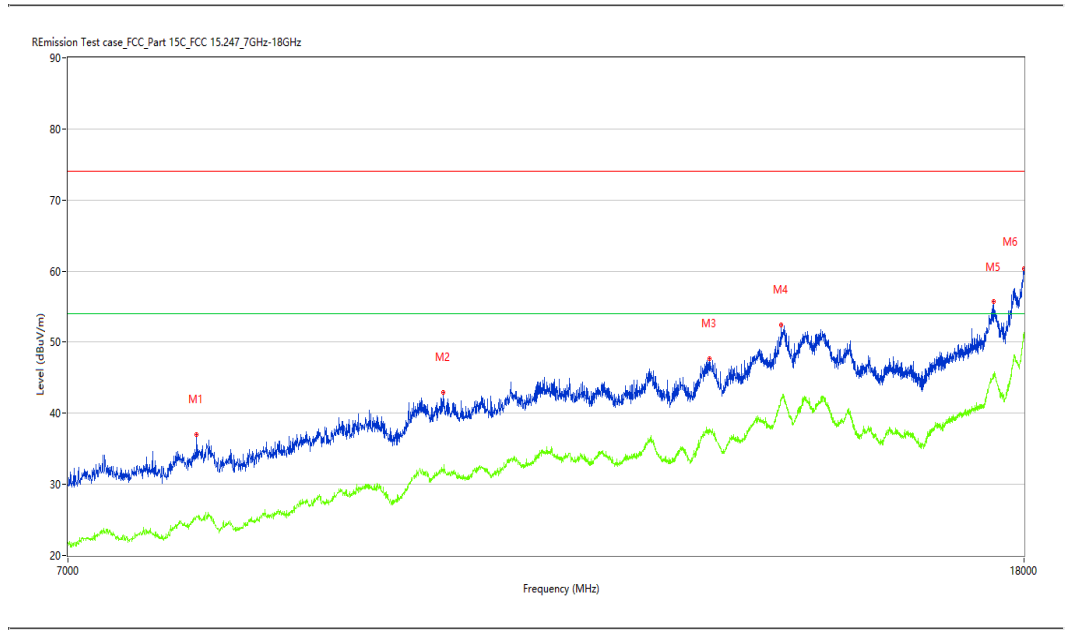

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7948.750	37.07	3.36	74.0	36.93	Peak	195.10	100	Horizontal	Pass
1**	7948.750	25.39	3.36	54.0	28.61	AV	195.10	100	Horizontal	Pass
2	10137.750	42.98	9.34	74.0	31.02	Peak	174.30	100	Horizontal	Pass
2**	10137.750	31.67	9.34	54.0	22.33	AV	174.30	100	Horizontal	Pass
3	13195.750	47.73	14.08	74.0	26.27	Peak	121.40	100	Horizontal	Pass
3**	13195.750	37.24	14.08	54.0	16.76	AV	121.40	100	Horizontal	Pass
4	14163.750	52.48	18.99	74.0	21.52	Peak	300.80	100	Horizontal	Pass
4**	14163.750	41.73	18.99	54.0	12.27	AV	300.80	100	Horizontal	Pass
5	17472.000	55.66	21.29	74.0	18.34	Peak	290.00	100	Horizontal	Pass
5**	17472.000	45.22	21.29	54.0	8.78	AV	290.00	100	Horizontal	Pass
6	17997.251	60.34	27.75	74.0	13.66	Peak	258.40	100	Horizontal	Pass
6**	17997.251	51.40	27.75	54.0	2.60	AV	258.40	100	Horizontal	Pass

BLE-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2023-07-29_11.25.16

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.5

Load: Full load

Hum.: 53.5%

Remark: DR-RSE01-E23060104-01#02

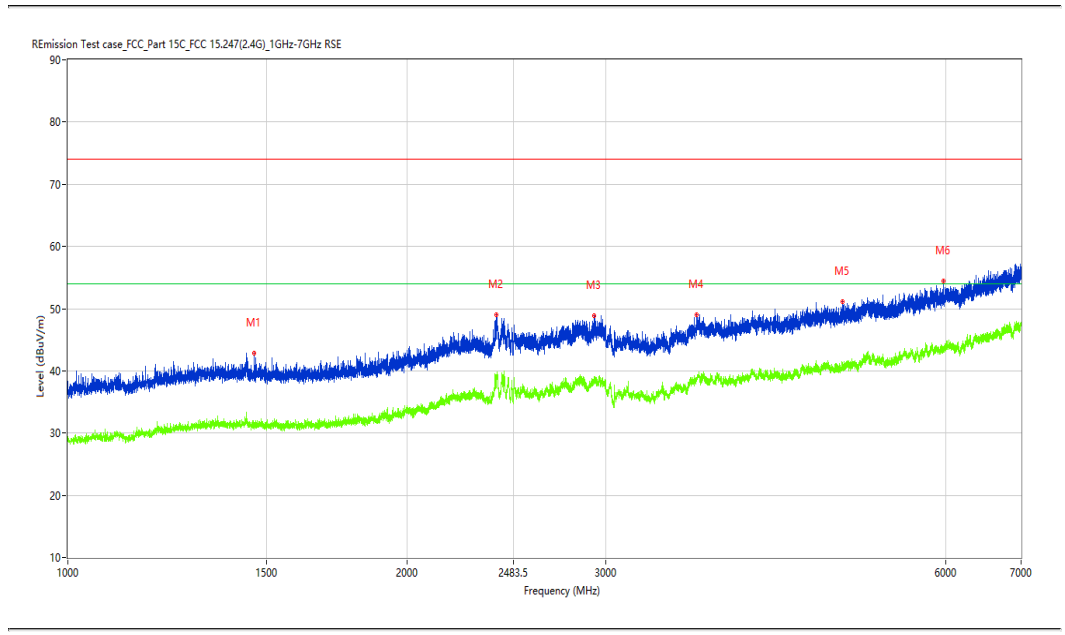

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1463.750	42.86	-12.95	74.0	31.14	Peak	6.50	100	Vertical	Pass
1**	1463.750	30.92	-12.95	54.0	23.08	AV	6.50	100	Vertical	Pass
2	2400.000	49.05	-4.67	74.0	24.95	Peak	322.60	100	Vertical	Pass
2**	2400.000	39.45	-4.67	54.0	14.55	AV	322.60	100	Vertical	Pass
3	2928.750	48.90	-4.69	74.0	25.10	Peak	248.50	100	Vertical	Pass
3**	2928.750	38.94	-4.69	54.0	15.06	AV	248.50	100	Vertical	Pass
4	3611.500	49.00	-2.59	74.0	25.00	Peak	0.00	100	Vertical	Pass
4**	3611.500	38.68	-2.59	54.0	15.32	AV	0.00	100	Vertical	Pass
5	4864.000	51.11	-0.86	74.0	22.89	Peak	233.50	100	Vertical	Pass
5**	4864.000	40.47	-0.86	54.0	13.53	AV	233.50	100	Vertical	Pass
6	5977.500	54.46	1.33	74.0	19.54	Peak	191.50	100	Vertical	Pass
6**	5977.500	43.47	1.33	54.0	10.53	AV	191.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2023-07-24_21.08.00

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

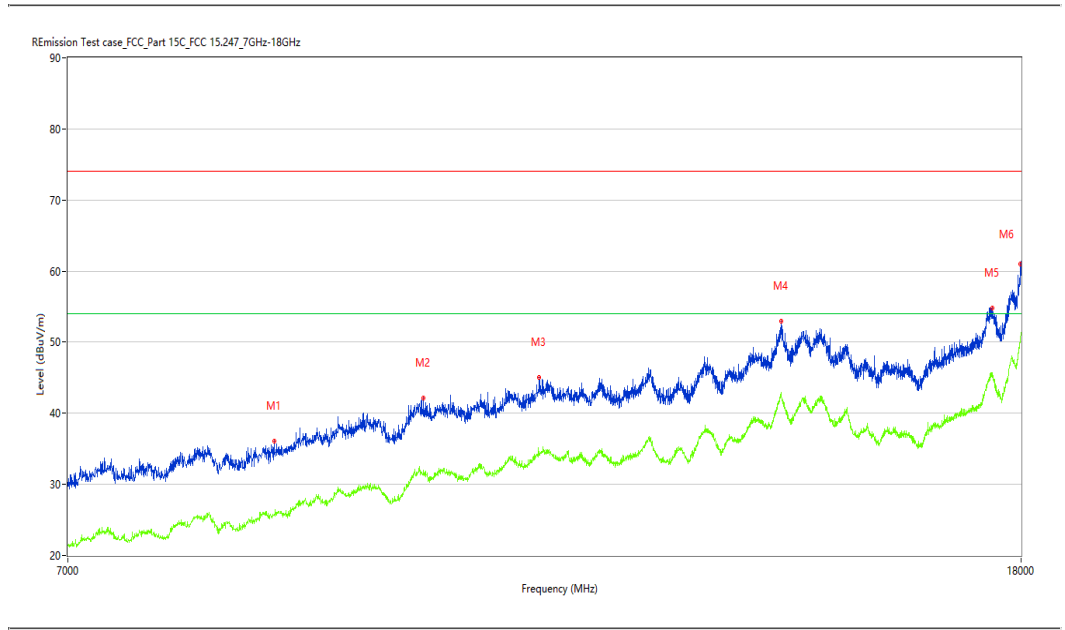

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8589.500	36.08	4.28	74.0	37.92	Peak	0.80	100	Vertical	Pass
1**	8589.500	25.75	4.28	54.0	28.25	AV	0.80	100	Vertical	Pass
2	9956.250	42.10	9.64	74.0	31.90	Peak	15.30	100	Vertical	Pass
2**	9956.250	31.93	9.64	54.0	22.07	AV	15.30	100	Vertical	Pass
3	11163.500	45.01	10.96	74.0	28.99	Peak	0.00	100	Vertical	Pass
3**	11163.500	34.16	10.96	54.0	19.84	AV	0.00	100	Vertical	Pass
4	14188.500	52.94	19.75	74.0	21.06	Peak	78.60	100	Vertical	Pass
4**	14188.500	42.98	19.75	54.0	11.02	AV	78.60	100	Vertical	Pass
5	17499.501	54.84	21.21	74.0	19.16	Peak	195.80	100	Vertical	Pass
5**	17499.501	45.21	21.21	54.0	8.79	AV	195.80	100	Vertical	Pass
6	17991.750	60.98	27.41	74.0	13.02	Peak	206.20	100	Vertical	Pass
6**	17991.750	50.47	27.41	54.0	3.53	AV	206.20	100	Vertical	Pass

BLE-Bandedge -Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2023-07-24_20.24.46

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

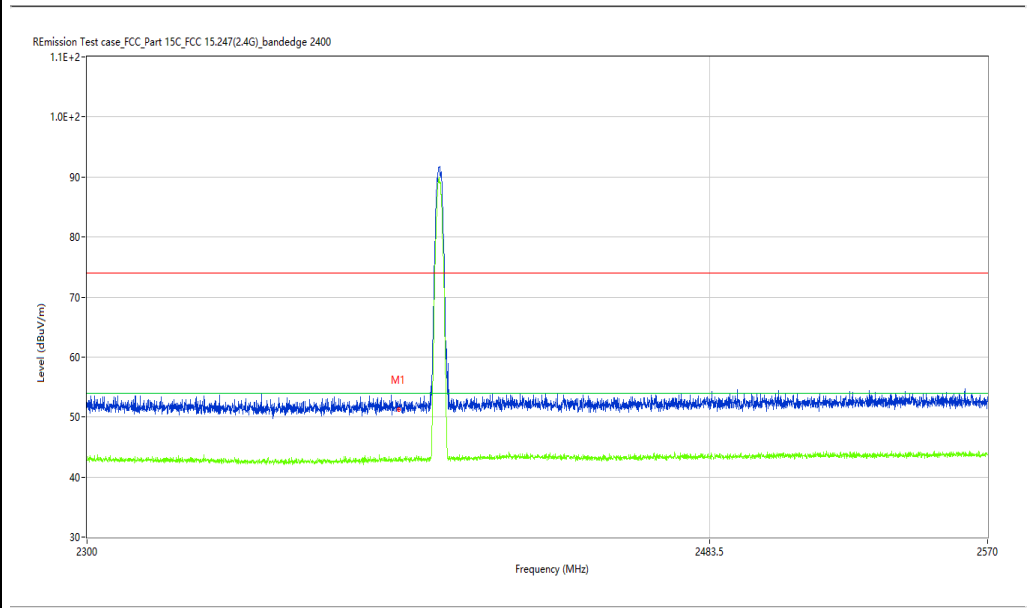

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.28	-9.96	74.0	22.72	Peak	67.08	100	H	Pass
1**	2390.000	42.76	-9.96	54.0	11.24	AV	67.08	100	H	Pass

BLE-Bandedge -Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2023-07-24_20.30.45

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

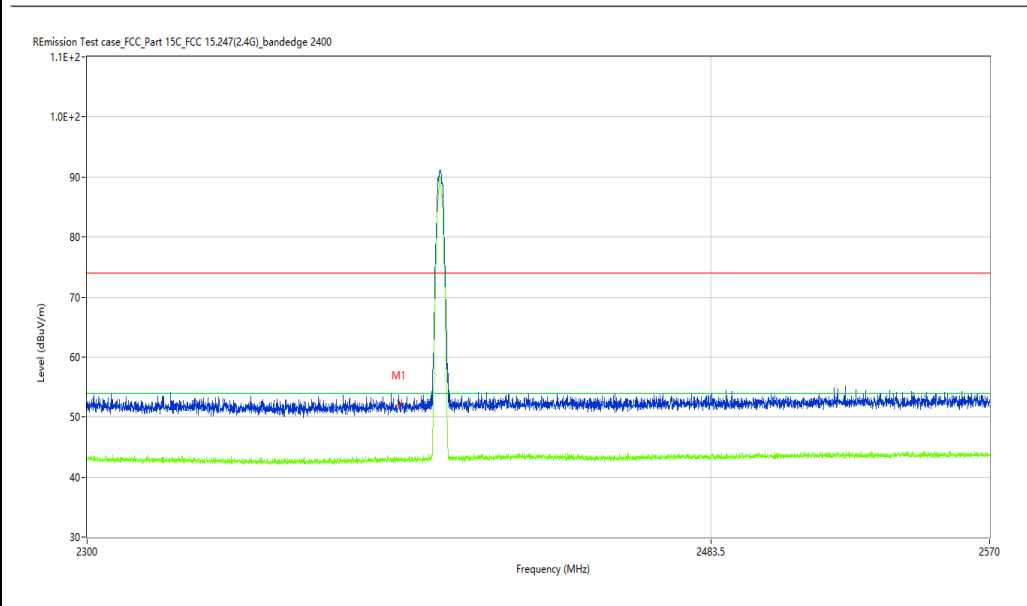

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.95	-9.96	74.0	22.05	Peak	256.35	100	V	Pass
1**	2390.000	42.82	-9.96	54.0	11.18	AV	256.35	100	V	Pass

BLE-Bandedge -High channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2023-07-24_20.26.20

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

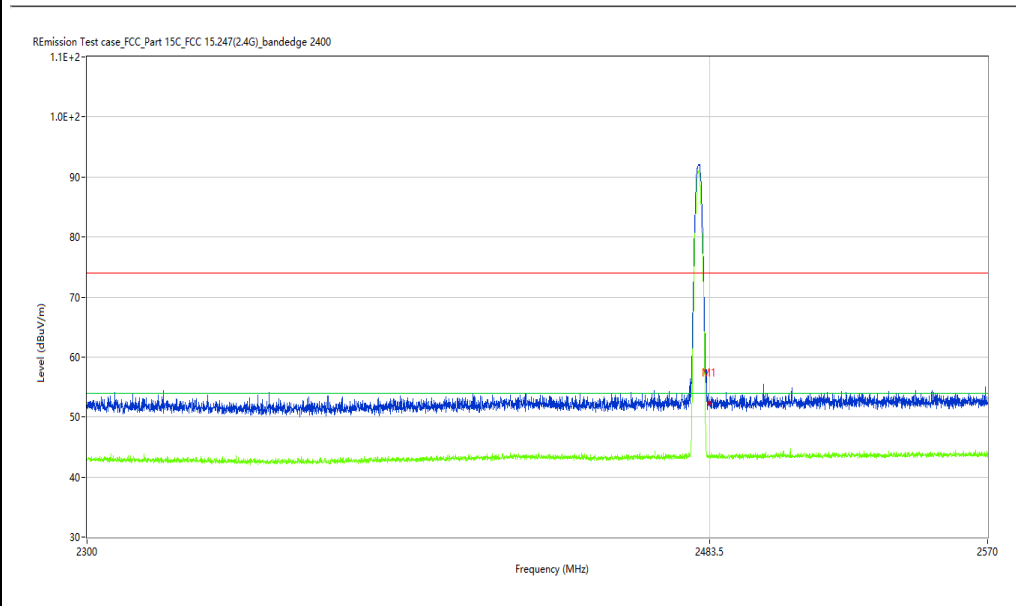

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.50	-9.51	74.0	21.50	Peak	271.47	100	H	Pass
1**	2483.500	43.82	-9.51	54.0	10.18	AV	271.47	100	H	Pass

BLE-Bandedge -High channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2023-07-24_20.27.53

EUT Name: N.A

Test Engineer: ZY

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.2

Load: Full load

Hum.: 53%

Remark: DR-RSE01-E23060104-01#02

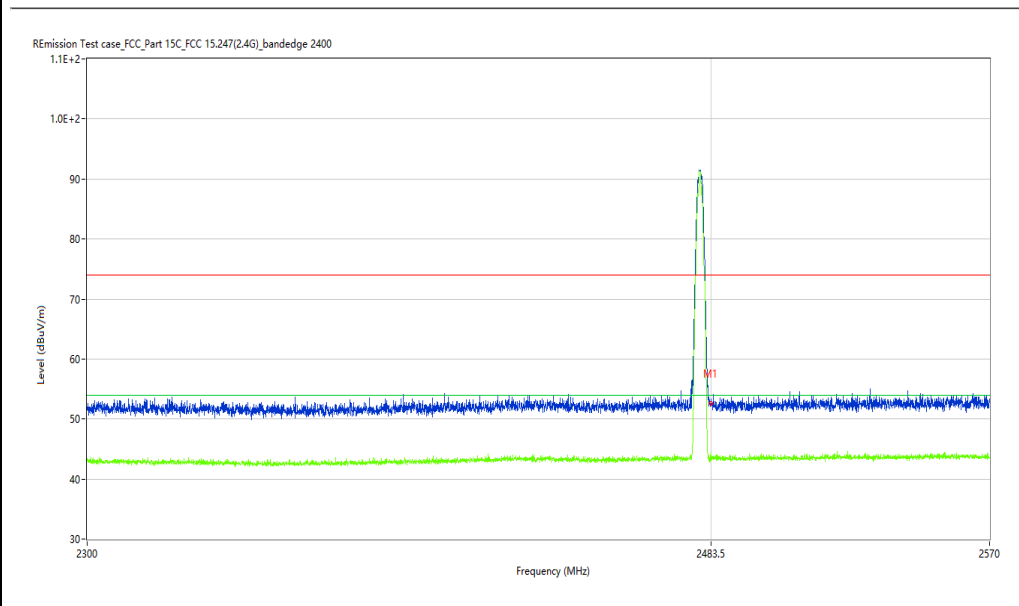

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.41	-9.51	74.0	21.59	Peak	241.67	100	V	Pass
1**	2483.500	43.31	-9.51	54.0	10.69	AV	241.67	100	V	Pass