


Power bank + wireless charge (W05) user's manual

一、 Product electrical parameters:

Item	parameters	Remark
Wireless charging output	10W max	
TYPE-C output	5.0V/2.4A	
TYPE-C input	5V/3A;9V/2A	Work with adapter (5V/2A)
Battery capacity	755475PH-5000mAh(19Wh)	
Environment temperature	0°C -- 40°C	

二、 Instructions :

1、 diagram

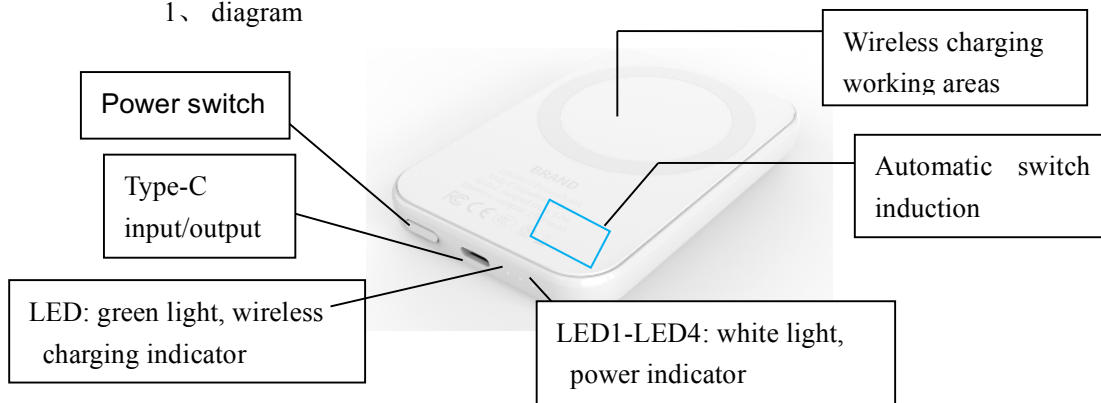

2、 power switch (power on ,power off ,check the power, shut down); press the “switch” button to start , (the wireless charge indicator light flashes twice and automatically goes off, and the power lights turn on one by one. After one second, the power lights stabilize to the battery indicator light.) Press the switch for 2 seconds to turn off ; into the sleep standby state.

3、 TYPE-C input/output:

- TYPE-C output: 5.0V/2.4A; (connect to the mobile phone and start to charge the mobile phone, when fully charged, the mobile phone will automatically stop charging and the power lights will turn off.
- Placing the mobile phone in the magnetic position to charge the mobile automatically.
- TYPE-C input: use the quick charge adapter to connect to the wireless charger, which compatible with QC2.0/3.0, PD2.0/3.0 protocol, there are 4 LEDs displaying the battery capacity, after the battery is fully charged, the 4 LEDs will be on. (note: it is recommended that the adapter with fast charging function be used for charging.)

4、 LED indicator:

- Battery power indicator:

Power rate	LED1	LED2	LED3	LED4
75-100%	on	on	on	on
50-75%	on	on	on	off
25-50%	on	on	off	off
5-25%	on	off	off	off
1-5%	on	off	off	off
0%	off	off	off	off

b、 Battery charging indicator

电量比	LED1	LED2	LED3	LED4
100%	on	on	on	on
75-99%	on	on	on	flashing
50-75%	on	on	flashing	off
25-50%	on	flashing	off	off
0-25%	flashing	off	off	off

c、 Wireless charging indicator

- 1、 flash twice when starting the machine, and then automatically go off.
- 2、 keep green light on when charging the mobile.
- 3、 Flashing for 5-10 seconds if an error is detected, and automatically turn off.
- 4、 wireless charging function:
 - a、 the battery power output is 10W (max). As long as the mobile phone is placed in the magnetic wireless charge position., the wireless charge function can be automatically charged to wake up. after the mobile phone is fully charged, it will stop working and the indicator light will automatically go off.
 - b、 connect to the quick charge adapter , wireless charging output of 7.5W, also can give the internal battery power charging, wireless charging indicator long on work, power indicator to shine as the battery power inside . after the mobile is fully charged, it will automatically stop working, and wireless charging indicator light turns off , the power indicator light will turn on.
- 5、 If the power supply is too low, the mobile phone cannot be charged, the indicator light will flash for 5 seconds and then automatically turn off.
- 6、 Protection function:
 - a、 input and output: overvoltage protection, overload protection, short-circuit protection and over-temperature protection.
 - b、 The battery: over charge protection, over discharge protection, over current protection, short circuit protection. The battery surface gets over temperature(NTC) protection.
 - c、 Wireless charge FOD protection function, placing a one-dollar coin to the center of the coil can trigger the FOD, and the wireless charge indicator light flashes, automatic shutdown after 5-10 seconds.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction