




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: 11b 2412MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/14 20:09:08

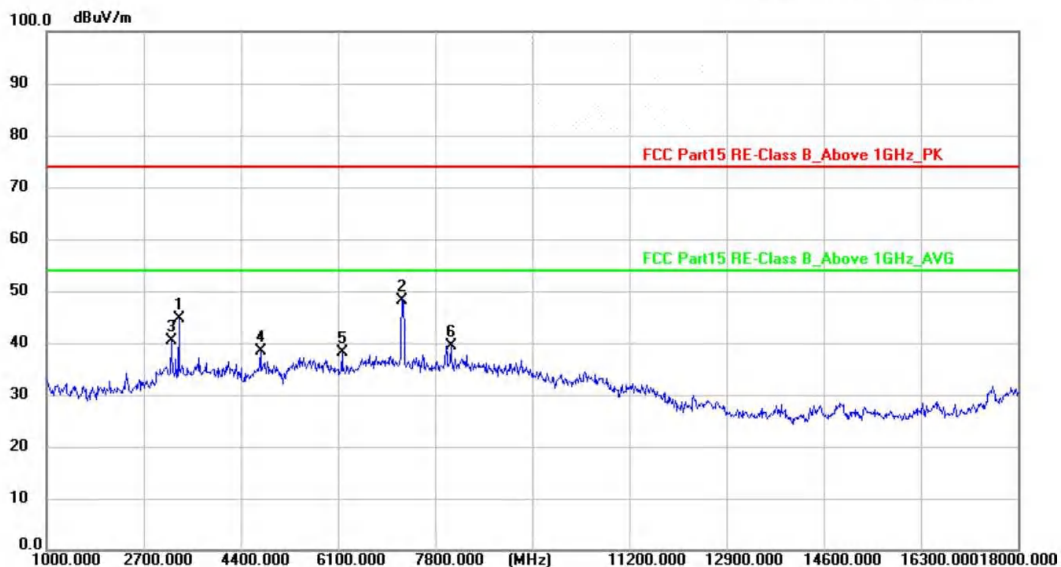

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3326.875	62.45	-17.72	44.73	74.00	-29.27	peak	150	157	P	
2 *	7232.625	55.99	-7.84	48.15	74.00	-25.85	peak	150	49	P	
3	3190.875	58.33	-18.05	40.28	74.00	-33.72	peak	150	217	P	
4	4750.625	52.63	-14.18	38.45	74.00	-35.55	peak	150	135	P	
5	6176.500	48.55	-10.37	38.18	74.00	-35.82	peak	150	210	P	
6	8078.375	46.40	-7.09	39.31	74.00	-34.69	peak	150	98	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11b 2437MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeTrakW)

Radiated Emission Measurement

Test Date: 2024/11/14 20:13:15

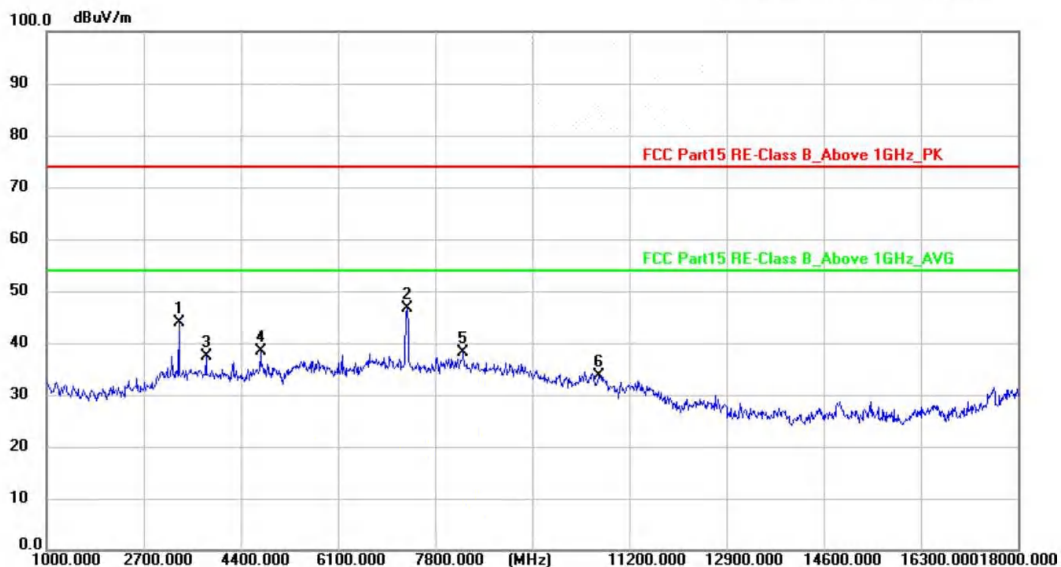

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3324.750	61.68	-17.72	43.96	74.00	-30.04	peak	150	135	P	
2 *	7311.250	54.45	-7.77	46.68	74.00	-27.32	peak	150	247	P	
3	3800.750	53.88	-16.58	37.30	74.00	-36.70	peak	150	168	P	
4	4750.625	52.64	-14.18	38.46	74.00	-35.54	peak	150	204	P	
5	8293.000	45.12	-6.88	38.24	74.00	-35.76	peak	150	197	P	
6	10658.125	38.39	-4.74	33.65	74.00	-40.35	peak	150	10	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: See note Distance: 3m Humidity: 54 %RH
M/N: See note Test Engineer: Felix Pang
Test Mode: 11b 2437MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeTrakW)

Radiated Emission Measurement

Test Date: 2024/11/14 20:18:41

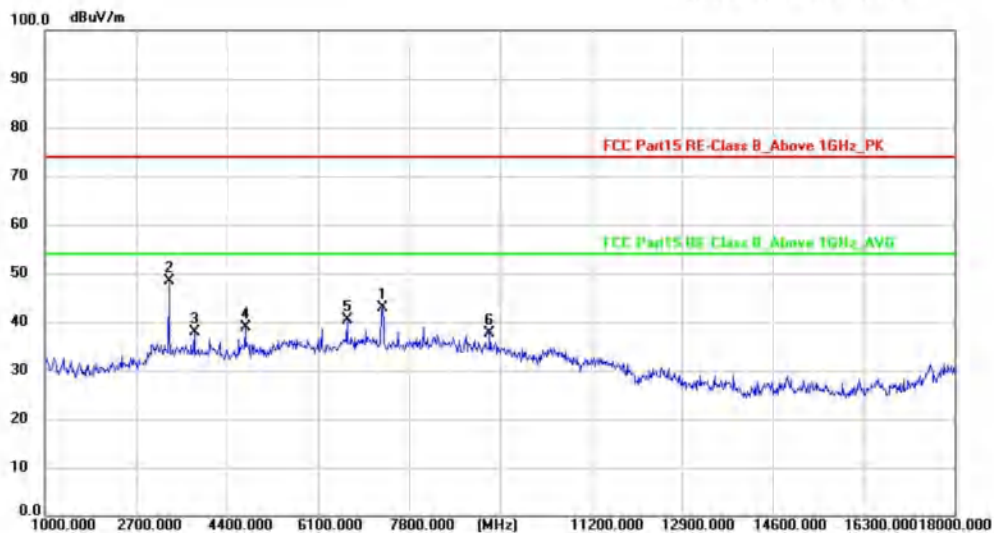

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7311.250	50.61	-7.77	42.84	74.00	-31.16	peak	150	120	P	
2 *	3326.875	66.20	-17.72	48.48	74.00	-25.52	peak	150	157	P	
3	3800.750	54.49	-16.58	37.91	74.00	-36.09	peak	150	198	P	
4	4750.625	52.20	-13.43	38.77	74.00	-35.23	peak	150	217	P	
5	6652.500	49.30	-9.02	40.28	74.00	-33.72	peak	150	135	P	
6	9315.125	43.63	-6.03	37.60	74.00	-36.40	peak	150	47	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: b 2412MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 13:31:16

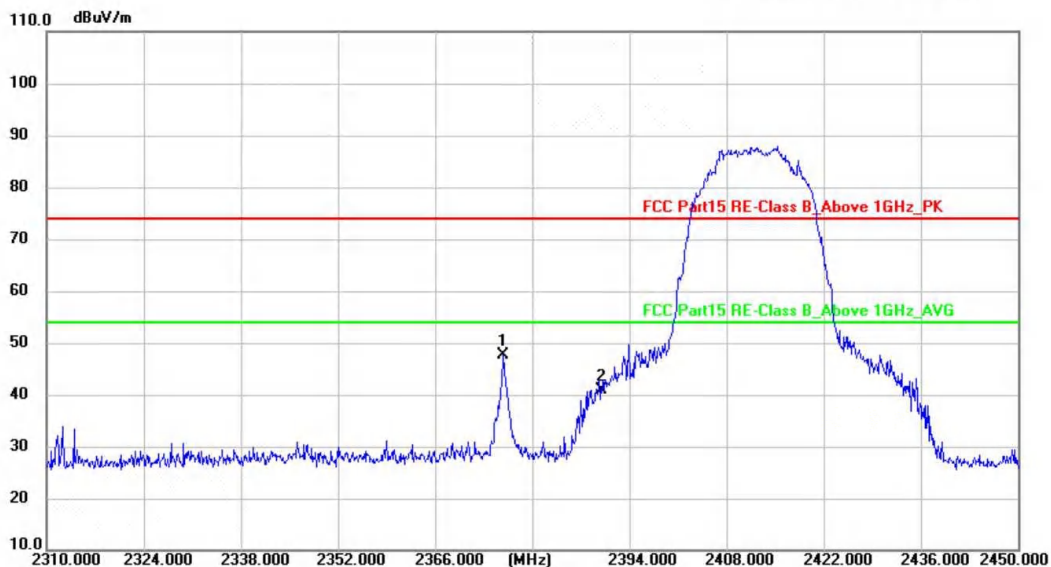

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2375.923	73.75	-26.15	47.60	74.00	-26.40	peak	150	141	P	
2	2390.000	67.08	-26.12	40.96	74.00	-33.04	peak	150	204	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: b 2412MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 13:36:42

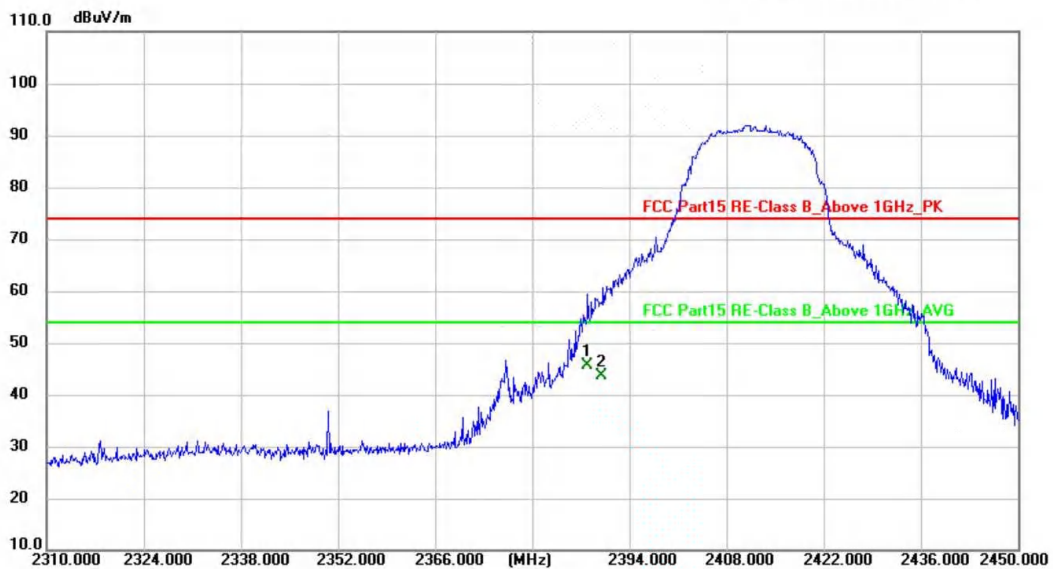

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2388.068	71.81	-26.12	45.69	54.00	-8.31	AVG	150	17	P	
2	2390.000	69.74	-26.12	43.62	54.00	-10.38	AVG	150	241	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: b 2462MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 13:41:00

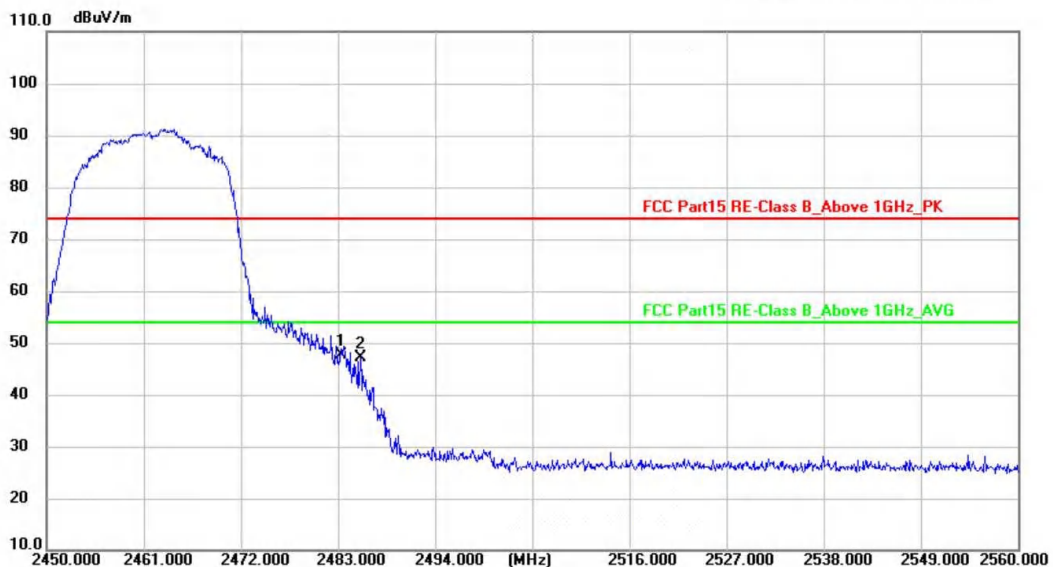

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	73.53	-25.84	47.69	74.00	-26.31	peak	150	201	P	
2	2485.530	72.86	-25.83	47.03	74.00	-26.97	peak	150	45	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: b 2462MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 13:46:15

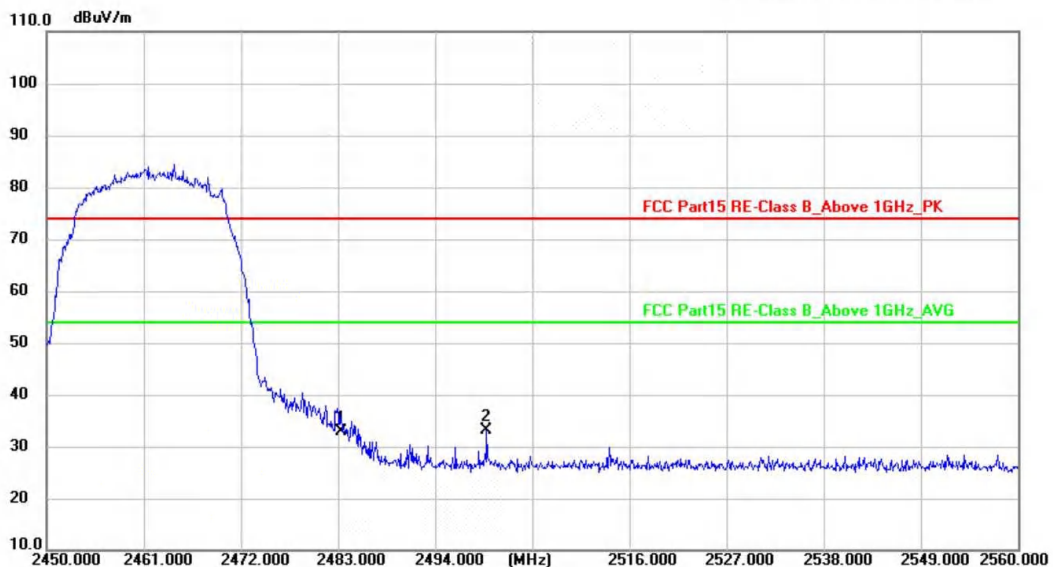

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	58.81	-25.84	32.97	74.00	-41.03	peak	150	157	P	
2 *	2499.899	58.81	-25.78	33.03	74.00	-40.97	peak	150	168	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: g 2412MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 13:51:30

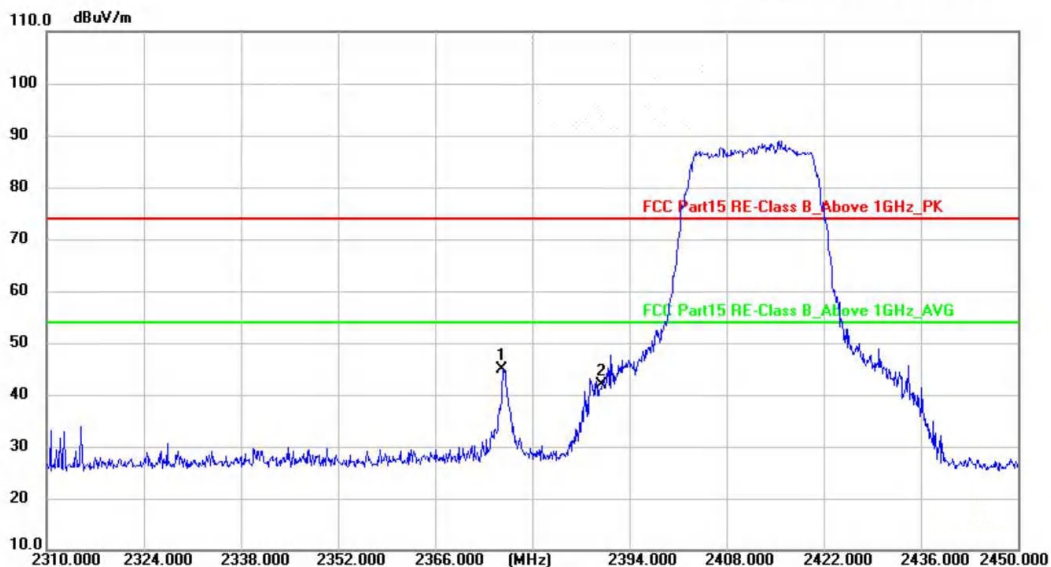

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2375.852	70.98	-26.15	44.83	74.00	-29.17	peak	150	125	P	
2	2390.000	67.98	-26.12	41.86	74.00	-32.14	peak	150	247	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104


Test Site: PSI EMC Lab-3m Chamber
EUT: See note
M/N: See note
Test Mode: g 2412MHz(Ant 1)
Test Voltage: DC 24V
Note: Optical 3D Measuring and Dynamic Tracking System
FreeScan Trak ProW(FreeTrakW)

Polarization: **Horizontal**
Distance: 3m
Test Engineer: Felix Pang

Temperature: 26 °C
Humidity: 54 %RH

Radiated Emission Measurement

Test Date: 2024/11/15 13:56:42

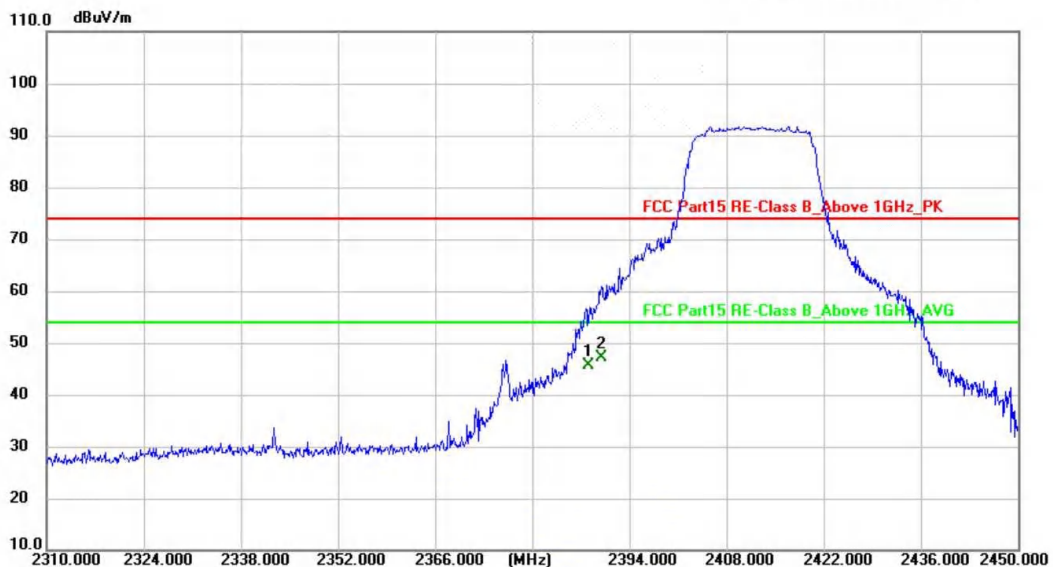

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2388.347	71.76	-26.12	45.64	54.00	-8.36	AVG	150	147	P	
2 *	2390.000	73.37	-26.12	47.25	54.00	-6.75	AVG	150	247	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: g 2462MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 13:59:52

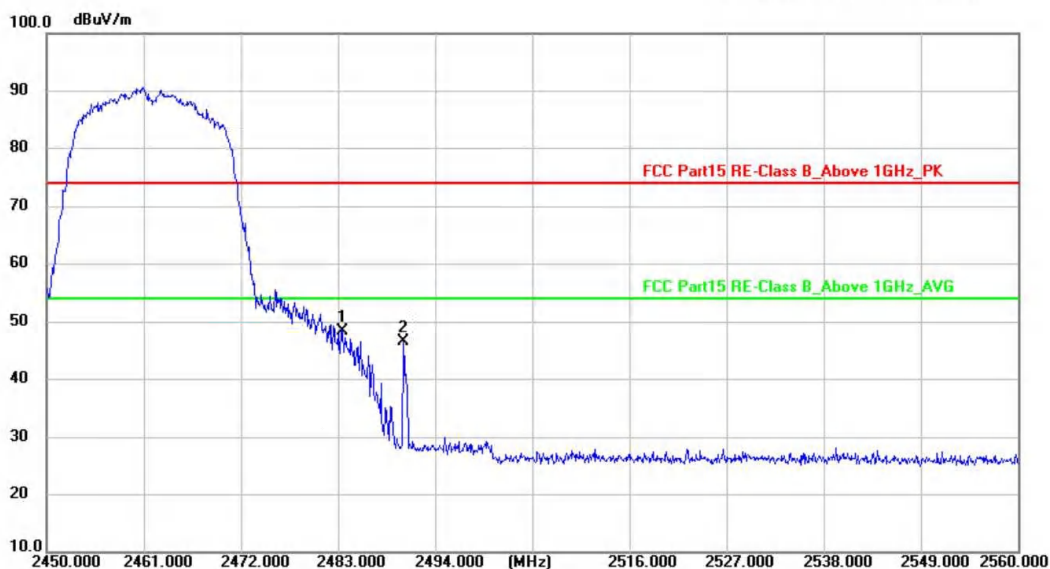

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	74.20	-25.84	48.36	74.00	-25.64	peak	150	65	P	
2	2490.384	72.29	-25.81	46.48	74.00	-27.52	peak	150	47	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: g 2462MHz(Ant 1)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:04:04

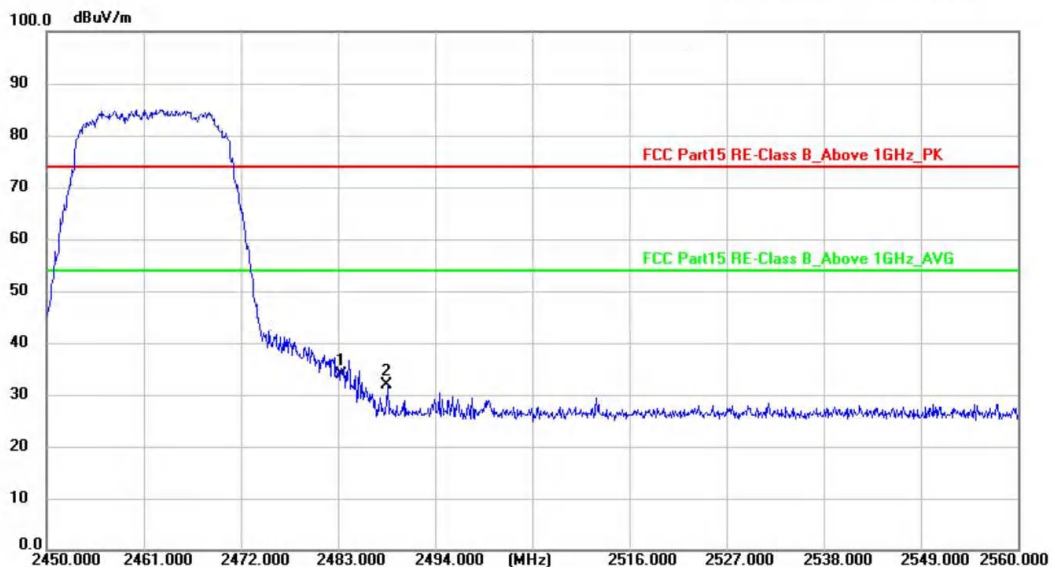

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	59.61	-25.84	33.77	74.00	-40.23	peak	150	13	P	
2	2488.637	57.63	-25.82	31.81	74.00	-42.19	peak	150	42	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: n20 2412MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:08:01



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2375.940	72.81	-26.15	46.66	74.00	-27.34	peak	150	168	P	
2 *	2390.000	73.99	-26.12	47.87	74.00	-26.13	peak	150	247	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: n20 2412MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:13:11

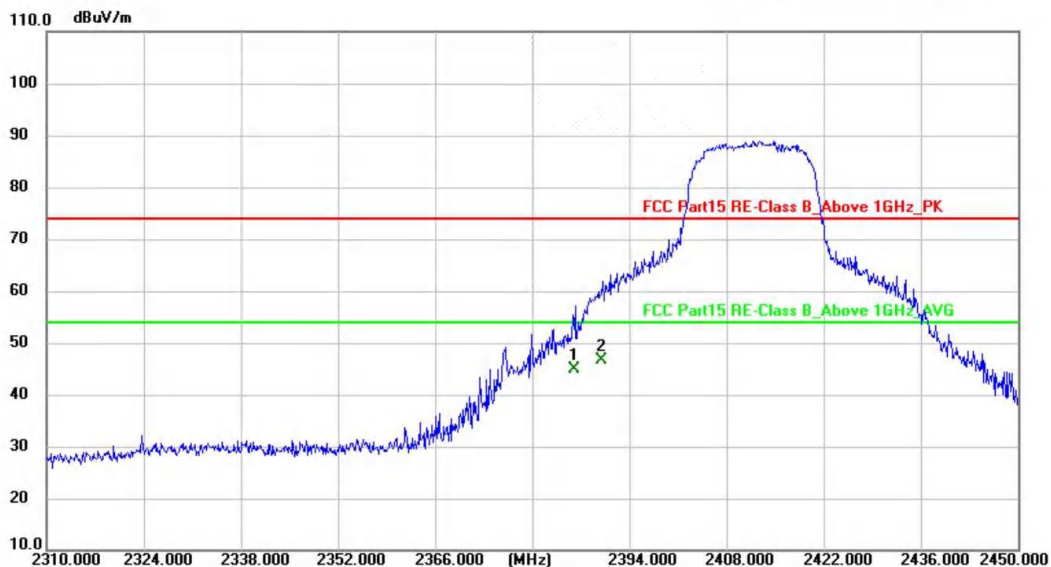

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2386.247	70.97	-26.13	44.84	54.00	-9.16	AVG	150	157	P	
2 *	2390.000	72.81	-26.12	46.69	54.00	-7.31	AVG	150	148	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: n20 2462MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:17:58

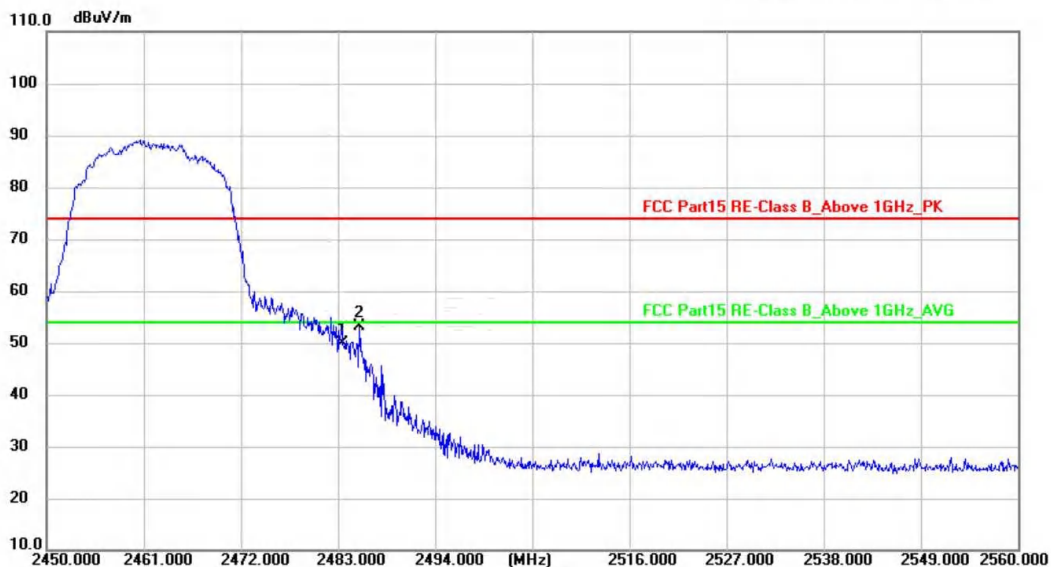

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	75.80	-25.84	49.96	74.00	-24.04	peak	150	127	P	
2 *	2485.503	78.85	-25.83	53.02	74.00	-20.98	peak	150	164	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: n20 2462MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:22:34



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	63.92	-25.84	38.08	74.00	-35.92	peak	150	98	P	
2 *	2501.026	68.64	-25.78	42.86	74.00	-31.14	peak	150	245	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: ax20 2412MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:26:01



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2388.400	67.46	-26.12	41.34	54.00	-12.66	AVG	150	64	P	
2 *	2390.000	69.99	-26.12	43.87	54.00	-10.13	AVG	150	127	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: ax20 2412MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:31:43



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2386.878	71.82	-26.13	45.69	54.00	-8.31	AVG	150	165	P	
2 *	2390.000	72.33	-26.12	46.21	54.00	-7.79	AVG	150	248	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Horizontal	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: ax20 2462MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:35:57

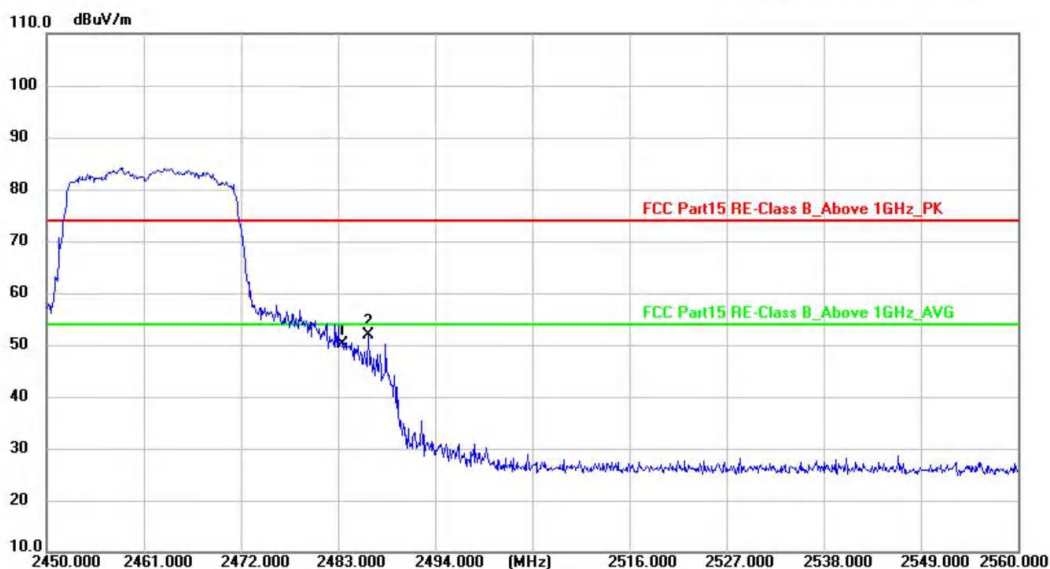

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	75.85	-25.84	50.01	74.00	-23.99	peak	150	157	P	
2 *	2486.479	77.70	-25.83	51.87	74.00	-22.13	peak	150	137	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber	Polarization: Vertical	Temperature: 26 °C
EUT: See note	Distance: 3m	Humidity: 54 %RH
M/N: See note	Test Engineer: Felix Pang	
Test Mode: ax20 2462MHz(MIMO)		
Test Voltage: DC 24V		
Note: Optical 3D Measuring and Dynamic Tracking System		
FreeScan Trak ProW(FreeTrakW)		

Radiated Emission Measurement

Test Date: 2024/11/15 14:38:01

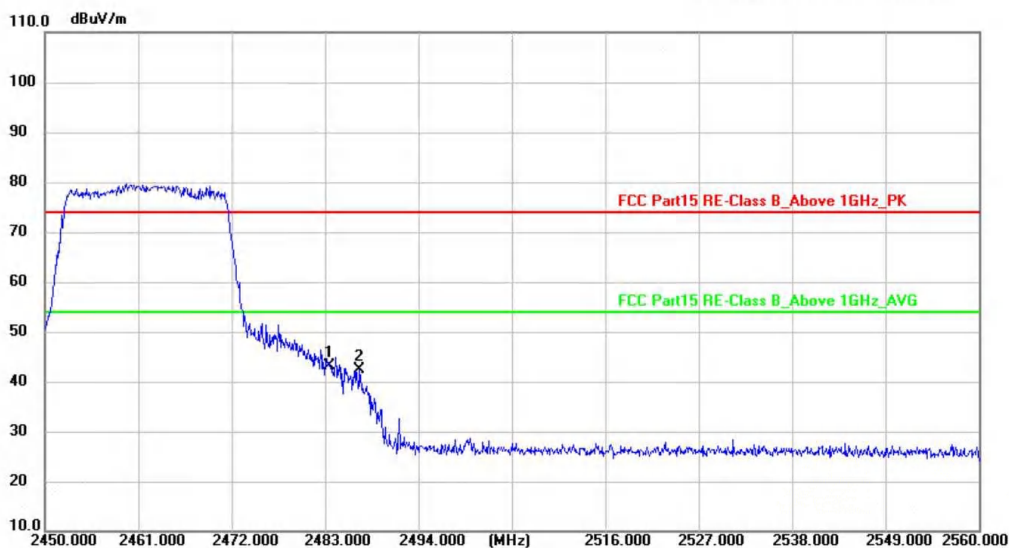

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	68.88	-25.84	43.04	74.00	-30.96	peak	150	157	P	
2	2487.070	68.32	-25.83	42.49	74.00	-31.51	peak	150	140	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: BD 2\Data :#16

Page: 1

Engineer Signature:

It verified that there are no evident emissions found in co-location modes (2.4GHz SRD+2.4GHz Wi-Fi), thus no records listed.

Appendix B.7: Test Results of Conducted emissions of AC mains




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **L1** Temperature: 26 °C
EUT: See note Humidity: 54 %RH
M/N: FreeScan Trak ProW(FreeTrakW) Test Engineer: Felix Pang
Test Mode: 2.4G WIFI Link
Test Voltage: AC 120V/60Hz
Note: Optical 3D Measuring and Dynamic Tracking System

Conducted Emission Measurement

Test Date: 2024/9/25 15:21:48

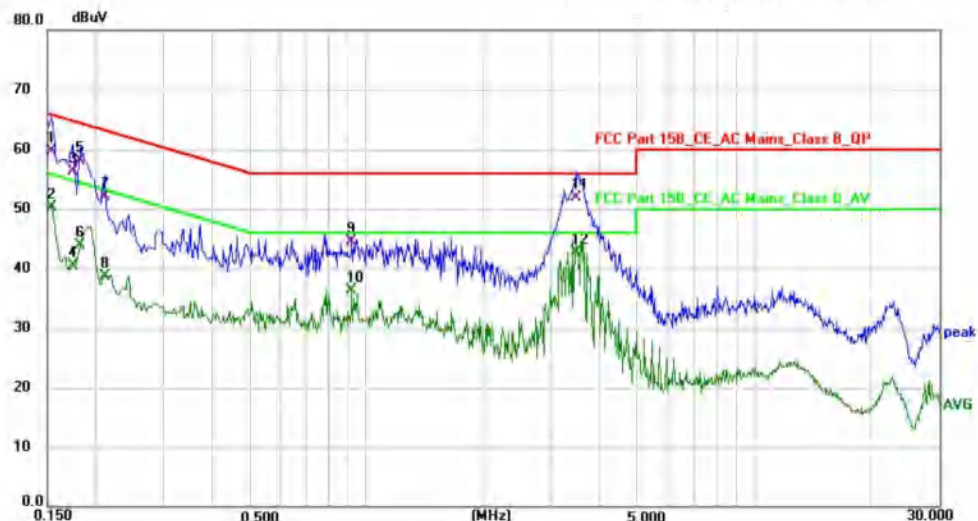

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	49.72	9.94	59.66	65.79	-6.13	QP	P	
2	0.1539	40.39	9.94	50.33	55.79	-5.46	AVG	P	
3	0.1740	46.31	9.94	56.25	64.77	-8.52	QP	P	
4	0.1740	30.62	9.94	40.56	54.77	-14.21	AVG	P	
5	0.1819	48.17	9.95	58.12	64.40	-6.28	QP	P	
6	0.1819	34.02	9.95	43.97	54.40	-10.43	AVG	P	
7	0.2100	42.21	9.95	52.16	63.21	-11.05	QP	P	
8	0.2100	28.70	9.95	38.65	53.21	-14.56	AVG	P	
9	0.9180	35.10	9.42	44.52	56.00	-11.48	QP	P	
10	0.9180	26.98	9.42	36.40	46.00	-9.60	AVG	P	
11	3.4620	42.45	9.39	51.84	56.00	-4.16	QP	P	
12 *	3.4620	33.31	9.39	42.70	46.00	-3.30	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **N** Temperature: 26 °C
EUT: See note Humidity: 54 %RH
M/N: FreeScan Trak ProW(FreeTrakW) Test Engineer: Felix Pang
Test Mode: 2.4G WIFI Link
Test Voltage: AC 120V/60Hz
Note: Optical 3D Measuring and Dynamic Tracking System

Conducted Emission Measurement

Test Date: 2024/9/25 15:29:51

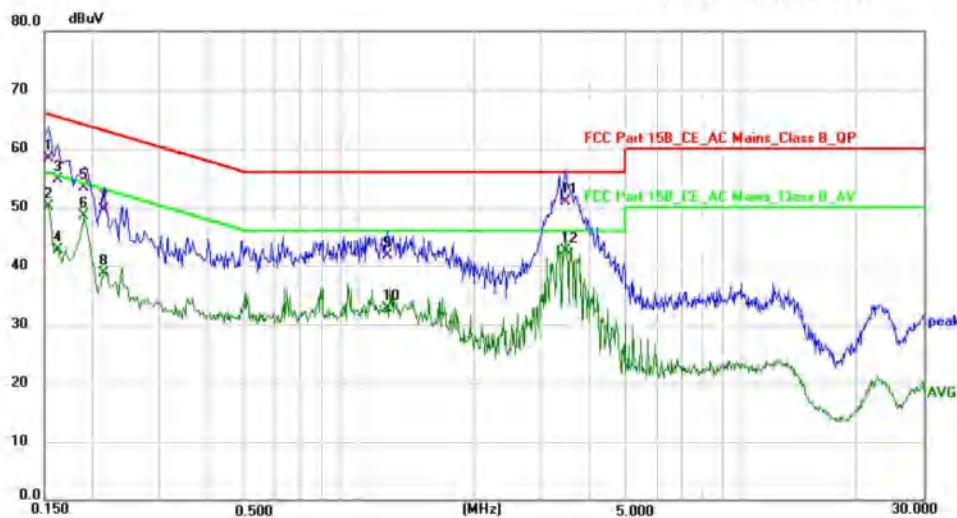

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	48.57	9.79	58.36	65.79	-7.43	QP	P	
2	0.1539	40.41	9.79	50.20	55.79	-5.59	AVG	P	
3	0.1620	44.94	9.84	54.78	65.36	-10.58	QP	P	
4	0.1620	32.92	9.84	42.76	55.36	-12.60	AVG	P	
5	0.1900	43.22	9.99	53.21	64.04	-10.83	QP	P	
6	0.1900	38.47	9.99	48.46	54.04	-5.58	AVG	P	
7	0.2140	39.51	10.01	49.52	63.05	-13.53	QP	P	
8	0.2140	28.62	10.01	38.63	53.05	-14.42	AVG	P	
9	1.1900	32.19	9.46	41.65	56.00	-14.35	QP	P	
10	1.1900	23.25	9.46	32.71	46.00	-13.29	AVG	P	
11	3.4740	41.42	9.56	50.98	56.00	-5.02	QP	P	
12 *	3.4740	32.95	9.56	42.51	46.00	-3.49	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit