



Appendix D

RF Test Data for 5.2GWIFI(Conducted Measurement)

Product Name: Digital Projector

Test Model: NeoPix 750 Smart

Environmental Conditions

Temperature:	26.3° C
Relative Humidity:	52.9%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng





D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	22.916	---	Pass
NVNT	a	5200	Ant0	20.875	---	Pass
NVNT	a	5240	Ant0	23.362	---	Pass
NVNT	n20	5180	Ant0	26.366	---	Pass
NVNT	n20	5200	Ant0	26.958	---	Pass
NVNT	n20	5240	Ant0	25.385	---	Pass
NVNT	n40	5190	Ant0	39.767	---	Pass
NVNT	n40	5230	Ant0	43.301	---	Pass
NVNT	ac20	5180	Ant0	25.423	---	Pass
NVNT	ac20	5200	Ant0	24.145	---	Pass
NVNT	ac20	5240	Ant0	24.804	---	Pass
NVNT	ac40	5190	Ant0	40.17	---	Pass
NVNT	ac40	5230	Ant0	40.621	---	Pass
NVNT	ax20	5180	Ant0	28.133	---	Pass
NVNT	ax20	5200	Ant0	27.191	---	Pass
NVNT	ax20	5240	Ant0	28.993	---	Pass
NVNT	ax40	5190	Ant0	40.102	---	Pass
NVNT	ax40	5230	Ant0	44.232	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

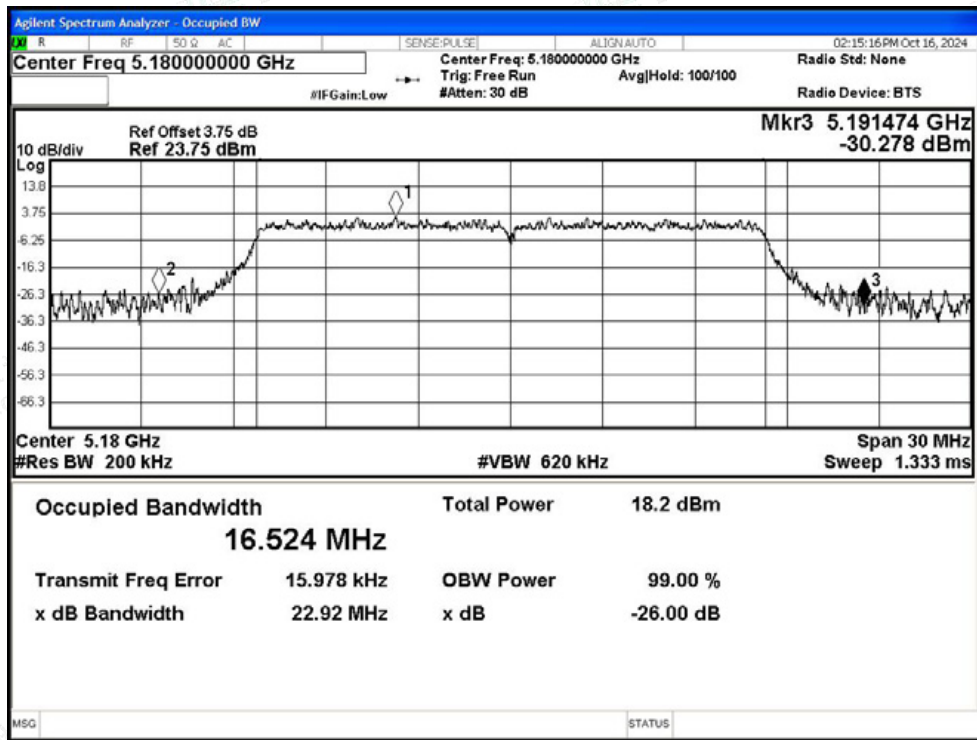


-26dB Bandwidth NVNT a 5200MHz Ant0

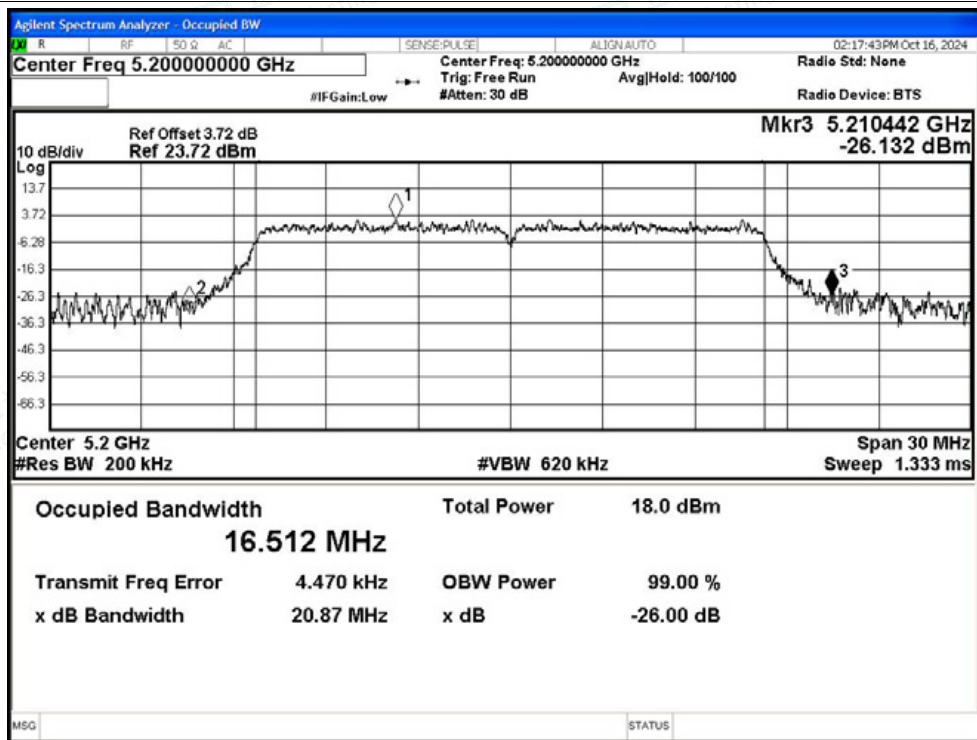




-26dB Bandwidth NVNT a 5240MHz Ant0

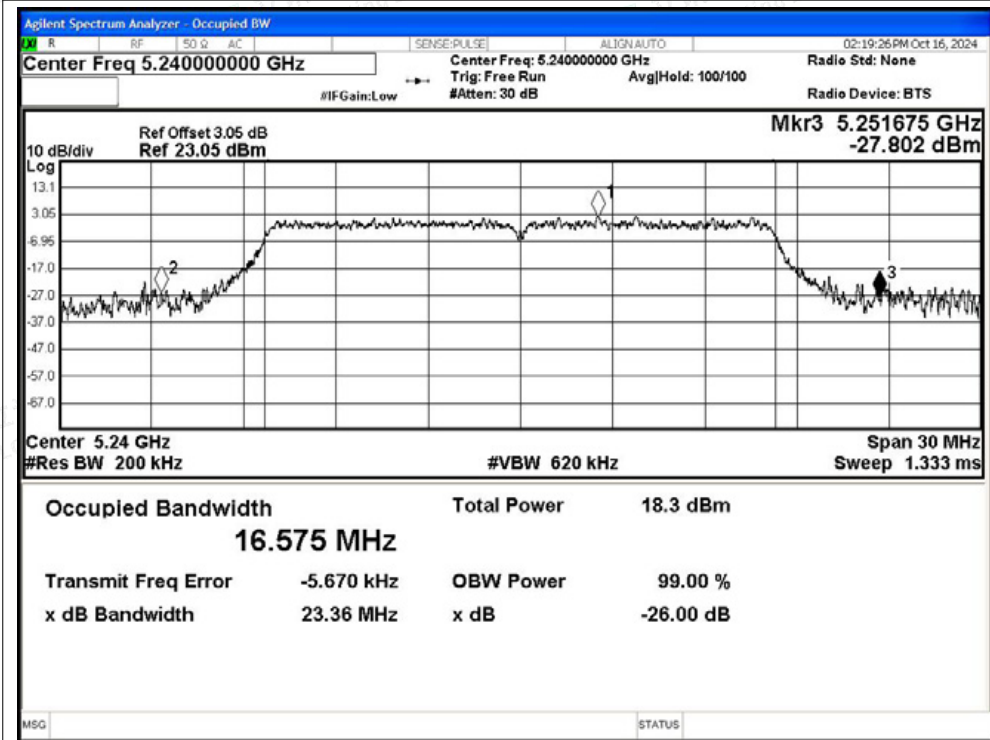


-26dB Bandwidth NVNT n20 5180MHz Ant0

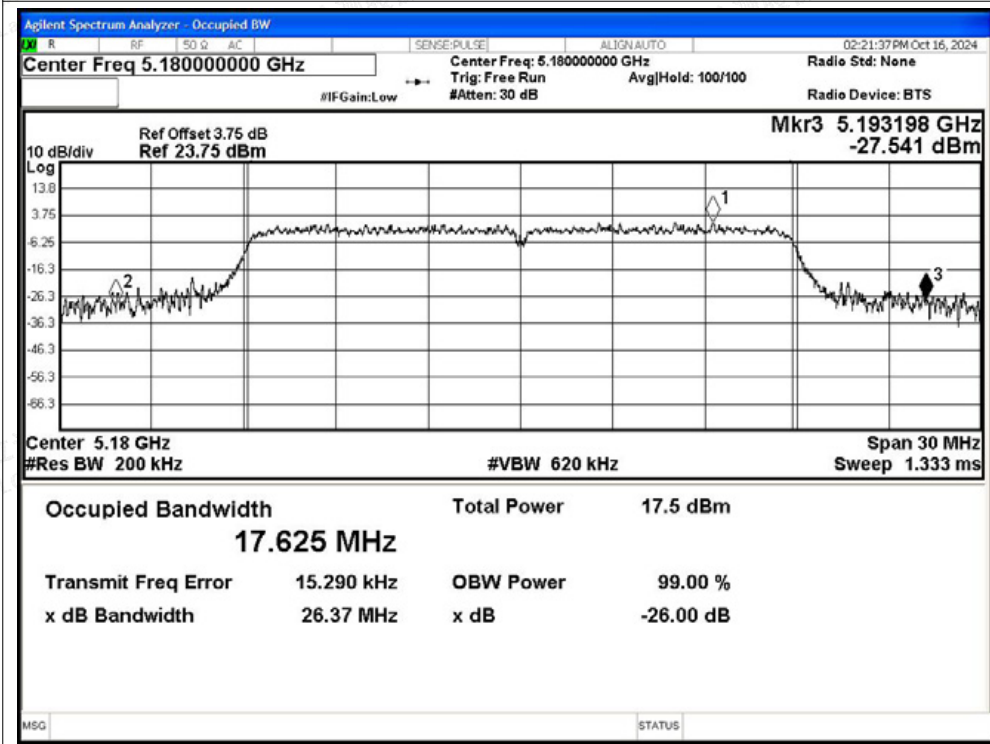




-26dB Bandwidth NVNT n20 5200MHz Ant0

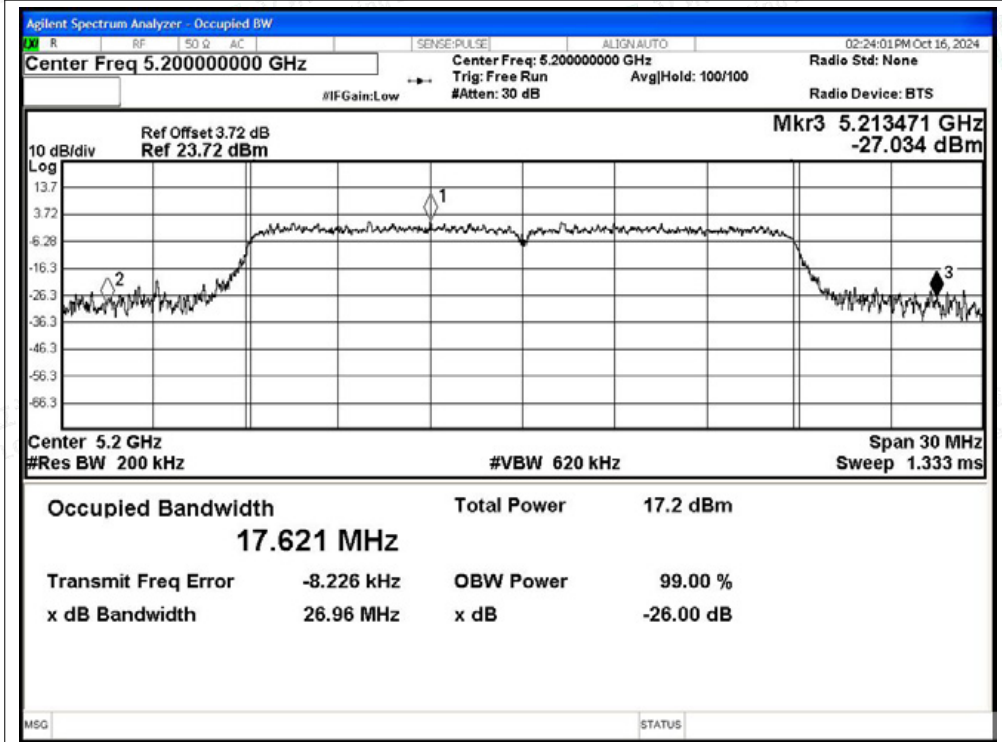


-26dB Bandwidth NVNT n20 5240MHz Ant0

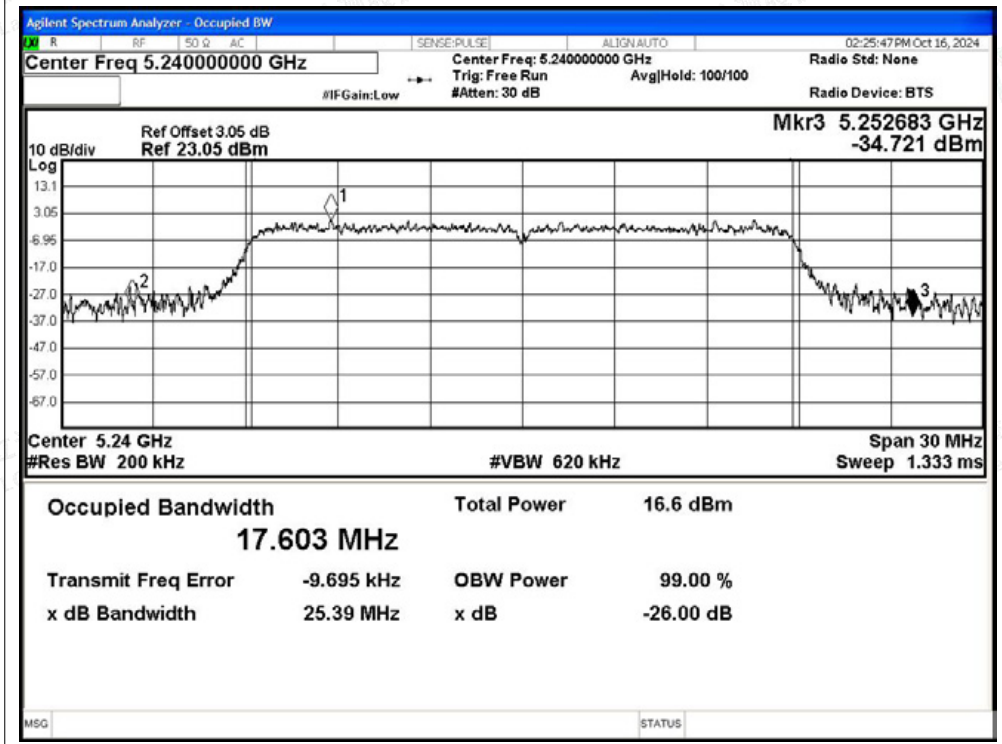




-26dB Bandwidth NVNT n40 5190MHz Ant0

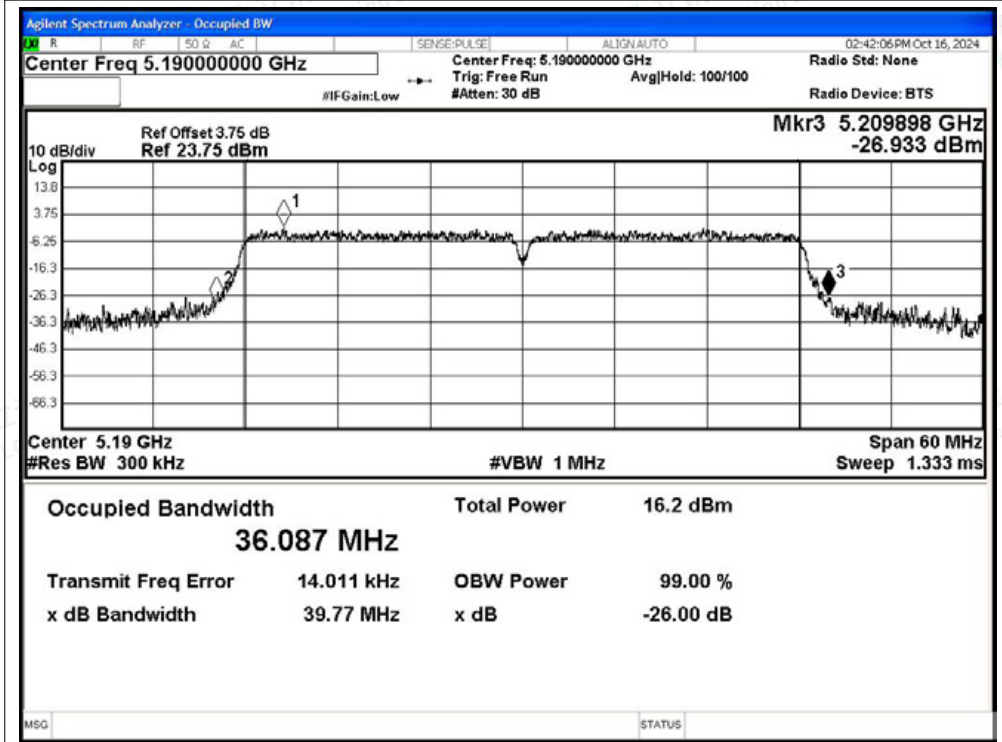


-26dB Bandwidth NVNT n40 5230MHz Ant0

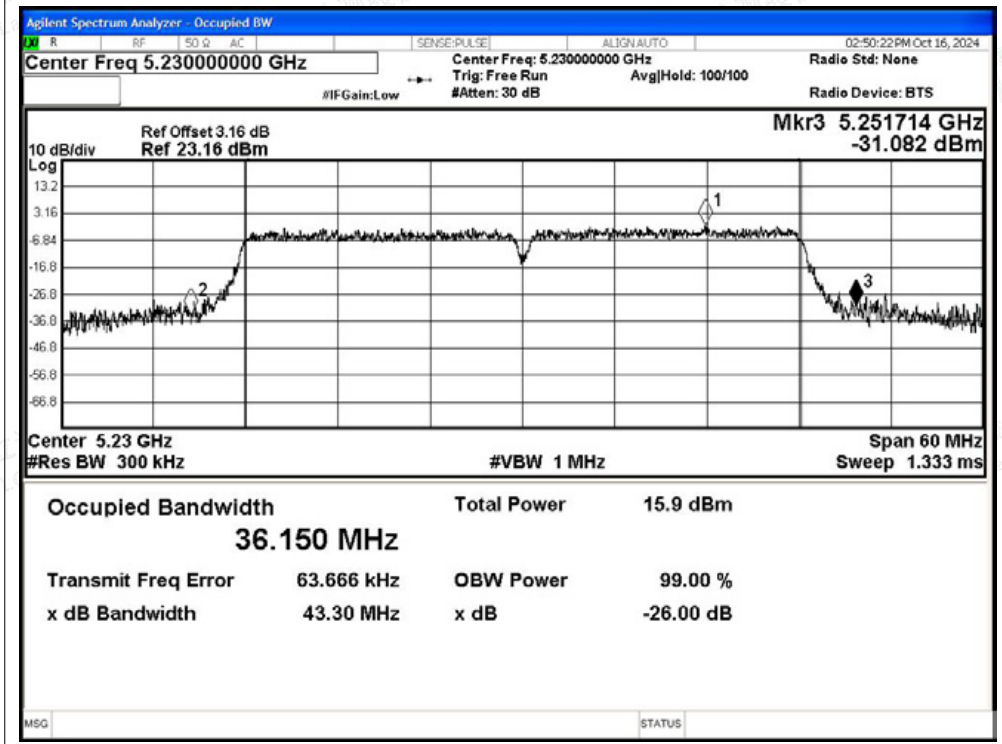




-26dB Bandwidth NVNT ac20 5180MHz Ant0

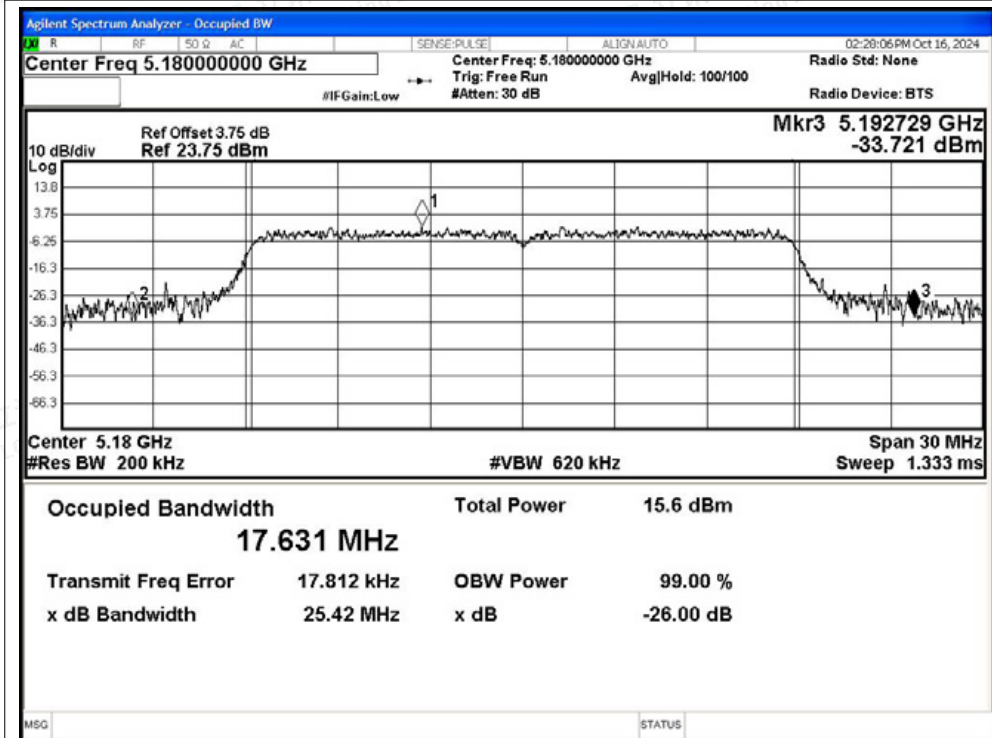


-26dB Bandwidth NVNT ac20 5200MHz Ant0

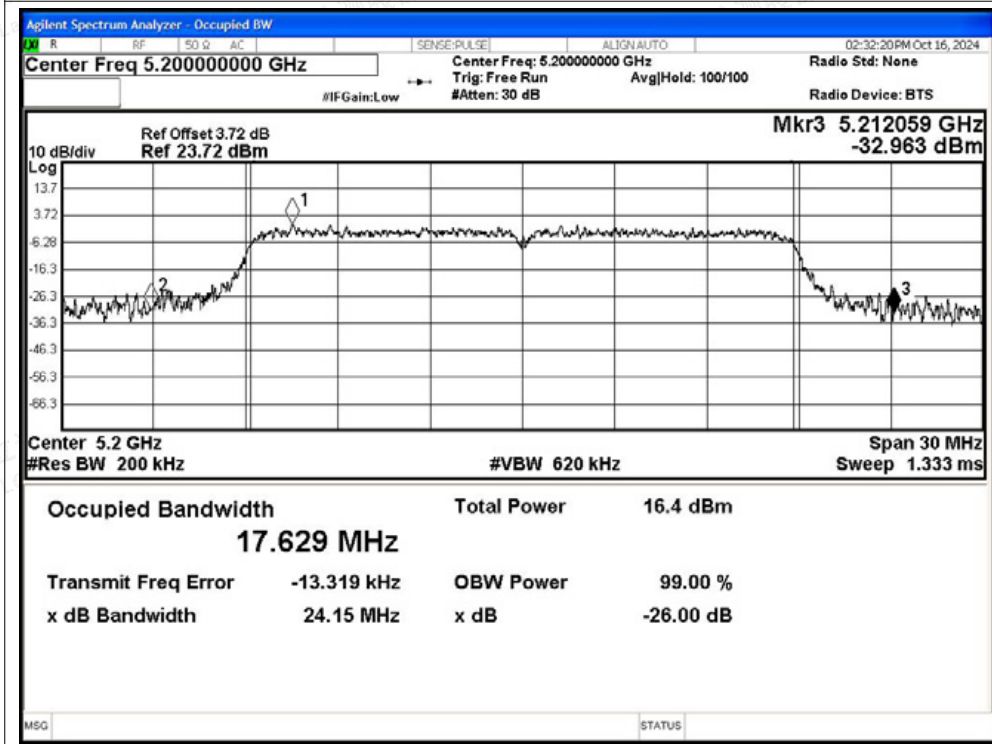




-26dB Bandwidth NVNT ac20 5240MHz Ant0

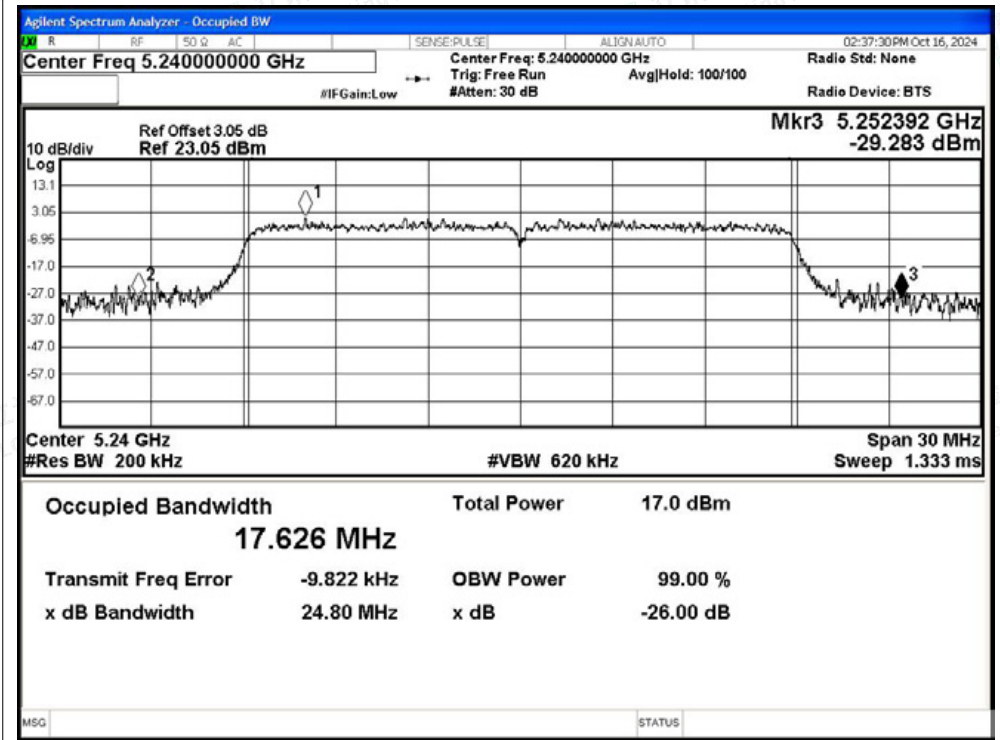


-26dB Bandwidth NVNT ac40 5190MHz Ant0

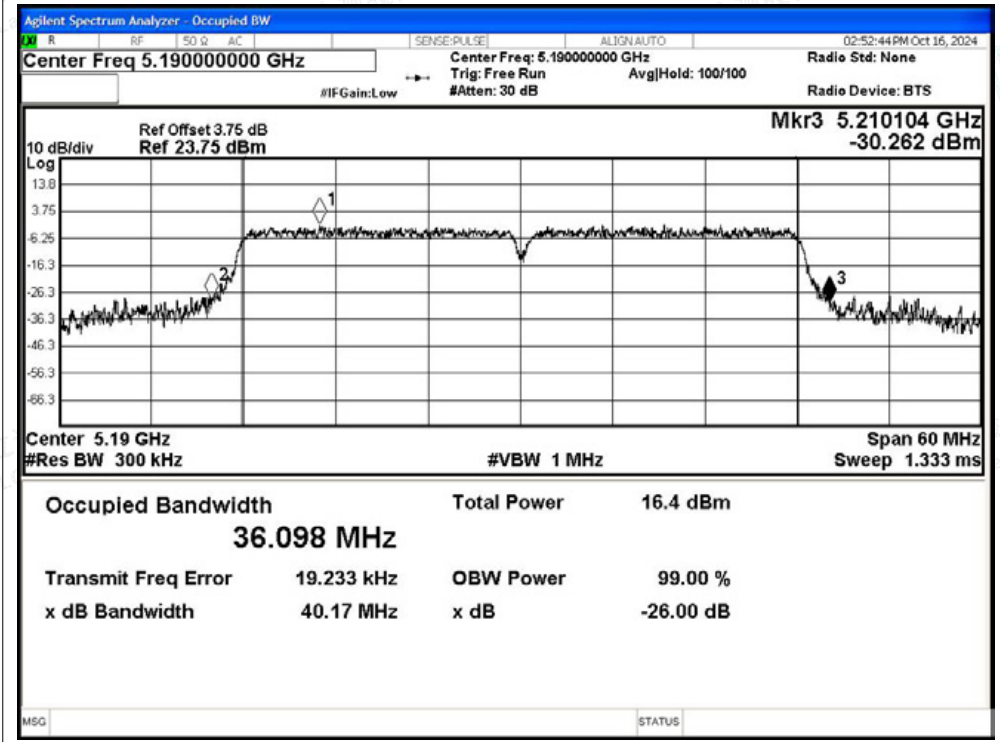




-26dB Bandwidth NVNT ac40 5230MHz Ant0

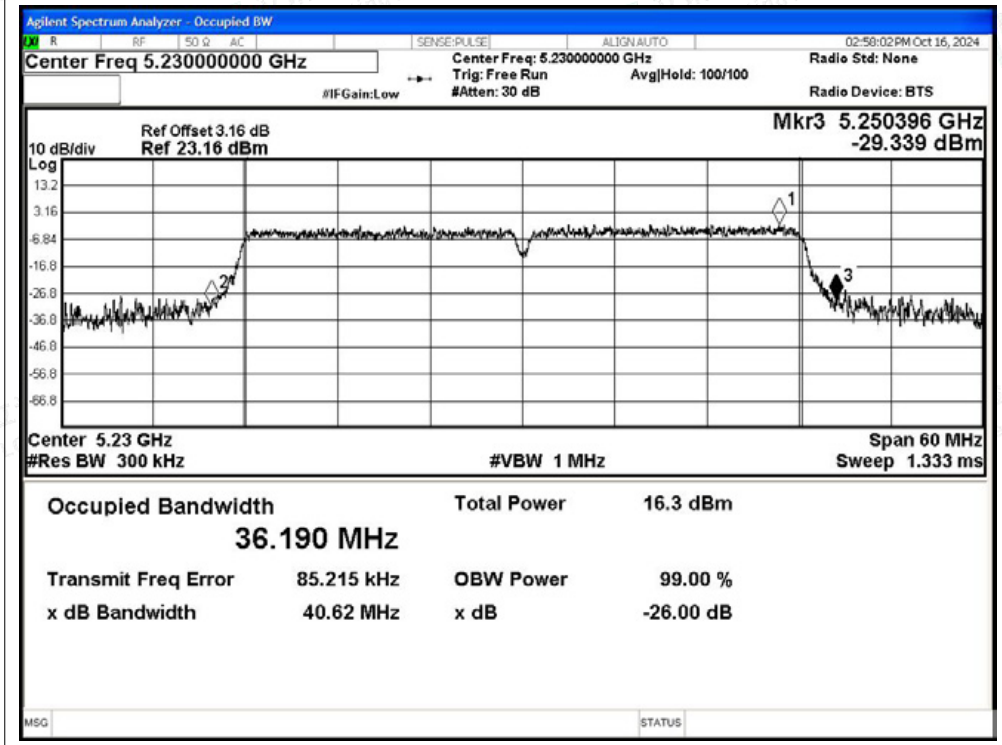




-26dB Bandwidth NVNT ax20 5180MHz Ant0

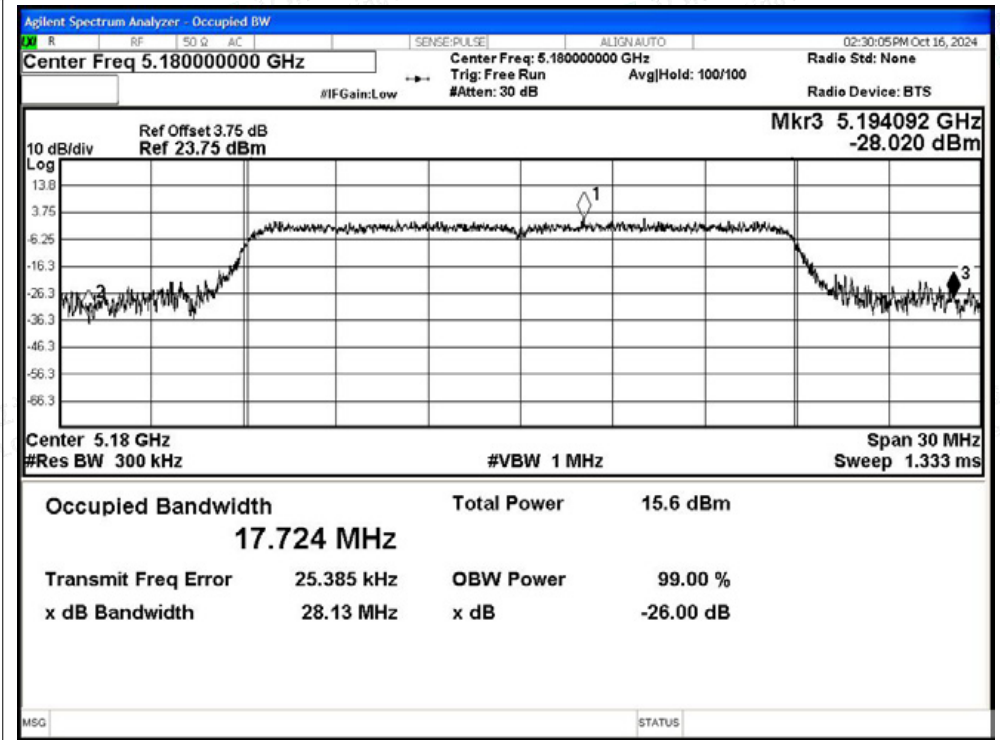


-26dB Bandwidth NVNT ax20 5200MHz Ant0

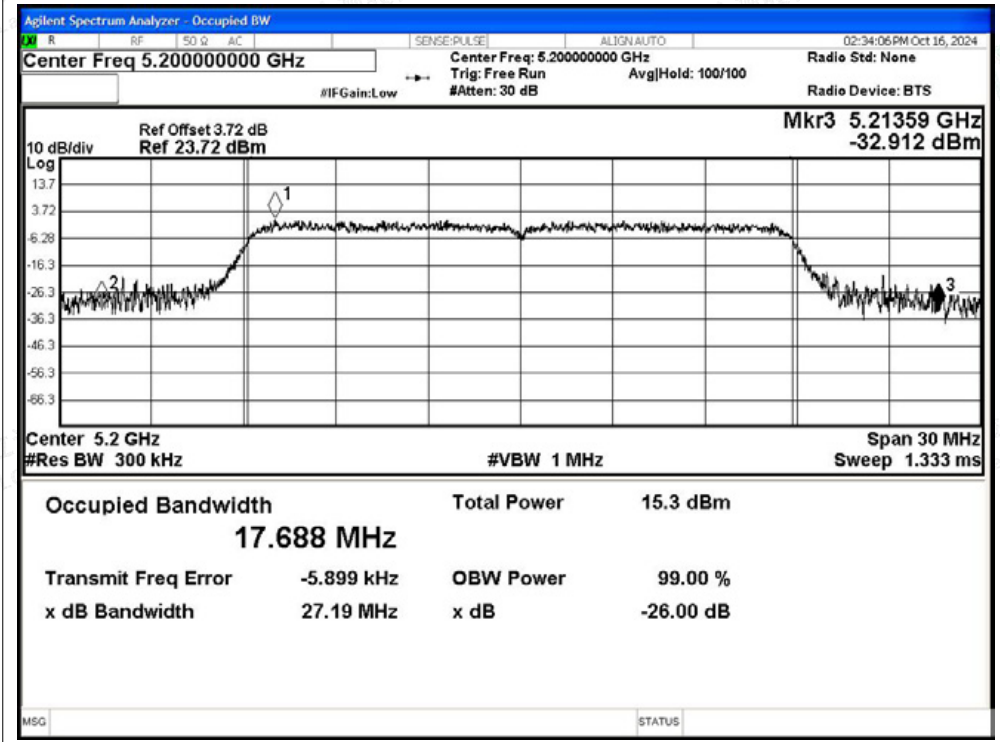




-26dB Bandwidth NVNT ax20 5240MHz Ant0

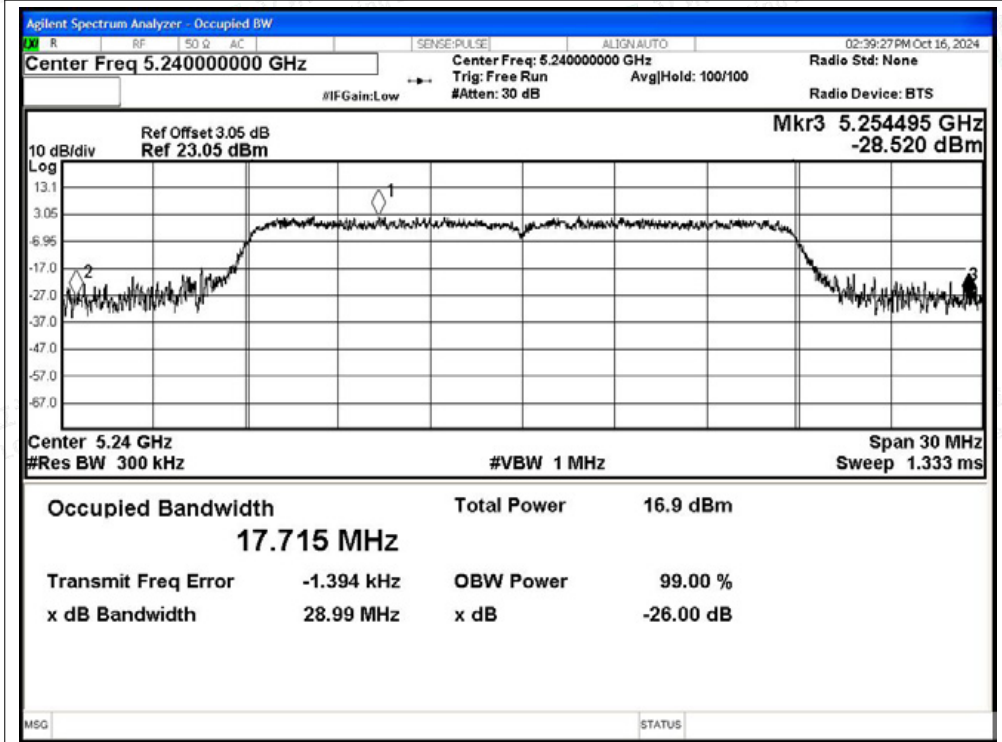


-26dB Bandwidth NVNT ax40 5190MHz Ant0

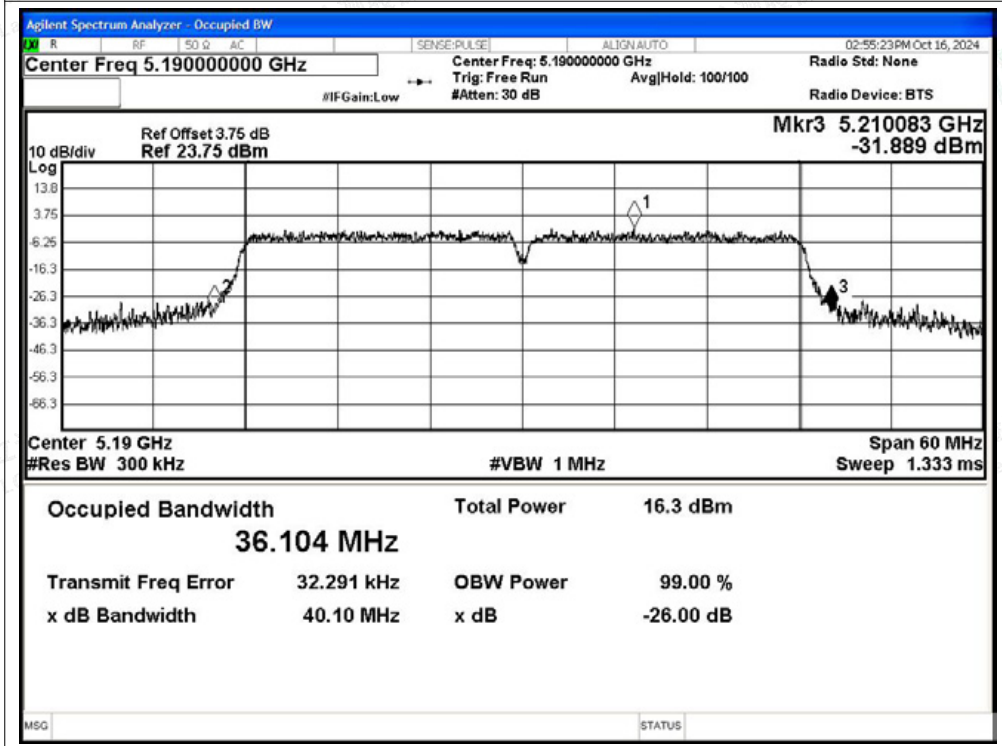



-26dB Bandwidth NVNT ax40 5230MHz Ant0

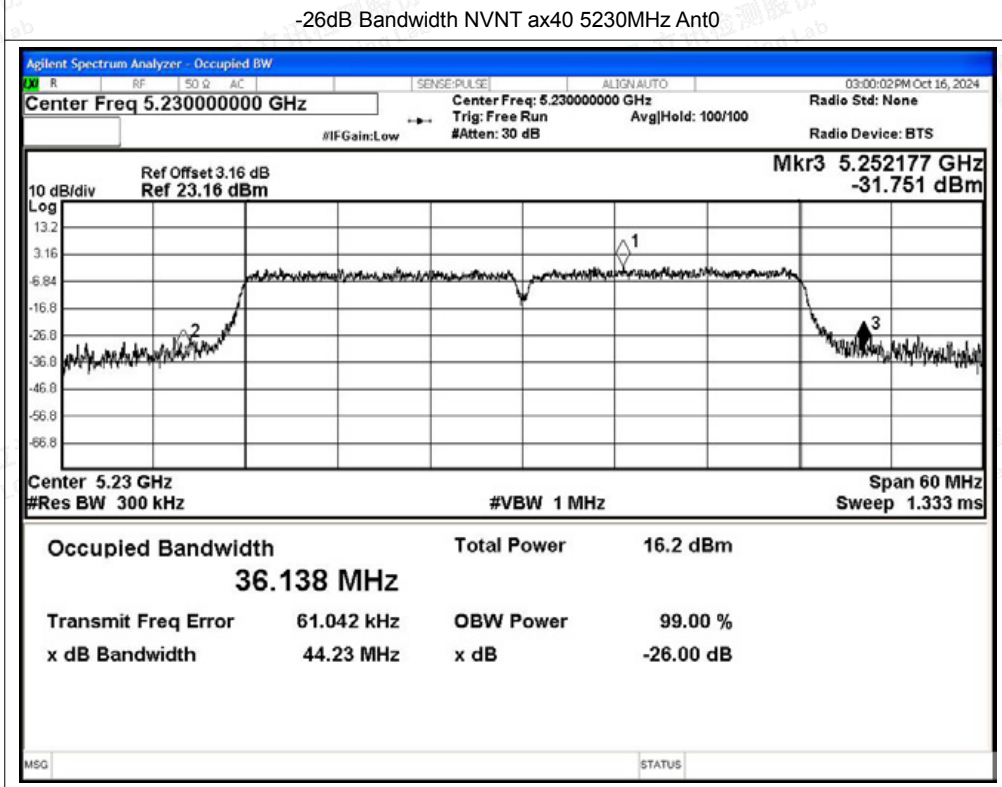



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	23.469	---	Pass
NVNT	a	5200	Ant1	25.863	---	Pass
NVNT	a	5240	Ant1	24.792	---	Pass
NVNT	n20	5180	Ant1	25.475	---	Pass
NVNT	n20	5200	Ant1	25.608	---	Pass
NVNT	n20	5240	Ant1	28.076	---	Pass
NVNT	n40	5190	Ant1	39.456	---	Pass
NVNT	n40	5230	Ant1	39.755	---	Pass
NVNT	ac20	5180	Ant1	25.799	---	Pass
NVNT	ac20	5200	Ant1	28.301	---	Pass
NVNT	ac20	5240	Ant1	27.257	---	Pass
NVNT	ac40	5190	Ant1	45.281	---	Pass
NVNT	ac40	5230	Ant1	46.468	---	Pass
NVNT	ax20	5180	Ant1	27.083	---	Pass
NVNT	ax20	5200	Ant1	29.365	---	Pass
NVNT	ax20	5240	Ant1	27.394	---	Pass
NVNT	ax40	5190	Ant1	41.229	---	Pass
NVNT	ax40	5230	Ant1	45.734	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

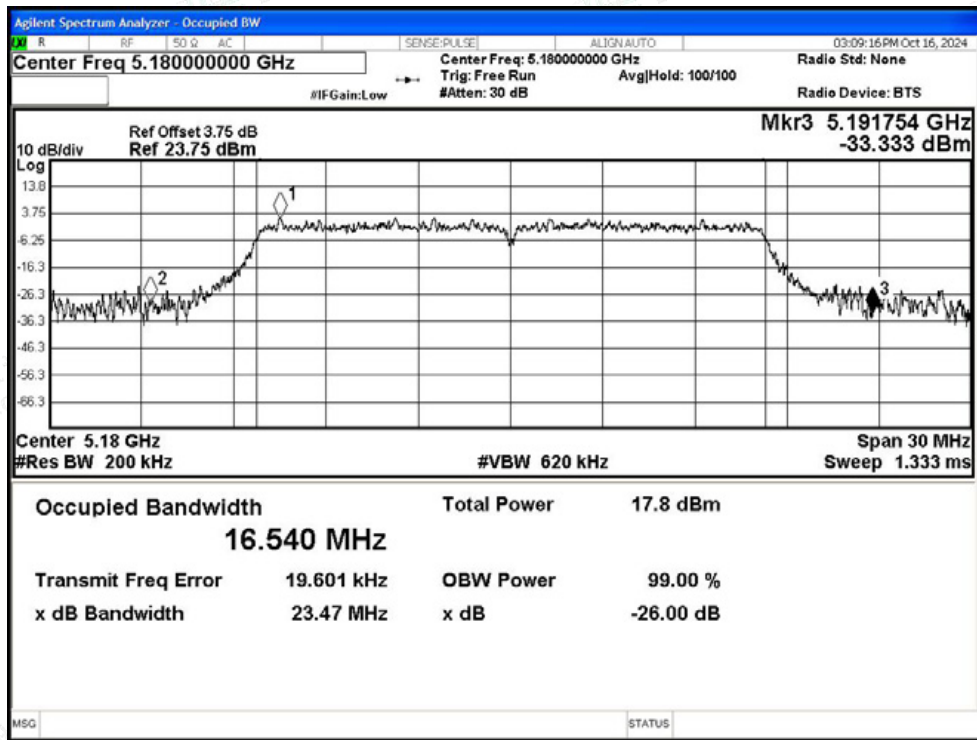


-26dB Bandwidth NVNT a 5200MHz Ant1

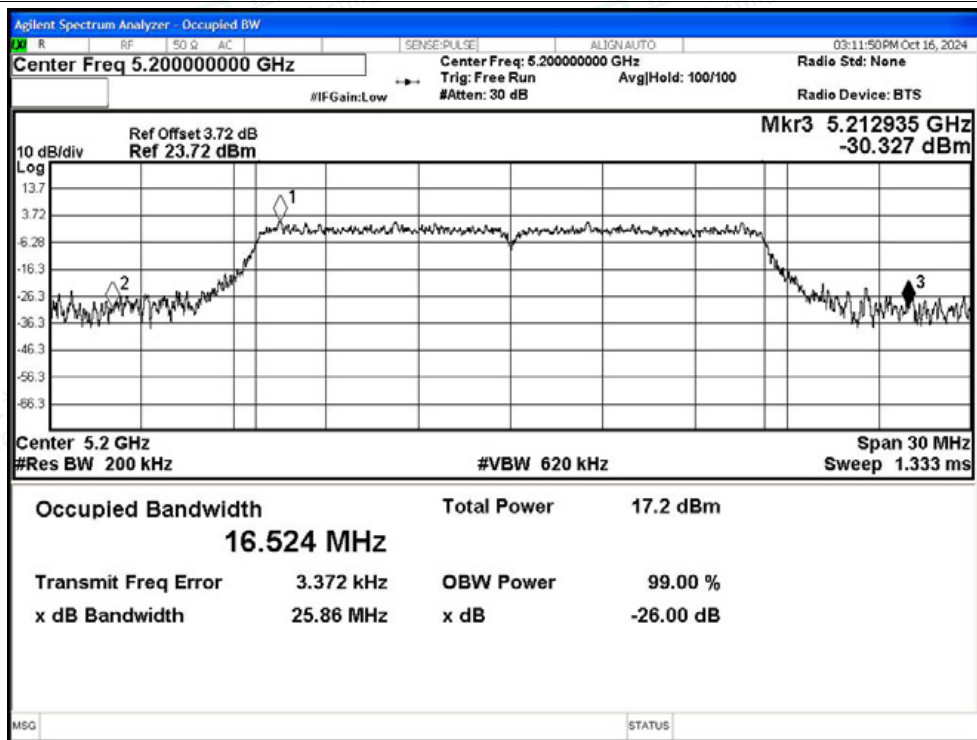




-26dB Bandwidth NVNT a 5240MHz Ant1

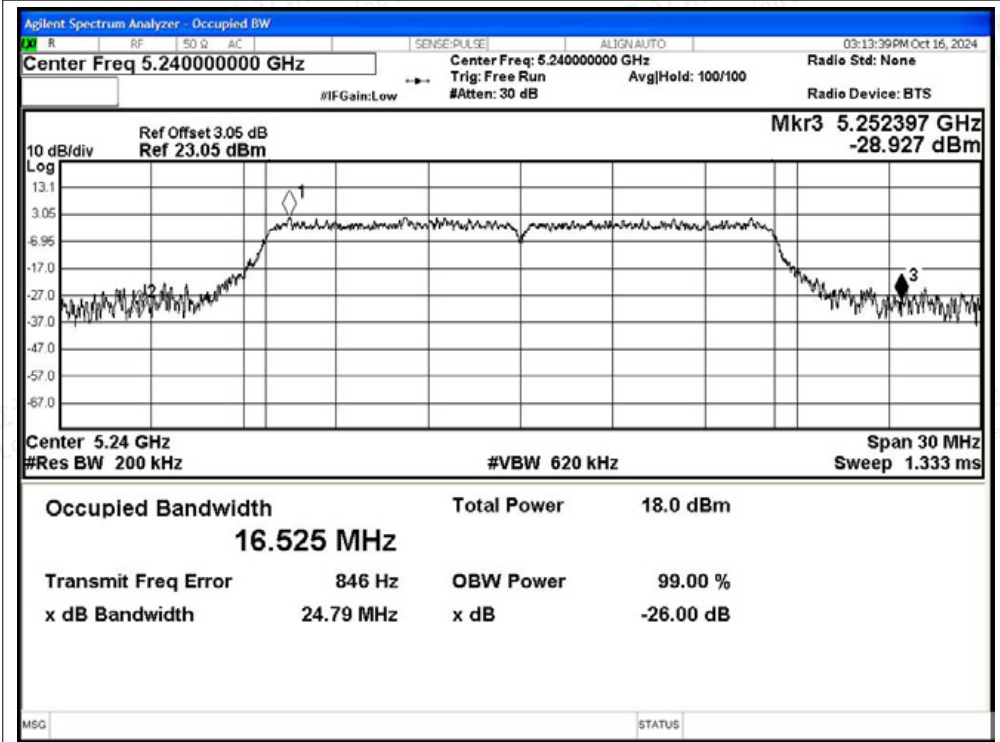


-26dB Bandwidth NVNT n20 5180MHz Ant1

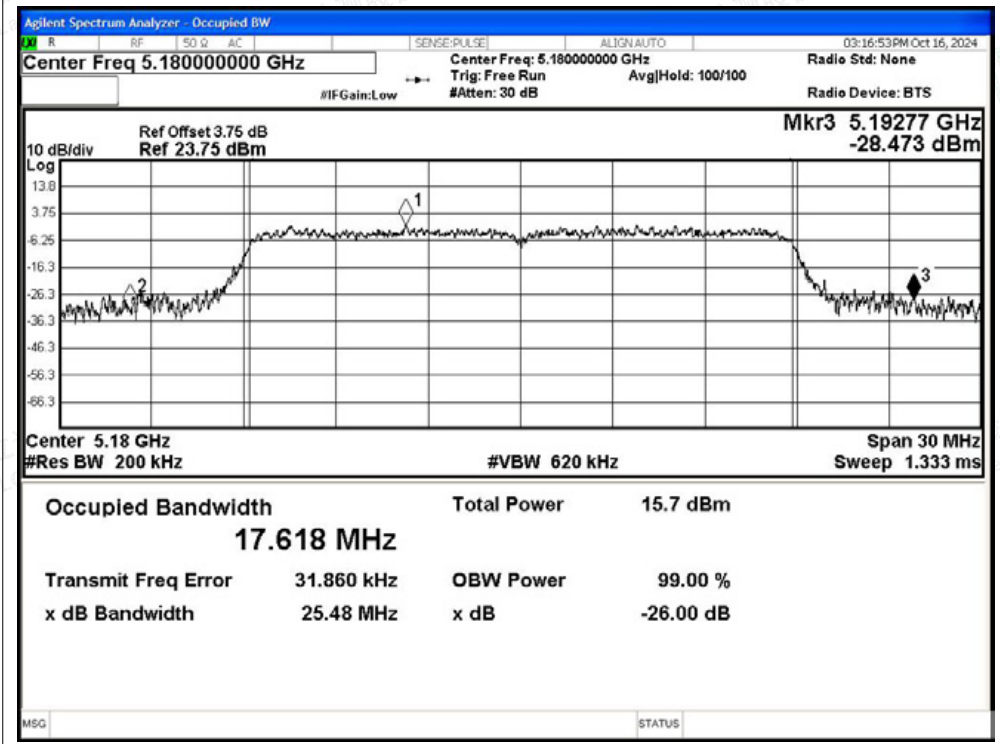




-26dB Bandwidth NVNT n20 5200MHz Ant1

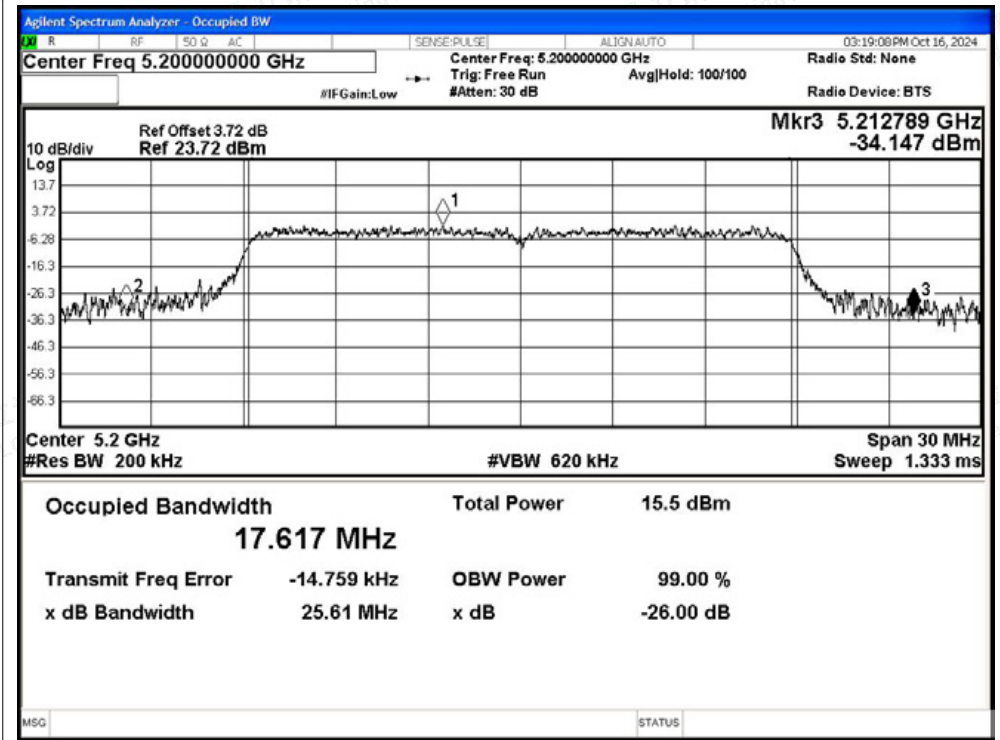


-26dB Bandwidth NVNT n20 5240MHz Ant1

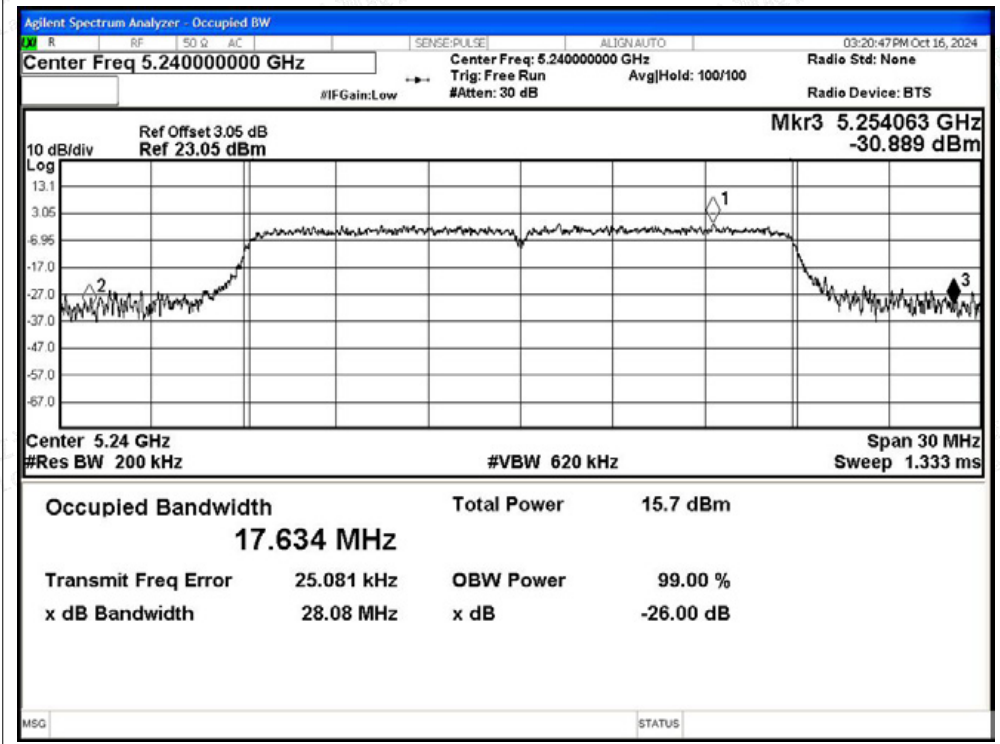




-26dB Bandwidth NVNT n40 5190MHz Ant1

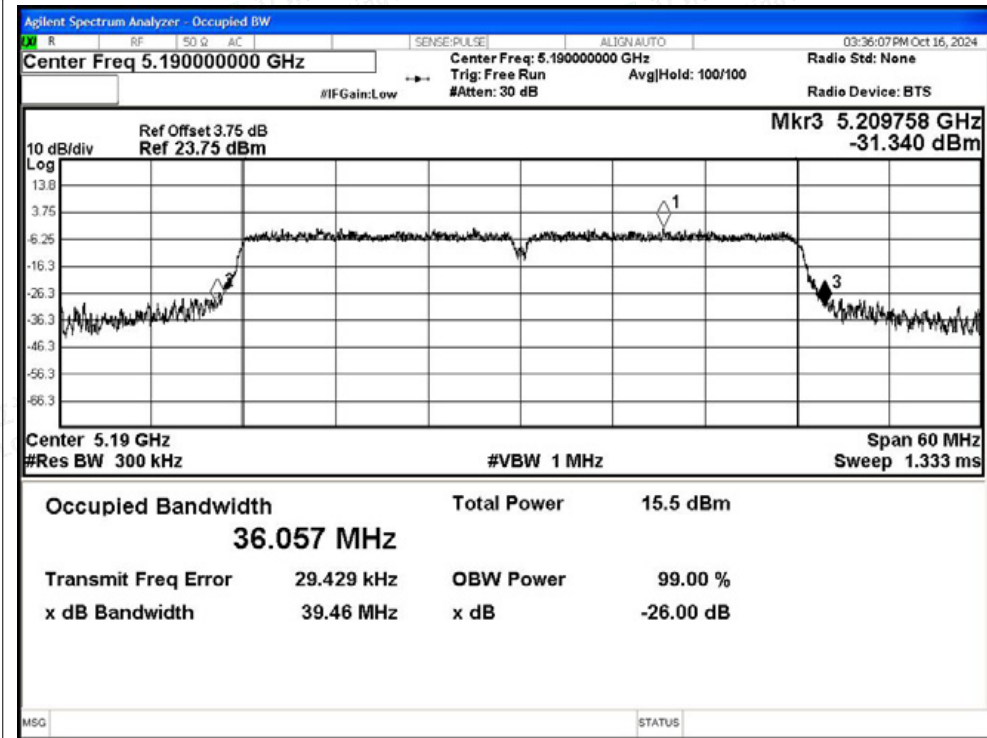


-26dB Bandwidth NVNT n40 5230MHz Ant1

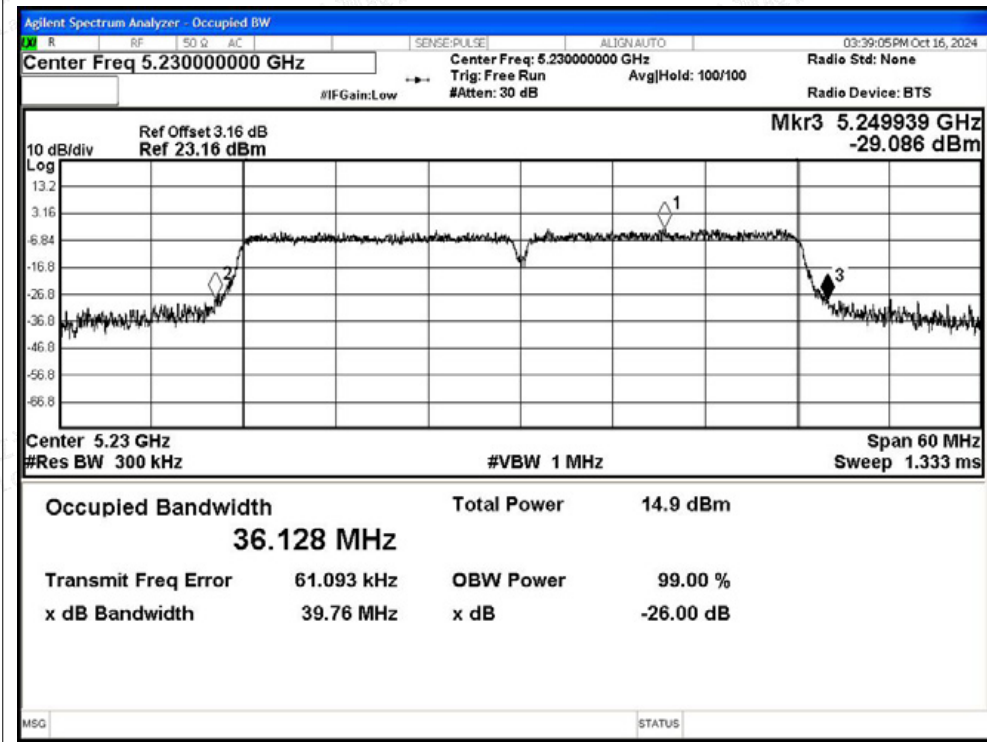




-26dB Bandwidth NVNT ac20 5180MHz Ant1

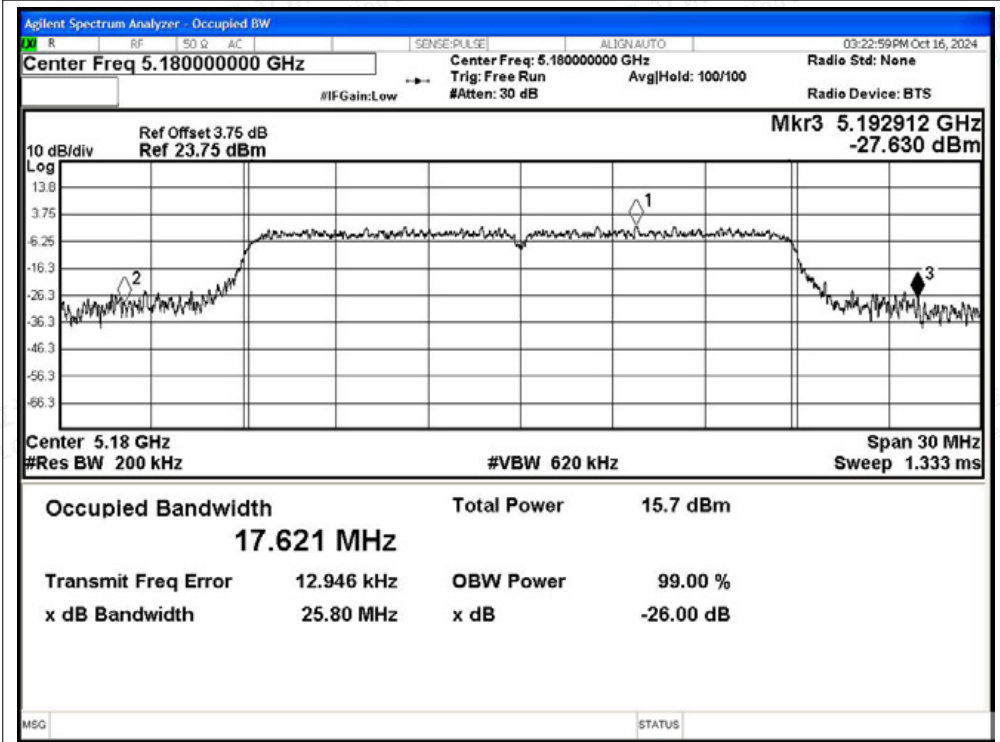


-26dB Bandwidth NVNT ac20 5200MHz Ant1

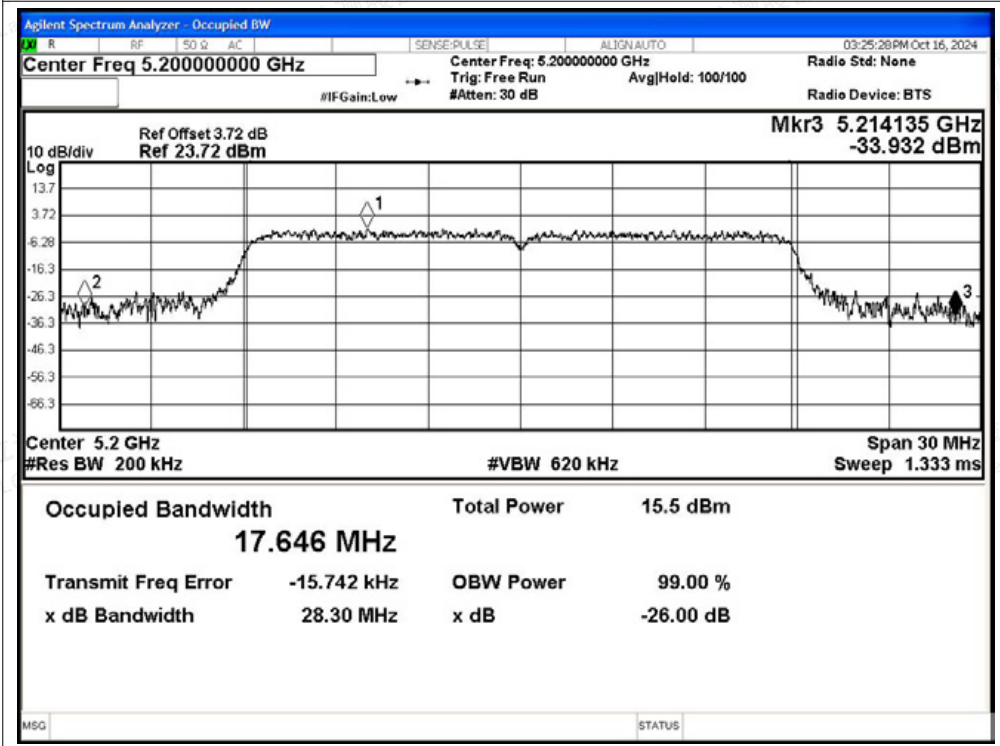




-26dB Bandwidth NVNT ac20 5240MHz Ant1

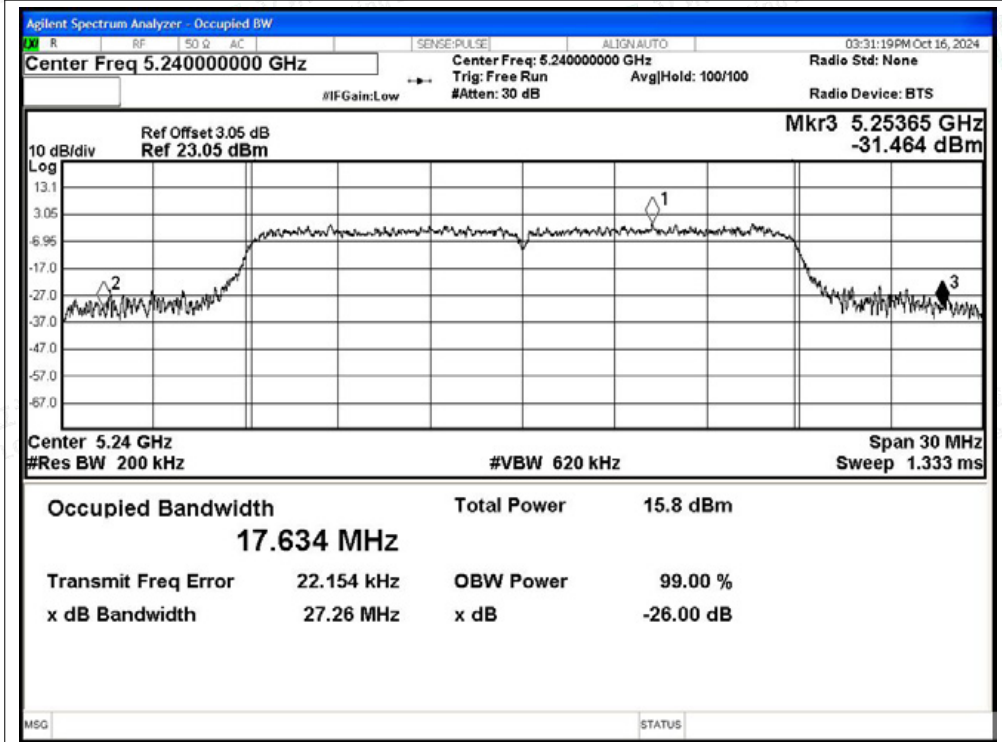


-26dB Bandwidth NVNT ac40 5190MHz Ant1

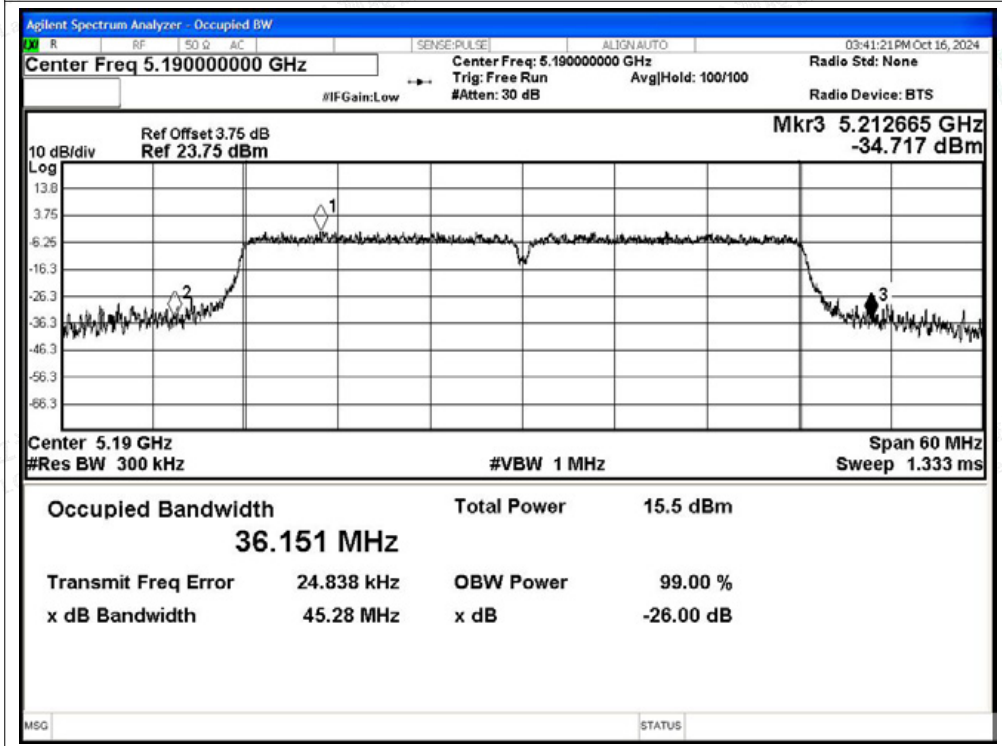




-26dB Bandwidth NVNT ac40 5230MHz Ant1

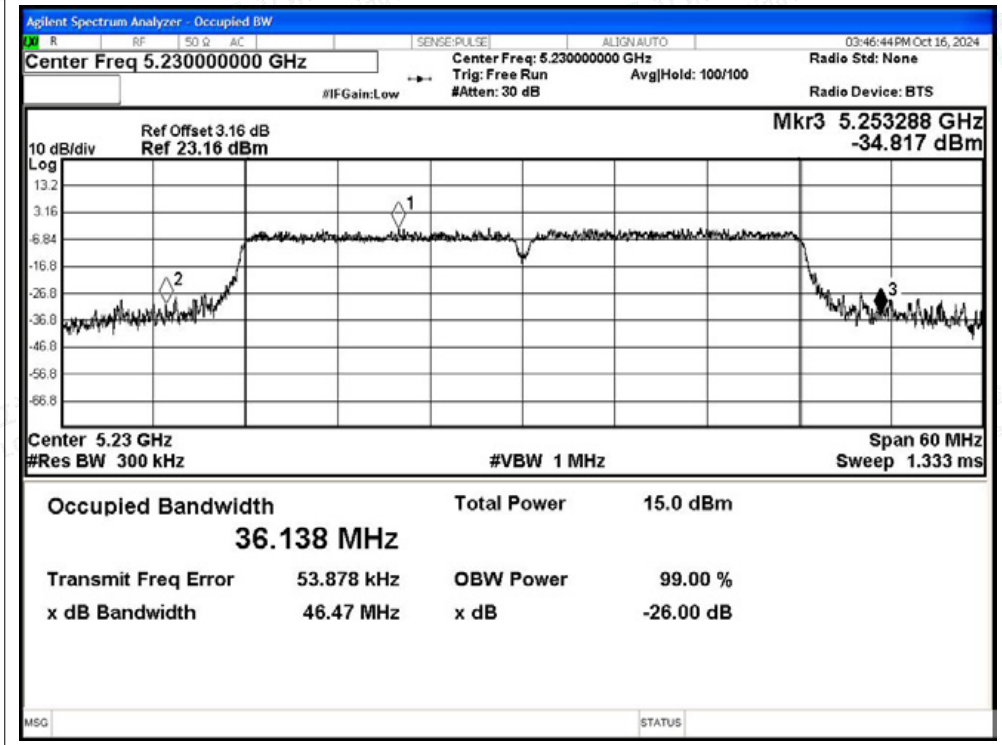




-26dB Bandwidth NVNT ax20 5180MHz Ant1

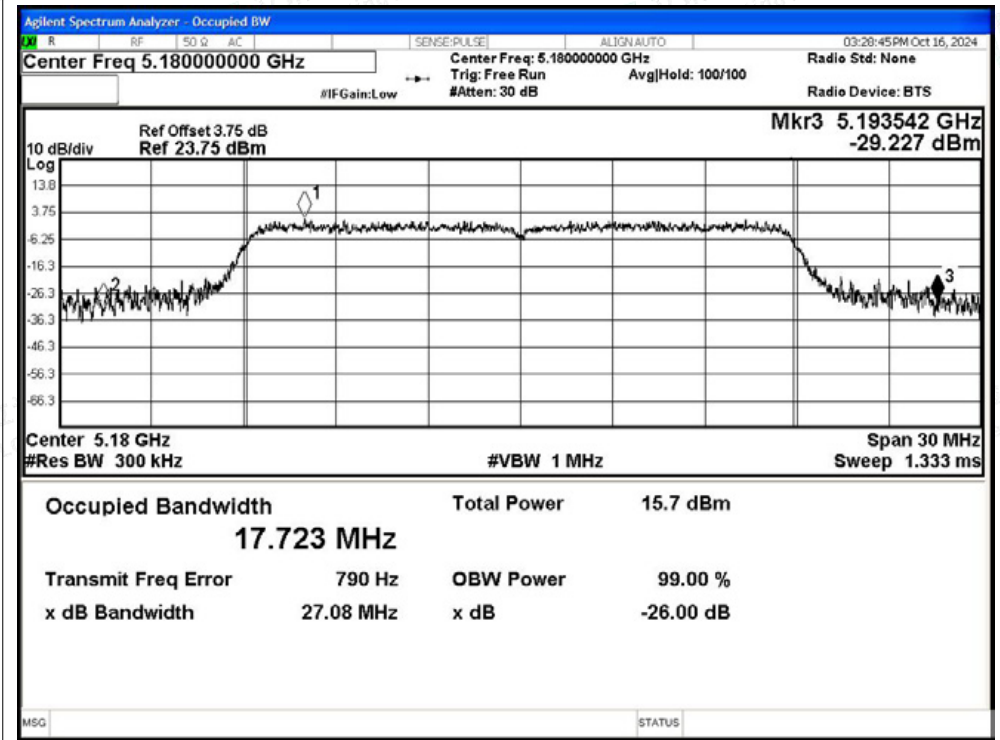


-26dB Bandwidth NVNT ax20 5200MHz Ant1

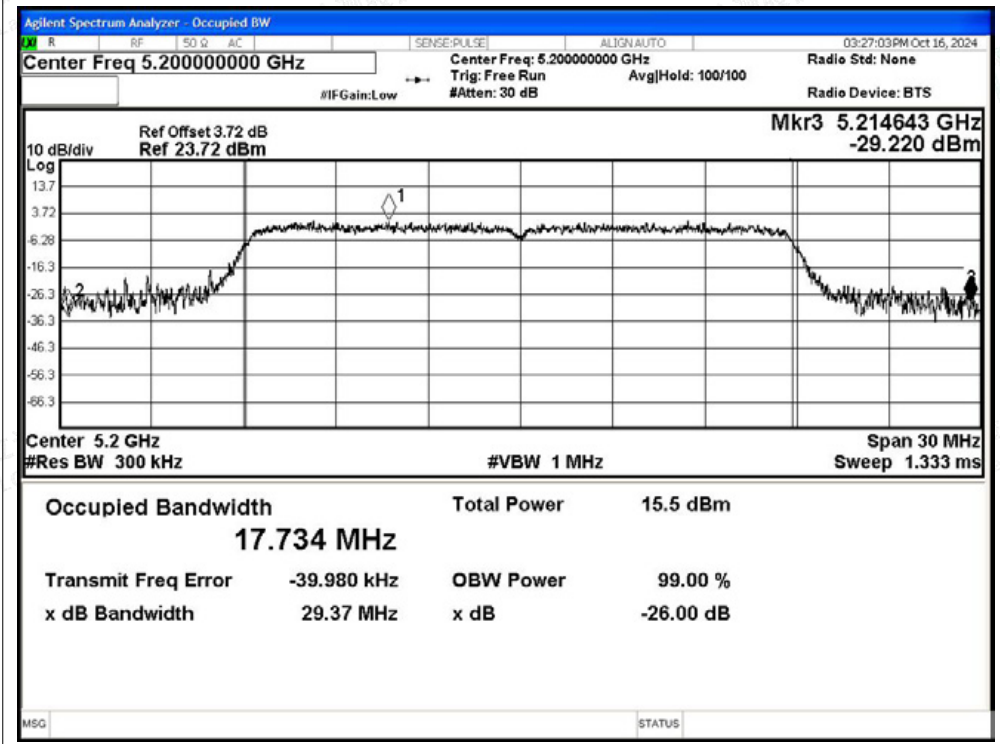




-26dB Bandwidth NVNT ax20 5240MHz Ant1

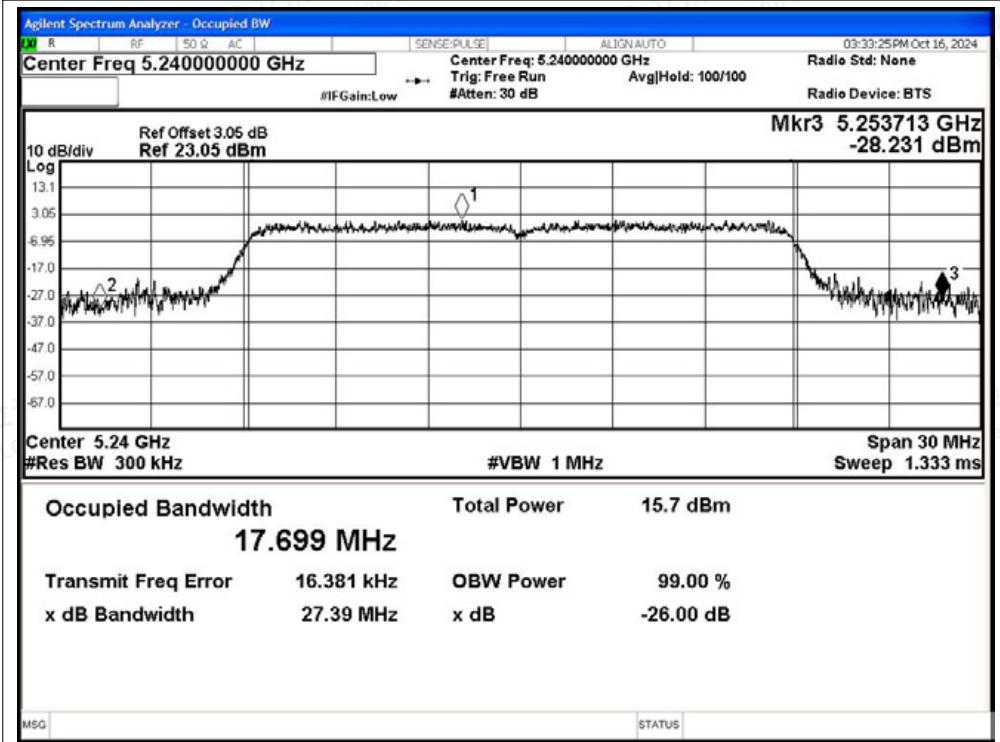


-26dB Bandwidth NVNT ax40 5190MHz Ant1

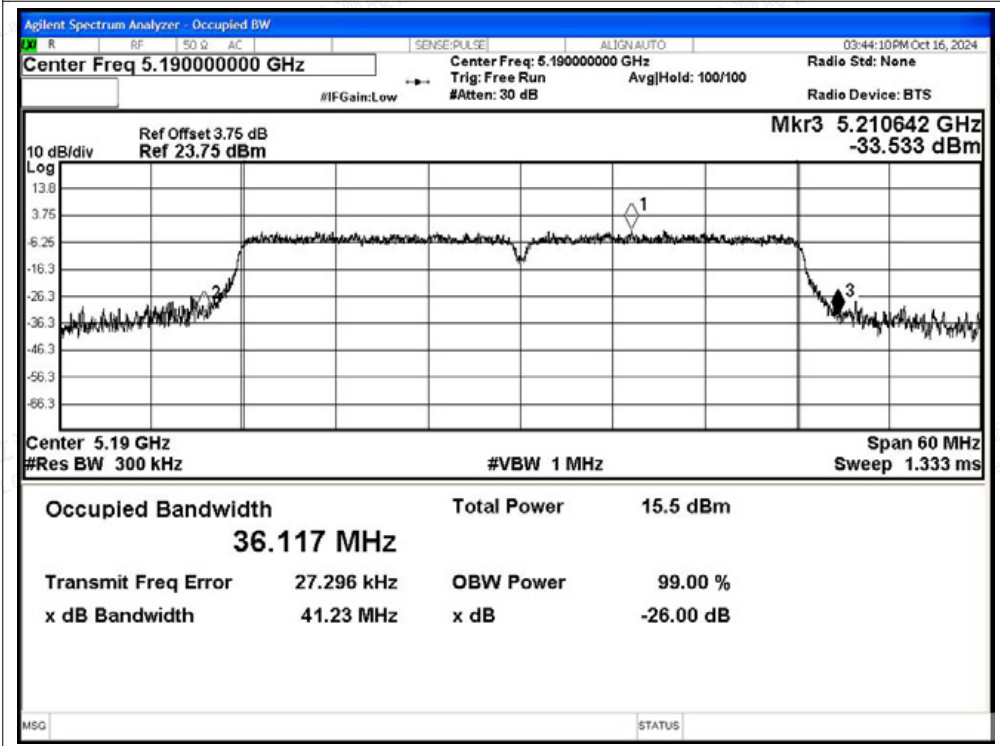



-26dB Bandwidth NVNT ax40 5230MHz Ant1

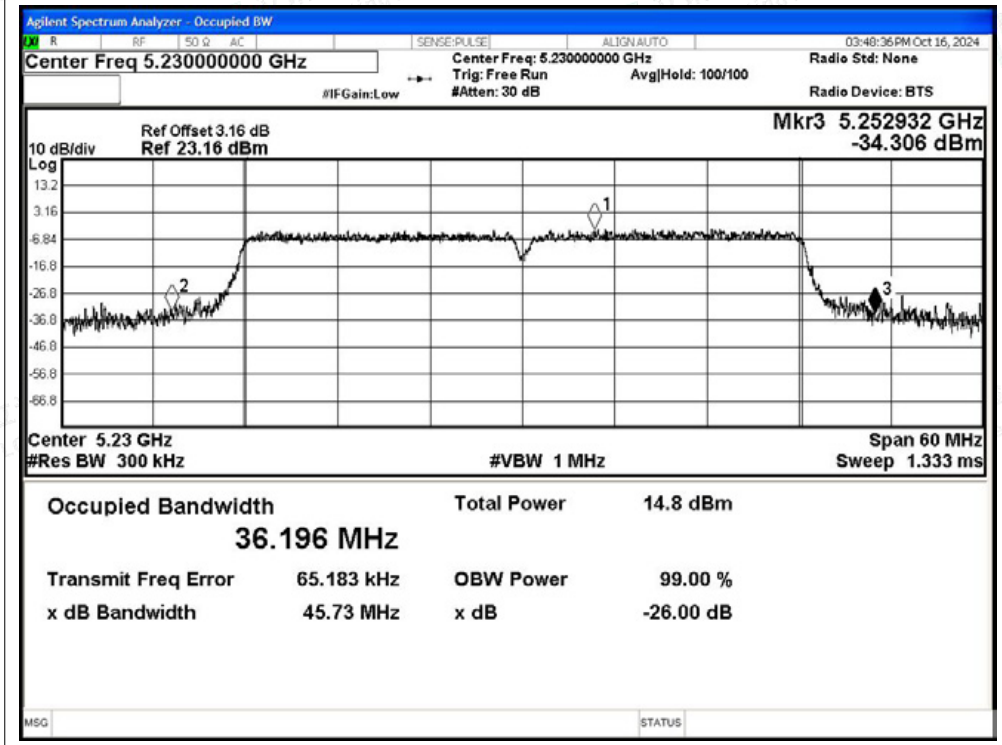



D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	12.56	0.24	12.8	24	Pass
NVNT	a	5200	Ant0	12.32	0.24	12.56	24	Pass
NVNT	a	5240	Ant0	12.55	0.24	12.79	24	Pass
NVNT	n20	5180	Ant0	11.96	0.12	12.08	24	Pass
NVNT	n20	5200	Ant0	11.74	0.12	11.86	24	Pass
NVNT	n20	5240	Ant0	10.93	0.12	11.05	24	Pass
NVNT	n40	5190	Ant0	10.56	0.12	10.68	24	Pass
NVNT	n40	5230	Ant0	9.98	0.12	10.1	24	Pass
NVNT	ac20	5180	Ant0	11	0.12	11.12	24	Pass
NVNT	ac20	5200	Ant0	10.88	0.12	11	24	Pass
NVNT	ac20	5240	Ant0	11.49	0.12	11.61	24	Pass
NVNT	ac40	5190	Ant0	10.57	0.12	10.69	24	Pass
NVNT	ac40	5230	Ant0	10.49	0.12	10.61	24	Pass
NVNT	ax20	5180	Ant0	10.01	0.12	10.13	24	Pass
NVNT	ax20	5200	Ant0	10.79	0.12	10.91	24	Pass
NVNT	ax20	5240	Ant0	11.33	0.12	11.45	24	Pass
NVNT	ax40	5190	Ant0	10.64	0.12	10.76	24	Pass
NVNT	ax40	5230	Ant0	10.37	0.12	10.49	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	11.46	0.24	11.7	24	Pass
NVNT	a	5200	Ant1	11.46	0.24	11.7	24	Pass
NVNT	a	5240	Ant1	10.75	0.24	10.99	24	Pass
NVNT	n20	5180	Ant1	10.12	0.12	10.24	24	Pass
NVNT	n20	5200	Ant1	9.93	0.12	10.05	24	Pass
NVNT	n20	5240	Ant1	10.21	0.12	10.33	24	Pass
NVNT	n40	5190	Ant1	9.75	0.12	9.87	24	Pass
NVNT	n40	5230	Ant1	9.1	0.12	9.22	24	Pass
NVNT	ac20	5180	Ant1	10.13	0.12	10.25	24	Pass
NVNT	ac20	5200	Ant1	10	0.12	10.12	24	Pass
NVNT	ac20	5240	Ant1	10.34	0.12	10.46	24	Pass
NVNT	ac40	5190	Ant1	9.72	0.12	9.84	24	Pass
NVNT	ac40	5230	Ant1	9.12	0.12	9.24	24	Pass
NVNT	ax20	5180	Ant1	10.1	0.12	10.22	24	Pass
NVNT	ax20	5200	Ant1	10.03	0.12	10.15	24	Pass
NVNT	ax20	5240	Ant1	10.12	0.12	10.24	24	Pass
NVNT	ax40	5190	Ant1	9.88	0.12	10	24	Pass
NVNT	ax40	5230	Ant1	8.98	0.12	9.1	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Antenna		Total Power (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	12.08	10.24	14.27	24	Pass
NVNT	n20	5200	11.86	10.05	14.06	24	Pass
NVNT	n20	5240	11.05	10.33	13.72	24	Pass
NVNT	n40	5190	10.68	9.87	13.30	24	Pass
NVNT	n40	5230	10.1	9.22	12.69	24	Pass
NVNT	ac20	5180	11.12	10.25	13.72	24	Pass
NVNT	ac20	5200	11	10.12	13.59	24	Pass
NVNT	ac20	5240	11.61	10.46	14.08	24	Pass
NVNT	ac40	5190	10.69	9.84	13.30	24	Pass
NVNT	ac40	5230	10.61	9.24	12.99	24	Pass
NVNT	ax20	5180	10.13	10.22	13.19	24	Pass
NVNT	ax20	5200	10.91	10.15	13.56	24	Pass
NVNT	ax20	5240	11.45	10.24	13.90	24	Pass
NVNT	ax40	5190	10.76	10	13.41	24	Pass
NVNT	ax40	5230	10.49	9.1	12.86	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant0	1.84	0.24	2.08	11	Pass
NVNT	a	5200	Ant0	1.96	0.24	2.2	11	Pass
NVNT	a	5240	Ant0	2.04	0.24	2.28	11	Pass
NVNT	n20	5180	Ant0	1.2	0.12	1.32	11	Pass
NVNT	n20	5200	Ant0	0.87	0.12	0.99	11	Pass
NVNT	n20	5240	Ant0	0.25	0.12	0.37	11	Pass
NVNT	n40	5190	Ant0	-3.42	0.12	-3.3	11	Pass
NVNT	n40	5230	Ant0	-3.17	0.12	-3.05	11	Pass
NVNT	ac20	5180	Ant0	-1.06	0.12	-0.94	11	Pass
NVNT	ac20	5200	Ant0	0	0.12	0.12	11	Pass
NVNT	ac20	5240	Ant0	0.9	0.12	1.02	11	Pass
NVNT	ac40	5190	Ant0	-3.04	0.12	-2.92	11	Pass
NVNT	ac40	5230	Ant0	-3.09	0.12	-2.97	11	Pass
NVNT	ax20	5180	Ant0	-0.68	0.12	-0.56	11	Pass
NVNT	ax20	5200	Ant0	-1.02	0.12	-0.9	11	Pass
NVNT	ax20	5240	Ant0	0.49	0.12	0.61	11	Pass
NVNT	ax40	5190	Ant0	-3.37	0.12	-3.25	11	Pass
NVNT	ax40	5230	Ant0	-3.15	0.12	-3.03	11	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	1.47	0.24	1.71	11	Pass
NVNT	a	5200	Ant1	1.01	0.24	1.25	11	Pass
NVNT	a	5240	Ant1	1.66	0.24	1.9	11	Pass
NVNT	n20	5180	Ant1	-0.71	0.12	-0.59	11	Pass
NVNT	n20	5200	Ant1	-0.67	0.12	-0.55	11	Pass
NVNT	n20	5240	Ant1	-0.52	0.12	-0.4	11	Pass
NVNT	n40	5190	Ant1	-4.26	0.12	-4.14	11	Pass
NVNT	n40	5230	Ant1	-4.1	0.12	-3.98	11	Pass
NVNT	ac20	5180	Ant1	-0.86	0.12	-0.74	11	Pass
NVNT	ac20	5200	Ant1	-0.75	0.12	-0.63	11	Pass
NVNT	ac20	5240	Ant1	-0.51	0.12	-0.39	11	Pass
NVNT	ac40	5190	Ant1	-4.01	0.12	-3.89	11	Pass
NVNT	ac40	5230	Ant1	-4.2	0.12	-4.08	11	Pass
NVNT	ax20	5180	Ant1	-0.82	0.12	-0.7	11	Pass
NVNT	ax20	5200	Ant1	-0.48	0.12	-0.36	11	Pass
NVNT	ax20	5240	Ant1	-0.68	0.12	-0.56	11	Pass
NVNT	ax40	5190	Ant1	-4.08	0.12	-3.96	11	Pass
NVNT	ax40	5230	Ant1	-4.24	0.12	-4.12	11	Pass

MIMO

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
			Duty Factor (dB)				
			Ant0	Ant1			
NVNT	n20	5180	1.32	-0.59	3.48	11	Pass
NVNT	n20	5200	0.99	-0.55	3.30	11	Pass
NVNT	n20	5240	0.37	-0.4	3.01	11	Pass
NVNT	n40	5190	-3.3	-4.14	-0.69	11	Pass
NVNT	n40	5230	-3.05	-3.98	-0.48	11	Pass
NVNT	ac20	5180	-0.94	-0.74	2.17	11	Pass
NVNT	ac20	5200	0.12	-0.63	2.77	11	Pass
NVNT	ac20	5240	1.02	-0.39	3.38	11	Pass
NVNT	ac40	5190	-2.92	-3.89	-0.37	11	Pass
NVNT	ac40	5230	-2.97	-4.08	-0.48	11	Pass
NVNT	ax20	5180	-0.56	-0.7	2.38	11	Pass
NVNT	ax20	5200	-0.9	-0.36	2.39	11	Pass
NVNT	ax20	5240	0.61	-0.56	3.07	11	Pass
NVNT	ax40	5190	-3.25	-3.96	-0.58	11	Pass
NVNT	ax40	5230	-3.03	-4.12	-0.53	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant0

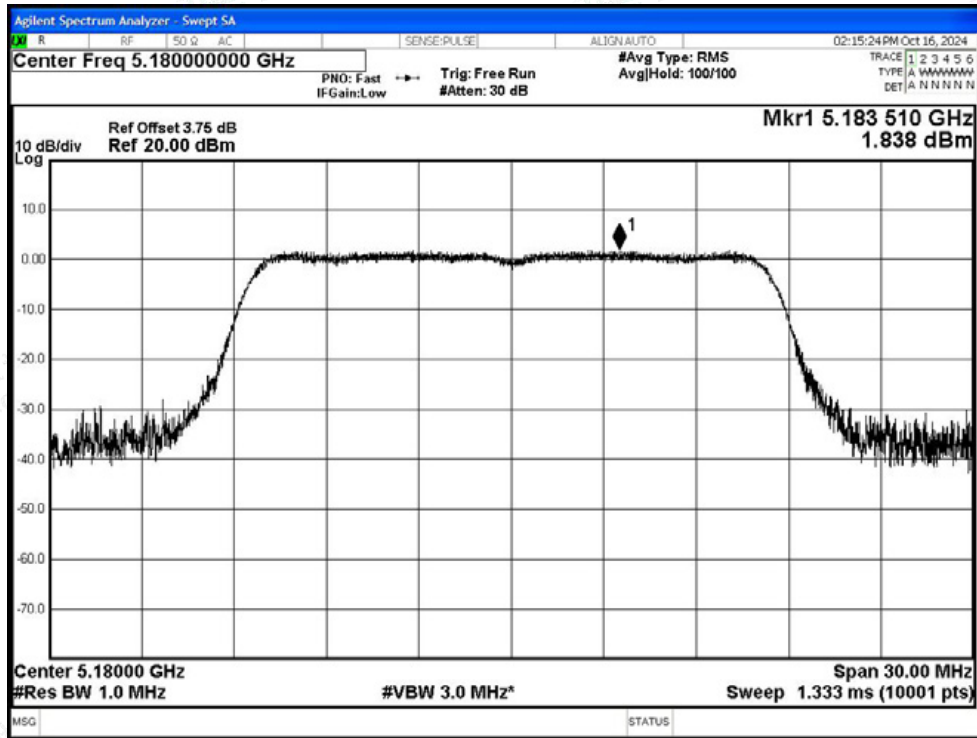


PSD NVNT a 5200MHz Ant0

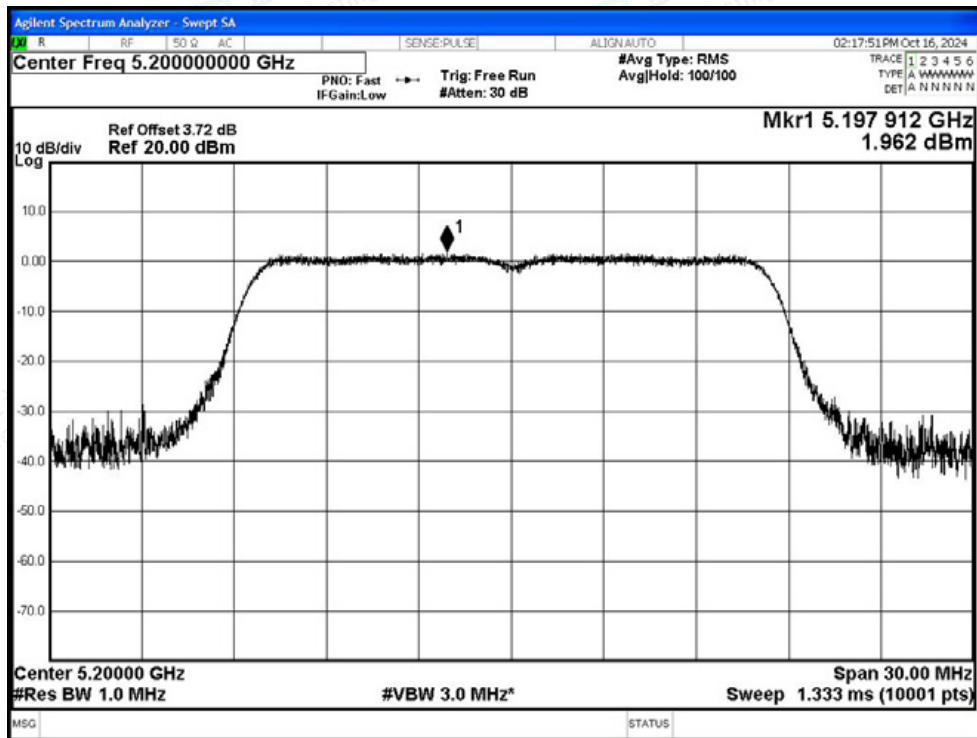




PSD NVNT a 5240MHz Ant0

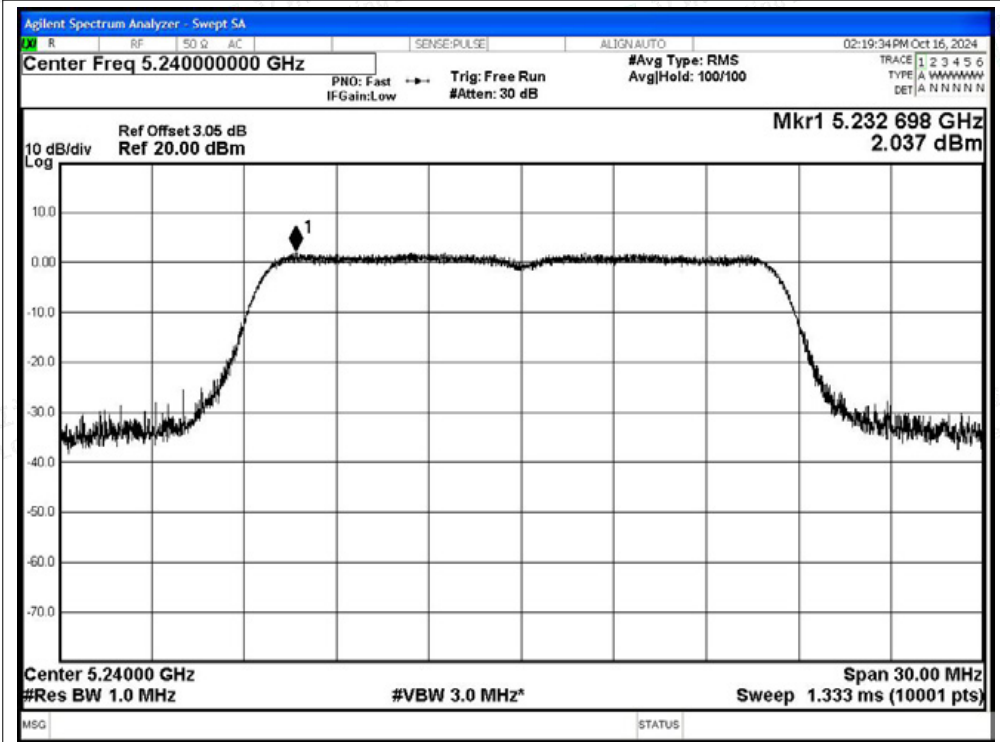


PSD NVNT n20 5180MHz Ant0

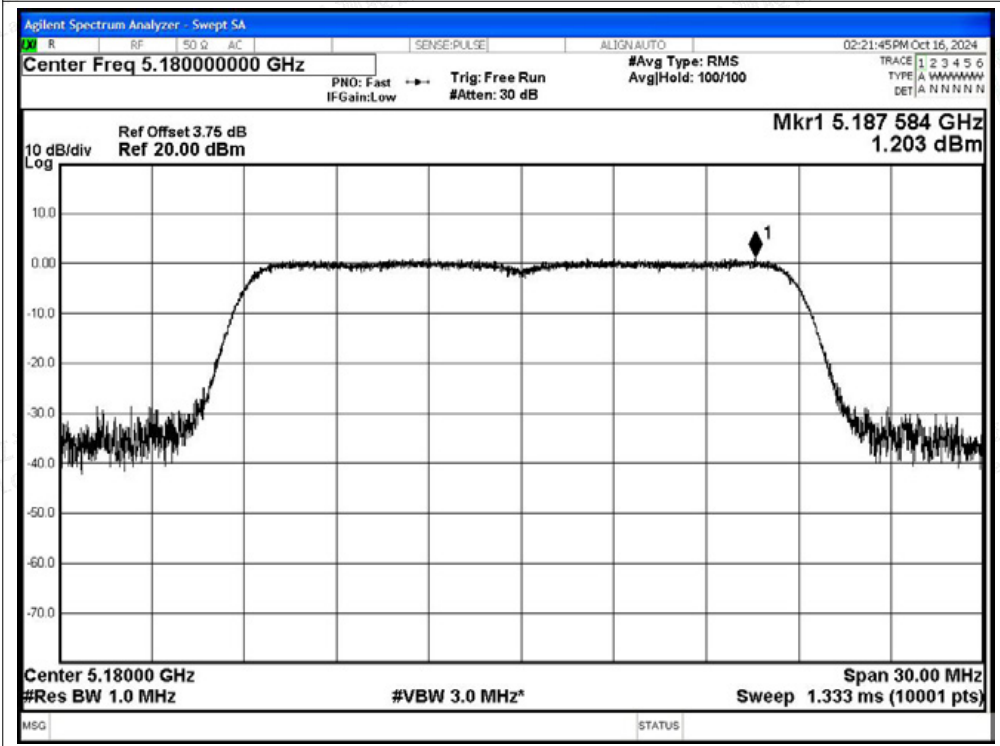




PSD NVNT n20 5200MHz Ant0

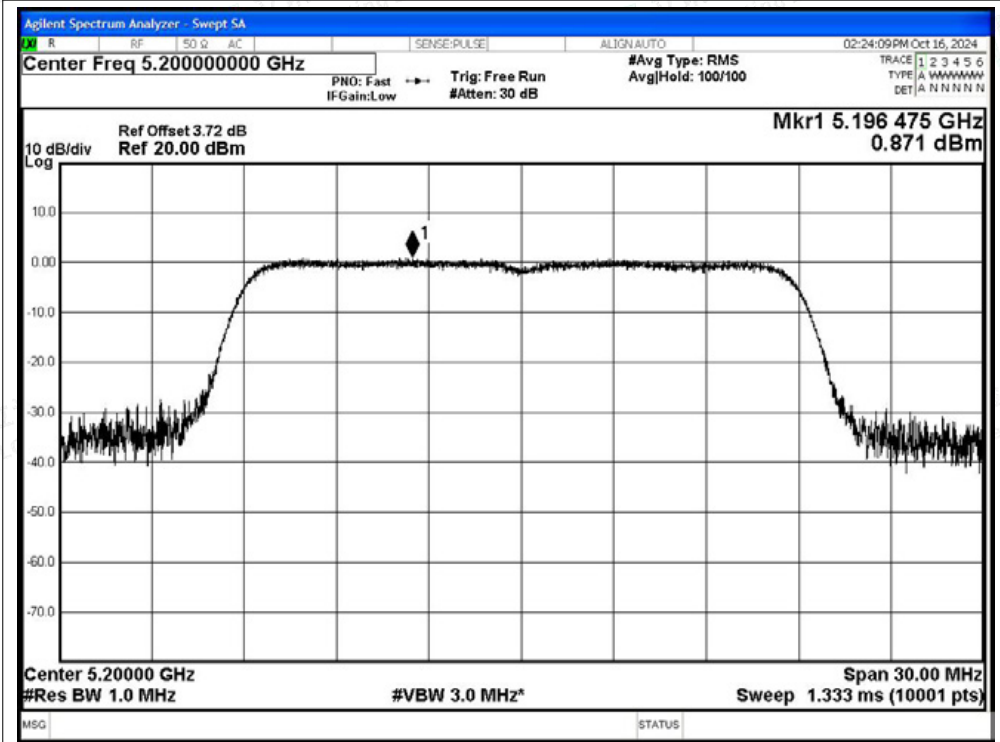


PSD NVNT n20 5240MHz Ant0

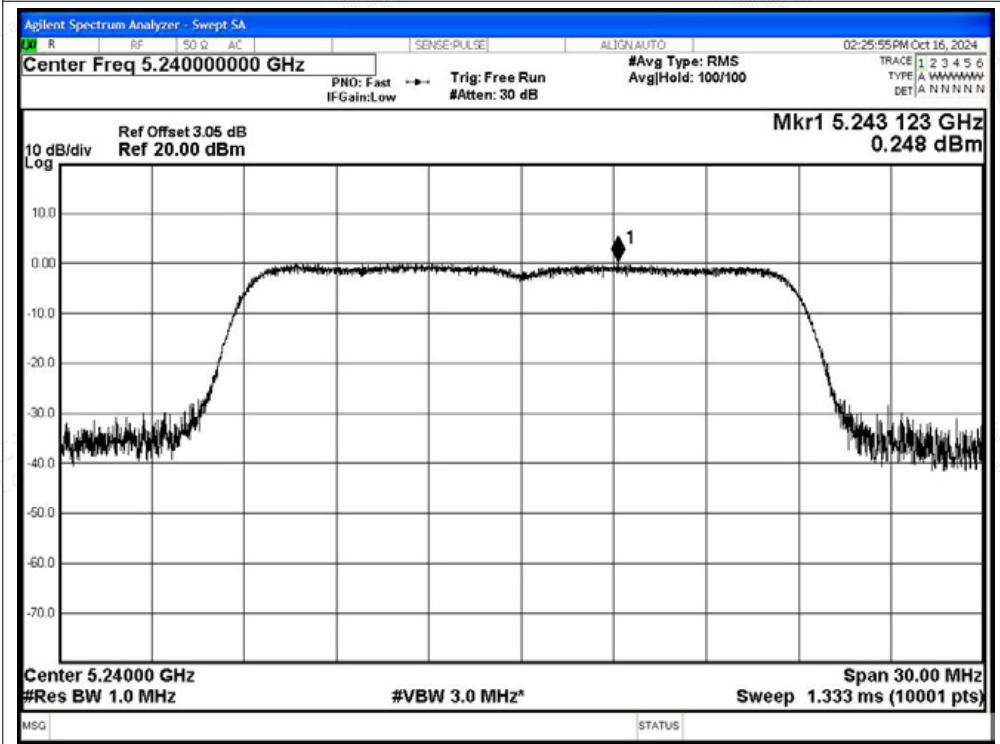




PSD NVNT n40 5190MHz Ant0

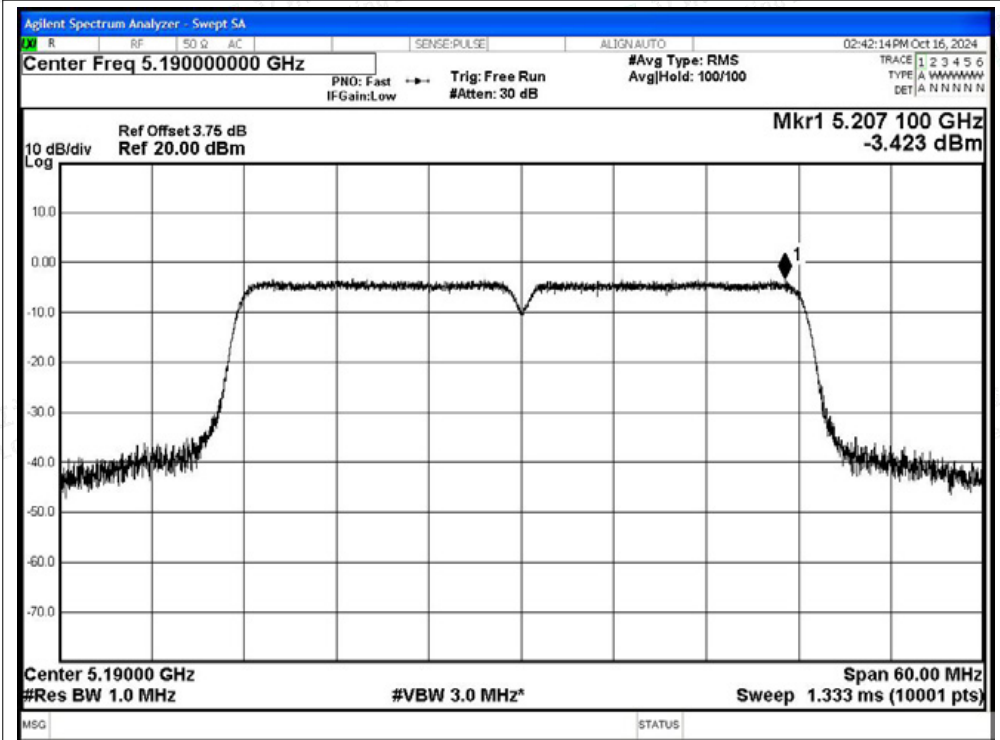


PSD NVNT n40 5230MHz Ant0

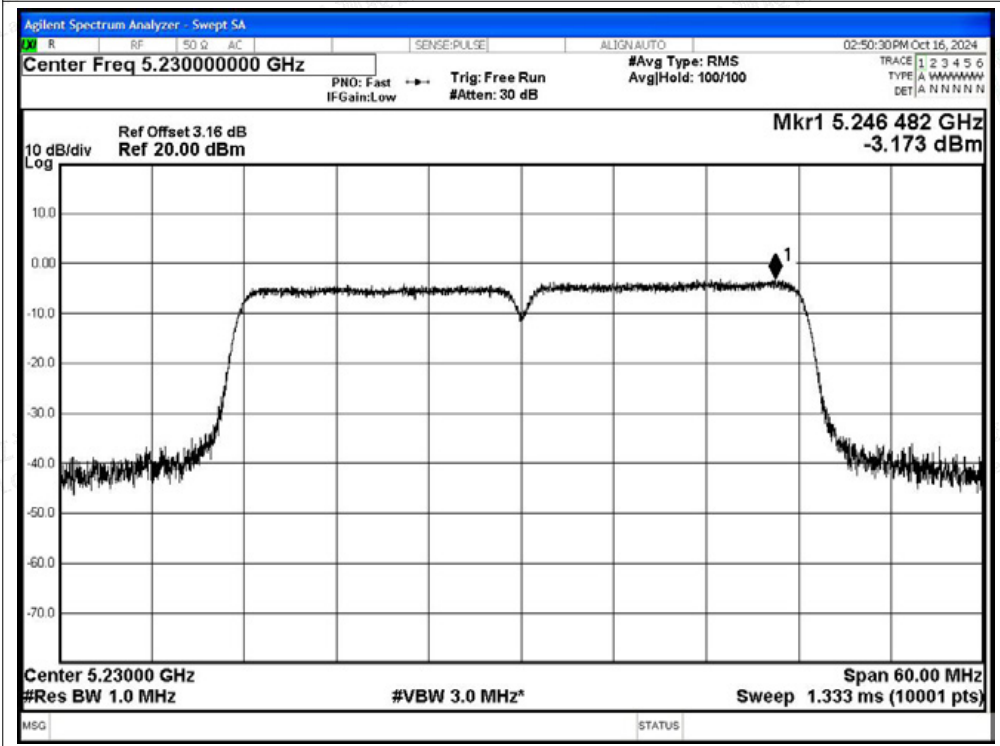




PSD NVNT ac20 5180MHz Ant0

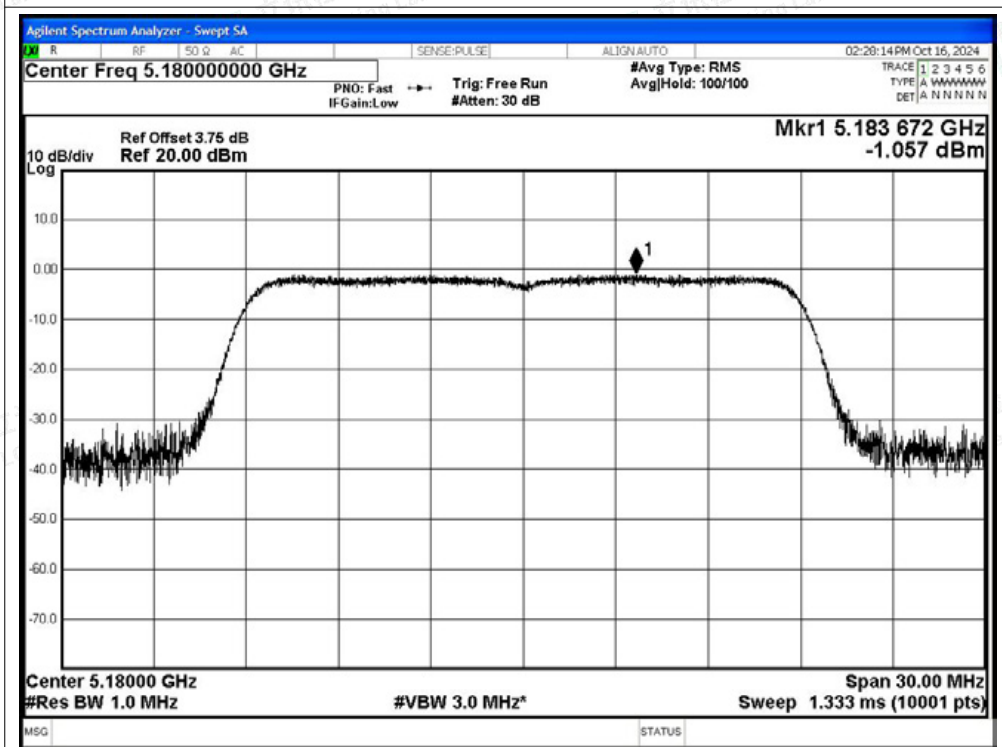


PSD NVNT ac20 5200MHz Ant0

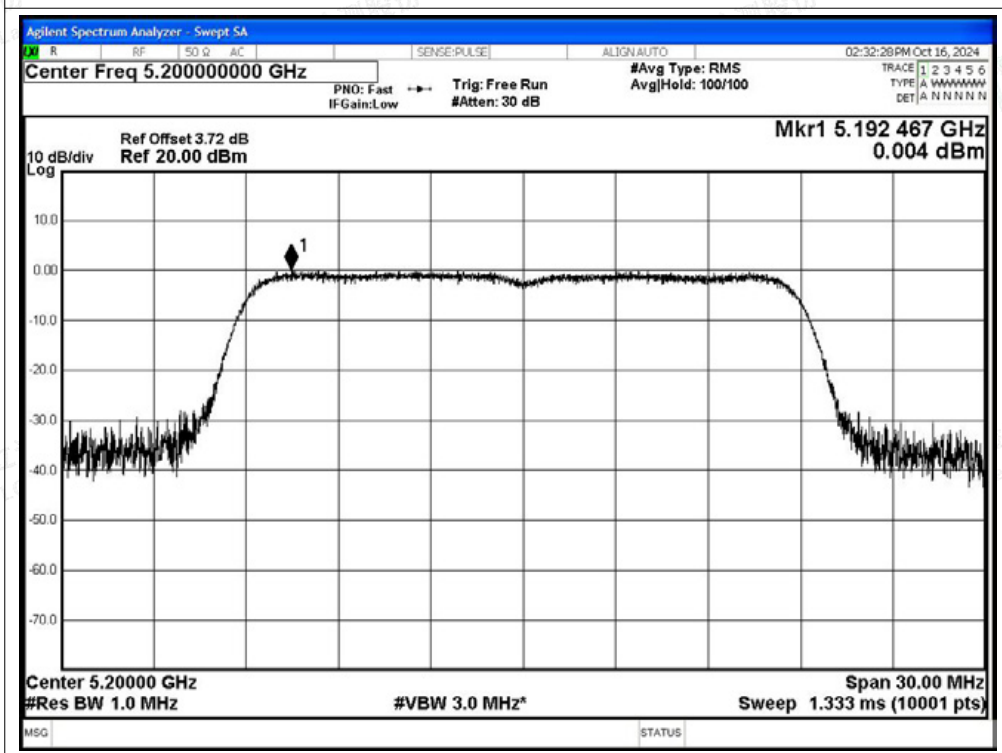





PSD NVNT ac20 5240MHz Ant0

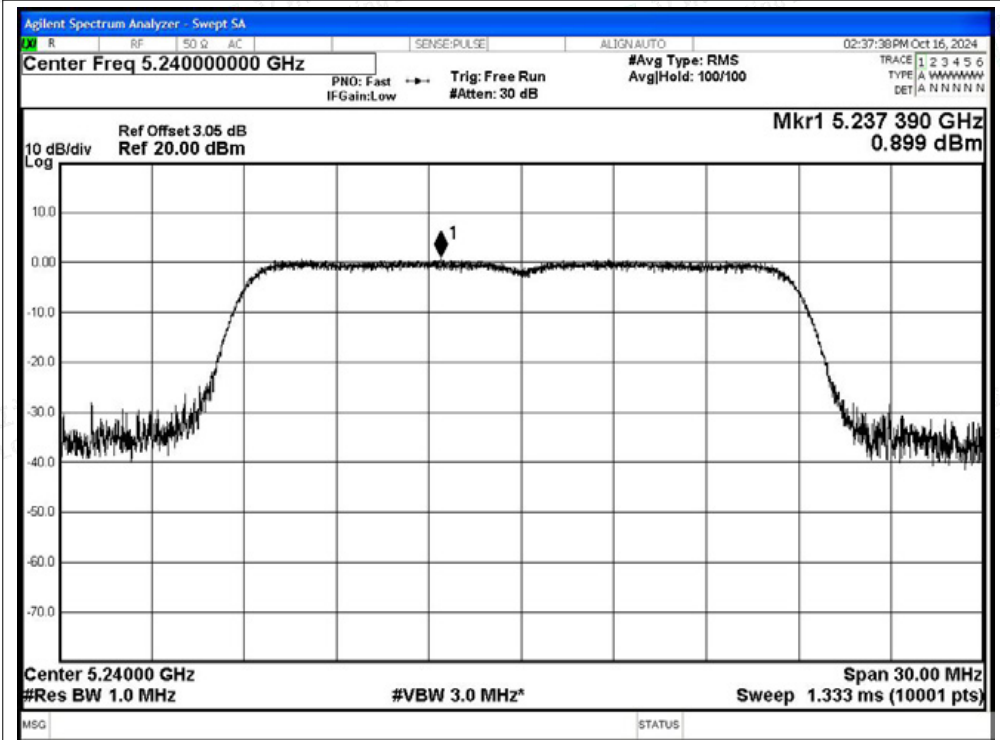


PSD NVNT ac40 5190MHz Ant0

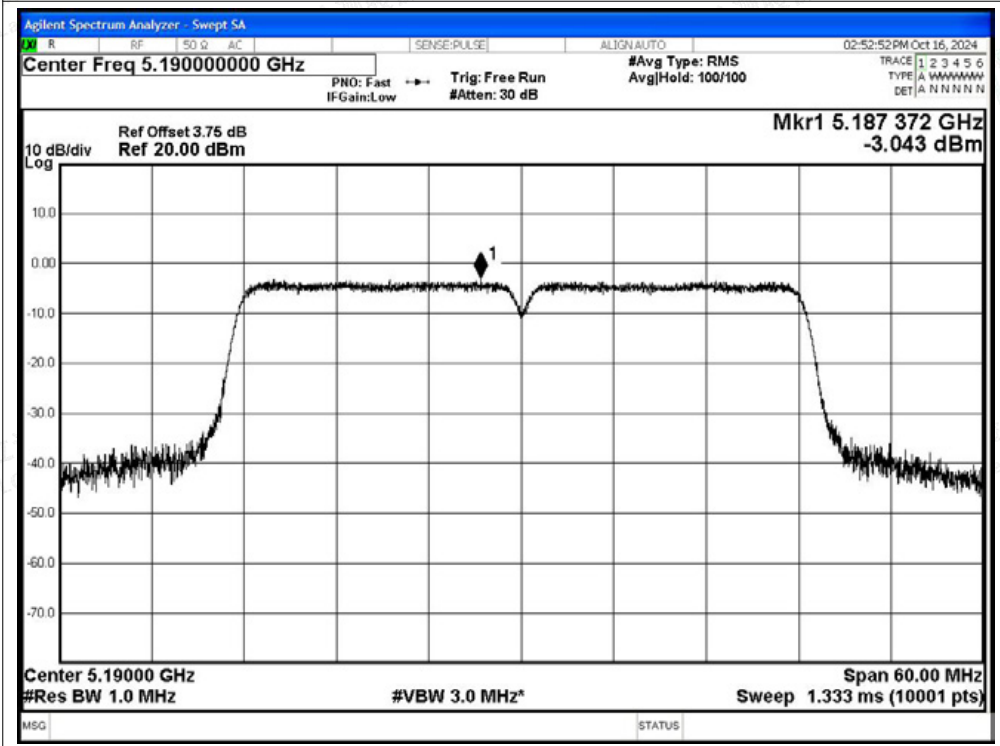

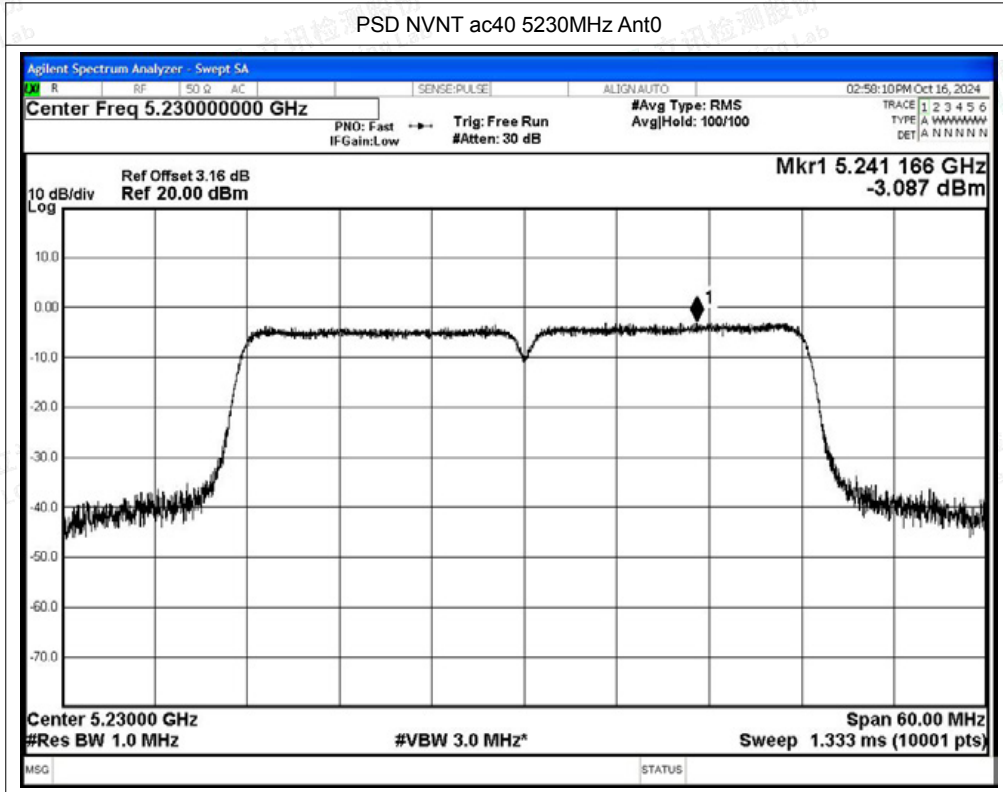




PSD NVNT ax20 5180MHz Ant0

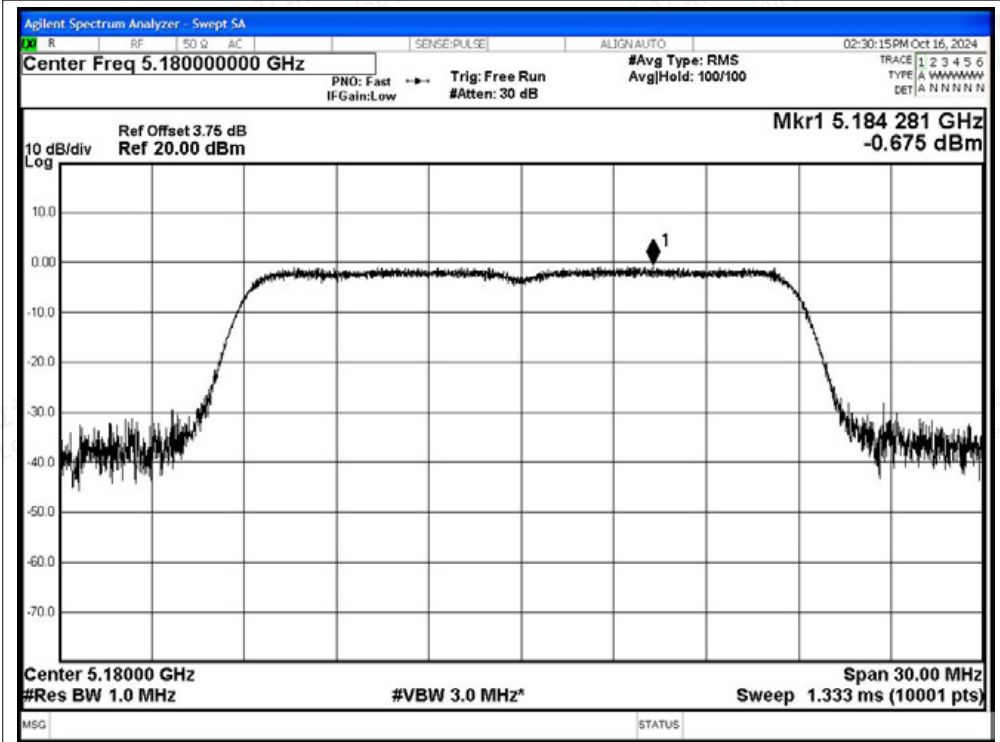


PSD NVNT ax20 5200MHz Ant0

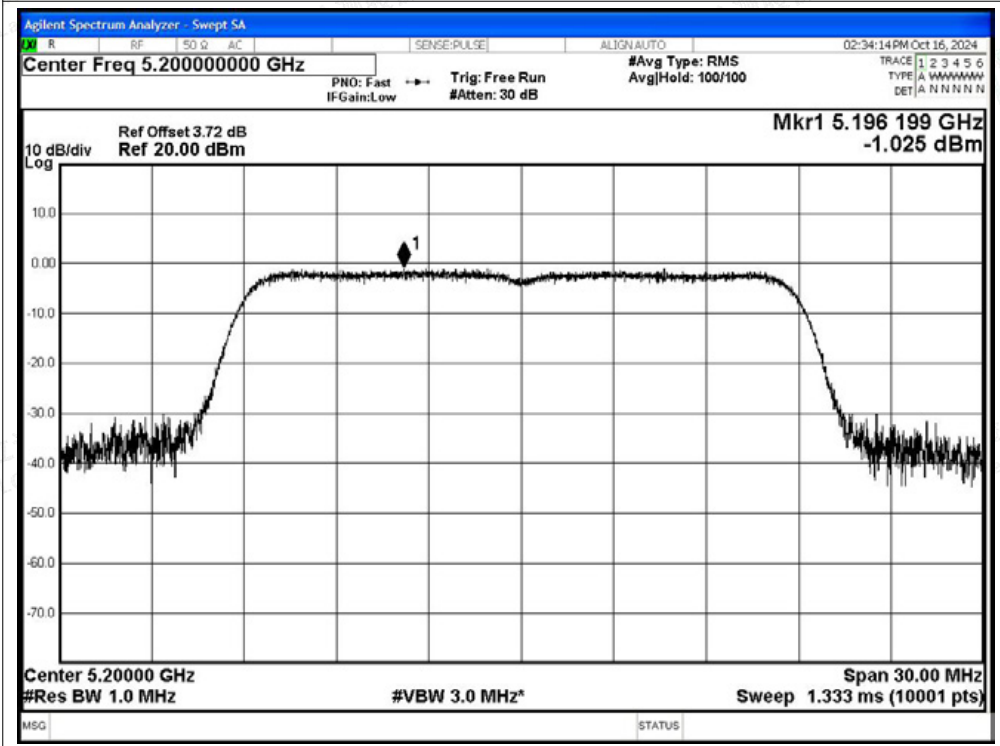





PSD NVNT ax20 5240MHz Ant0

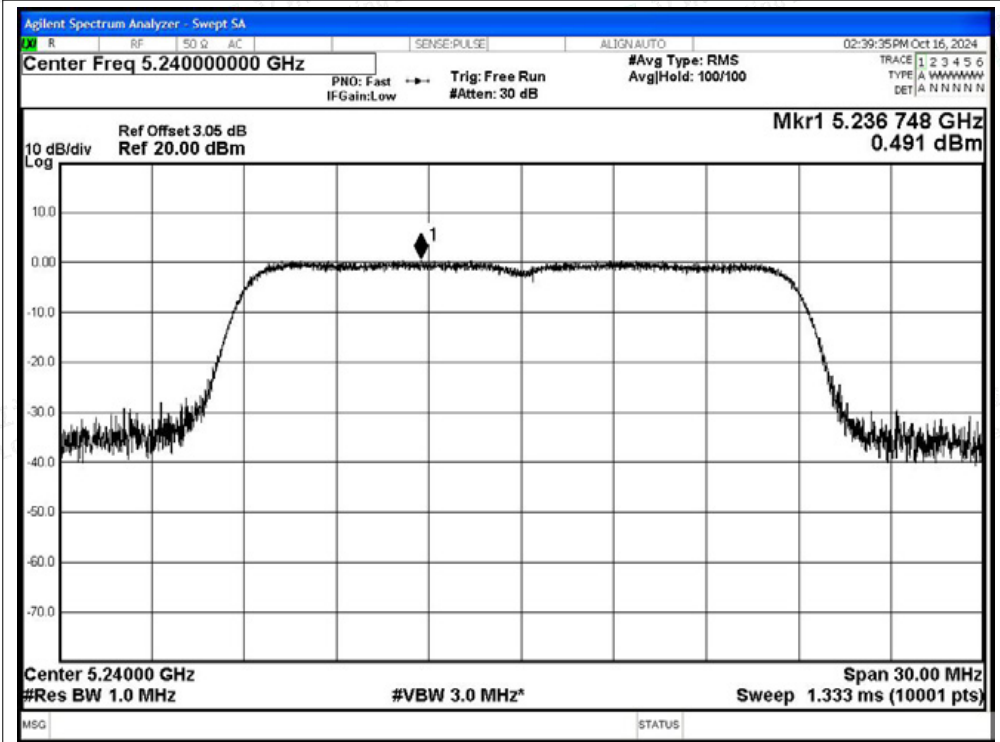

PSD NVNT ax40 5190MHz Ant0

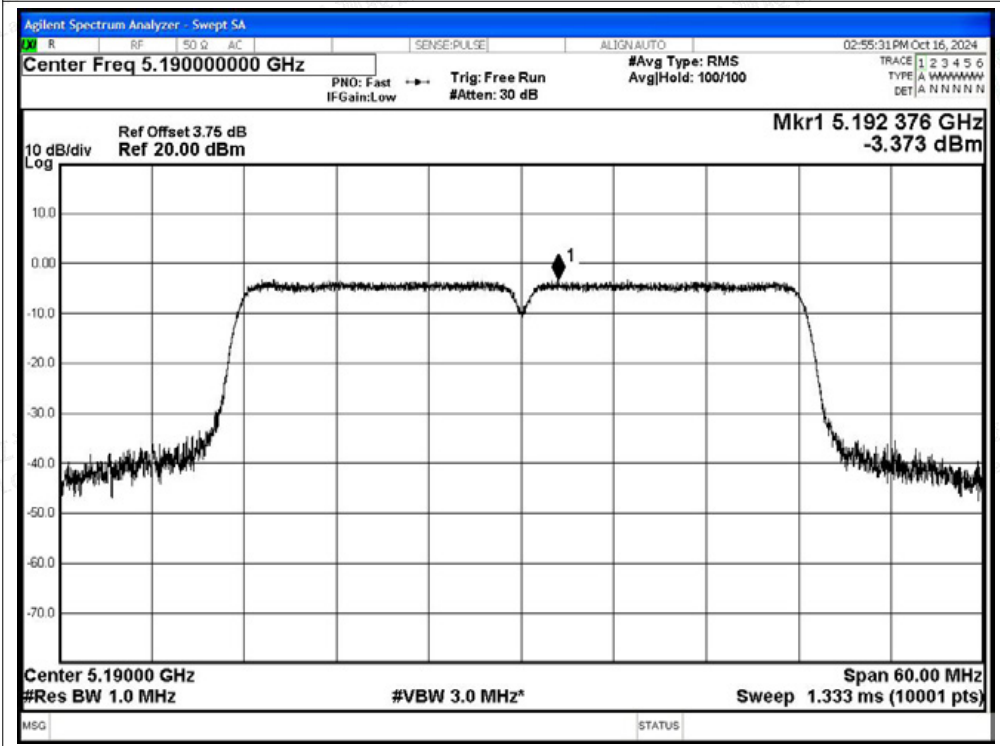


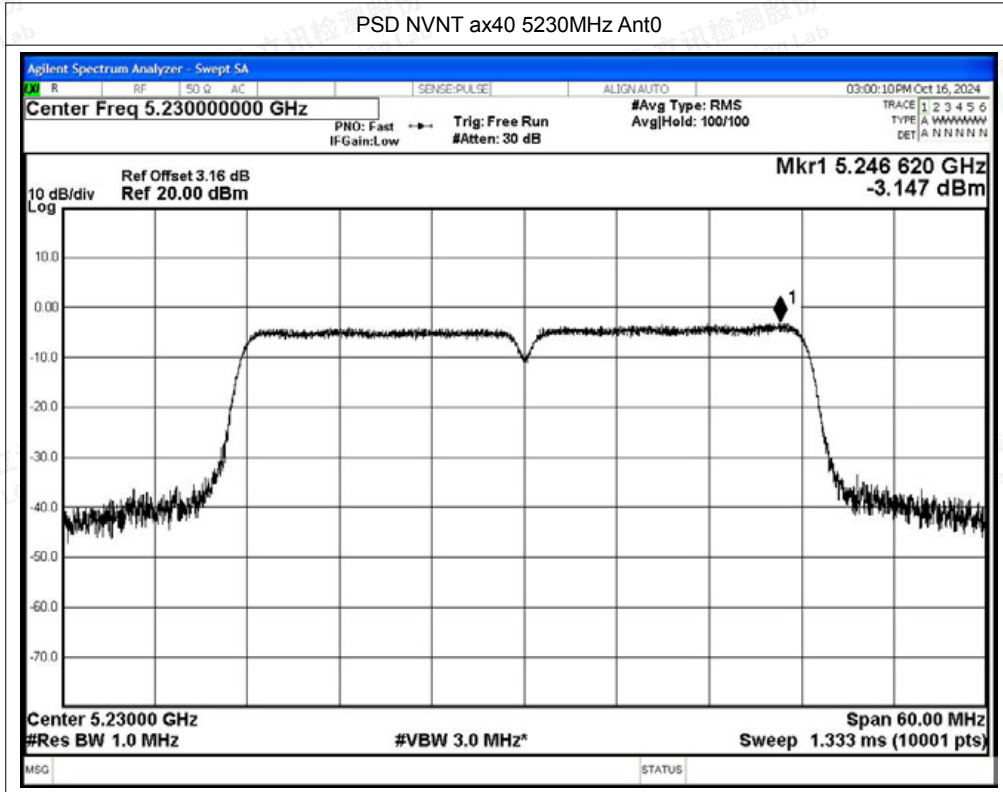




Test Graphs

PSD NVNT a 5180MHz Ant1

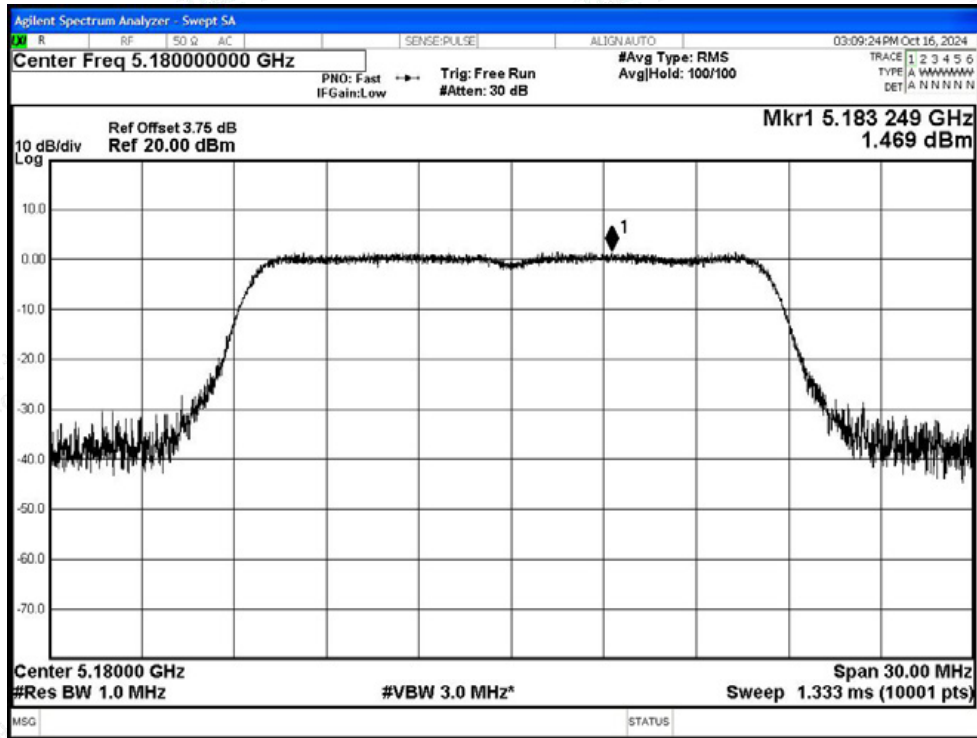


PSD NVNT a 5200MHz Ant1

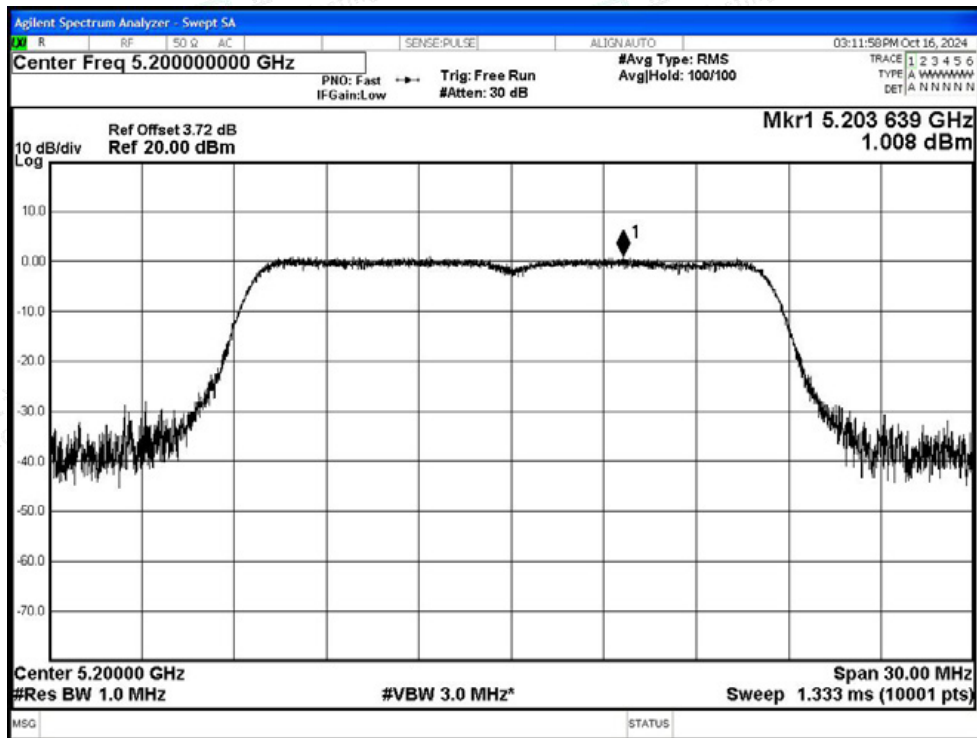




PSD NVNT a 5240MHz Ant1

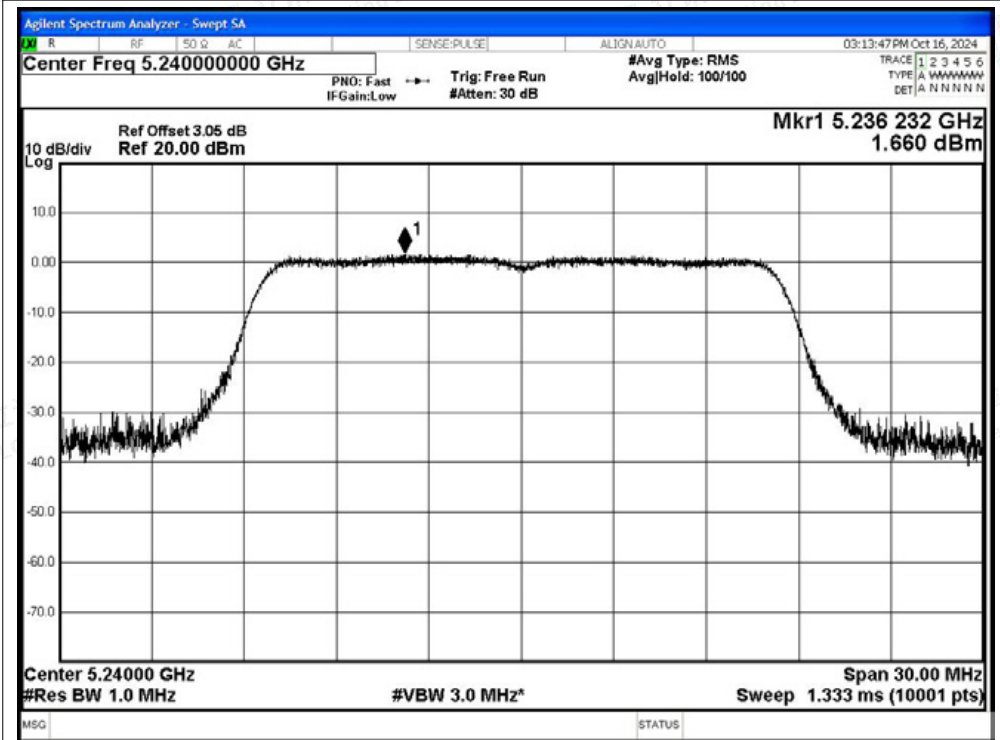


PSD NVNT n20 5180MHz Ant1

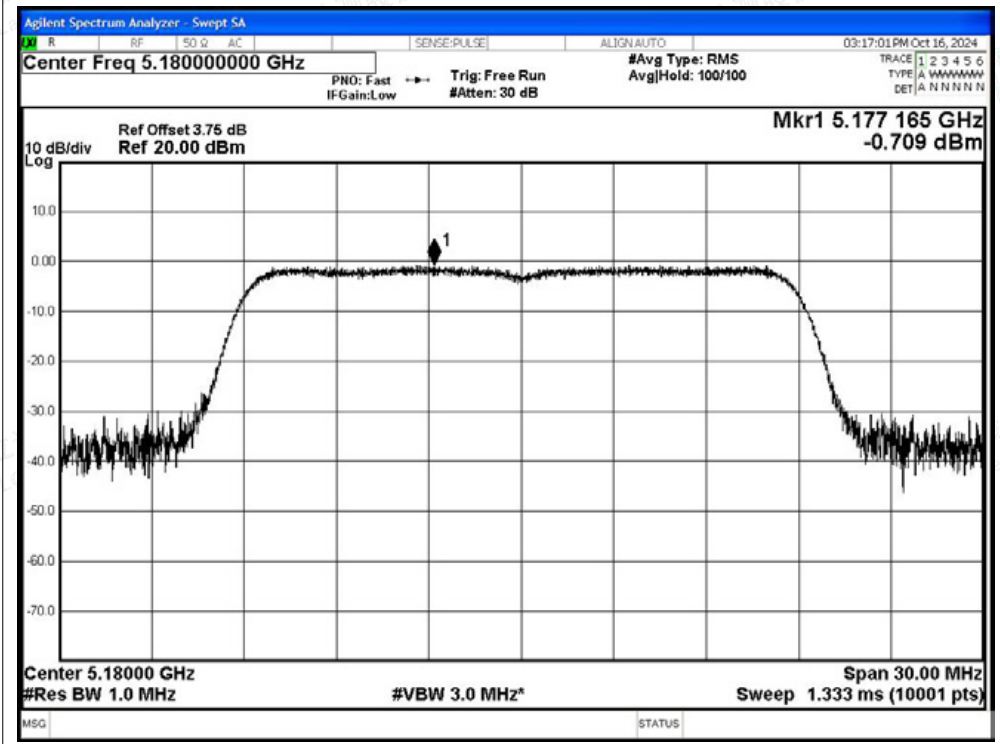




PSD NVNT n20 5200MHz Ant1

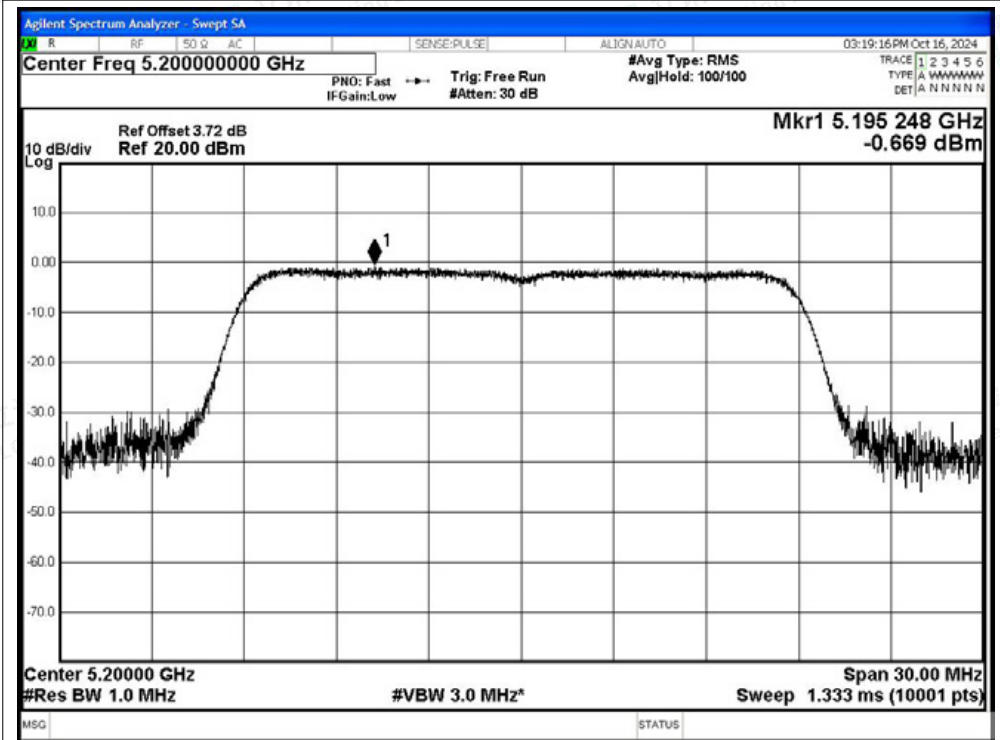


PSD NVNT n20 5240MHz Ant1

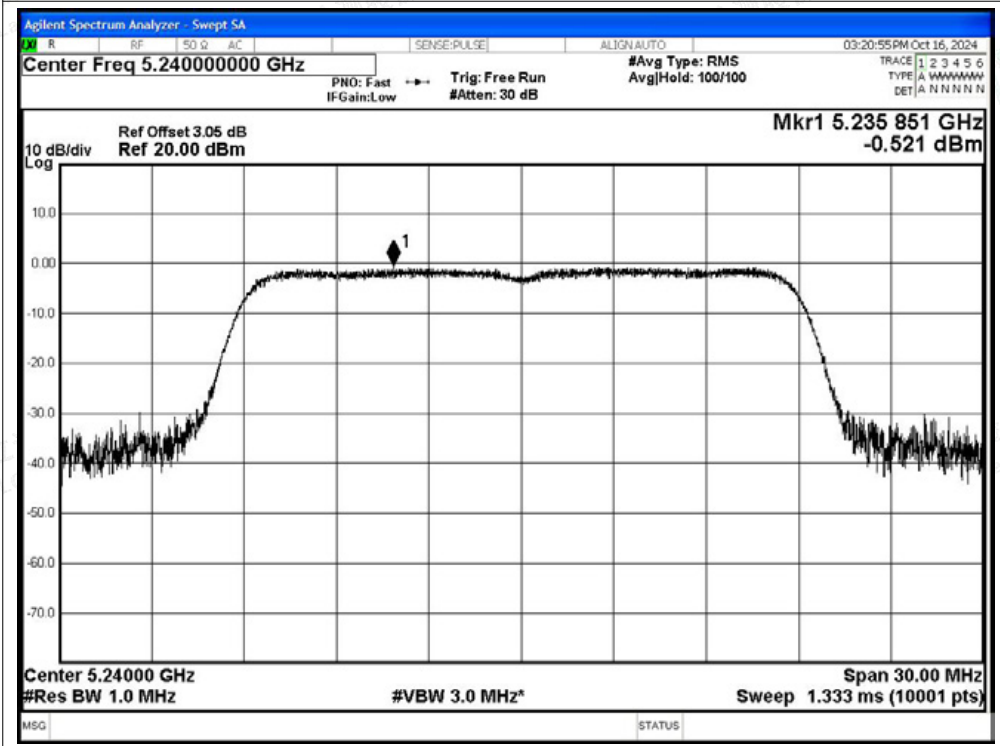




PSD NVNT n40 5190MHz Ant1

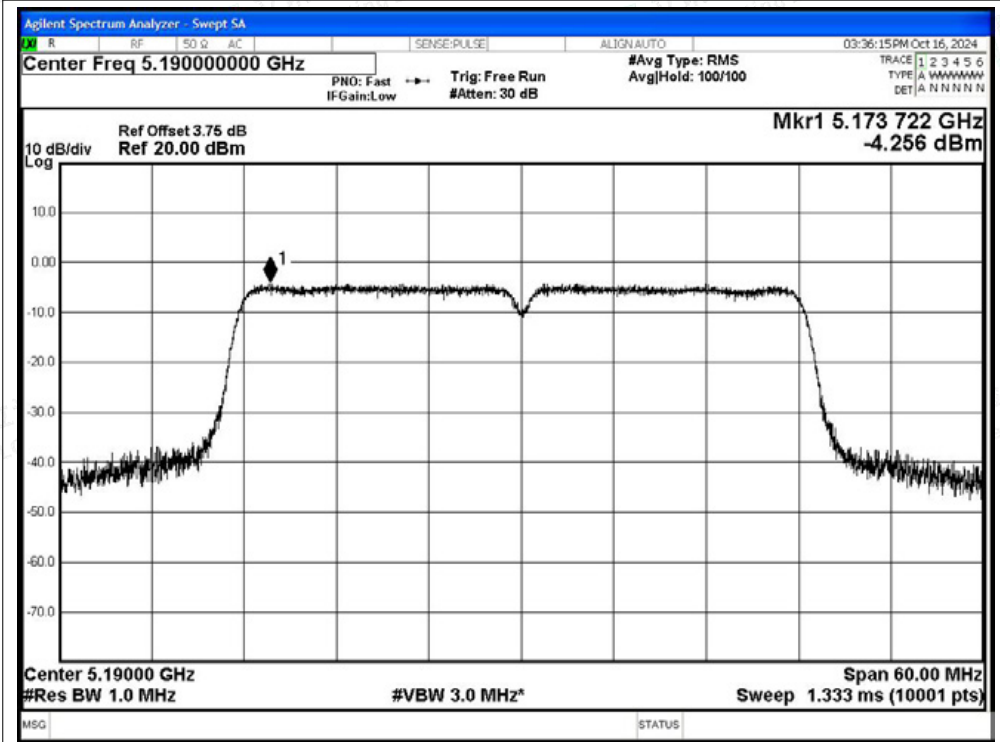


PSD NVNT n40 5230MHz Ant1

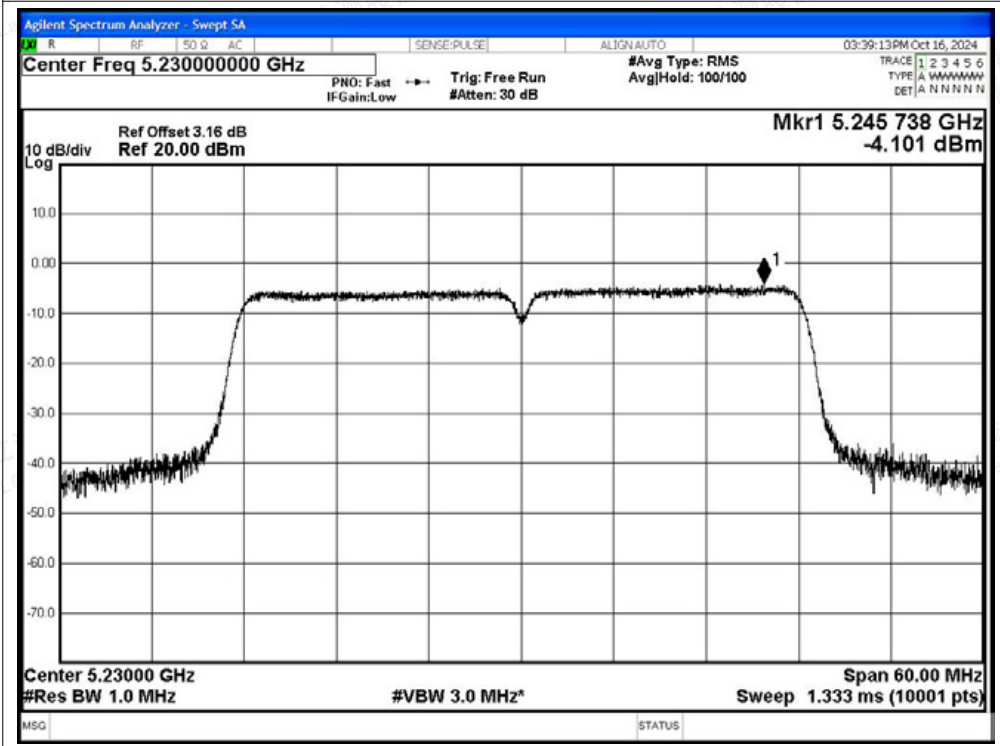




PSD NVNT ac20 5180MHz Ant1

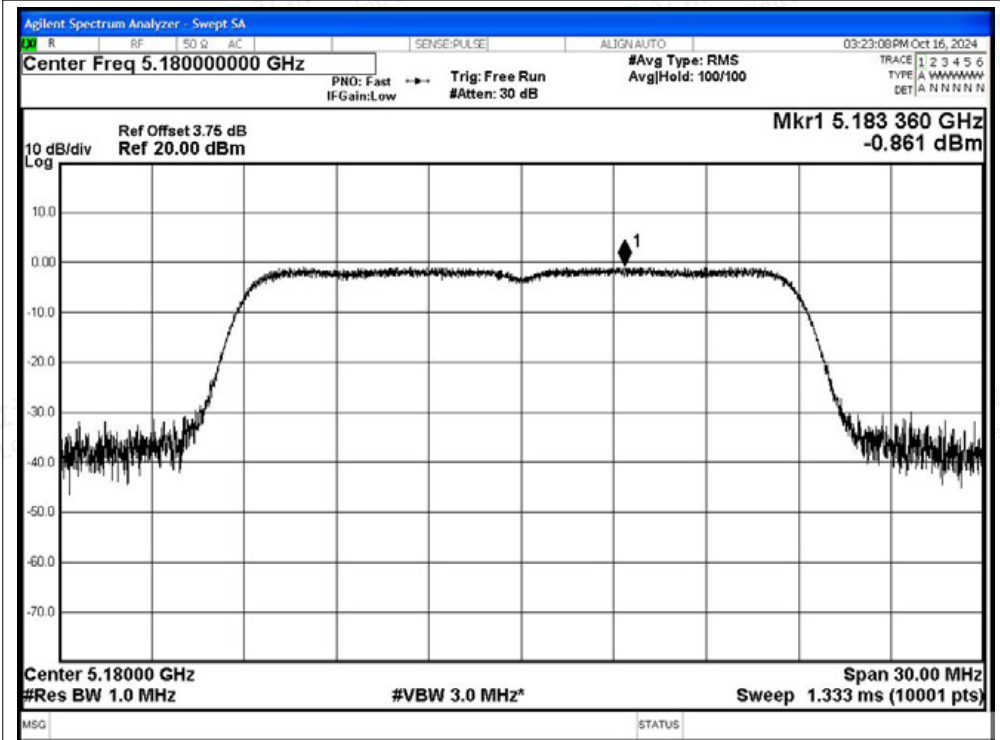


PSD NVNT ac20 5200MHz Ant1

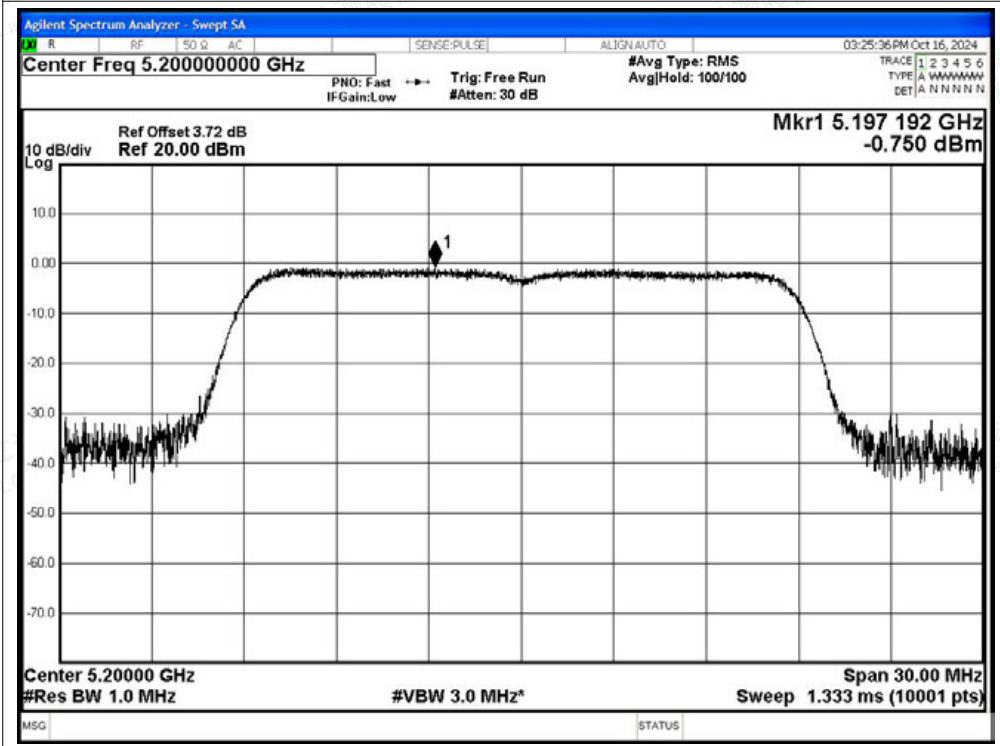





PSD NVNT ac20 5240MHz Ant1

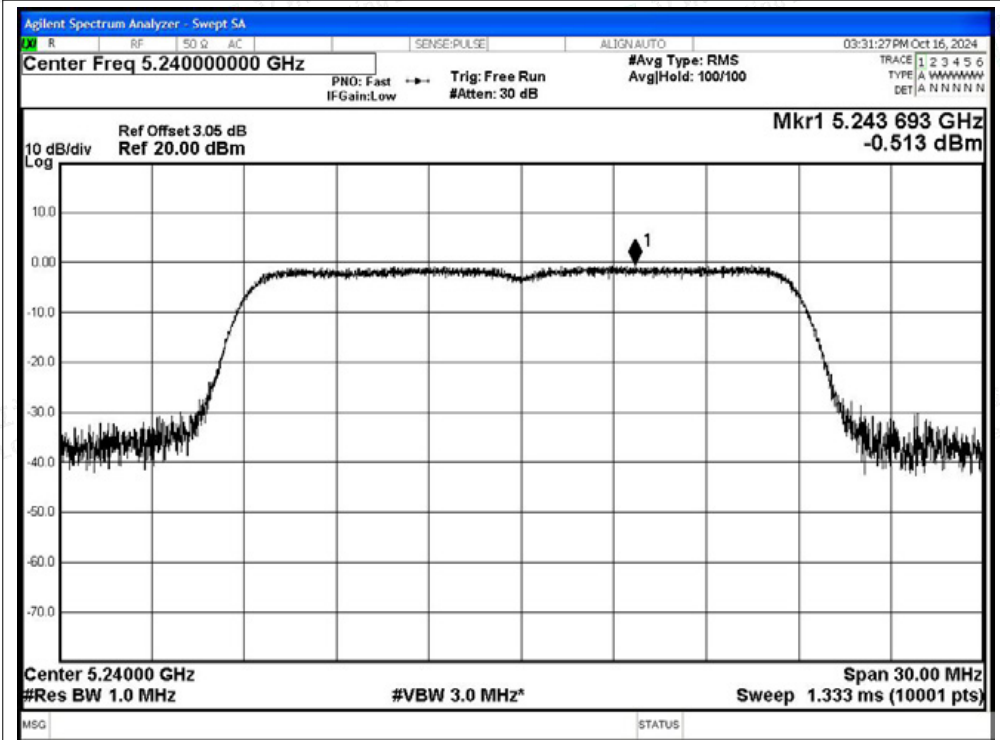


PSD NVNT ac40 5190MHz Ant1

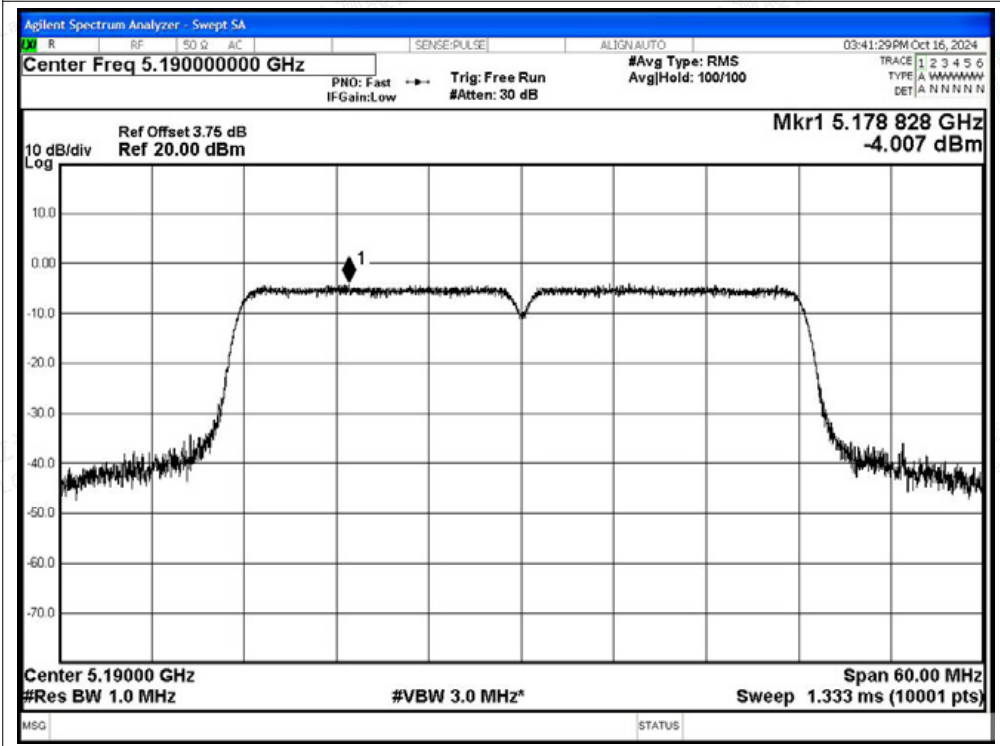

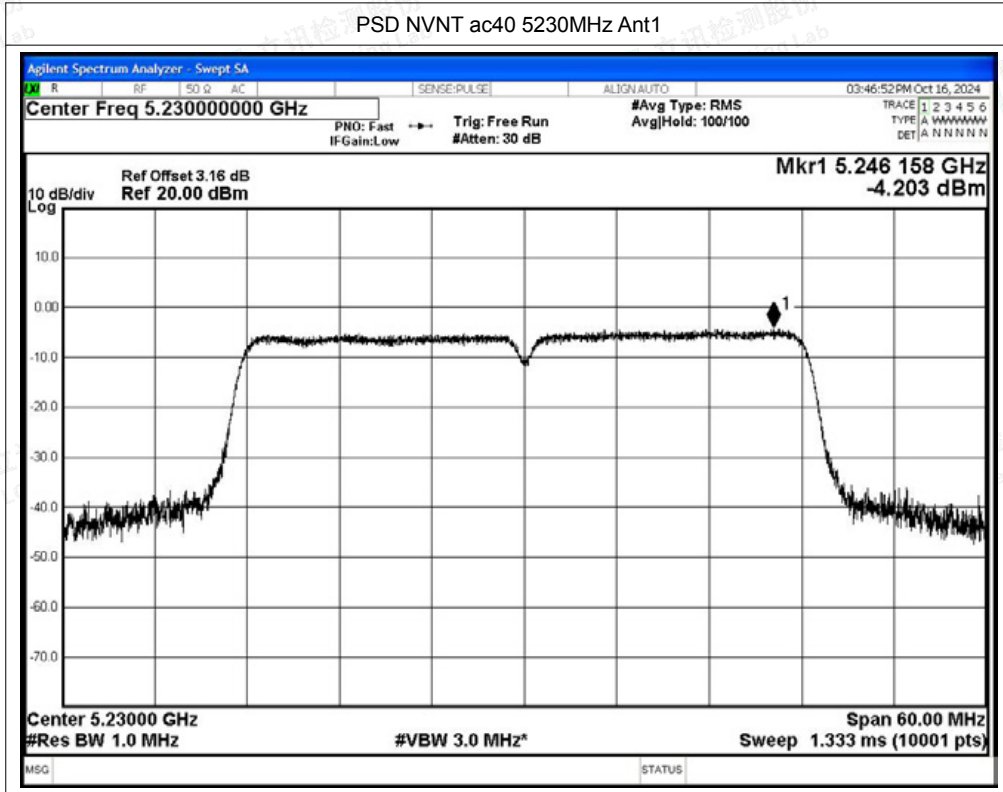




PSD NVNT ax20 5180MHz Ant1

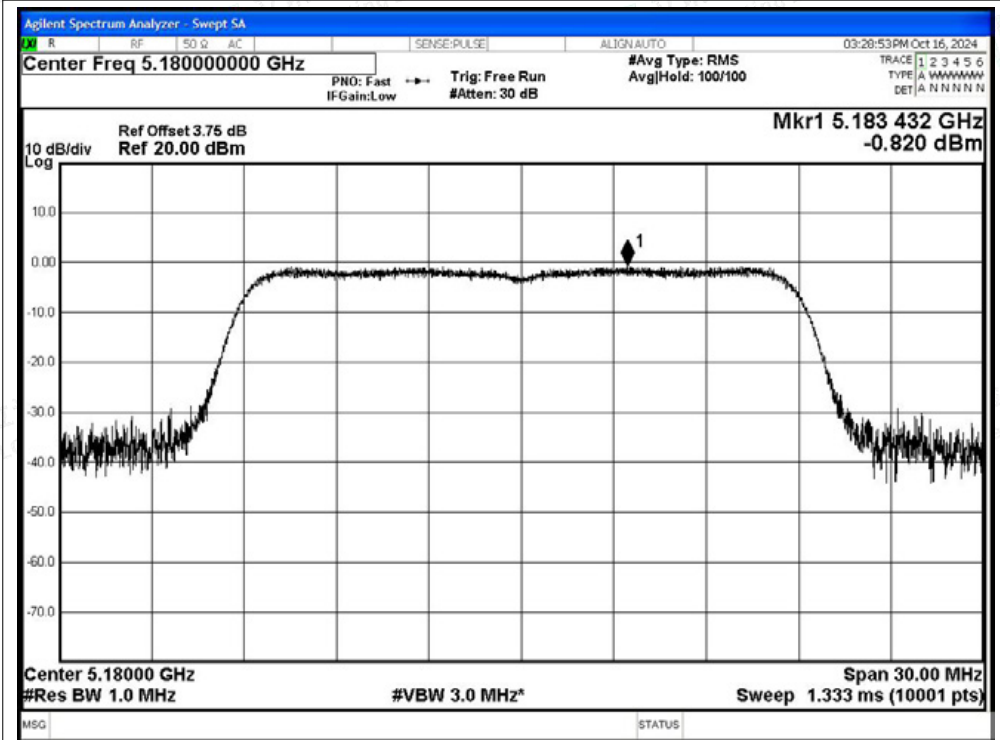


PSD NVNT ax20 5200MHz Ant1

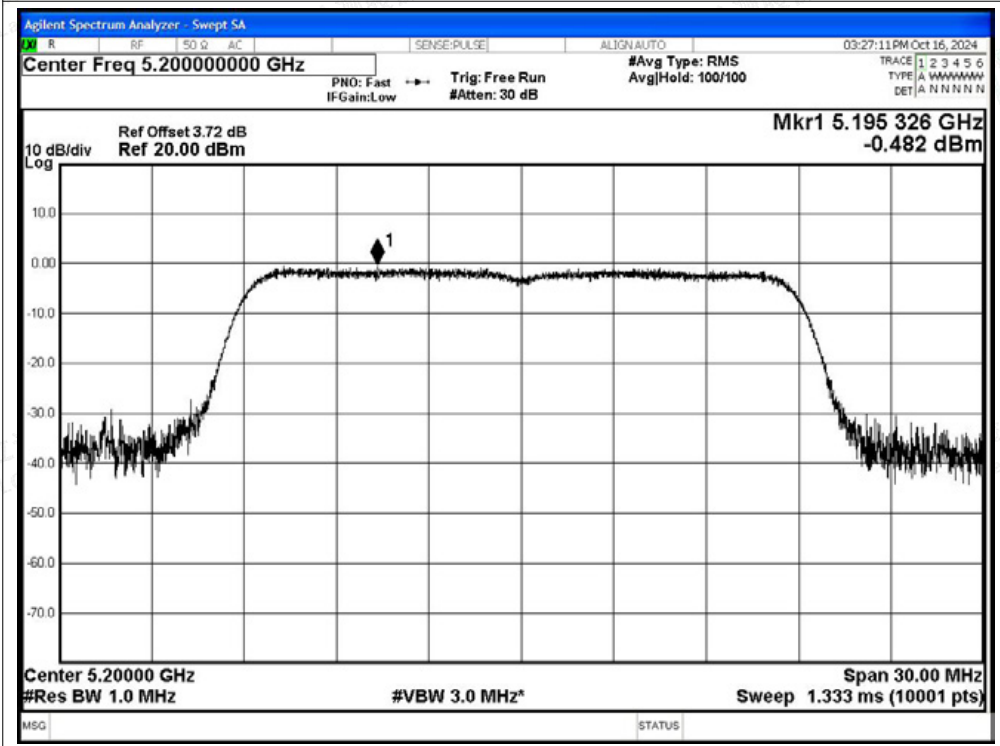





PSD NVNT ax20 5240MHz Ant1

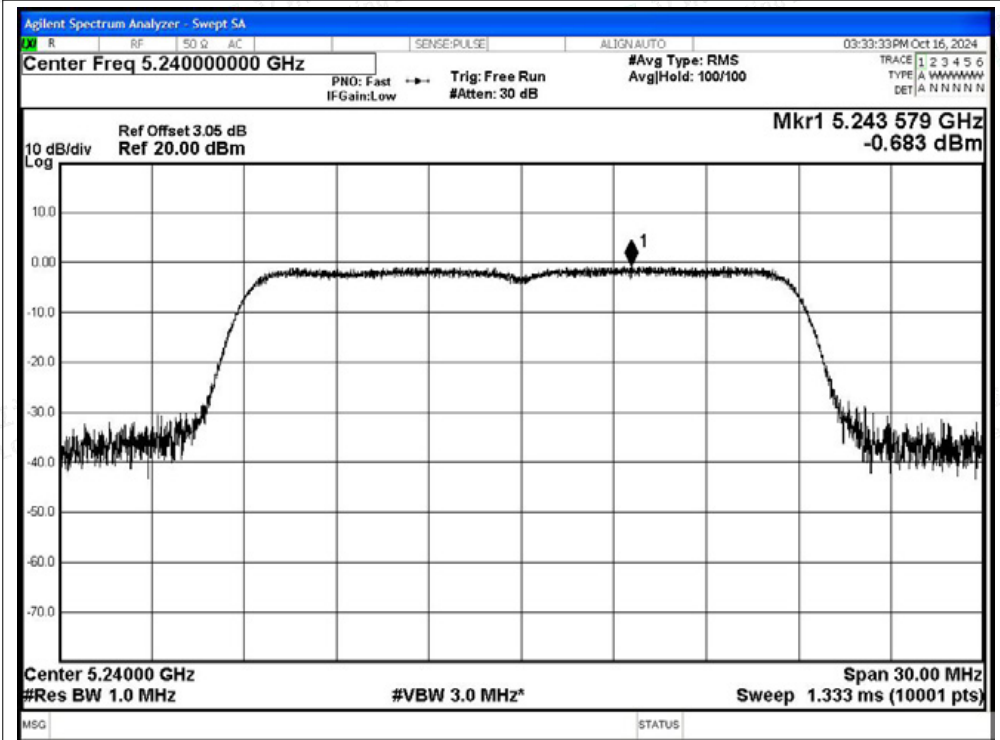

PSD NVNT ax40 5190MHz Ant1

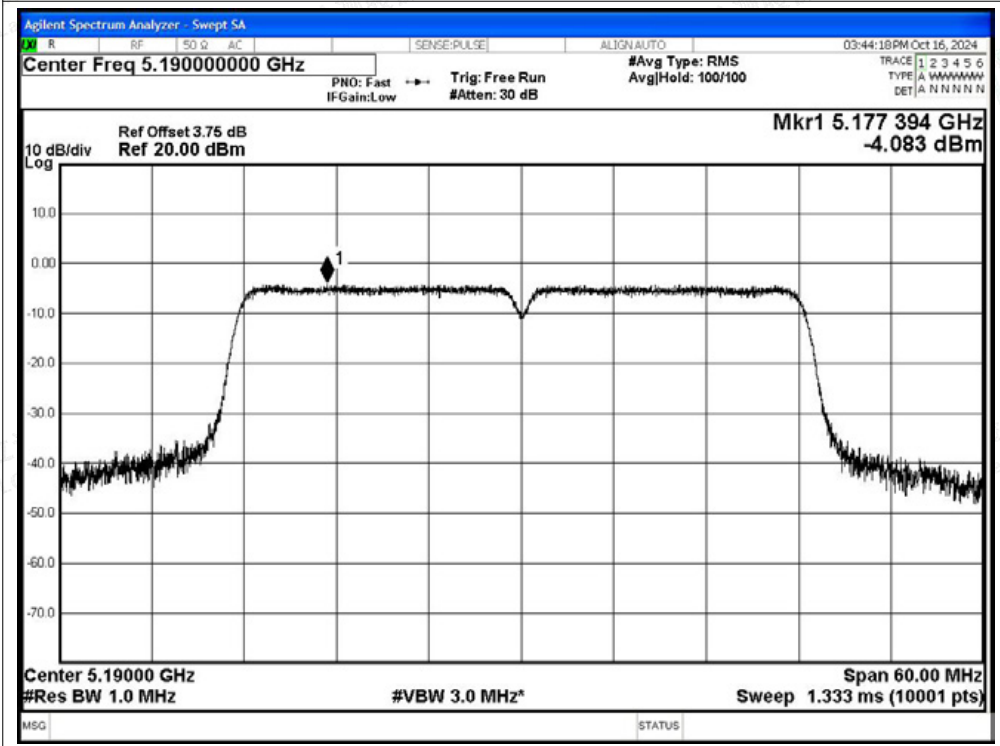

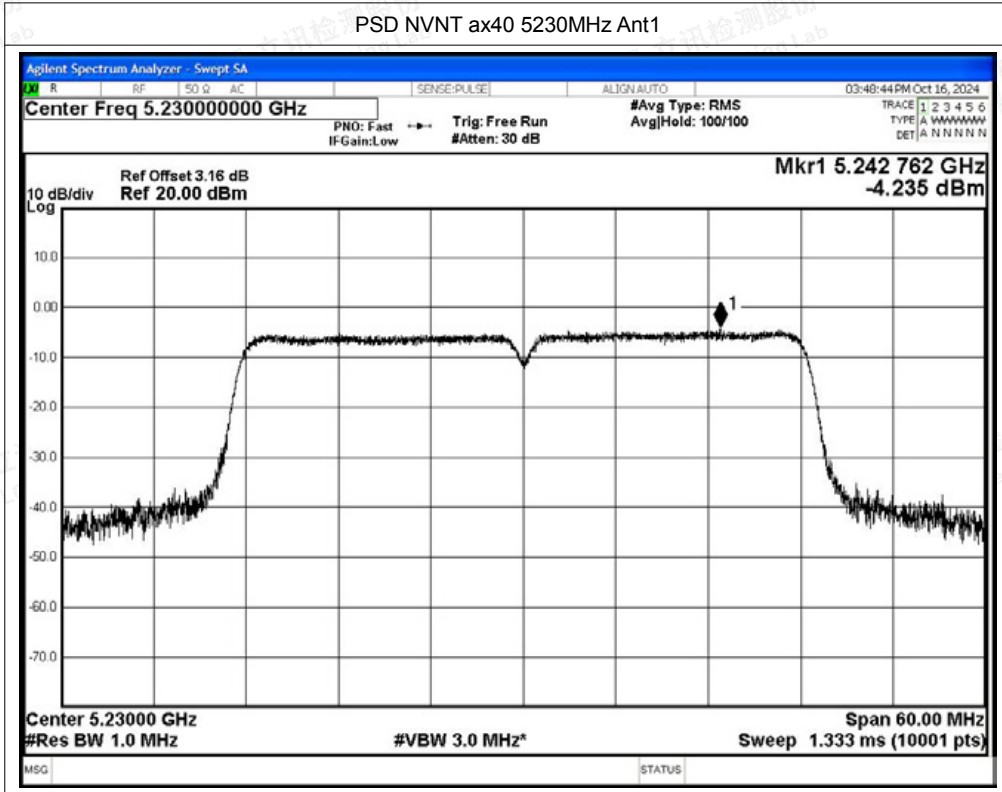



D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-49.56	2.97	-	48.64	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-58.4	2.97	0.24	40.04	Average	54	Pass
NVNT	a	5180	Ant0	5147.5	-41.91	2.97	-	56.29	Peak	68.2	Pass
NVNT	a	5180	Ant0	5148.2	-53.45	2.97	0.24	44.99	Average	54	Pass
NVNT	a	5180	Ant0	5150	-41.97	2.97	-	56.23	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-52.93	2.97	0.24	45.51	Average	54	Pass
NVNT	a	5240	Ant0	5350	-49.95	2.97	-	48.25	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-56.9	2.97	0.24	41.54	Average	54	Pass
NVNT	a	5240	Ant0	5459.04	-46.7	2.97	-	51.50	Peak	68.2	Pass
NVNT	a	5240	Ant0	5372.88	-56.58	2.97	0.24	41.86	Average	54	Pass
NVNT	a	5240	Ant0	5460	-49.07	2.97	-	49.13	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-58.3	2.97	0.24	40.14	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-50.17	2.97	-	48.03	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-58.18	2.97	0.12	40.14	Average	54	Pass
NVNT	n20	5180	Ant0	5148.2	-38.77	2.97	-	59.43	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5149.6	-52.5	2.97	0.12	45.82	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-41.03	2.97	-	57.17	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-53.8	2.97	0.12	44.52	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-47.55	2.97	-	50.65	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-57.14	2.97	0.12	41.18	Average	54	Pass
NVNT	n20	5240	Ant0	5372.4	-46.84	2.97	-	51.36	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350.56	-56.78	2.97	0.12	41.54	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-49.27	2.97	-	48.93	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-58.44	2.97	0.12	39.88	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-49.2	2.97	-	49.00	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-58.44	2.97	0.12	39.88	Average	54	Pass
NVNT	n40	5190	Ant0	5149.7	-38.03	2.97	-	60.17	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5149.7	-53.47	2.97	0.12	44.85	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-38.03	2.97	-	60.17	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-53.47	2.97	0.12	44.85	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-50.6	2.97	-	47.60	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-57.26	2.97	0.12	41.06	Average	54	Pass
NVNT	n40	5230	Ant0	5350.92	-46.29	2.97	-	51.91	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5351.46	-56.74	2.97	0.12	41.58	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-50.05	2.97	-	48.15	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-58.32	2.97	0.12	40.00	Average	54	Pass





NVNT	ac20	5180	Ant0	4500	-49.63	2.97	-	48.57	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	4500	-58.49	2.97	0.12	39.83	Average	54	Pass
NVNT	ac20	5180	Ant0	5146.8	-40.76	2.97	-	57.44	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5149.6	-52.33	2.97	0.12	45.99	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-40.81	2.97	-	57.39	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-51.59	2.97	0.12	46.73	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-48.25	2.97	-	49.95	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-57.15	2.97	0.12	41.17	Average	54	Pass
NVNT	ac20	5240	Ant0	5447.76	-46.08	2.97	-	52.12	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350.56	-56.74	2.97	0.12	41.58	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-49.63	2.97	-	48.57	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-57.79	2.97	0.12	40.53	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-50.32	2.97	-	47.88	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-58.21	2.97	0.12	40.11	Average	54	Pass
NVNT	ac40	5190	Ant0	5148.97	-42.04	2.97	-	56.16	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5149.7	-52.76	2.97	0.12	45.56	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-43.29	2.97	-	54.91	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-52.76	2.97	0.12	45.56	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-49.36	2.97	-	48.84	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-57.59	2.97	0.12	40.73	Average	54	Pass
NVNT	ac40	5230	Ant0	5368.47	-46.26	2.97	-	51.94	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5351.46	-56.62	2.97	0.12	41.70	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-50.55	2.97	-	47.65	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-58.29	2.97	0.12	40.03	Average	54	Pass
NVNT	ax20	5180	Ant0	4500	-50.69	2.97	-	47.51	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	4500	-57.93	2.97	0.12	40.39	Average	54	Pass
NVNT	ax20	5180	Ant0	5149.6	-37.28	2.97	-	60.92	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5149.6	-52.31	2.97	0.12	46.01	Average	54	Pass
NVNT	ax20	5180	Ant0	5150	-40.8	2.97	-	57.40	Peak	68.2	Pass
NVNT	ax20	5180	Ant0	5150	-52.23	2.97	0.12	46.09	Average	54	Pass
NVNT	ax20	5240	Ant0	5350	-51	2.97	-	47.20	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5350	-57.33	2.97	0.12	40.99	Average	54	Pass
NVNT	ax20	5240	Ant0	5396.4	-46.32	2.97	-	51.88	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5350.56	-56.65	2.97	0.12	41.67	Average	54	Pass
NVNT	ax20	5240	Ant0	5460	-49.61	2.97	-	48.59	Peak	68.2	Pass
NVNT	ax20	5240	Ant0	5460	-57.45	2.97	0.12	40.87	Average	54	Pass
NVNT	ax40	5190	Ant0	4500	-48.86	2.97	-	49.34	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	4500	-58.01	2.97	0.12	40.31	Average	54	Pass
NVNT	ax40	5190	Ant0	5147.51	-41.9	2.97	-	56.30	Peak	68.2	Pass
NVNT	ax40	5190	Ant0	5148.97	-52.66	2.97	0.12	45.66	Average	54	Pass
NVNT	ax40	5190	Ant0	5150	-42.13	2.97	-	56.07	Peak	68.2	Pass





NVNT	ax40	5190	Ant0	5150	-53.45	2.97	0.12	44.87	Average	54	Pass
NVNT	ax40	5230	Ant0	5350	-49.16	2.97	-	49.04	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5350	-57.42	2.97	0.12	40.90	Average	54	Pass
NVNT	ax40	5230	Ant0	5391.42	-46.75	2.97	-	51.45	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5371.98	-56.84	2.97	0.12	41.48	Average	54	Pass
NVNT	ax40	5230	Ant0	5460	-49.5	2.97	-	48.70	Peak	68.2	Pass
NVNT	ax40	5230	Ant0	5460	-57.96	2.97	0.12	40.36	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity