OnBoard 2.4 GHz SMD - Antenna PRO-OB-440 13.75 x 5.23 x 3.53 mm Request Samples 🕥 Check Inventory **RoHS/RoHS II Compliant** MSL Level = 1 Applications Features Compact 2.4 GHz - Wi-Fi/BT/BLE/ZigBee/ISM • Low Cost IoT, M2M Mixed Linear Polarization Industrial IoT 0 Consumer IoT Peak Gain of less than 5 dBi 0

- Efficiency > 65%
- Surface Mount
- Durable-Shelf life of up to 10 years

- Medical IoT
- Telemetry
- Wireless Remote Control
- Personal Area Networks (PAN)
- Industrial/Commercial Equipments

Product Image





5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22

OnBoard 2.4 GHz SMD - Antenna

PRO-OB-440

Request Samples 🕥

Check Inventory

13.75 x 5.23 x 3.53 mm RoHS/RoHS II Compliant MSL Level = 1

Electrical Specification

Parameter	Specification	Unit
Operating Frequency	2400 - 2500	MHz
Center Frequency	2450	MHZ
Return Loss	< -6.9	dB
Polarization	Mixed Linear	-
Maximum Gain	< 5.0	dBi
Efficiency	>65	%
Impedance	50	Ω

<u>Note</u>: All measurements were conducted on the evaluation board in free space. Performance will vary depending on the ground plane, application, and environment.

Mechanical Specification

Parameter	Specification
Antenna Dimension	13.75 x 5.23 x 3.53 mm
Evaluation board Dimension	100 x 50 mm
Mounting Type	Surface Mount


Environmental Specification

Parameter	Specification	
Operating Temperature	40°C to 1125°C	
Storage Temperature	-40° C to $+125^{\circ}$ C	
Maximum Temperature	400°C	
RoHS Compliance	Yes Compliant with EU directive 2011/65/EU and 2015/863	
Shelf life	10 years	
MSL	Level 1, unlimited	
Mechanical resistance	Immunity to vibrations IEC/EN 60068-2-6, Fc test Immunity to shock IEC/EN 60068-2-27, Ea test	



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com


REVISED: 11-01-22

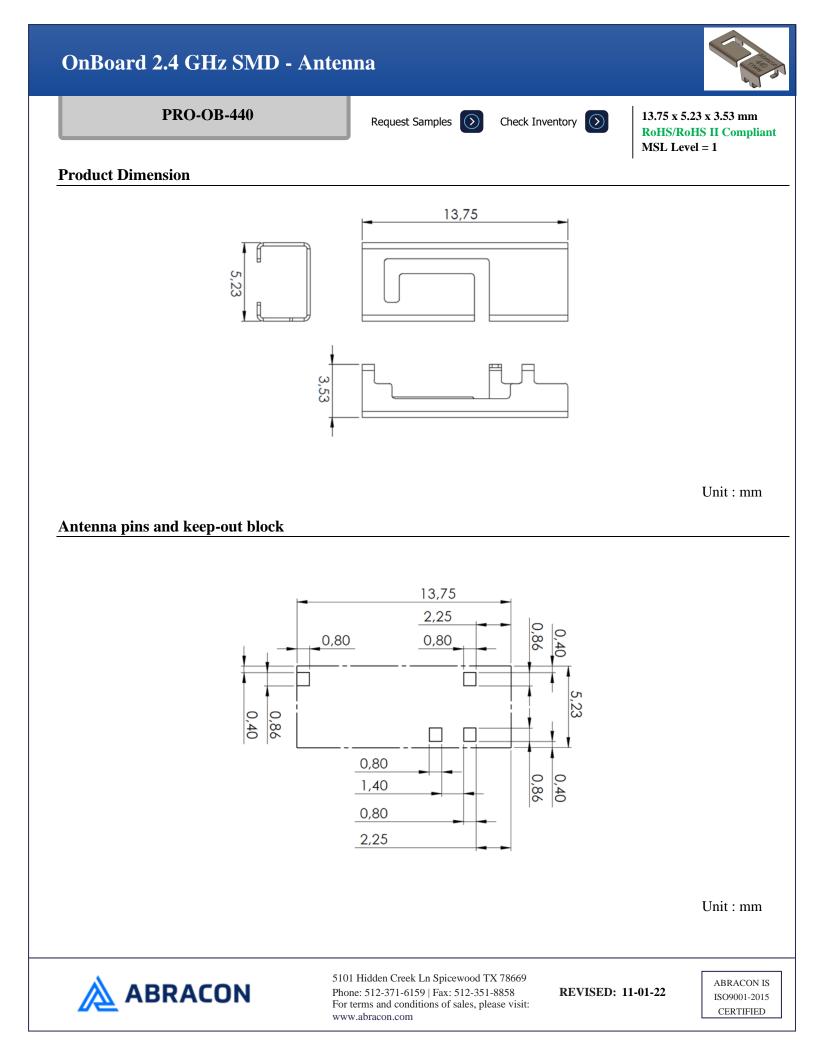




PCB layout and antenna pin numbering

The antenna uses PIFA technology and should thus be mounted on a ground plane. If there are several layers in the PCB, there is an advantage to add vias for smooth interconnection of the ground areas to avoid splits in the ground plane. It is also important that there is a ground clearance around the NC pads and the RF feed pad, through all layers of the PCB. It is recommended to implement a matching network to optimize the antenna impedance in your application. The components can be positioned under the antenna. See recommendations in the figures below.

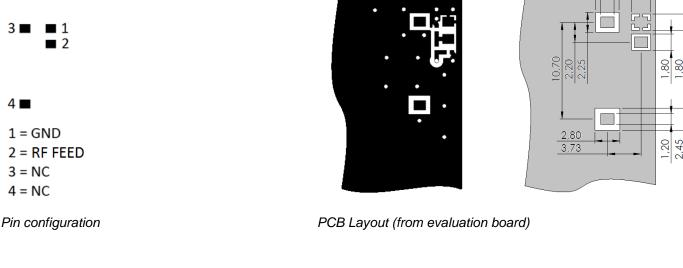



Clearance through all layers

Unit : mm



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22


2,60 1,50

2.10



Measurement Setup

The antenna measurements were all done in free space with the OnBoard SMD 2400 evaluation board (PRO-EB-450) that has a PCB size of 100 x 50 mm.

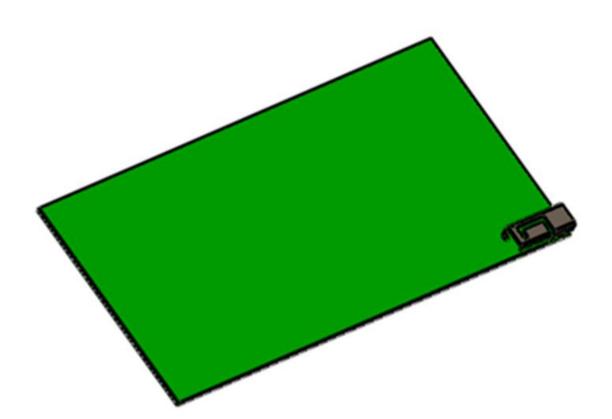




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com


REVISED: 11-01-22




Reflection Characteristics – Return Loss

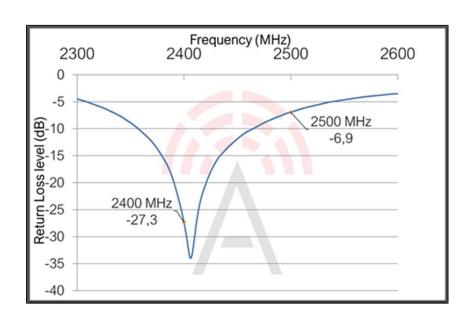

Total Radiation Efficiency

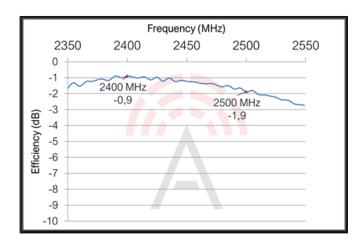


Maximum Radiation Gain

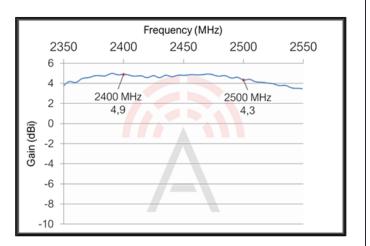




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22

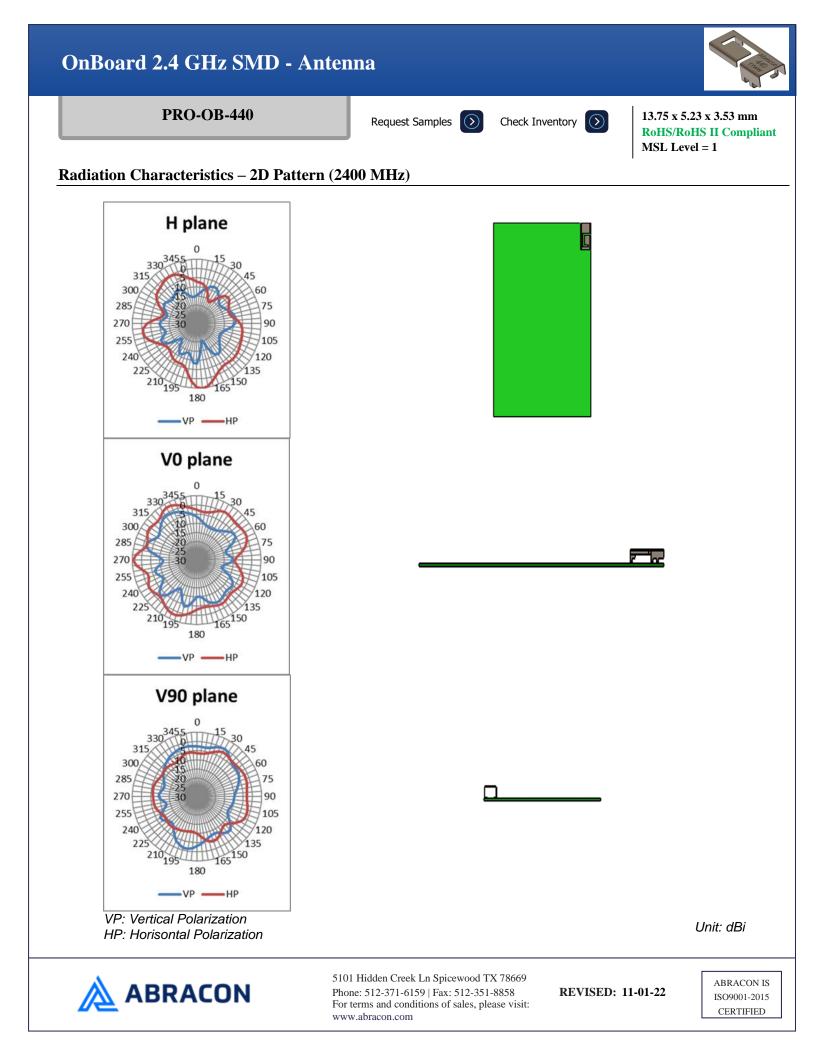

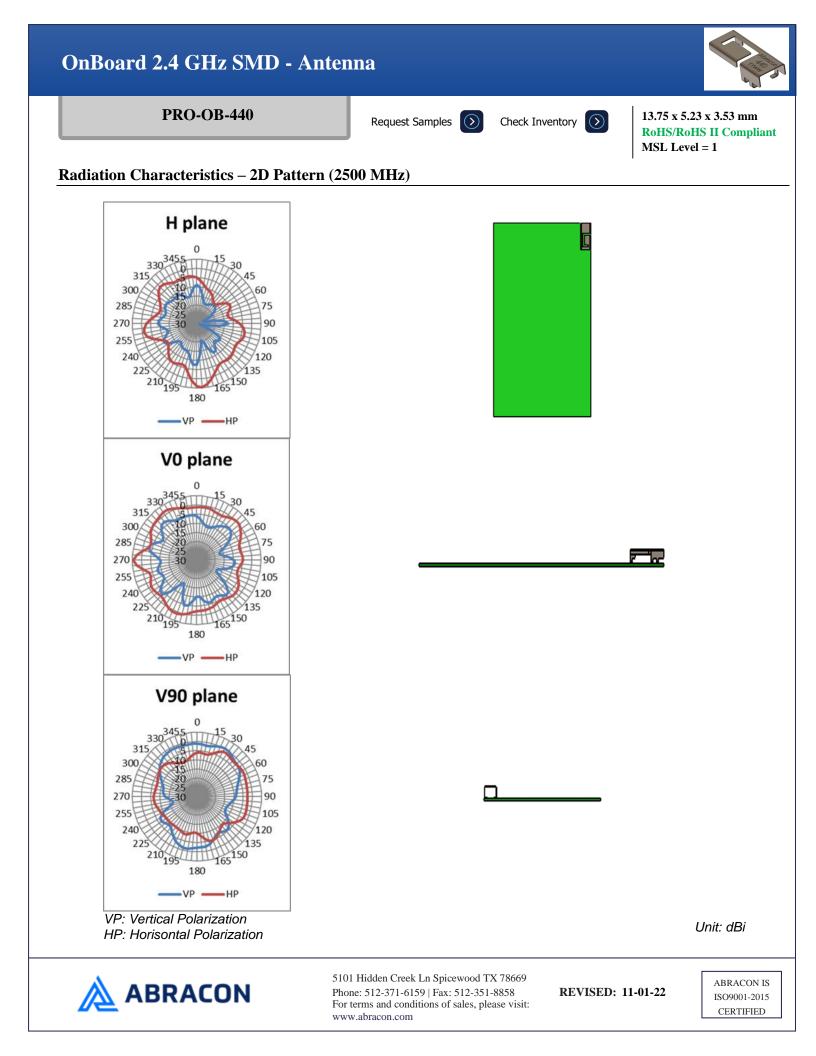




Evaluation Board Outline & Matching Circuit

The evaluation board (PRO-EB-450) is developed to simplify antenna testing and evaluation. It has an arbitrary size of 100×50 mm and includes an SMA connector. The purpose is to give a reference design for an optimal antenna implementation. The evaluation board can also be used to test other implementations by cutting and soldering the PCB into any device.



Evaluation board outline

The evaluation board has a matching circuit implemented next to the antenna. This is aimed to enable optimization possibilities for the user. The component positions are sized for 0402 (1005 metric) SMD components.

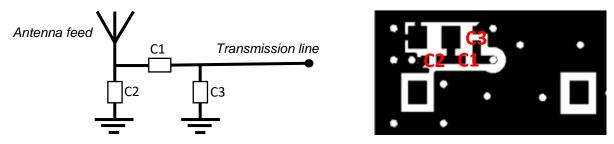

Matching circuit

The antenna needs a matching circuit to adjust the resonant frequency balance. When delivered, the evaluation board is tuned for optimum balance at the 2.4 GHz frequency band using the following (can be replaced by equivalent):

- C1 = 1.5 nH (LQW15AN1N5B00D)
- C2 = 0.5 pF (GRM1555C1HR50WA01D) C3 = N/A

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22



General Implementation Guidelines

The antenna can be positioned in different ways, although there are some positions which are more beneficial. Below picture shows a typical PCB with examples on different antenna positions. The optimal position is option 1 or 4.

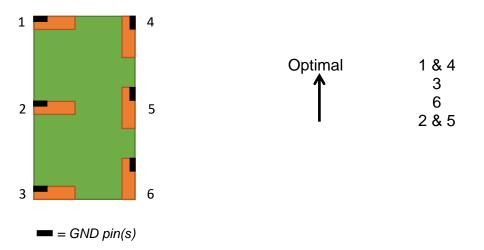

The antenna should be aligned with the PCB edge if possible, preferably with the GND pin(s) close to a corner.

The antenna enables that small electrical components are mounted inside the antenna keep-out block. This is a spaceefficient solution which has very little influence on the performance. It may have an impact on the antenna tuning, but is fully possible if there is limited space on the PCB.

Another general aspect on surface mounted antennas is regarding the PCB population. If other electrical components are positioned in the surrounding area of the antenna, some impact on the antenna tuning and radiated performance may be expected. It is recommended that such components are distributed below a topographical slope that starts on PCB level at the antenna keep-out block, and slowly increases the height.

It shall also be highlighted that plastic and metal parts in the near proximity of antennas may influence the antenna tuning and/or performance. This aspect should be noted as a general guideline for all antennas. The effects are difficult to estimate without detailed information, but it is common that a plastic housing above the antenna shifts the resonant frequency down. It is recommended to measure the antenna in the actual device after implementation.




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22




Packaging

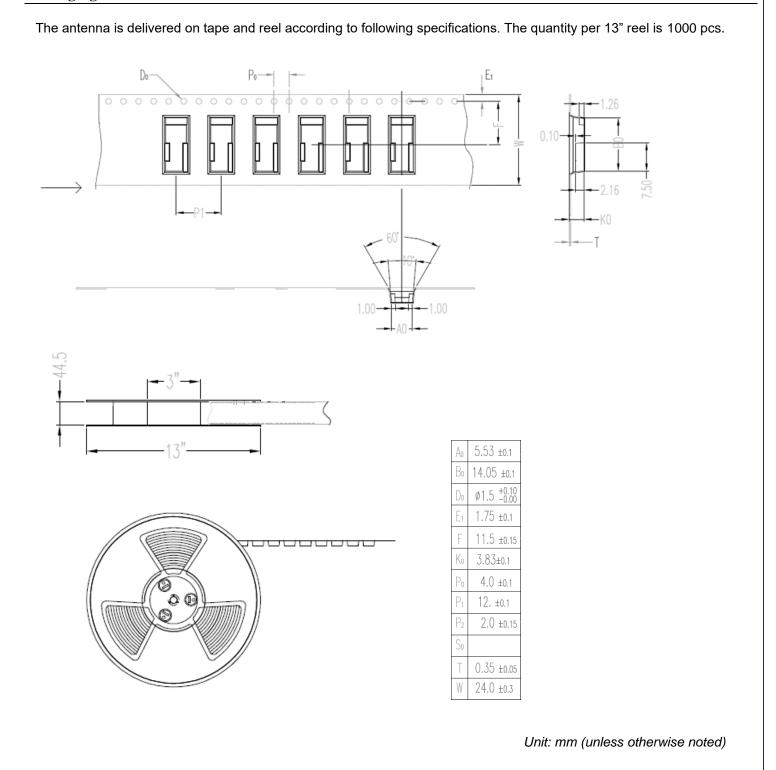



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22

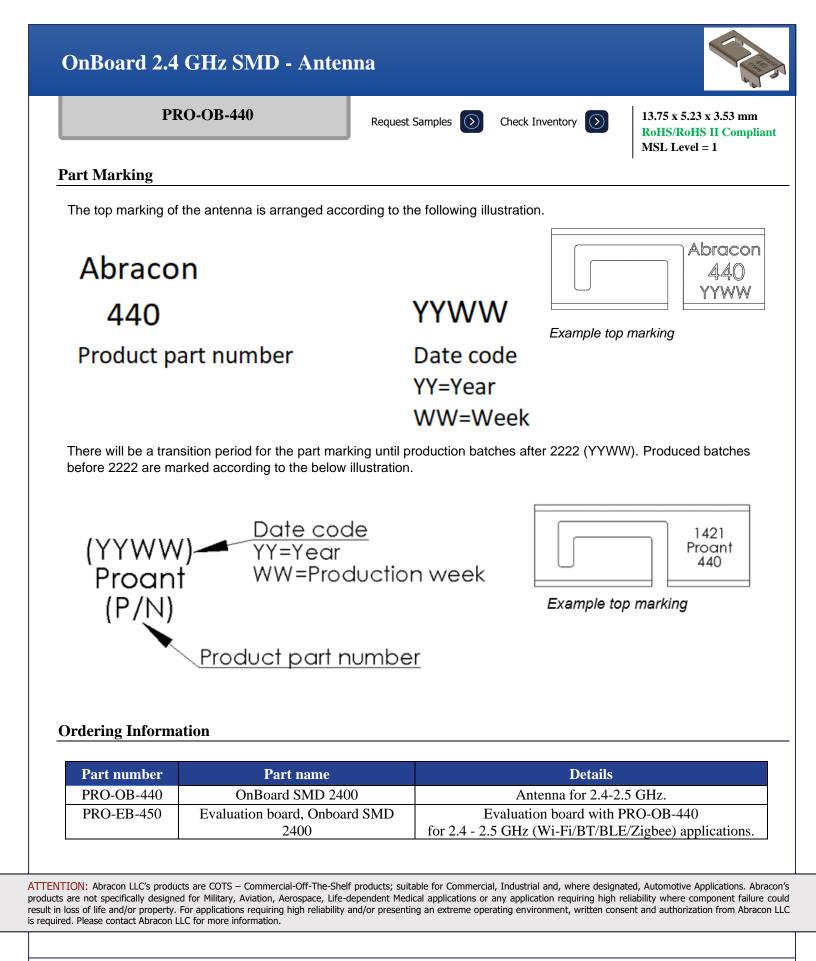

À ABRACON

5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-01-22