



[product.]

Smart LED Bulb

[smart. **ENABLED.**]

[finish. **OPAL.**]

[fitting. **E26 SCREW.**]

[power. **5W.**]

[region. **NORTH AMERICA.**]


A Punch Bulb with Zigbee smart home compatibility and E26 fitting. It features a robust glass shell and matt black metal base with laser etched Buster + Punch insignia. This bulb can integrate with smart home projects via any Zigbee 3.0 compatible hub.



[finish. **OPAL.**]

[type. **DIMMABLE & TUNABLE WHITE LED.**]

[info. **MEASUREMENTS.**]

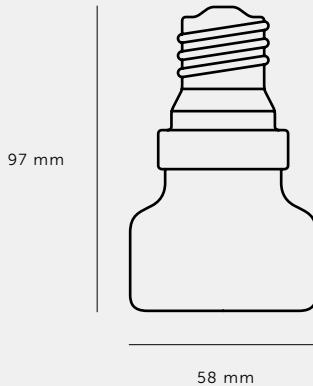

[info. **SPECIFICATIONS.**]

A Punch Bulb with Zigbee compatibility and an E26 fitting. Available in an Opal finish. Designed to work with the Buster + Punch smart hub or any Zigbee 3.0 compatible hub (e.g. Amazon Echo 4th generation). Works with Amazon Alexa and Google Home via a compatible hub.

IMPORTANT: This bulb provides its own smart dimming and is not compatible with dimming lighting circuits. Brightness level and White temperature are precisely controllable via the Buster + Punch Hub & App. Compatible with other Zigbee standard 3.0 hubs and apps. For indoor use only.

Protocol: Zigbee
Power: 5W (5.5W Max, 0.1W Standby)
Type: Dimmable & Tunable White LED
Material: Glass shell, Metal base
Screw fitting: E26
Supply: 120V 60Hz
Lumen: max 350
Light appearance: 2700k-6500k.
CRI: 80
Power factor: 0.5
Certification: FCC SDOC+ID, cETLus

[please. **NOTE.**]

For setup of this smart bulb, refer to your smart home Zigbee hub guide, e.g. the B+P hub and app here (www.busterandpunch.com, **URL TO BE UPDATED**).

To perform a factory reset of the bulb and restart Zigbee set-up, turn the bulb off and on six times as per the troubleshooting guide here (www.busterandpunch.com, **URL TO BE UPDATED**).

- Risk of electric shock - do not use where directly exposed to water
- Risque de choc électrique – ne pas utiliser si exposé directement à l'eau
- Do not use with standard dimmers
- Ne pas utiliser avec des gradateurs standard

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS

NE CONVIENT PAS AUX SORTIES DE SECOURS

Only use a stable 120v supply to power this bulb. This bulb will not operate when connected to a dimmer or dimmable lighting circuit.

FCC WARNING

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RADIATION EXPOSURE STATEMENT

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

[info. **FINISH & SKU NUMBERS.**]

[finish.]

[North America.]

Opal

NSM-373049

[info. **CARE INSTRUCTIONS.**]

Wipe with a dry lint-free cloth.

