


Antenna Specification

Specifications

Summary

ITEM	SPEC.	
Model Name	IBM 2.4 GHz	
Center Frequency	2402 MHz	2.24 dBi
	2441 MHz	2.20 dBi
	2480 MHz	1.81 dBi
MAX. GAIN	2.24 dBi	
Polarization	Horizontal	
Antenna typen	Pcb Antenna	
Impedance	50 Ω	
Antenna Length	2.18cm	

Antenna Photo & Length (mm)

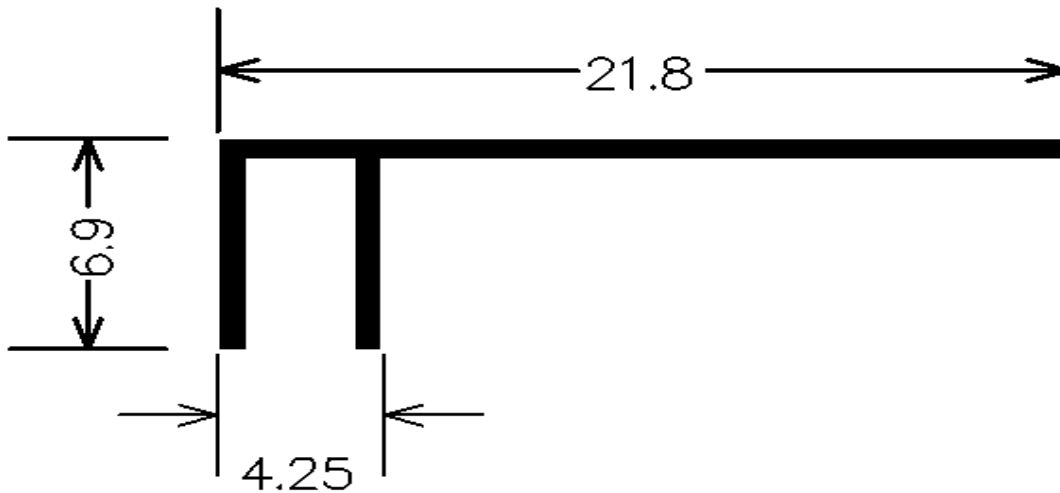


Test Address	UnictronTechnologies Corporation , 16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303,Taiwan
Test Date	2022-05-12
Test Instrument	vector network analyzer - R&S ZVB20

1. Main antenna : 2402 MHz

(green line: horizontal power)

(red line: vertical power)

1.1 Horizontal

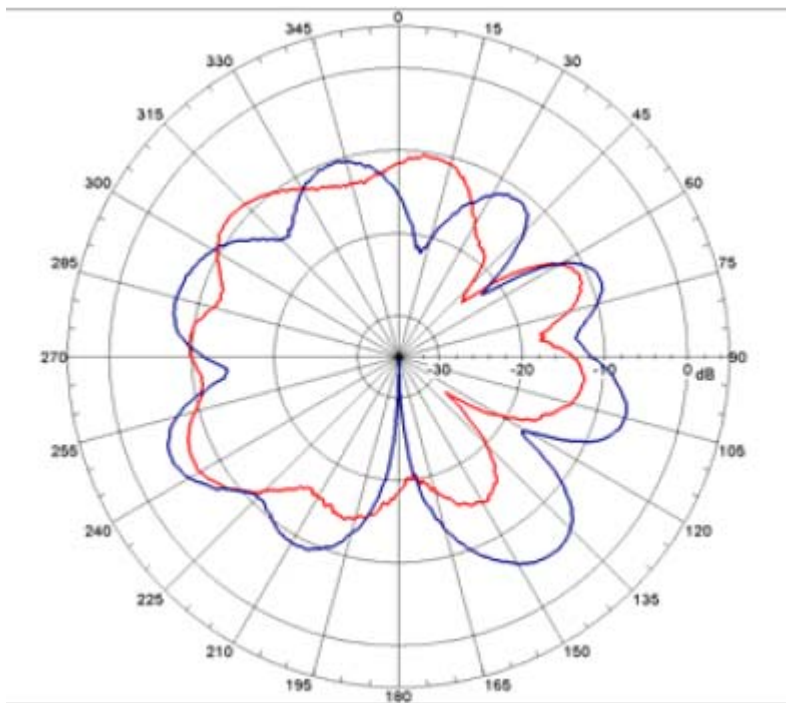

Frequency(MHZ): **2402**


Antenna Polarity: **Horizontal**

Maximum Value(dBi): **2.24**

Average Gain(dBi) : **-2.48**

Minimum Gain(dBi): **-55.18**

1.2 Vertical

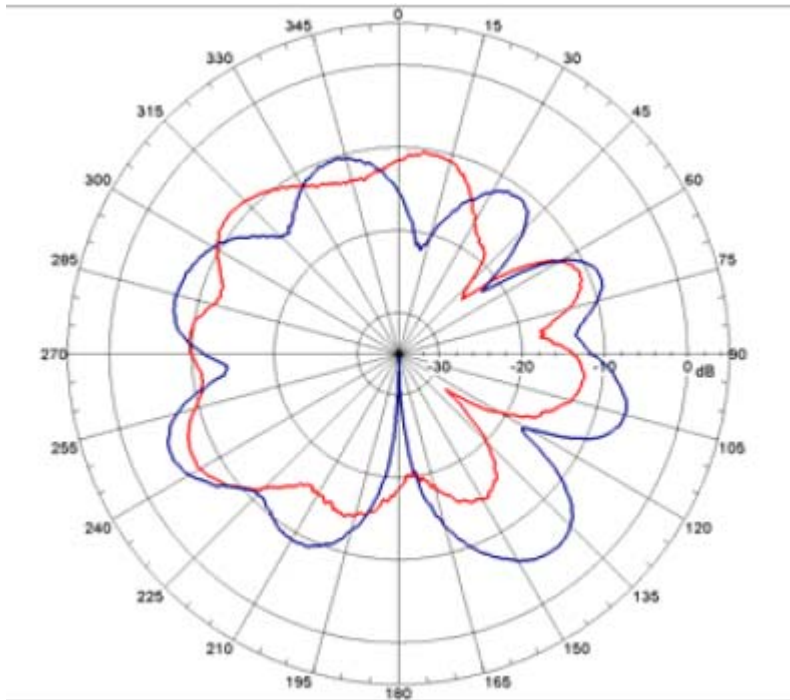

Frequency(MHZ): **2402**

Antenna Polarity: **Vertical**


Maximum Value(dBi): **-4.51**

Average Gain(dBi) : **-8.98**

Minimum Gain(dBi): **-62.3**

2. Main antenna : 2441 MHz

2.1 Horizontal

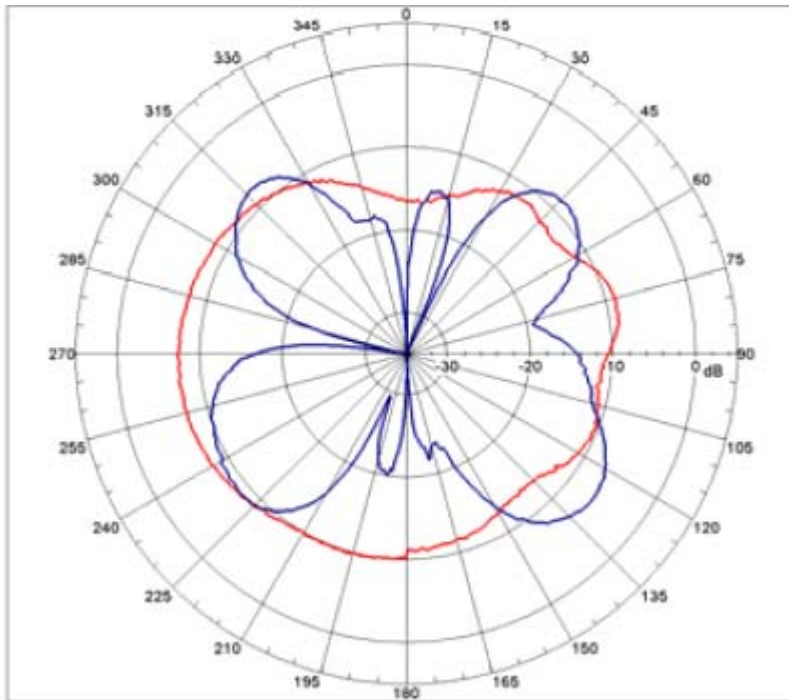

Frequency(MHZ): **2441**


Antenna Polarity: **Horizontal**

Maximum Value(dBi): **2.20**

Average Gain(dBi) : **-2.44**

Minimum Gain(dBi): **-64.78**

2.2 Vertical

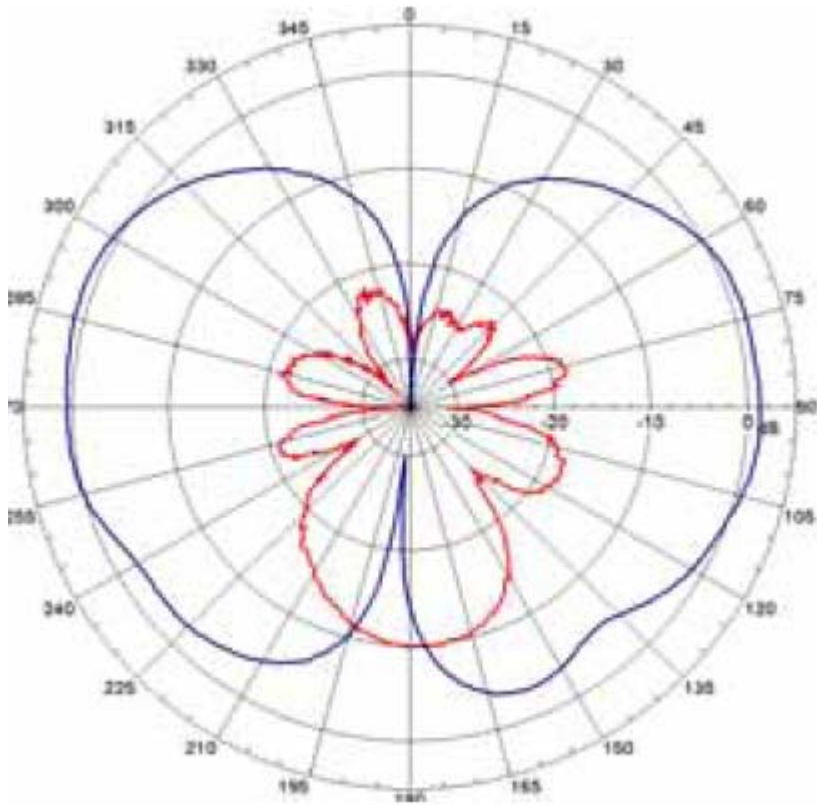

Frequency(MHZ): **2441**

Antenna Polarity: **Vertical**


Maximum Value(dBi): **-4.29**

Average Gain(dBi) : **-8.41**

Minimum Gain(dBi): **-47.4**

2. Main antenna : 2480 MHz

2.1 Horizontal

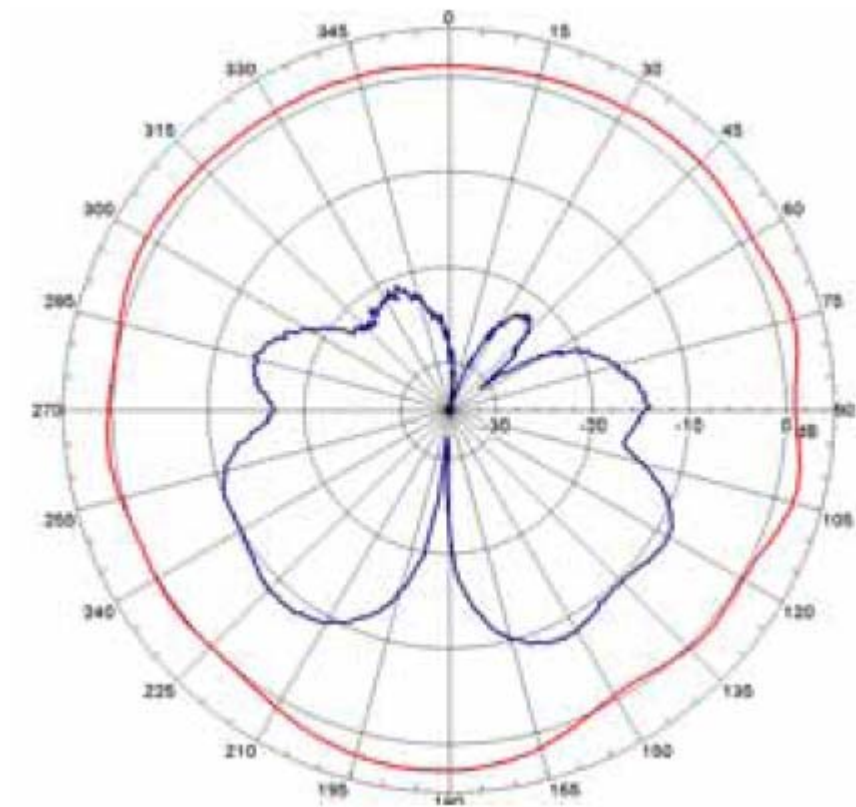

Frequency(MHZ): **2480**


Antenna Polarity: **Horizontal**

Maximum Value(dBi): **1.81**

Average Gain(dBi) : **-4.34**

Minimum Gain(dBi): **-55.4**

2.2 Vertical

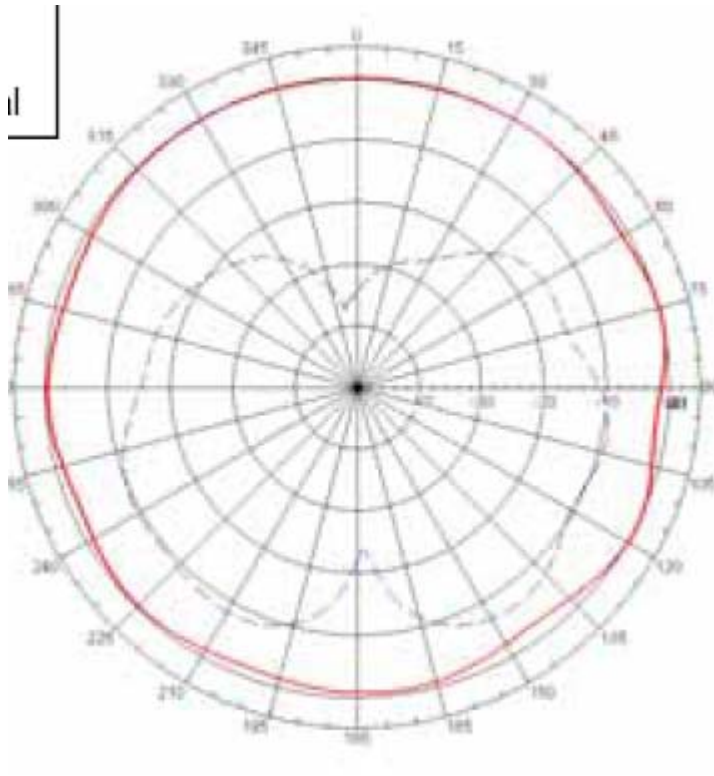

Frequency(MHZ): **2480**

Antenna Polarity: **Vertical**

Maximum Value(dBi): **-4.95**

Average Gain(dBi) : **-14.06**

Minimum Gain(dBi): **-64.00**