



# FCC TEST REPORT

## FCC ID:2BBE3-A7

**Report Number**.....: **ZHT-231221009E**

**Date of Test**.....: Dec. 21, 2023 to Jan. 03, 2024

**Date of issue**.....: Jan. 03, 2024

**Test Result** .....: **PASS**

**Testing Laboratory**.....: **Guangdong Zhonghan Testing Technology Co., Ltd.**

**Address** .....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Applicant's name** .....: **Shenzhen Baolifeng Electronic Technology Co., Ltd.**

**Address** .....: Room C1111, Block C, niulanqian building, Minzhi Avenue, Longhua New District, Shenzhen, China

**Manufacturer's name** .....: **Shenzhen Baolifeng Electronic Technology Co., Ltd.**

**Address** .....: Room C1111, Block C, niulanqian building, Minzhi Avenue, Longhua New District, Shenzhen, China

**Test specification:**

**Standard**.....: FCC CFR Title 47 Part 15 Subpart C

**Test procedure**.....: /

**Non-standard test method** .....: N/A

This device described above has been tested by ZHT, and the test result shows that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

**Product name**.....: **Car wireless charging bracket**

**Trademark** .....: /

**Model/Type reference**.....: A7, A5, A5s, A8, A9, A10

**Model Difference**..... Only model name is different.

**Ratings**.....: Input:5V/9V

Wireless charging output: 15 W Max



Testing procedure and testing location:

Testing Laboratory.....: Guangdong Zhonghan Testing Technology Co., Ltd.

Address.....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tested by (name + signature).....: Leon Li *Leon Li*

Reviewer (name + signature).....: Baret Wu *Baret Wu*

Approved (name + signature).....: Levi Lee *Levi Lee*



TABLE OF CONTENT

**1. VERSION ..... 4**

**2. TEST SUMMARY ..... 5**

    2.1 TEST FACILITY ..... 6

    2.2 MEASUREMENT UNCERTAINTY ..... 6

**3. GENERAL INFORMATION ..... 7**

    3.1 GENERAL DESCRIPTION OF EUT ..... 7

    3.2 Test mode ..... 7

    3.3 Block Diagram of EUT Configuration ..... 7

    3.4 Test Conditions ..... 7

    3.5 Description Of Support Uni/ (Conducted Mode) ..... 8

    3.6 EQUIPMEN/ LIST FOR ALL TEST ITEMS ..... 9

**4. CONDUCTED EMISSION TEST ..... 11**

    4.1 CONDUCTED EMISSION MEASUREMENT ..... 11

        4.1.1 POWER LINE CONDUCTED EMISSION Limi/ ..... 11

        4.1.2 TEST PROCEDURE ..... 11

        4.1.3 DEVIATION FROM TEST STANDARD ..... 11

        4.1.4 TEST SETUP ..... 12

        4.1.5 EUT OPERATING CONDITIONS ..... 12

        4.1.6 Test Result ..... 13

**5. RADIATED EMISSION MEASUREMENT ..... 15**

    5.1 Radiated Emission Limi/ ..... 15

    5.2 Anechoic Chamber Test Setup Diagram ..... 16

    5.3 Test Procedure ..... 16

    5.4 DEVIATION FROM TEST STANDARD ..... 16

    5.5 Test Result ..... 17

**6. BANDWIDTH TEST ..... 20**

**7. ANTENNA REQUIREMENT ..... 22**

**8. TEST SETUP PHOTO ..... 23**

**9. EUT CONSTRUCTIONAL DETAILS ..... 23**



1. VERSION

Report No.	Version	Description	Approved
ZHT-231221009E	Rev.01	Initial issue of report	Jan. 03, 2024



2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



### 2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.  
Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District  
Shenzhen, Guangdong, China

FCC Registration Number:255941  
Designation Number: CN0325  
IC Registered No.: 29832  
CAB identifier: CN0143

### 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(9k-30MHz)	$\pm 4.68\text{dB}$
5	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\%$







### 3.5 Description Of Support Uni/ (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support uni/. The following support uni/ or accessories were used to form a representative test configuration during the tes/.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	Power adapter	/	GS-551E	/	AE
E2	Wireless charging load	/	EESON	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.





3.6 EQUIPMEN/ LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	Mar 12, 2023	Mar 11, 2024
2	Loop antenna	EMCI	LAP600	Mar 12, 2023	Mar 11, 2024
3	Amplifier	Schwarzbeck	BBV 9743 B	Mar 12, 2023	Mar 11, 2024
4	Amplifier	Schwarzbeck	BBV 9718 B	Mar 12, 2023	Mar 11, 2024
5	Bilog Antenna	Schwarzbeck	VULB9162	Mar 17, 2023	Mar 16, 2024
6	Horn Antenna	Schwarzbeck	BBHA9120D	Mar 17, 2023	Mar 16, 2024
7	Horn Antenna	A.H.SYSTEMS	SAS574	Mar 12, 2023	Mar 11, 2024
8	Amplifier	AEROFLEX	100KHz-40GHz	Mar 12, 2023	Mar 11, 2024
9	Spectrum Analyzer	R&S	FSV40	Mar 12, 2023	Mar 11, 2024
10	CDNE	Schwarzbeck	CDNE M2 + CDNE M3	Aug. 09, 2022	Aug. 08, 2023
11	966 Anechoic Chamber	EMToni	9m6m6m	Nov. 25, 2021	Nov. 24, 2024
12	Spectrum Analyzer	KEYSIGHT	N9020A	Mar 12, 2023	Mar 11, 2024
13	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	Mar 12, 2023	Mar 11, 2024
14	Single Generator	Agilent	N5182A	Mar 12, 2023	Mar 11, 2024
15	Power Sensor	MWRFTest	MW100-RFCB	Mar 12, 2023	Mar 11, 2024
16	Audio analyzer	R&S	UPL	Mar 12, 2023	Mar 11, 2024
17	Single Generator	R&S	SMB100A	Mar 12, 2023	Mar 11, 2024
18	Power Amplifier Shielding Room	EMToni	2m3m3m	Nov. 25, 2021	Nov. 24, 2024



## Conduction Test equipment

Equipment	Manufacturer	Model	Asset NO.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	ZH-E005	May 12, 2023	May 11, 2024
LISN	R&S	ENV216	ZH-E006	May 12, 2023	May 11, 2024
ISN CAT 6	Schwarzbeck	NTFM 8158	ZH-E012	May 12, 2023	May 11, 2024
ISN CAT 5	Schwarzbeck	CAT5 8158	ZH-E013	May 12, 2023	May 11, 2024
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	ZH-E014	May 12, 2023	May 11, 2024
Current Transformer Clamp	Schwarzbeck	SW 9605	ZH-E015	May 12, 2023	May 11, 2024
CE Shielding Room	EMToni	9m4m3m	ZH-E002	Nov. 25, 2021	Nov. 24, 2024



#### 4. CONDUCTED EMISSION TEST

##### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

##### 4.1.1 POWER LINE CONDUCTED EMISSION Limi/

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.

##### 4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipmen/ powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.4 TEST SETUP

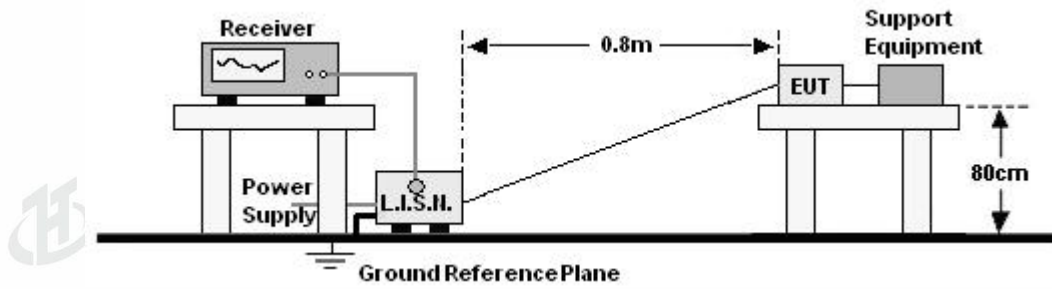


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

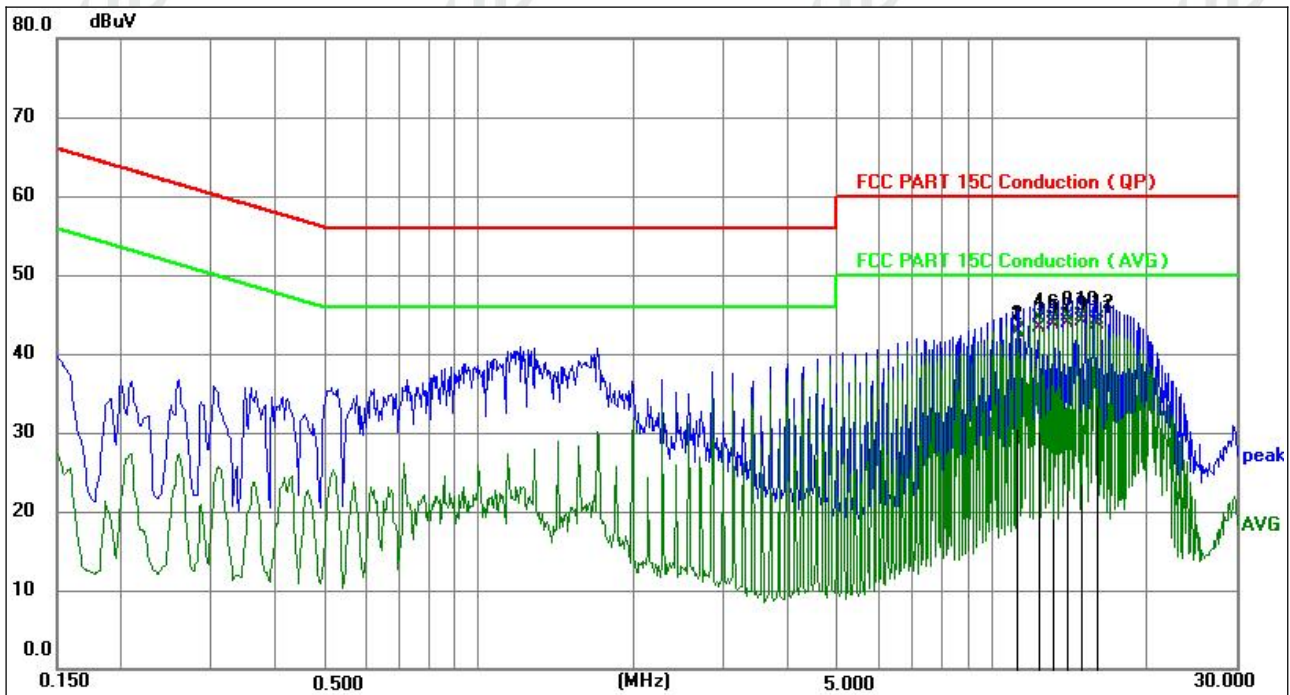

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	11.2560	32.65	10.08	42.73	60.00	-17.27	QP	P	
2	11.2560	32.79	10.08	42.87	50.00	-7.13	AVG	P	
3	12.3945	33.27	10.09	43.36	60.00	-16.64	QP	P	
4	12.3945	34.43	10.09	44.52	50.00	-5.48	AVG	P	
5	13.2494	33.63	10.09	43.72	60.00	-16.28	QP	P	
6	13.2494	34.26	10.09	44.35	50.00	-5.65	AVG	P	
7	14.1044	33.84	10.09	43.93	60.00	-16.07	QP	P	
8	14.1044	34.53	10.09	44.62	50.00	-5.38	AVG	P	
9	14.9595	34.08	10.09	44.17	60.00	-15.83	QP	P	
10 *	14.9595	34.59	10.09	44.68	50.00	-5.32	AVG	P	
11	16.0980	33.56	10.10	43.66	60.00	-16.34	QP	P	
12	16.0980	34.25	10.10	44.35	50.00	-5.65	AVG	P	


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor





Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

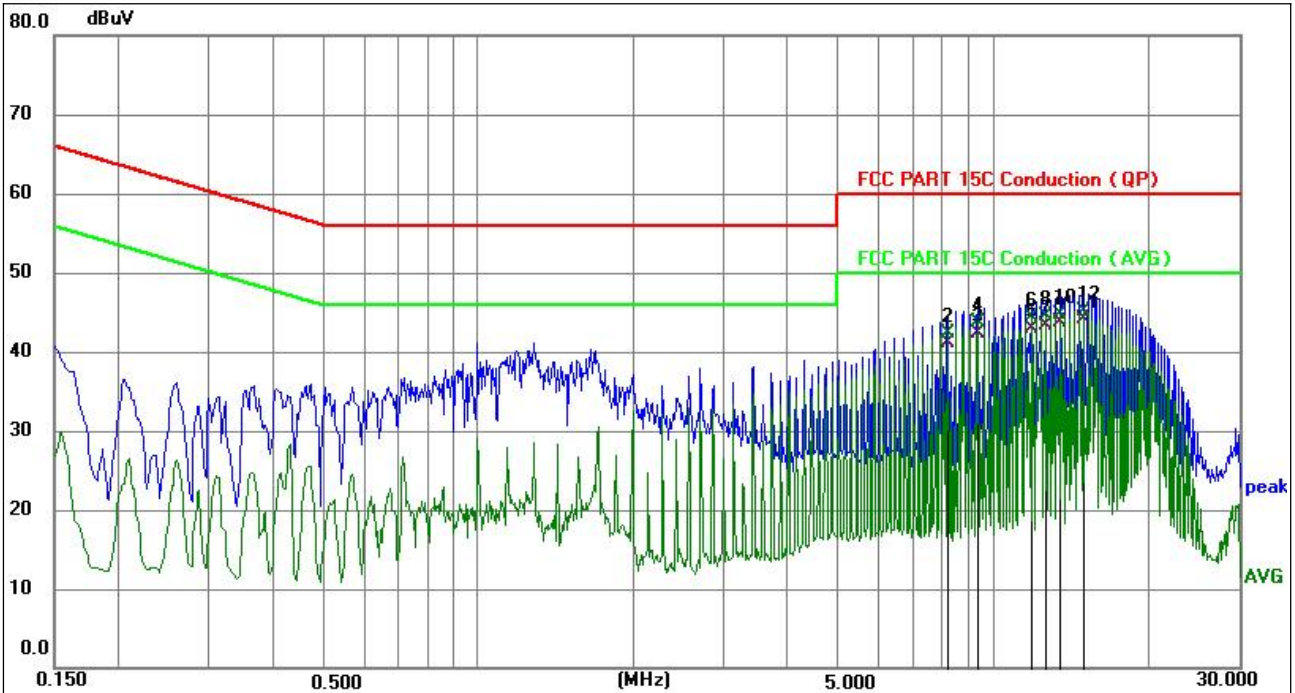

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	8.1600	30.94	10.09	41.03	60.00	-18.97	QP	P	
2	8.1600	32.26	10.09	42.35	50.00	-7.65	AVG	P	
3	9.3030	32.27	10.08	42.35	60.00	-17.65	QP	P	
4	9.3030	33.70	10.08	43.78	50.00	-6.22	AVG	P	
5	11.8275	32.88	10.09	42.97	60.00	-17.03	QP	P	
6	11.8275	34.19	10.09	44.28	50.00	-5.72	AVG	P	
7	12.6825	33.29	10.09	43.38	60.00	-16.62	QP	P	
8	12.6825	34.46	10.09	44.55	50.00	-5.45	AVG	P	
9	13.5375	33.56	10.09	43.65	60.00	-16.35	QP	P	
10	13.5375	34.58	10.09	44.67	50.00	-5.33	AVG	P	
11	14.9640	34.07	10.09	44.16	60.00	-15.84	QP	P	
12 *	14.9640	35.09	10.09	45.18	50.00	-4.82	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



**5. RADIATED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limi/

**Limi/ for frequency below 30MHz**

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value


**Limi/ for frequency Above 30MHz**

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value




### 5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

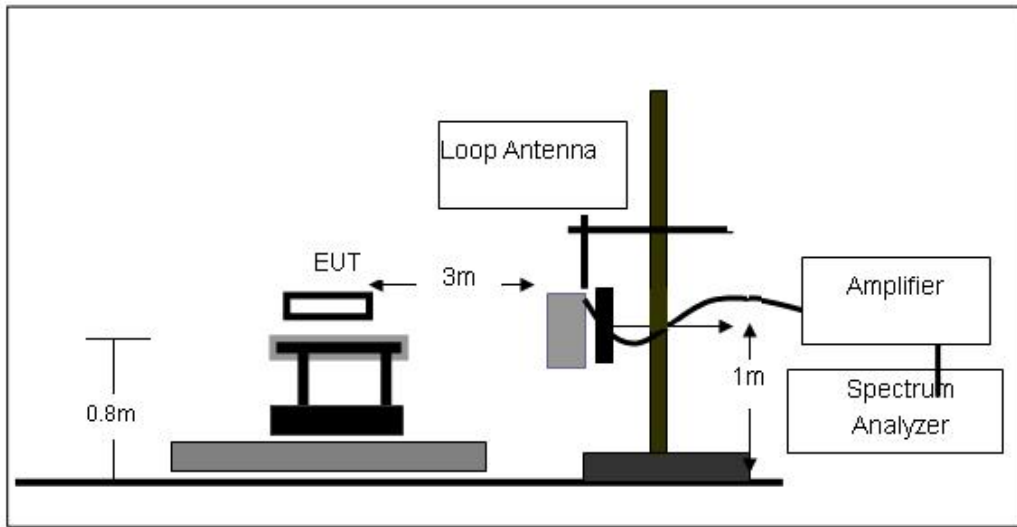

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

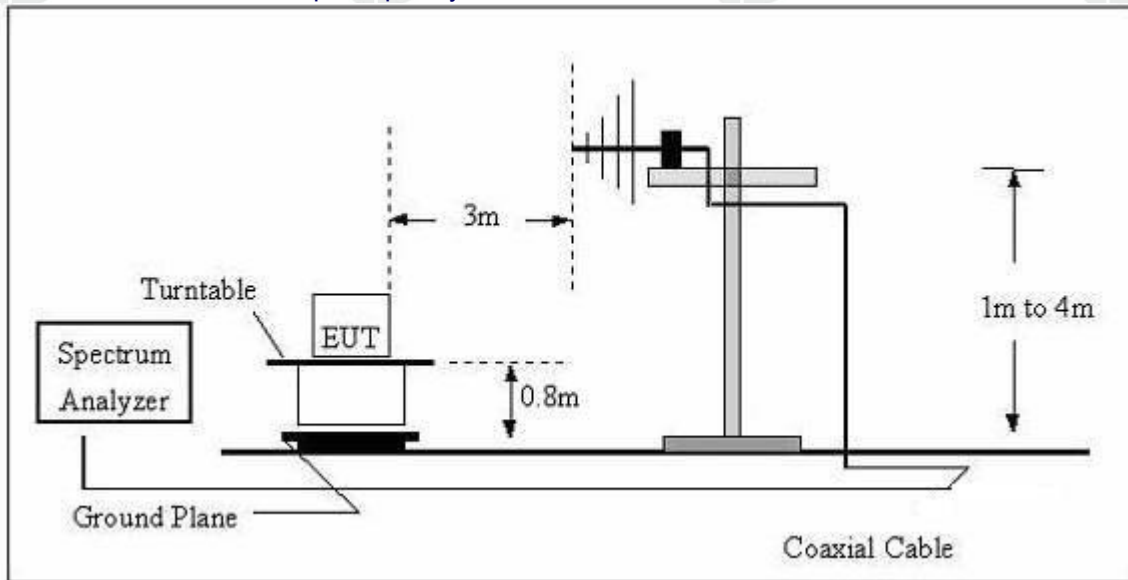

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

### 5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

### 5.4 DEVIATION FROM TEST STANDARD

No deviation



5.5 Test Result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80  
Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Frequency (kHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limi/ (dBμV/m)	Margin (dB)	Detector Type
65.86	48.96	15.15	64.11	111.85	-47.74	AVG
100.83	49.87	15.18	65.05	106.78	-41.73	AVG
186.91	68.92	15.2	84.12	105.58	-21.46	AVG
608.57	30.14	16.33	46.47	70.83	-24.36	QP
998.52	30.57	16.87	47.44	68.37	-20.93	QP
1207.55	21.47	17.62	39.09	65.29	-26.2	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Emission Level = Meter Reading - Factor


Margin = Emission Level- Limit.

The amplitude of emissions which are attenuated by more than 20db below the permissible value has no need to be reported.



30MHz-1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

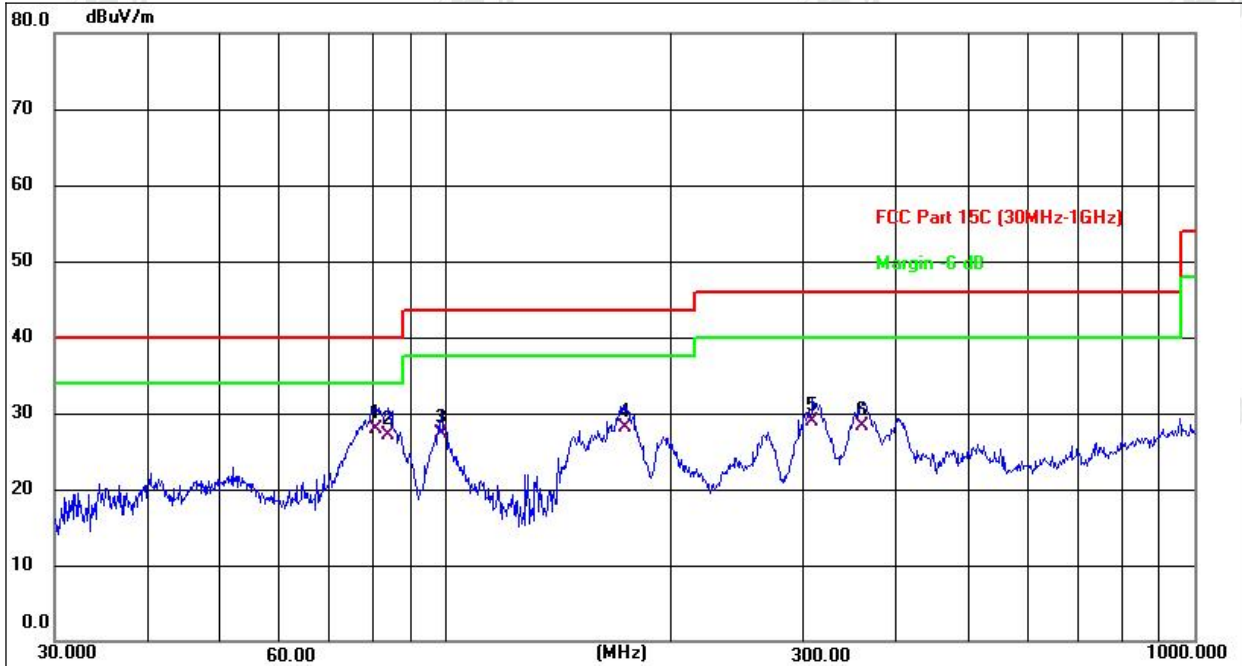

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	80.6440	42.48	-14.50	27.98	40.00	-12.02	QP
2	83.8155	40.89	-13.83	27.06	40.00	-12.94	QP
3	98.4865	38.48	-11.17	27.31	43.50	-16.19	QP
4	173.2050	40.77	-12.71	28.06	43.50	-15.44	QP
5	308.9125	36.76	-7.83	28.93	46.00	-17.07	QP
6	360.4476	34.99	-6.66	28.33	46.00	-17.67	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

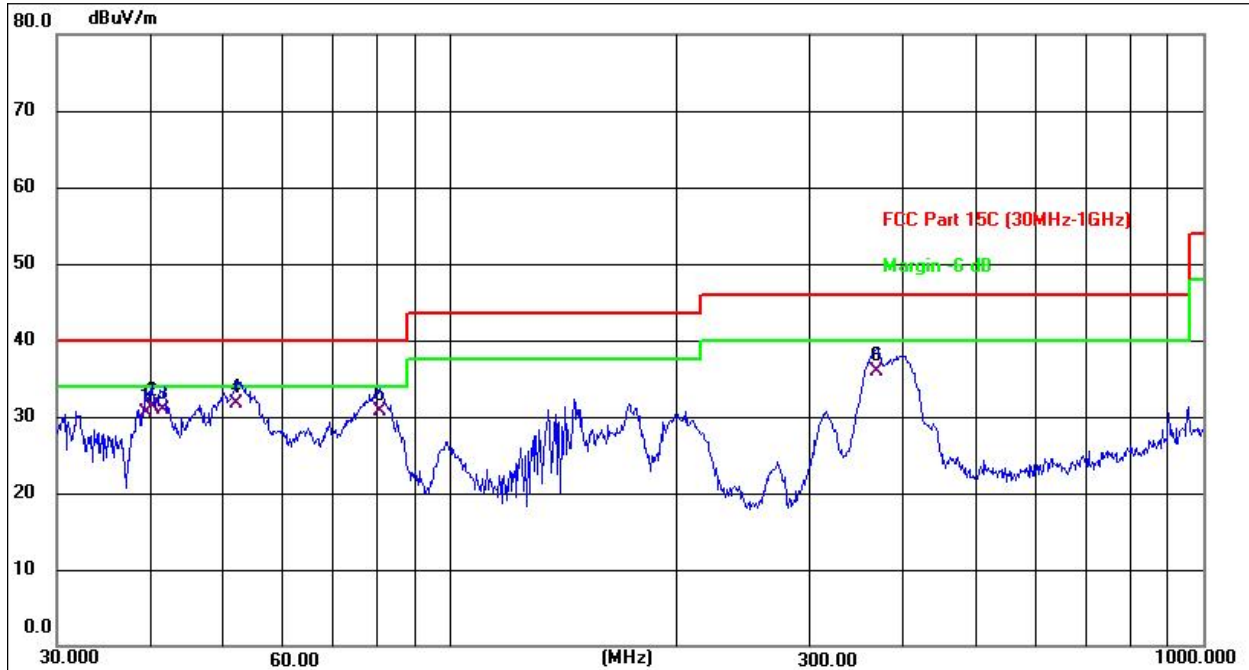

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.4371	40.36	-9.79	30.57	40.00	-9.43	QP
2	40.1347	40.91	-9.68	31.23	40.00	-8.77	QP
3	41.7129	40.44	-9.52	30.92	40.00	-9.08	QP
4 *	51.8430	40.67	-8.93	31.74	40.00	-8.26	QP
5	80.6441	45.24	-14.50	30.74	40.00	-9.26	QP
6	368.1116	42.47	-6.49	35.98	46.00	-10.02	QP

Remarks:


1. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
2. Level = Reading + Factor
3. Margin = Emission Level- Limit.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



## 6. BANDWIDTH TEST

1. Set RBW = 10 Hz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude poin/ (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

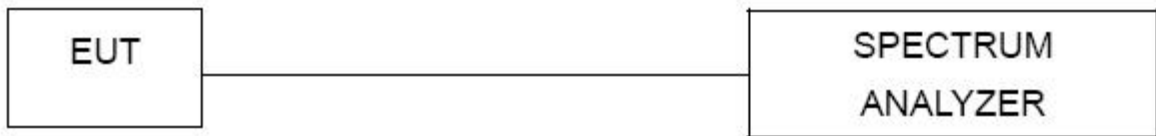






Temperature:	25.7 °C	Relative Humidity:	55%
Pressure:	101kPa		

Frequency (KHz)	20dB bandwidth (KHz)	Result
116.75	0.141	Pass

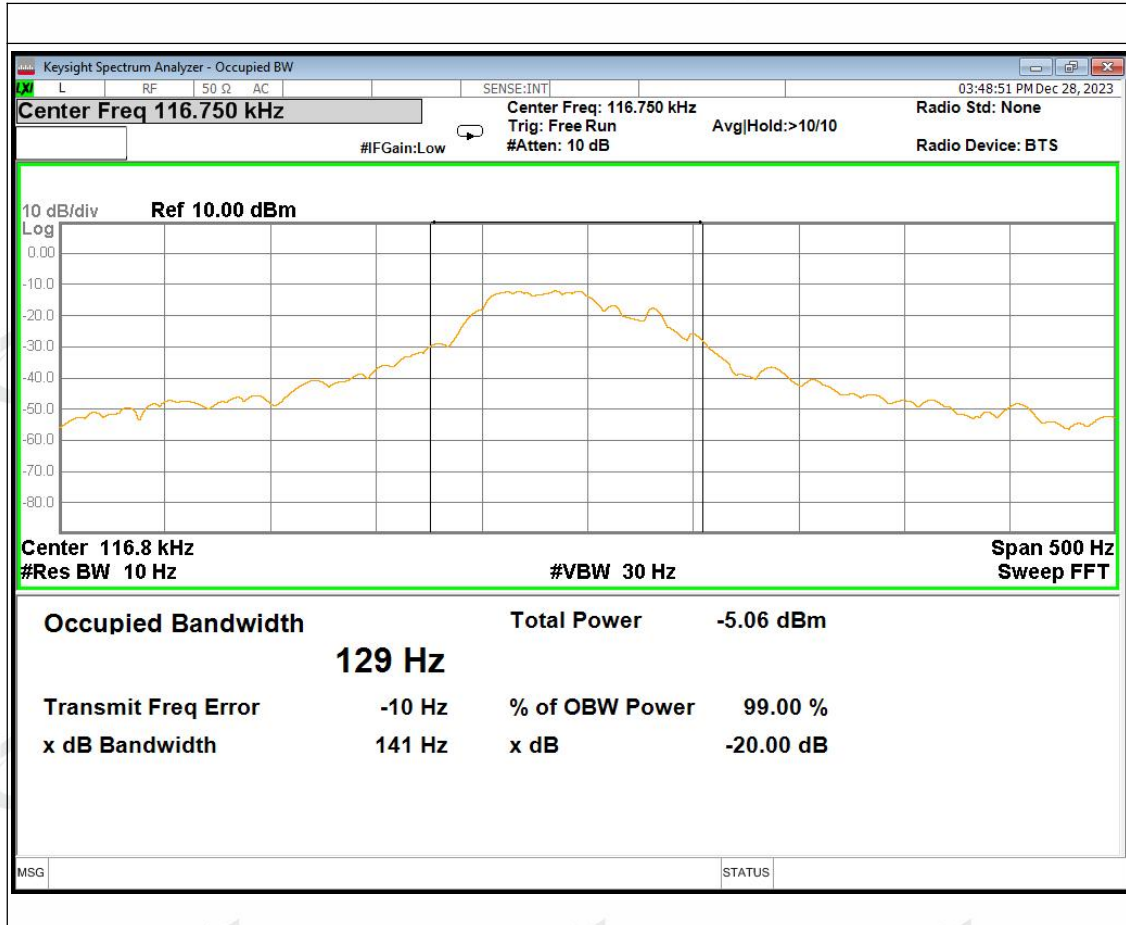



### 7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna: The antenna is coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	





**8. TEST SETUP PHOTO**

Reference to the appendix I for details.

**9. EUT CONSTRUCTIONAL DETAILS**

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*