




Plots of Injected signal (AWGN) level

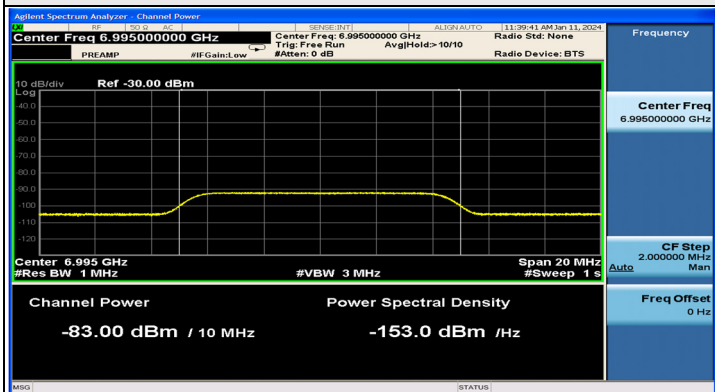


802.11be (EHT20) / CH209

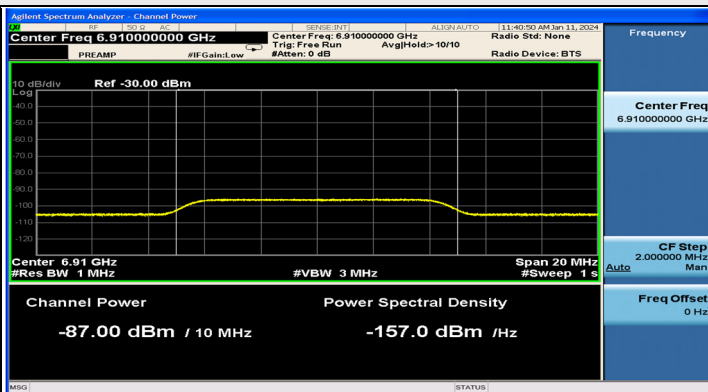

802.11be (EHT160) / CH207(Low Edge)

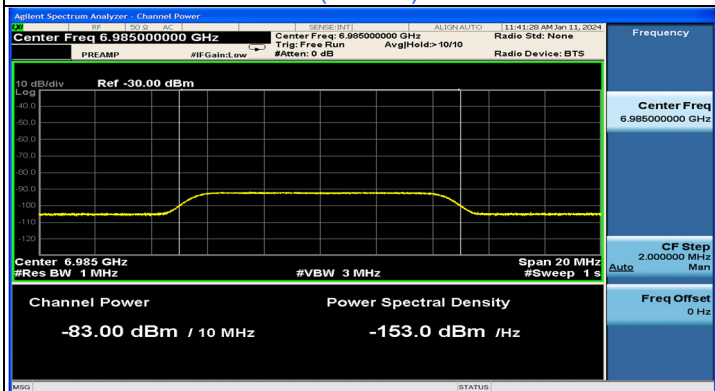


802.11be (EHT160) / CH207(Middle)

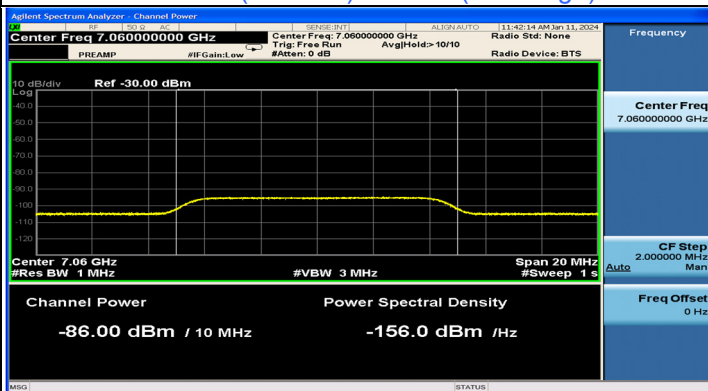


802.11be (EHT160) / CH207(High Edge)


Plots of EUT ceased transmission in the time domain

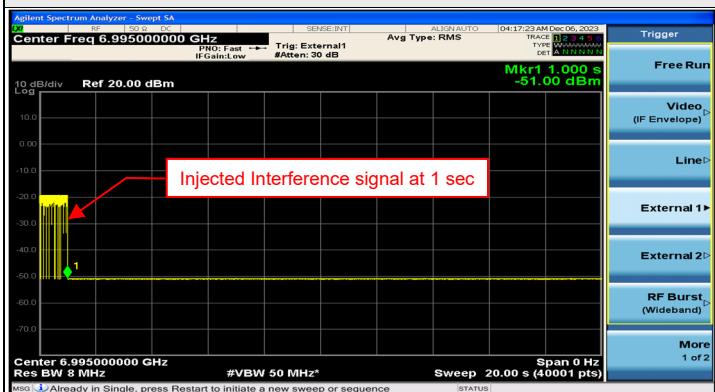


802.11be (EHT20) / CH209

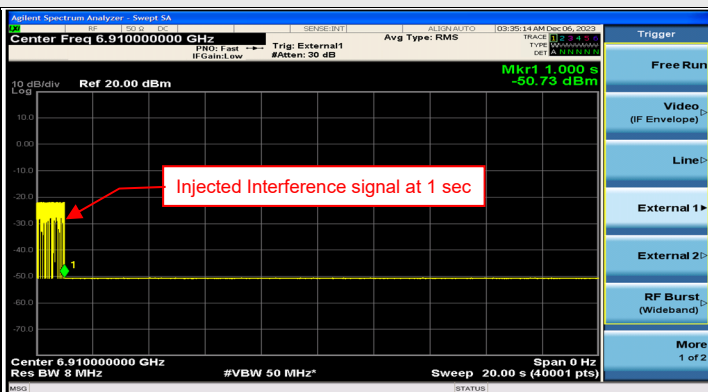

802.11be (EHT160) / CH207(Low Edge)

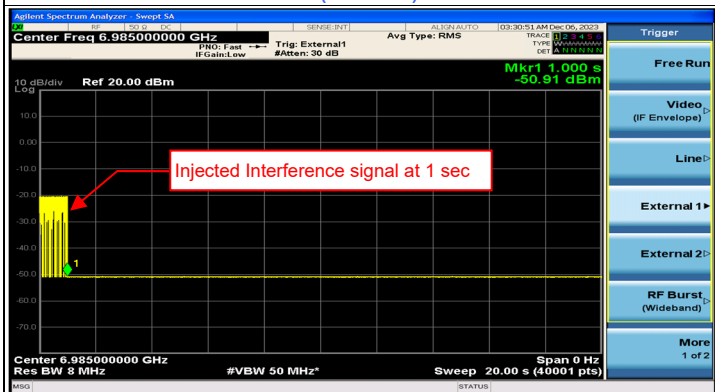

802.11be (EHT160) / CH207(Middle)

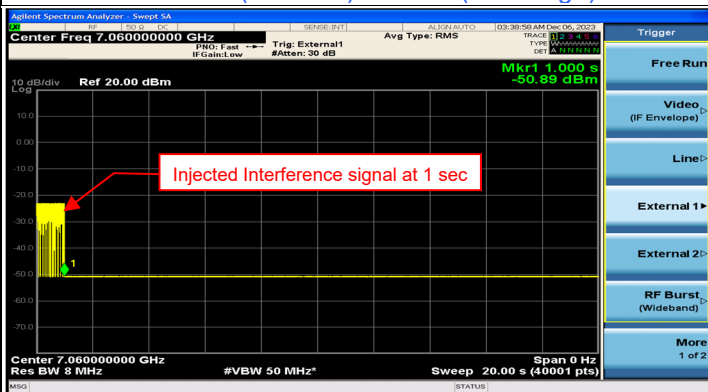


802.11be (EHT160) / CH207(High Edge)




Verify bandwidth reduction

Plots of EUT ceased transmission in the frequency domain

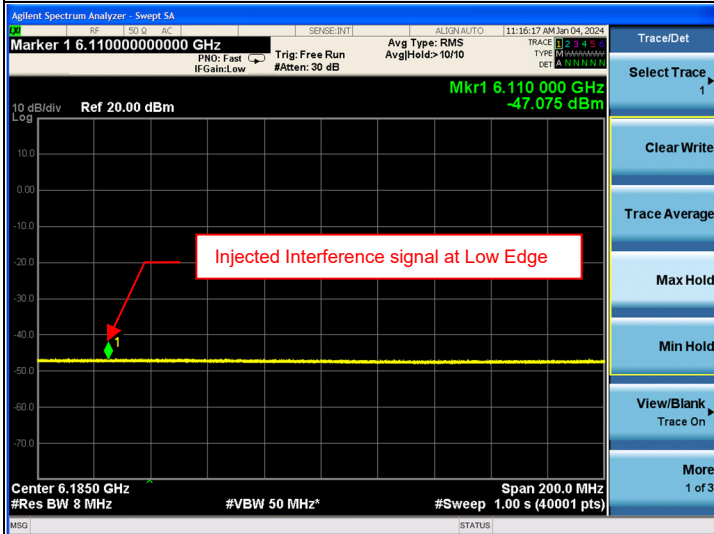


802.11be (EHT160) / CH47 (Low Edge)

A 10 MHz AWGN signal (centered at 6110MHz) is injected. The channel completely ceases operation.

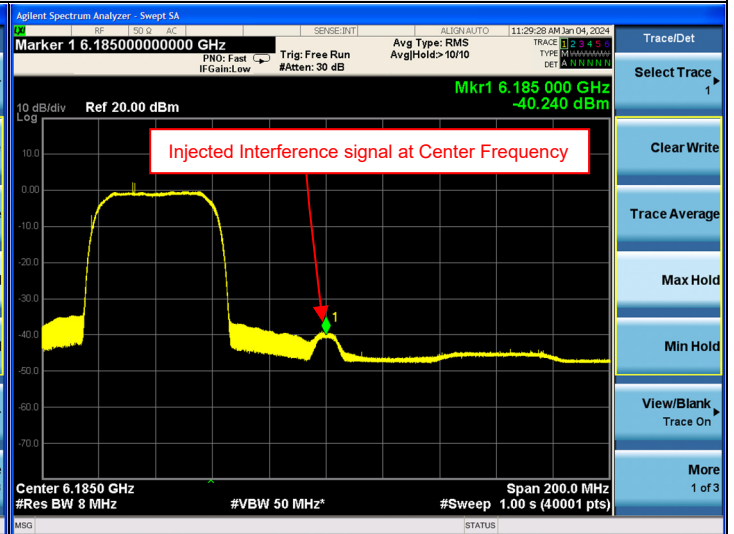

802.11be (EHT160) / CH47 (Middle)

A 10 MHz AWGN signal (centered at 6185 MHz) is injected. The channel reduces to a 40 MHz channel centered around 6125 MHz.

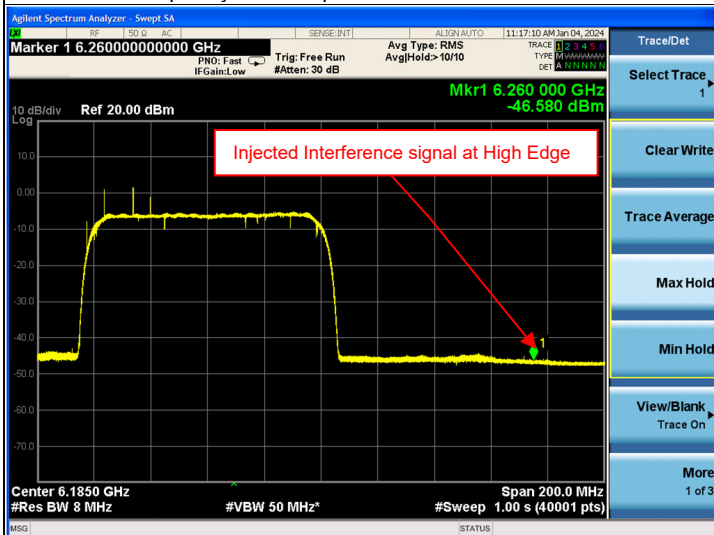

802.11be (EHT160) / CH47 (High Edge)

A 10 MHz AWGN signal (centered at 6260 MHz) is injected. The channel reduces to a 80 MHz channel centered around 6145 MHz.


7.8 AC Power Conducted Emissions
under control of a low-power indoor AP
For 1S1T

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	9.93	44.10	21.55	54.03	31.48	64.98	54.98	-10.95	-23.50
2	0.25547	9.93	26.65	6.80	36.58	16.73	61.58	51.58	-25.00	-34.85
3	0.49766	9.94	18.20	1.79	28.14	11.73	56.04	46.04	-27.90	-34.31
4	3.41797	10.08	25.93	17.39	36.01	27.47	56.00	46.00	-19.99	-18.53
5	15.22656	10.82	17.96	9.85	28.78	20.67	60.00	50.00	-31.22	-29.33
6	21.46094	11.20	21.45	15.46	32.65	26.66	60.00	50.00	-27.35	-23.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

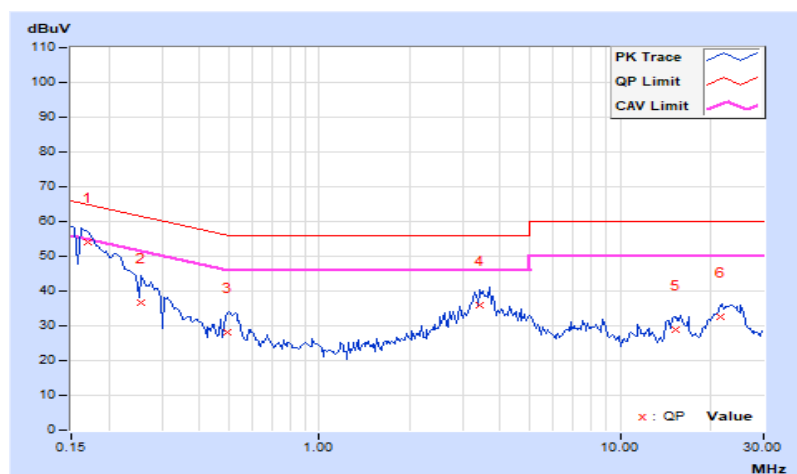


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.99	44.90	22.61	54.89	32.60	65.58	55.58	-10.69	-22.98
2	0.19687	9.99	39.13	21.60	49.12	31.59	63.74	53.74	-14.62	-22.15
3	0.52500	10.00	19.32	7.35	29.32	17.35	56.00	46.00	-26.68	-28.65
4	3.35938	10.12	25.34	16.92	35.46	27.04	56.00	46.00	-20.54	-18.96
5	15.27344	10.66	19.06	9.99	29.72	20.65	60.00	50.00	-30.28	-29.35
6	25.12891	11.00	22.06	21.18	33.06	32.18	60.00	50.00	-26.94	-17.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

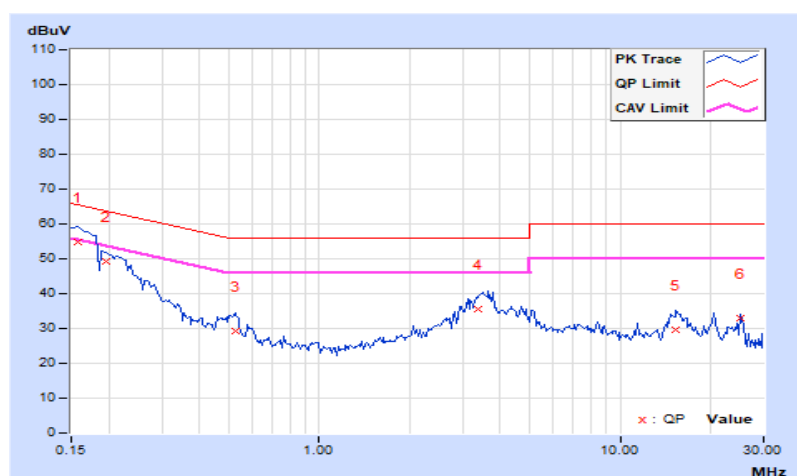


For 2S2T

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.93	44.35	23.95	54.28	33.88	65.58	55.58	-11.30	-21.70
2	0.19687	9.93	39.19	22.19	49.12	32.12	63.74	53.74	-14.62	-21.62
3	0.48984	9.94	15.86	0.92	25.80	10.86	56.17	46.17	-30.37	-35.31
4	3.38672	10.08	25.21	17.28	35.29	27.36	56.00	46.00	-20.71	-18.64
5	15.23047	10.82	18.39	9.20	29.21	20.02	60.00	50.00	-30.79	-29.98
6	21.88281	11.22	22.69	16.78	33.91	28.00	60.00	50.00	-26.09	-22.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

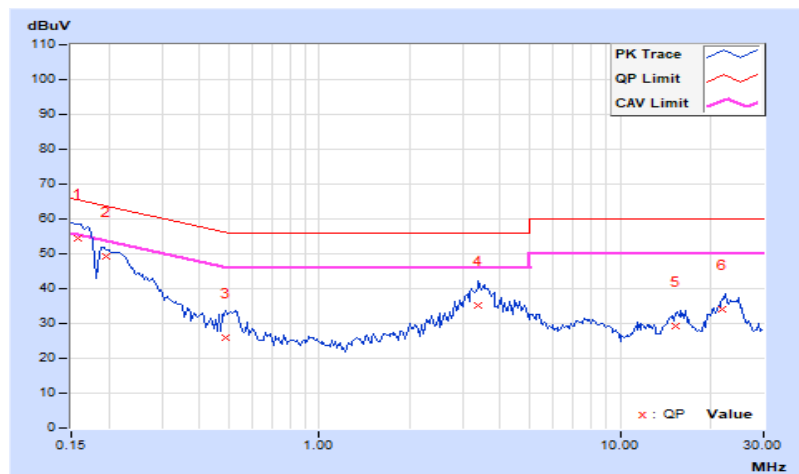


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.99	43.66	22.61	53.65	32.60	65.38	55.38	-11.73	-22.78
2	0.20859	9.99	36.17	14.48	46.16	24.47	63.26	53.26	-17.10	-28.79
3	0.50156	10.00	17.60	2.43	27.60	12.43	56.00	46.00	-28.40	-33.57
4	3.59766	10.13	26.13	17.72	36.26	27.85	56.00	46.00	-19.74	-18.15
5	14.39844	10.62	18.26	9.25	28.88	19.87	60.00	50.00	-31.12	-30.13
6	25.12500	11.00	19.09	17.29	30.09	28.29	60.00	50.00	-29.91	-21.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

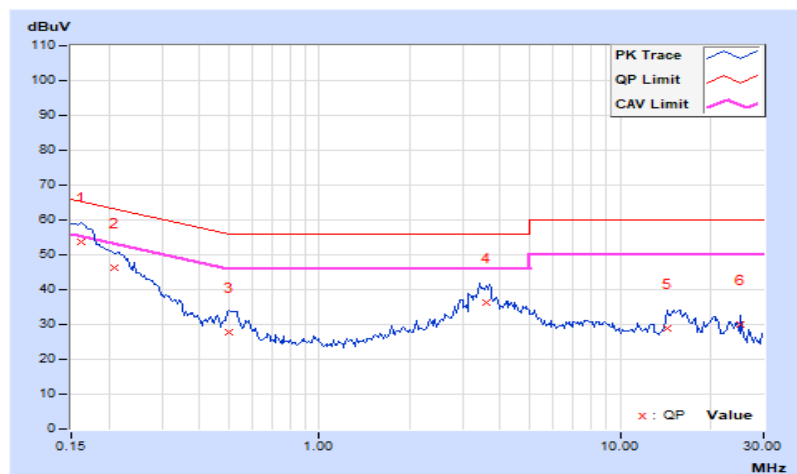

under control of a Standard Power AP


For 1S1T

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.93	45.06	22.53	54.99	32.46	65.58	55.58	-10.59	-23.12
2	0.25156	9.93	28.99	12.59	38.92	22.52	61.71	51.71	-22.79	-29.19
3	0.53281	9.95	19.80	8.75	29.75	18.70	56.00	46.00	-26.25	-27.30
4	3.53125	10.08	26.29	17.72	36.37	27.80	56.00	46.00	-19.63	-18.20
5	16.02734	10.87	18.82	8.53	29.69	19.40	60.00	50.00	-30.31	-30.60
6	22.26563	11.23	22.70	17.05	33.93	28.28	60.00	50.00	-26.07	-21.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

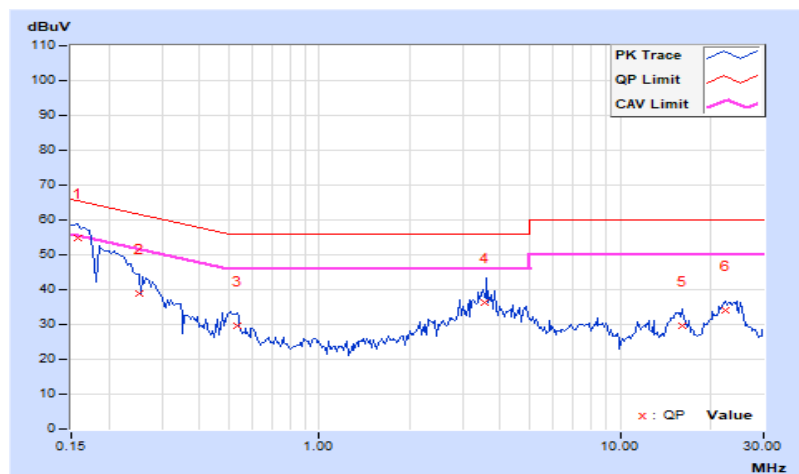


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.99	42.99	22.75	52.98	32.74	65.38	55.38	-12.40	-22.64
2	0.22422	9.99	36.10	16.10	46.09	26.09	62.66	52.66	-16.57	-26.57
3	0.53281	10.00	19.88	8.61	29.88	18.61	56.00	46.00	-26.12	-27.39
4	3.76563	10.14	24.16	16.44	34.30	26.58	56.00	46.00	-21.70	-19.42
5	15.18750	10.65	19.01	9.86	29.66	20.51	60.00	50.00	-30.34	-29.49
6	25.12891	11.00	21.90	21.16	32.90	32.16	60.00	50.00	-27.10	-17.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

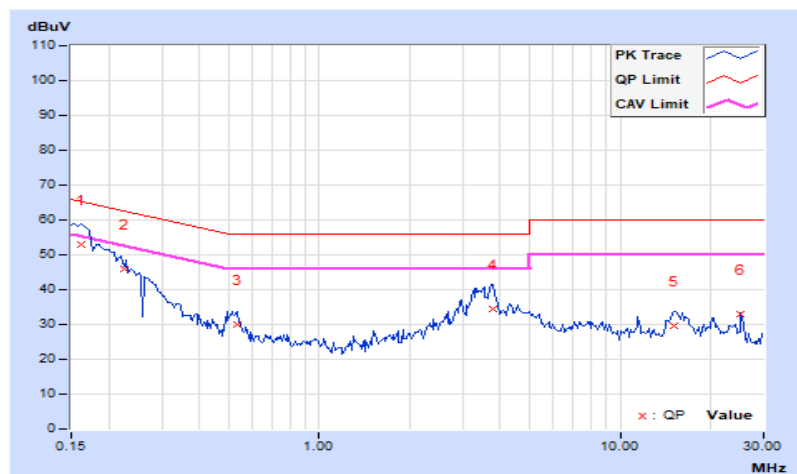


For 2S2T

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.93	44.52	24.09	54.45	34.02	65.58	55.58	-11.13	-21.56
2	0.22422	9.93	36.12	14.20	46.05	24.13	62.66	52.66	-16.61	-28.53
3	0.52109	9.95	19.30	7.11	29.25	17.06	56.00	46.00	-26.75	-28.94
4	3.76953	10.10	24.11	16.14	34.21	26.24	56.00	46.00	-21.79	-19.76
5	16.82813	10.92	16.76	7.43	27.68	18.35	60.00	50.00	-32.32	-31.65
6	21.54688	11.20	19.91	13.91	31.11	25.11	60.00	50.00	-28.89	-24.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

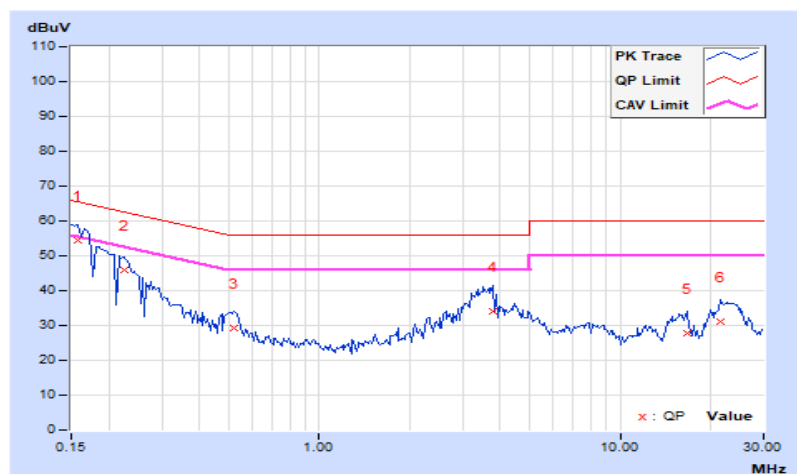

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	9.99	44.42	22.56	54.41	32.55	65.18	55.18	-10.77	-22.63
2	0.23203	9.99	33.88	15.68	43.87	25.67	62.38	52.38	-18.51	-26.71
3	0.51328	10.00	18.49	5.10	28.49	15.10	56.00	46.00	-27.51	-30.90
4	3.51953	10.13	28.29	20.12	38.42	30.25	56.00	46.00	-17.58	-15.75
5	15.77344	10.68	19.34	10.17	30.02	20.85	60.00	50.00	-29.98	-29.15
6	20.55859	10.89	20.63	18.77	31.52	29.66	60.00	50.00	-28.48	-20.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



7.9 Unwanted Emissions below 1 GHz

Mode A

under control of a low-power indoor AP


For 1S1T

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	34.37	32.51 PK	40	-7.49	-72.37	9.62	-62.75
2	180.71	33.27 PK	43.5	-10.23	-71.61	9.62	-61.99
3	290.44	33.34 PK	46	-12.66	-71.54	9.62	-61.92
4	537.43	34.02 PK	46	-11.98	-70.86	9.62	-61.24
5	778.96	34.14 PK	46	-11.86	-70.74	9.62	-61.12
6	842.62	36.19 PK	46	-9.81	-68.69	9.62	-59.07

Notes:

1. Margin value = Emission Level - Limit value
2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

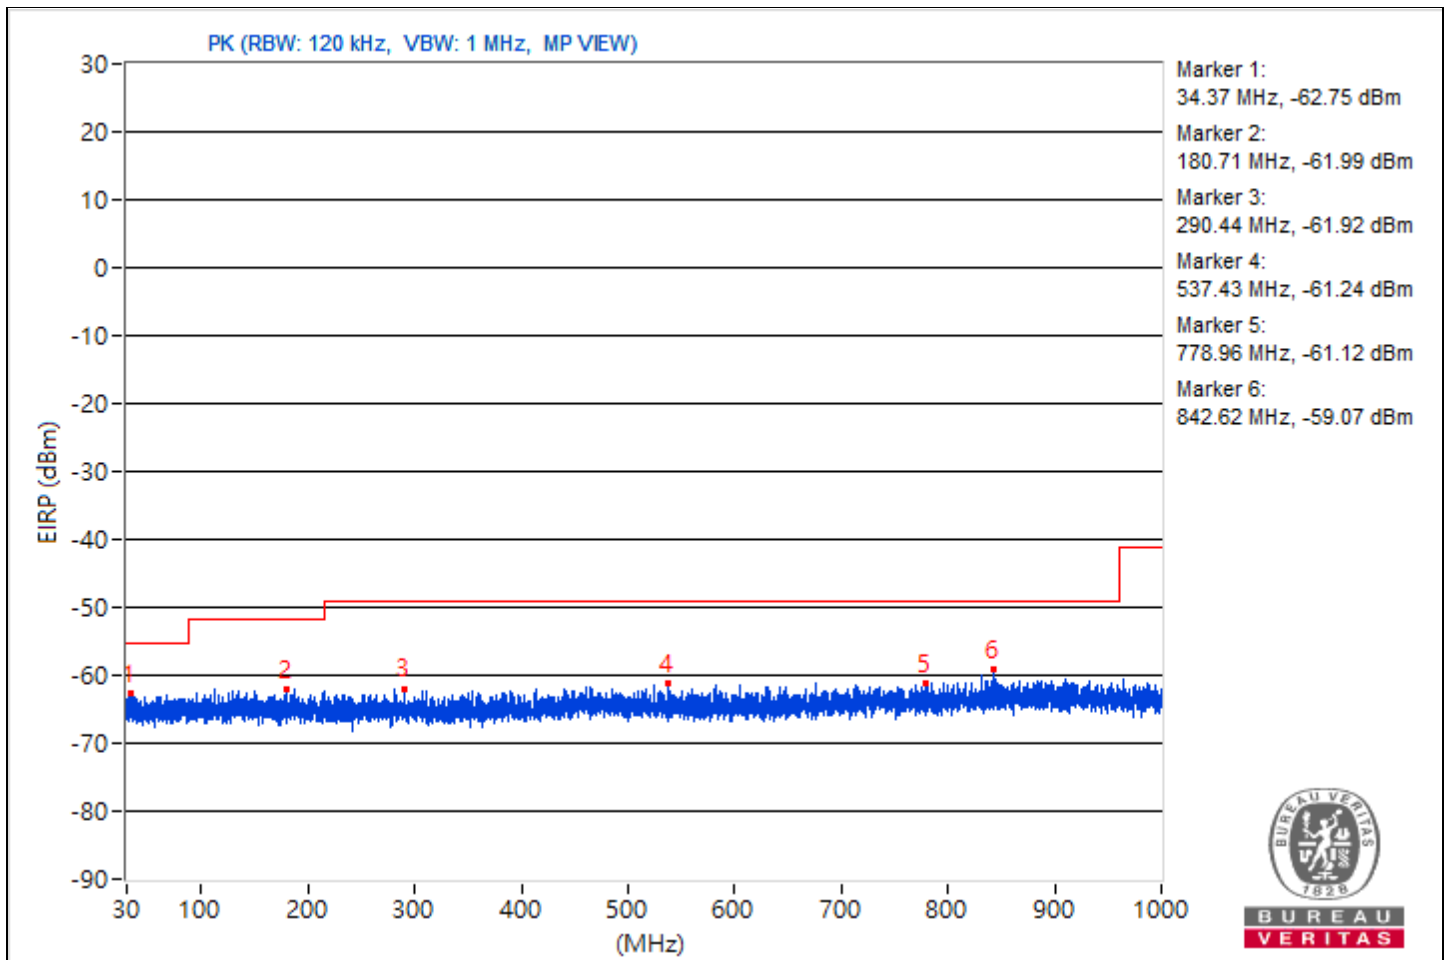


For 2S2T

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	58.62	32.83 PK	40	-7.17	-74.02	-76.44	9.62	-62.43
2	130.64	33.2 PK	43.5	-10.3	-76.5	-73.41	9.62	-62.06
3	313.12	33.71 PK	46	-12.29	-72.65	-76.55	9.62	-61.55
4	466.99	33.31 PK	46	-12.69	-76.51	-73.25	9.62	-61.95
5	773.14	34.77 PK	46	-11.23	-71.77	-75.08	9.62	-60.49
6	886.15	35.24 PK	46	-10.76	-74.92	-71.17	9.62	-60.02

- Notes:
1. Margin value = Emission Level - Limit value
 2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

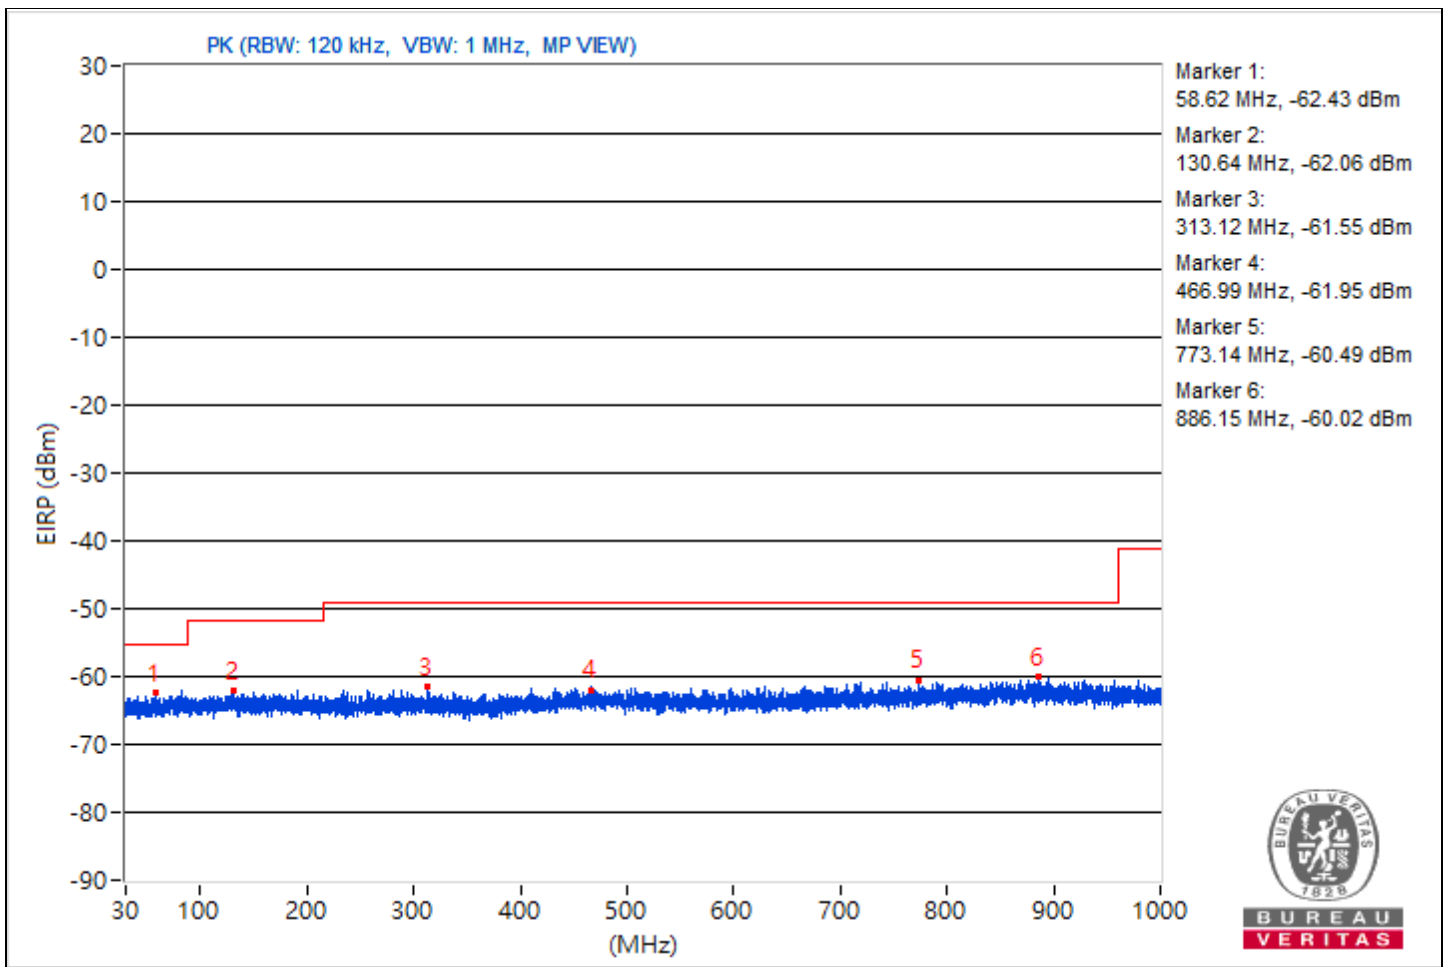


under control of a Standard Power AP

For 1S1T

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	46.25	30.26 PK	40	-9.74	-74.62	9.62	-65
2	116.09	30.94 PK	43.5	-12.56	-73.94	9.62	-64.32
3	275.17	31.34 PK	46	-14.66	-73.54	9.62	-63.92
4	588.11	32.64 PK	46	-13.36	-72.24	9.62	-62.62
5	758.83	32.5 PK	46	-13.5	-72.38	9.62	-62.76
6	826.37	32.56 PK	46	-13.44	-72.32	9.62	-62.7

- Notes:
1. Margin value = Emission Level - Limit value
 2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

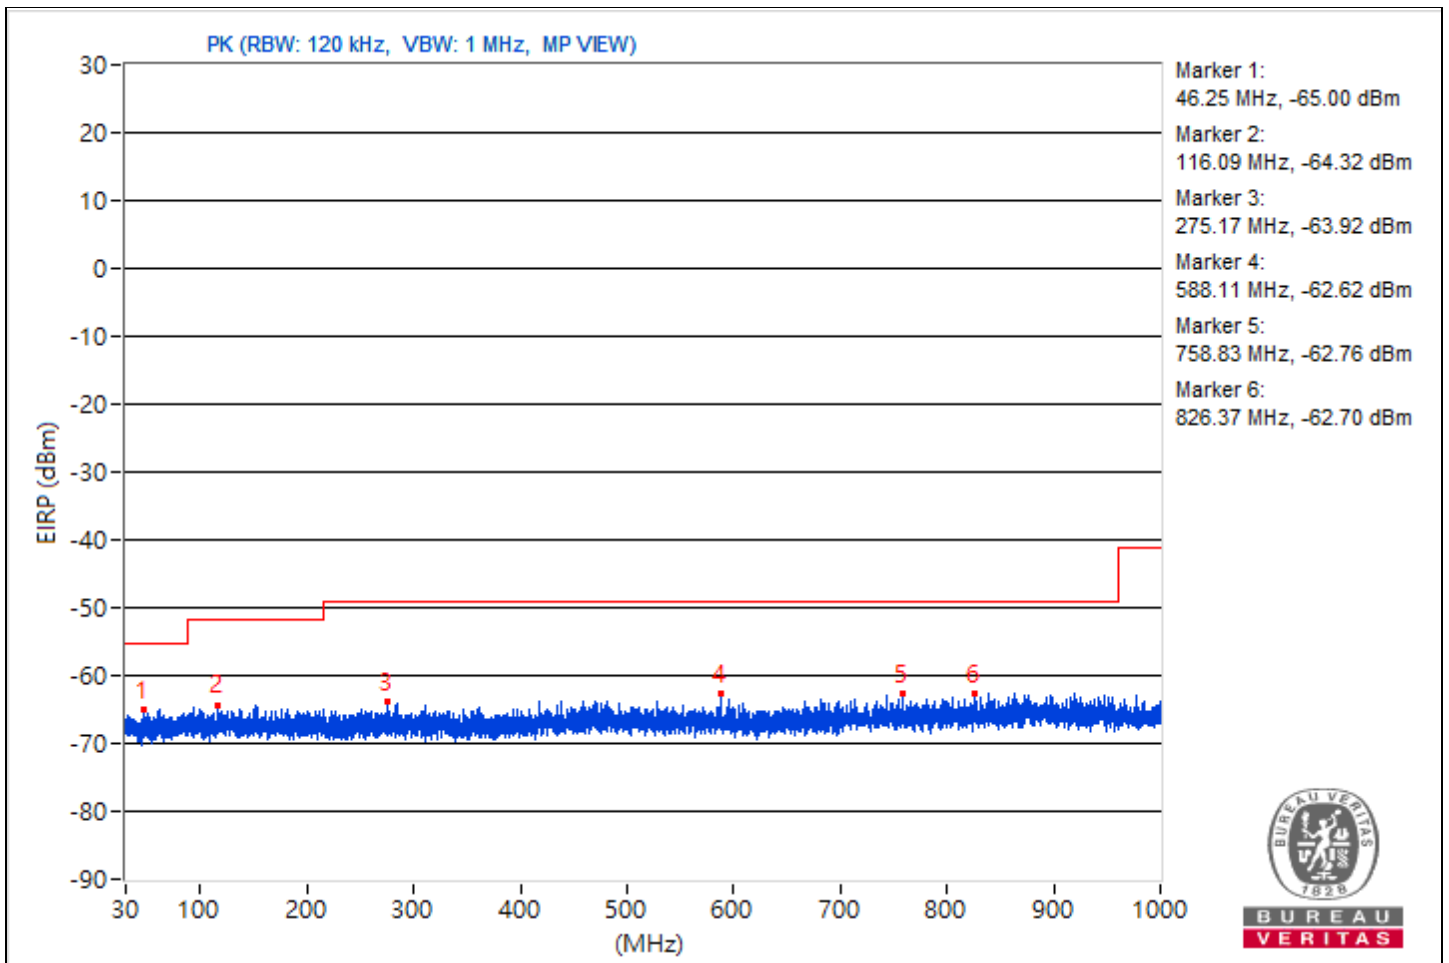


For 2S2T

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	86.75	33.17 PK	40	-6.83	-74.46	-74.99	9.62	-62.09
2	150.16	33.27 PK	43.5	-10.23	-77.4	-72.94	9.62	-61.99
3	303.42	33.21 PK	46	-12.79	-77.03	-73.17	9.62	-62.05
4	453.89	33.96 PK	46	-12.04	-73.3	-74.66	9.62	-61.3
5	733.61	34.91 PK	46	-11.09	-71.29	-75.78	9.62	-60.35
6	904.33	41.69 PK	46	-4.31	-73.55	-63.61	9.62	-53.57

- Notes:
1. Margin value = Emission Level - Limit value
 2. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

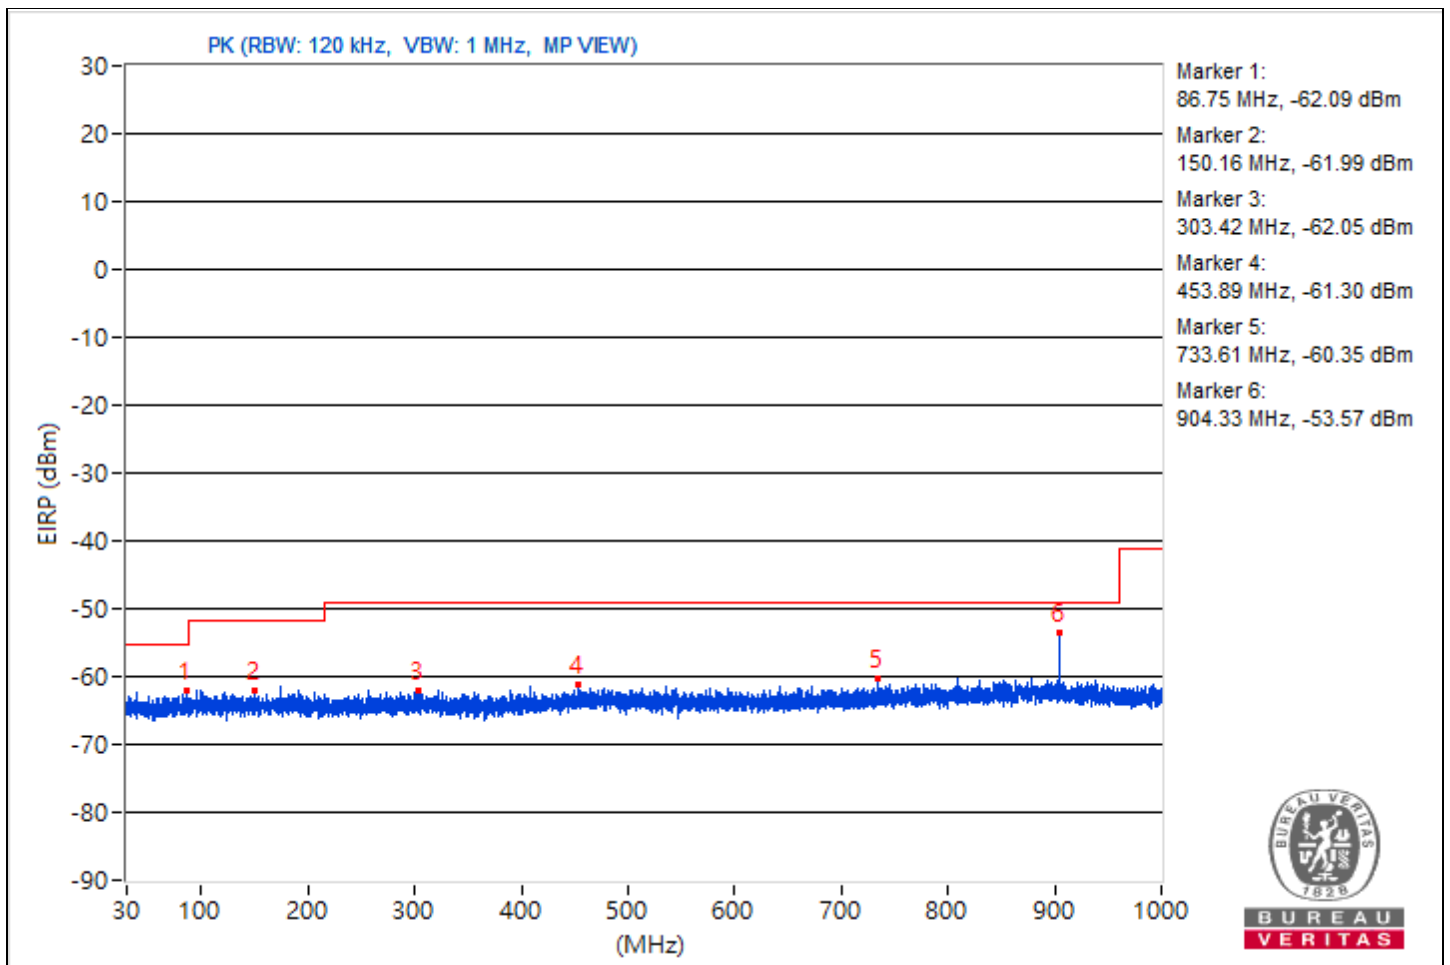

Mode B

under control of a low-power indoor AP


For 1S1T

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.46	24.9 QP	43.5	-18.6	3.00 H	338	41.5	-16.6
2	239.91	36.5 QP	46.0	-9.5	1.00 H	232	51.2	-14.7
3	291.61	39.1 QP	46.0	-6.9	1.00 H	296	51.8	-12.7
4	436.22	40.9 QP	46.0	-5.1	1.50 H	201	49.6	-8.7
5	696.18	45.3 QP	46.0	-0.7	2.00 H	235	49.3	-4.0
6	897.77	42.0 QP	46.0	-4.0	1.00 H	275	43.2	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

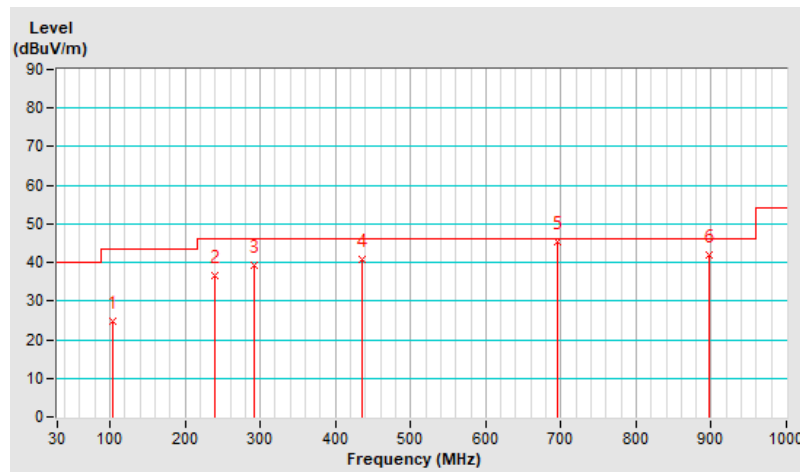


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.03	28.5 QP	40.0	-11.5	1.50 V	248	42.4	-13.9
2	104.45	34.2 QP	43.5	-9.3	1.50 V	317	50.8	-16.6
3	215.71	40.8 QP	43.5	-2.7	3.00 V	165	57.3	-16.5
4	242.04	29.2 QP	46.0	-16.8	1.00 V	36	43.8	-14.6
5	288.06	38.0 QP	46.0	-8.0	1.50 V	280	50.8	-12.8
6	693.48	34.0 QP	46.0	-12.0	1.00 V	36	38.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

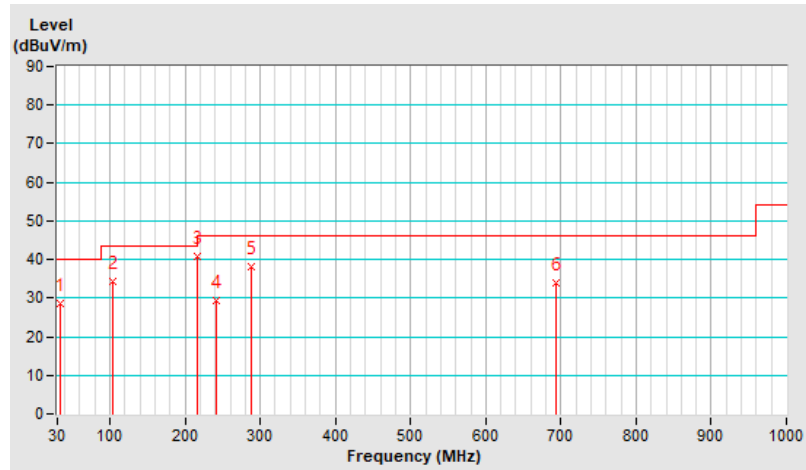


For 2S2T

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.57	23.8 QP	43.5	-19.7	3.00 H	308	40.4	-16.6
2	239.82	36.4 QP	46.0	-9.6	2.00 H	237	51.1	-14.7
3	294.61	38.6 QP	46.0	-7.4	1.00 H	267	51.3	-12.7
4	432.07	41.5 QP	46.0	-4.5	1.50 H	330	50.3	-8.8
5	696.35	45.1 QP	46.0	-0.9	2.00 H	256	49.1	-4.0
6	897.53	42.4 QP	46.0	-3.6	3.00 H	254	43.6	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

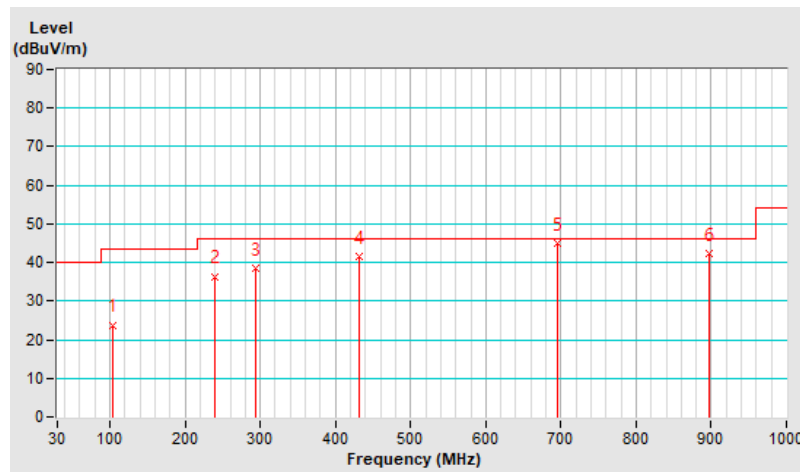


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.20	30.0 QP	40.0	-10.0	1.00 V	249	43.9	-13.9
2	103.87	35.3 QP	43.5	-8.2	1.50 V	334	52.0	-16.7
3	216.97	42.5 QP	46.0	-3.5	3.00 V	138	59.0	-16.5
4	241.85	29.5 QP	46.0	-16.5	1.00 V	50	44.1	-14.6
5	287.83	37.6 QP	46.0	-8.4	2.00 V	244	50.4	-12.8
6	693.78	34.5 QP	46.0	-11.5	1.00 V	36	38.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

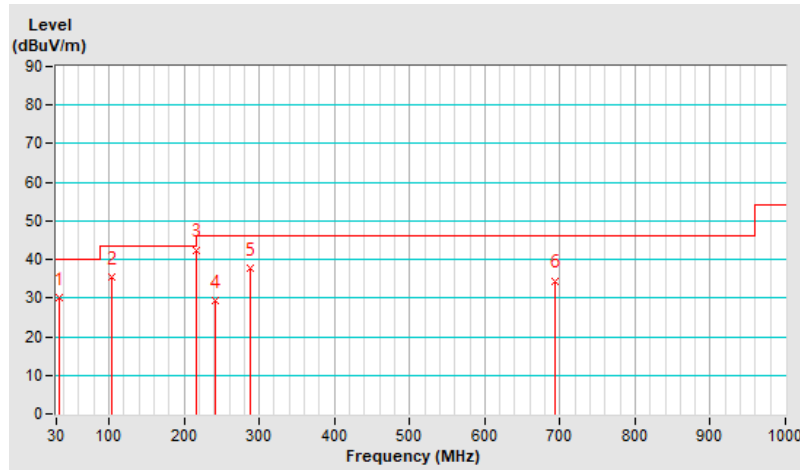

under control of a Standard Power AP

For 1S1T


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.70	24.4 QP	43.5	-19.1	2.00 H	322	41.0	-16.6
2	239.48	36.3 QP	46.0	-9.7	1.00 H	236	51.0	-14.7
3	292.22	38.9 QP	46.0	-7.1	1.50 H	292	51.6	-12.7
4	435.99	41.3 QP	46.0	-4.7	3.00 H	307	50.0	-8.7
5	696.63	45.2 QP	46.0	-0.8	1.00 H	242	49.2	-4.0
6	898.25	41.9 QP	46.0	-4.1	1.00 H	275	43.1	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

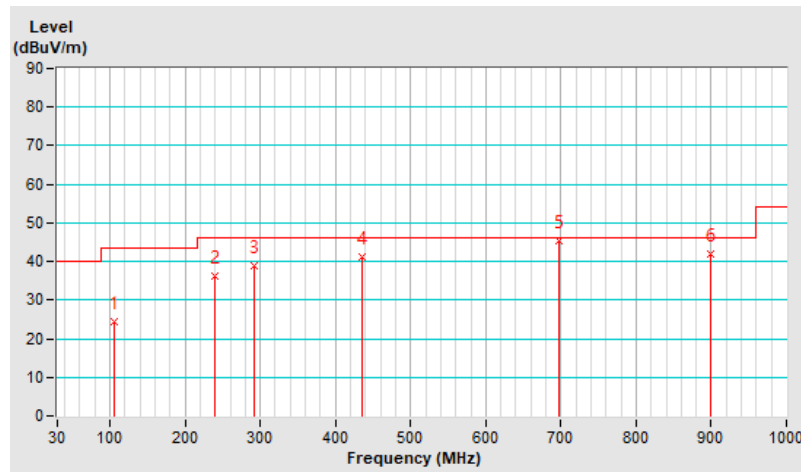


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.11	29.2 QP	40.0	-10.8	1.50 V	245	43.1	-13.9
2	100.91	34.1 QP	43.5	-9.4	1.00 V	338	51.3	-17.2
3	216.95	40.7 QP	46.0	-5.3	1.00 V	142	57.2	-16.5
4	241.11	29.1 QP	46.0	-16.9	1.00 V	27	43.7	-14.6
5	287.61	38.5 QP	46.0	-7.5	1.50 V	250	51.3	-12.8
6	694.11	34.0 QP	46.0	-12.0	3.00 V	35	38.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

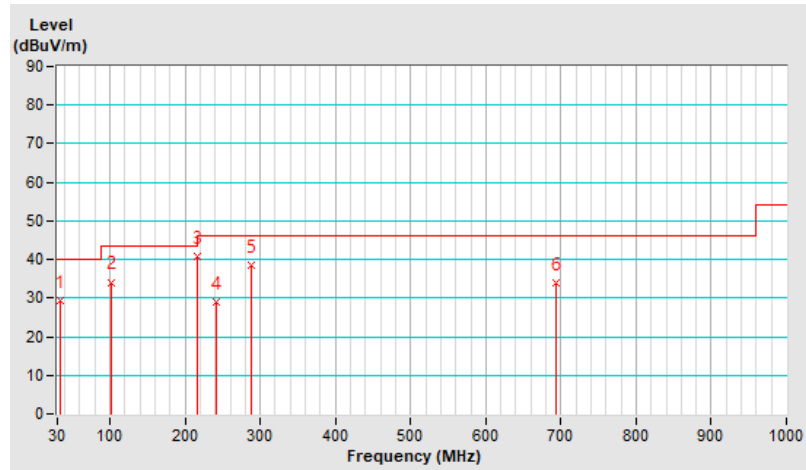


For 2S2T

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	104.73	24.1 QP	43.5	-19.4	1.00 H	317	40.7	-16.6
2	239.75	36.3 QP	46.0	-9.7	1.00 H	226	51.0	-14.7
3	289.55	38.3 QP	46.0	-7.7	1.50 H	278	51.1	-12.8
4	436.24	42.1 QP	46.0	-3.9	3.00 H	352	50.8	-8.7
5	696.56	44.5 QP	46.0	-1.5	1.50 H	268	48.5	-4.0
6	902.94	41.5 QP	46.0	-4.5	1.00 H	248	42.6	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

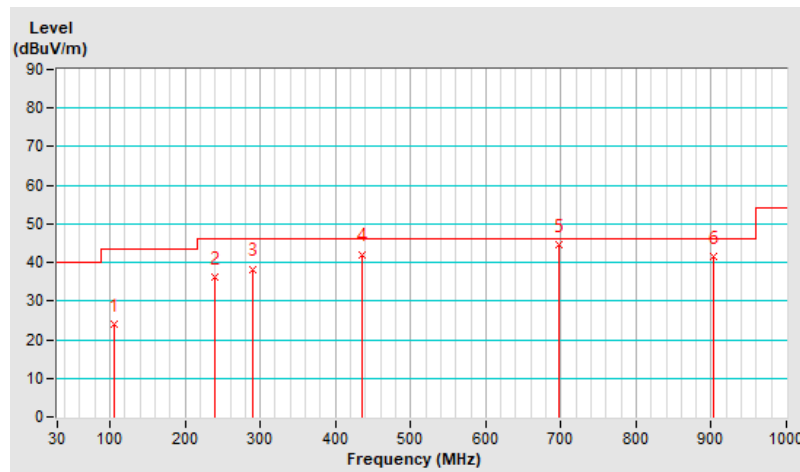


RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	20°C, 70% RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.78	30.0 QP	40.0	-10.0	1.50 V	245	43.9	-13.9
2	99.46	34.6 QP	43.5	-8.9	2.00 V	323	52.1	-17.5
3	214.52	43.0 QP	43.5	-0.5	2.00 V	154	59.5	-16.5
4	243.11	29.5 QP	46.0	-16.5	1.00 V	44	44.0	-14.5
5	287.60	38.4 QP	46.0	-7.6	3.00 V	244	51.2	-12.8
6	693.93	34.1 QP	46.0	-11.9	1.50 V	53	38.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

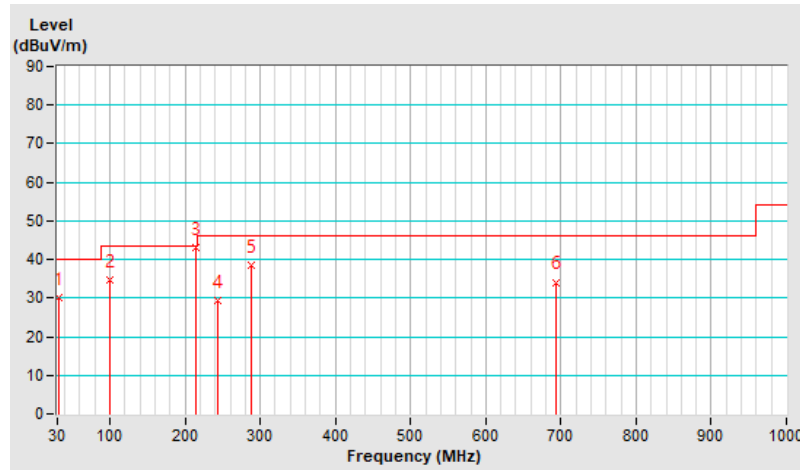

7.10 Unwanted Emissions above 1 GHz

Mode A

under control of a low-power indoor AP



For 1TX

Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3701.38	44.35 PK	74	-29.65	-55.83	4.92	-50.91
2	3796.42	32.66 AV	54	-21.34	-67.52	4.92	-62.6
3	10736	43.28 PK	74	-30.72	-56.9	4.92	-51.98
4	14472.89	31.6 AV	54	-22.4	-68.58	4.92	-63.66
5	21346.1	44.85 PK	74	-29.15	-55.33	4.92	-50.41
6	21120.1	33.45 AV	54	-20.55	-66.73	4.92	-61.81
7	23899.9	47.51 PK	74	-26.49	-52.67	4.92	-47.75
8	23721.1	34.77 AV	54	-19.23	-65.41	4.92	-60.49
9	38962.13	39.19 PK	74	-34.81	-60.99	4.92	-56.07
10	38832.8	27.65 AV	54	-26.35	-72.53	4.92	-67.61

Note: Margin value = Emission Level - Limit value

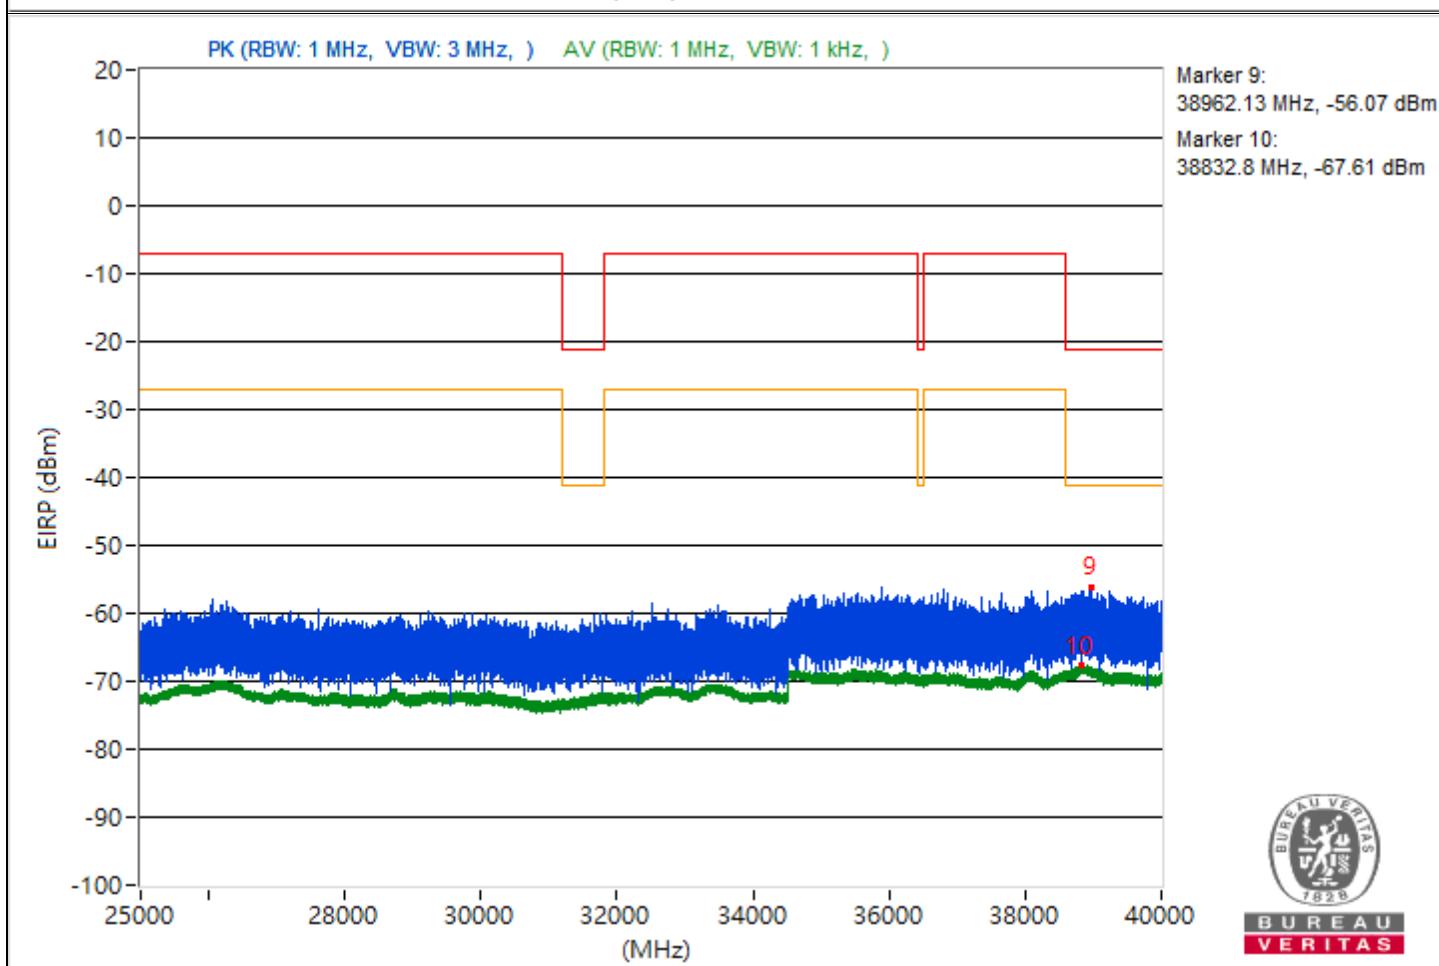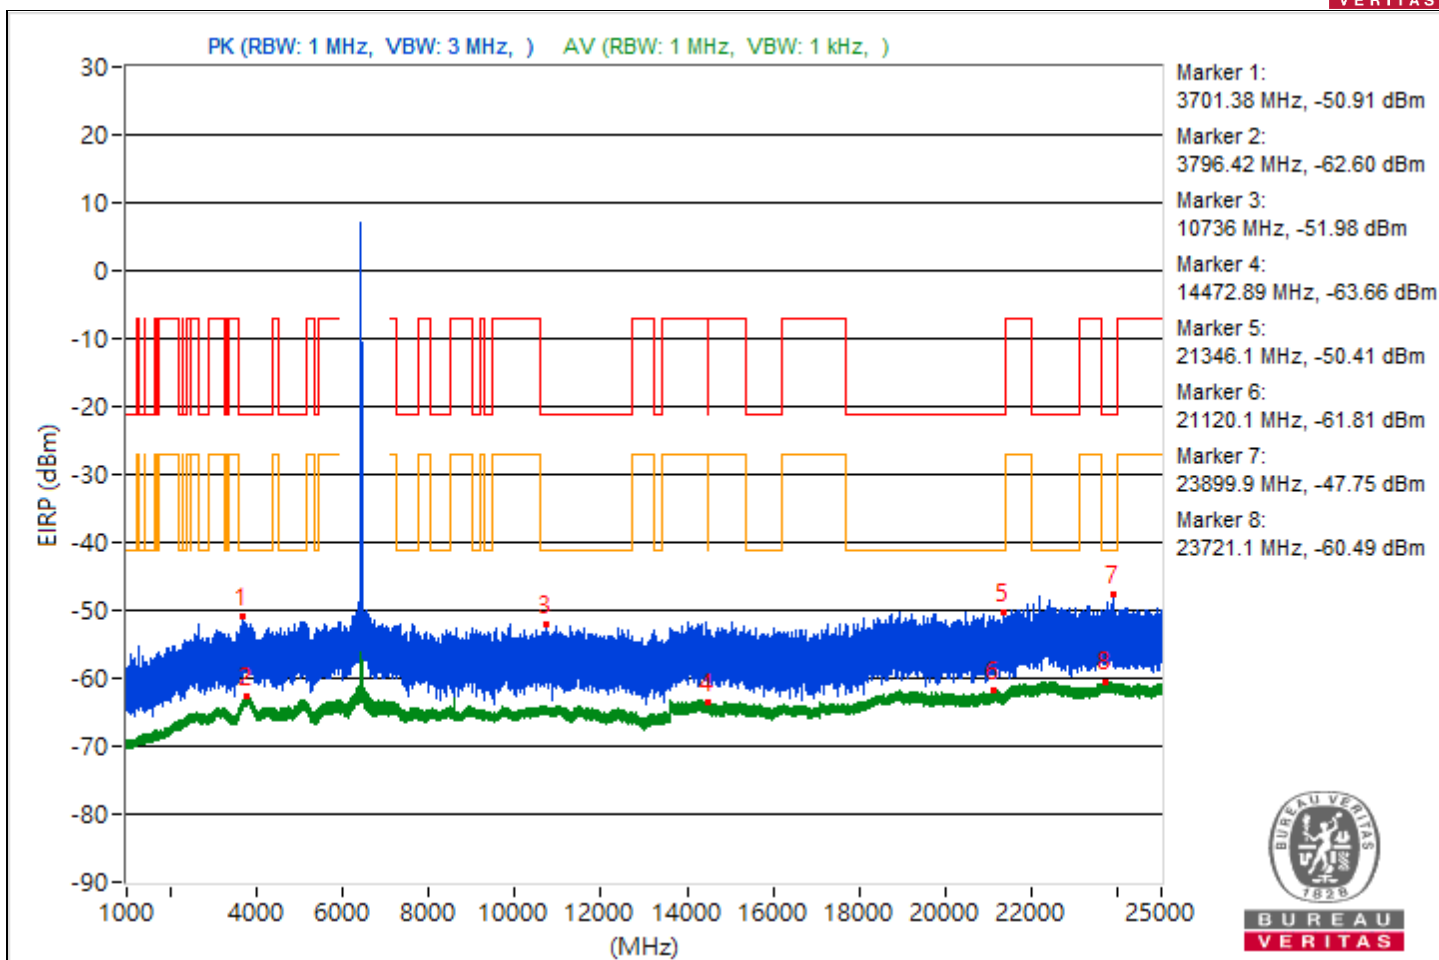





RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3909.12	44.19 PK	74	-29.81	-55.99	4.92	-51.07
2	3802.8	32.72 AV	54	-21.28	-67.46	4.92	-62.54
3	11595.91	43.57 PK	74	-30.43	-56.61	4.92	-51.69
4	8233.42	41.54 AV	54	-12.46	-58.64	4.92	-53.72
5	20920.1	46.42 PK	74	-27.58	-53.76	4.92	-48.84
6	21137.1	33.29 AV	54	-20.71	-66.89	4.92	-61.97
7	22343.2	47.09 PK	74	-26.91	-53.09	4.92	-48.17
8	22249.9	34.8 AV	54	-19.2	-65.38	4.92	-60.46
9	39764.18	38.81 PK	74	-35.19	-61.37	4.92	-56.45
10	38795.64	27.68 AV	54	-26.32	-72.5	4.92	-67.58

Note: Margin value = Emission Level - Limit value

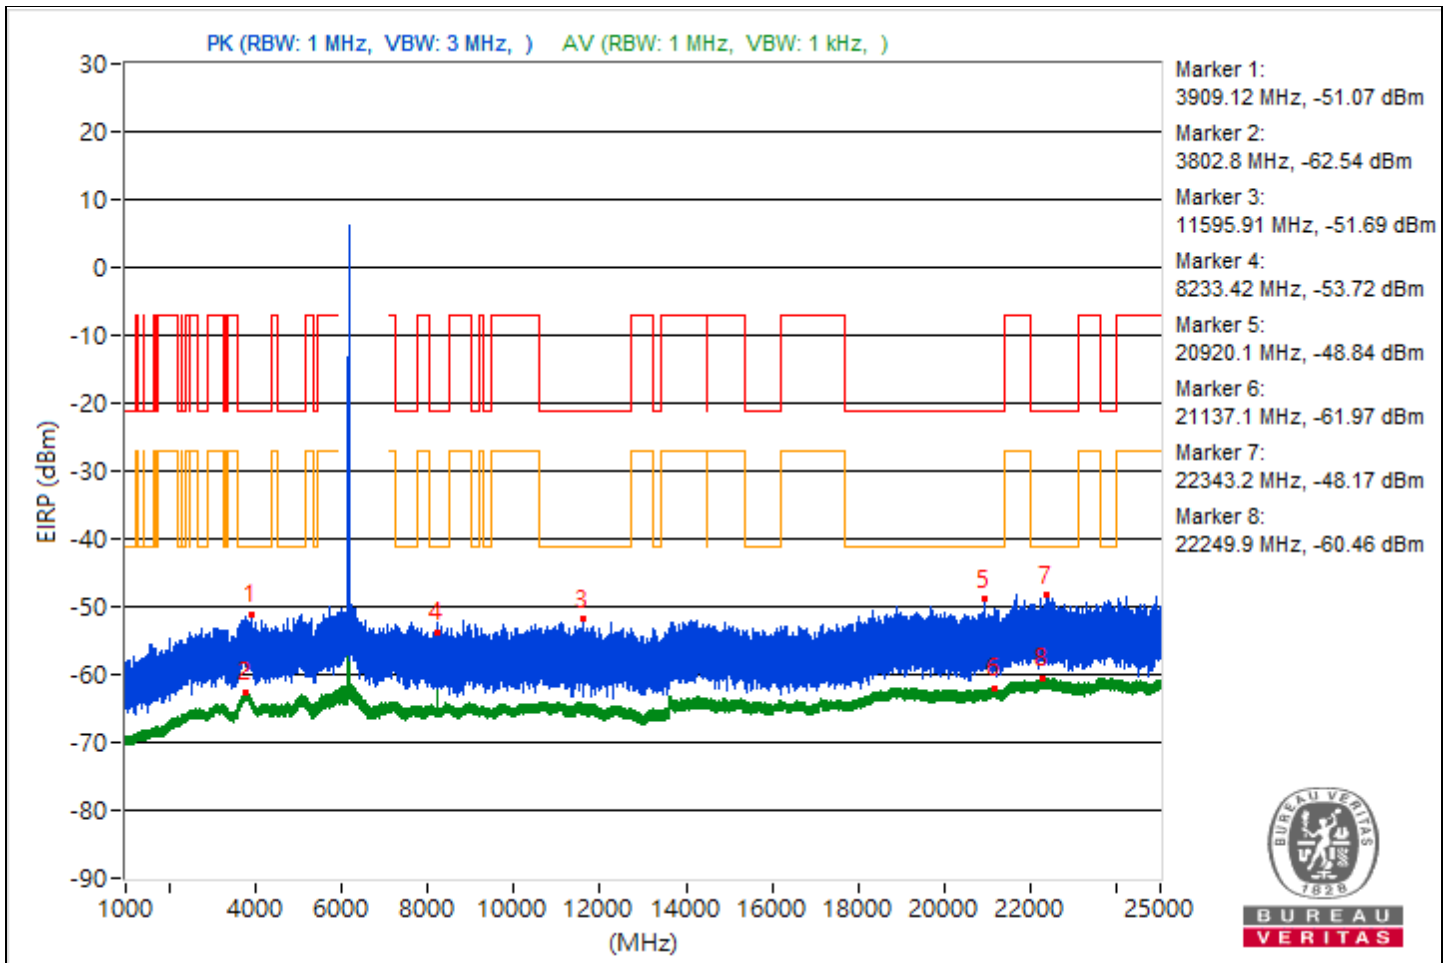

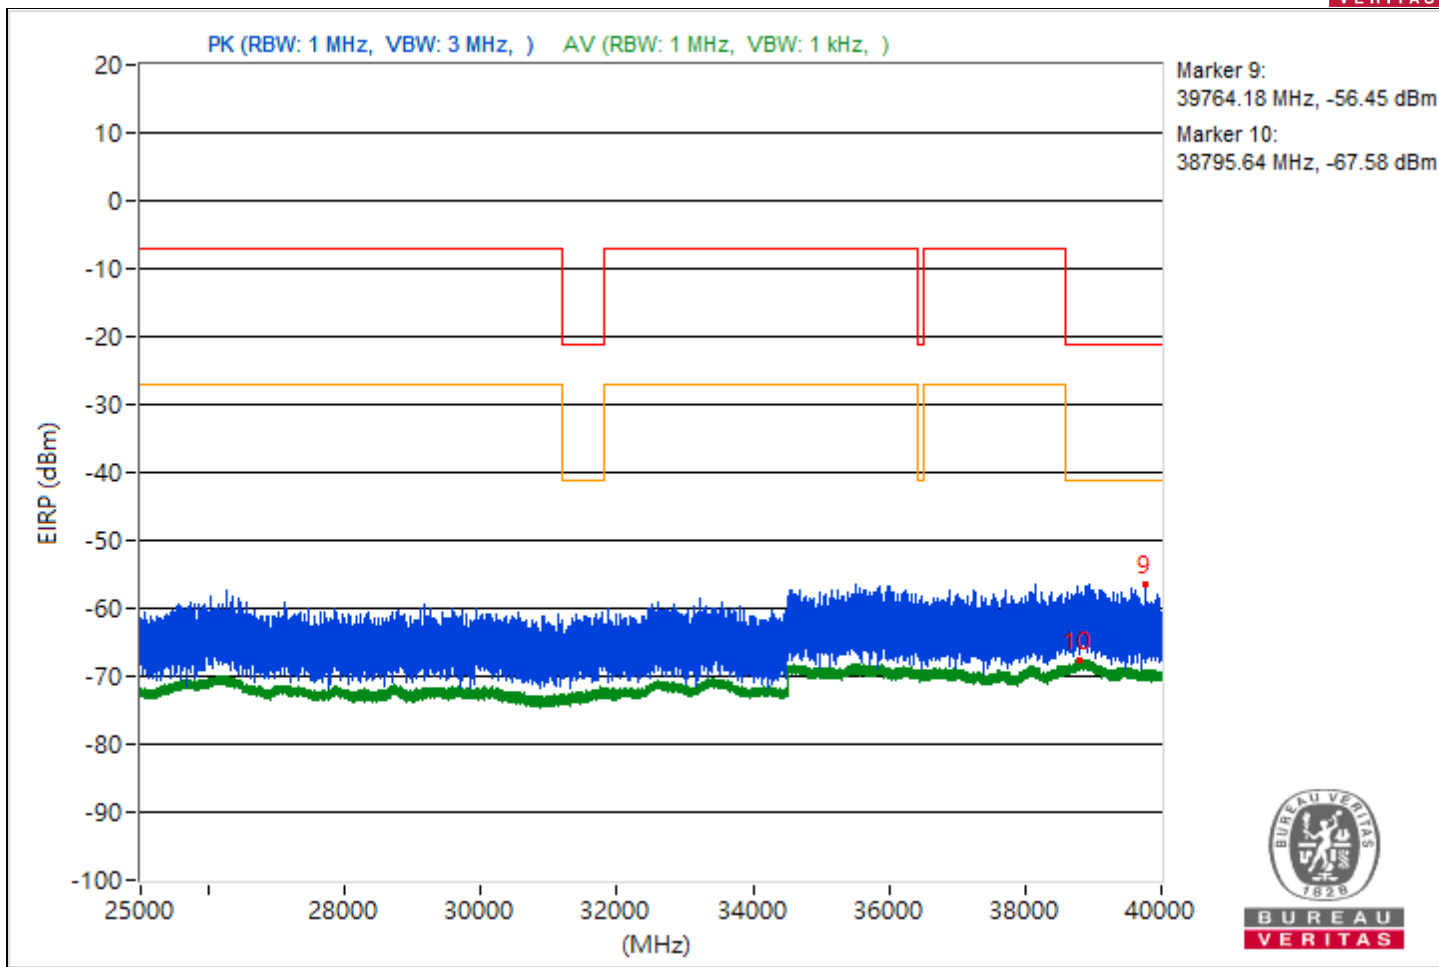





RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4993.97	44.28 PK	74	-29.72	-55.9	4.92	-50.98
2	3812.83	32.89 AV	54	-21.11	-67.29	4.92	-62.37
3	10706.49	43.95 PK	74	-30.05	-56.23	4.92	-51.31
4	7257.38	31.66 AV	54	-22.34	-68.52	4.92	-63.6
5	21167.5	45.8 PK	74	-28.2	-54.38	4.92	-49.46
6	21115.4	33.45 AV	54	-20.55	-66.73	4.92	-61.81
7	22199.3	46.73 PK	74	-27.27	-53.45	4.92	-48.53
8	23790.6	34.95 AV	54	-19.05	-65.23	4.92	-60.31
9	38981.33	39.36 PK	74	-34.64	-60.82	4.92	-55.9
10	38809.42	27.75 AV	54	-26.25	-72.43	4.92	-67.51

Note: Margin value = Emission Level - Limit value

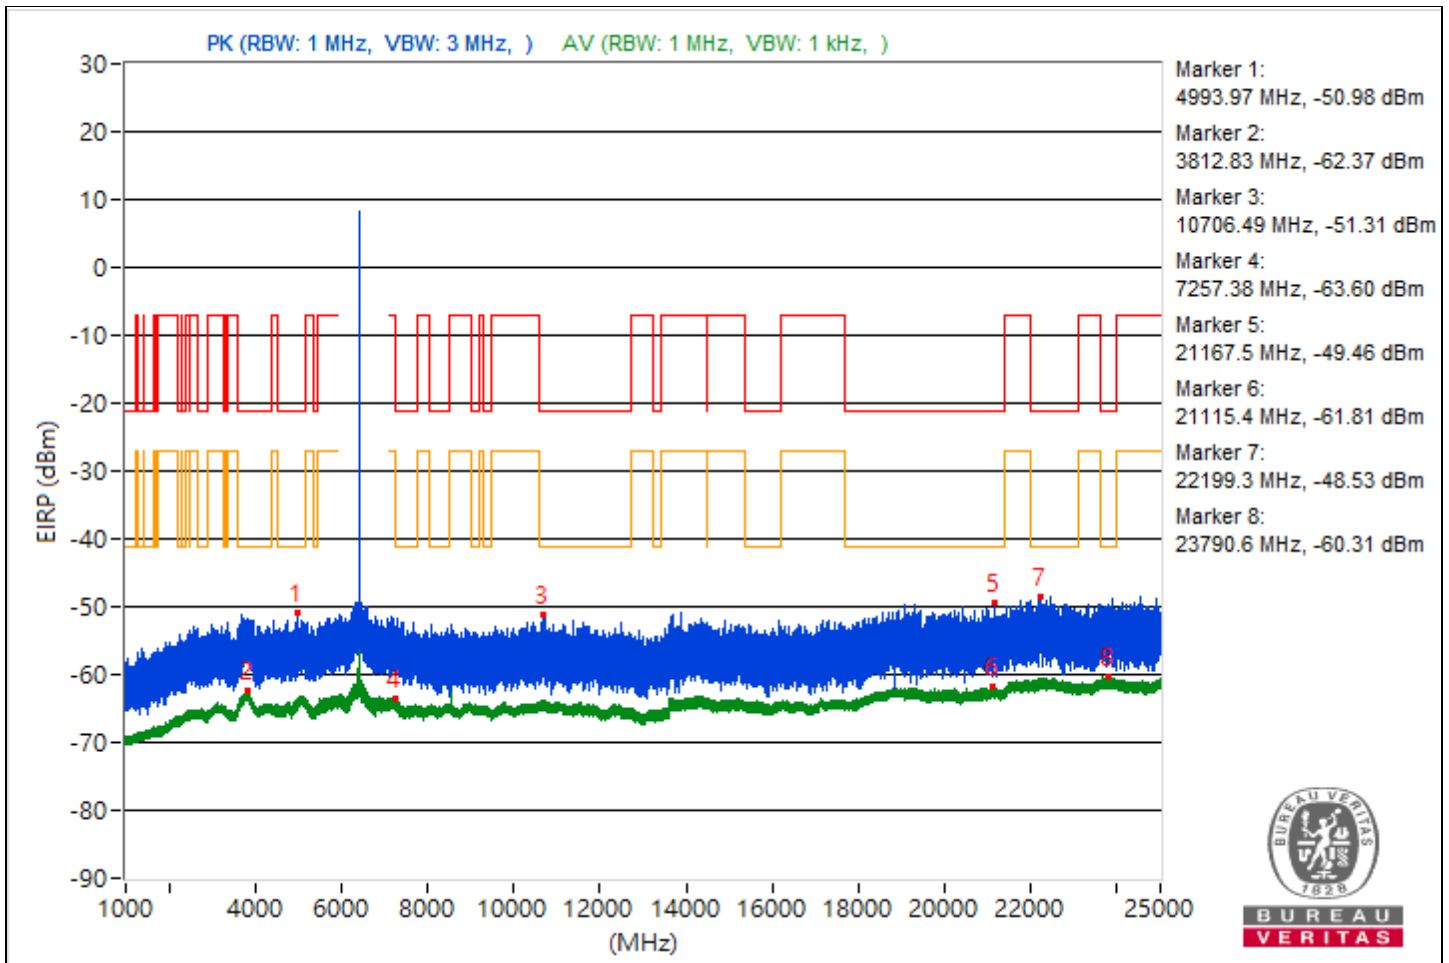

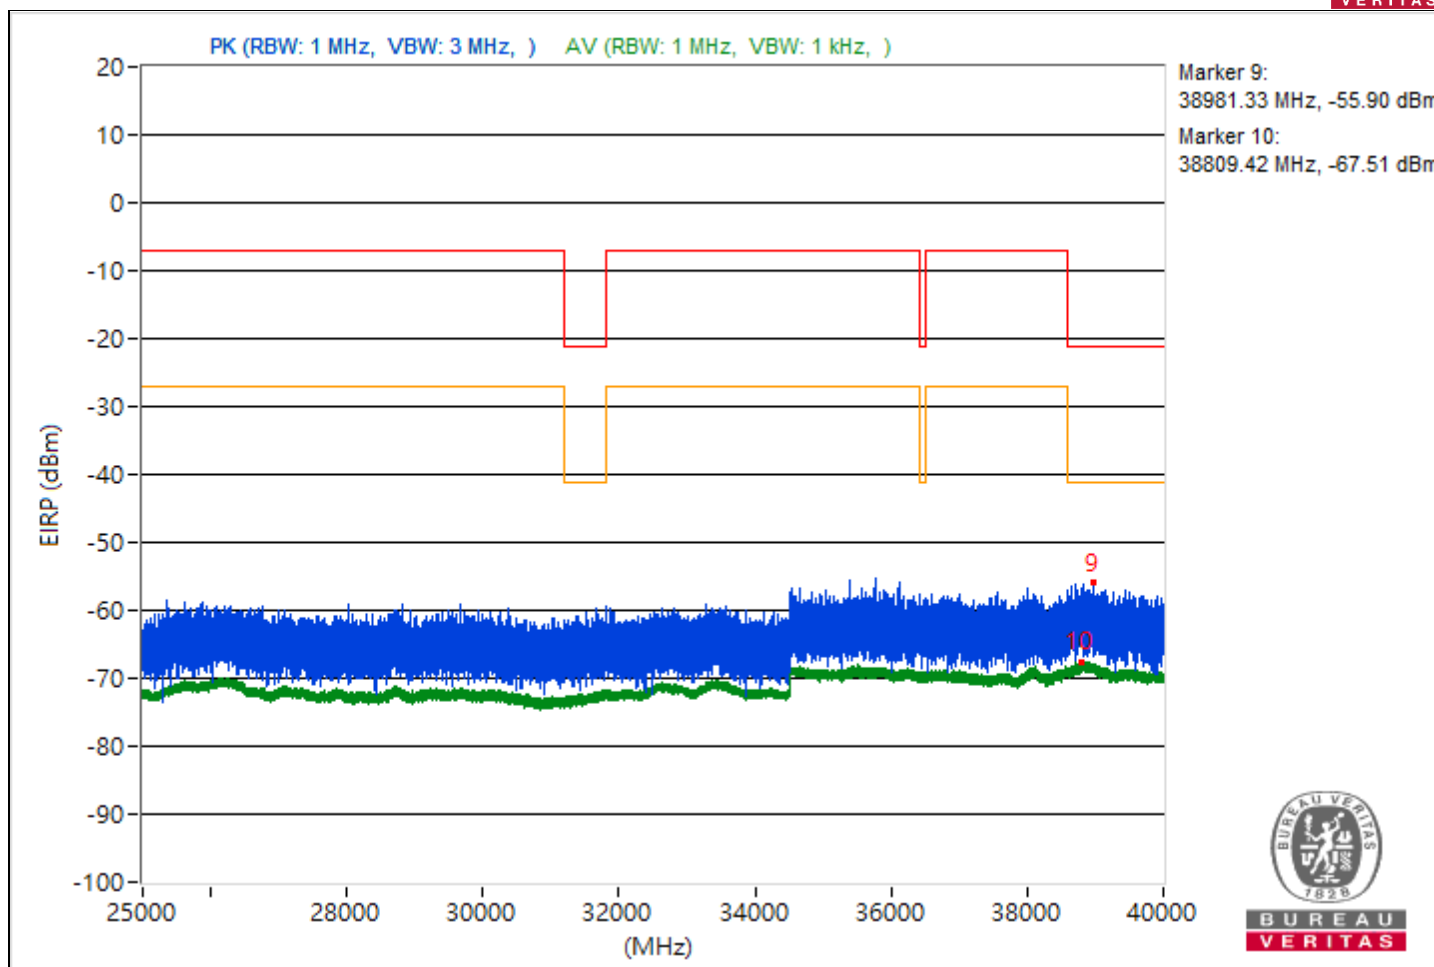





RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.63	43.9 PK	74	-30.1	-56.28	4.92	-51.36
2	3815.09	32.61 AV	54	-21.39	-67.57	4.92	-62.65
3	7328.16	43.68 PK	74	-30.32	-56.5	4.92	-51.58
4	14496.98	31.75 AV	54	-22.25	-68.43	4.92	-63.51
5	20611.1	45.65 PK	74	-28.35	-54.53	4.92	-49.61
6	21147.5	33.44 AV	54	-20.56	-66.74	4.92	-61.82
7	22322.9	46.47 PK	74	-27.53	-53.71	4.92	-48.79
8	23677.5	34.8 AV	54	-19.2	-65.38	4.92	-60.46
9	38939.56	38.91 PK	74	-35.09	-61.27	4.92	-56.35
10	38829.6	27.71 AV	54	-26.29	-72.47	4.92	-67.55

Note: Margin value = Emission Level - Limit value

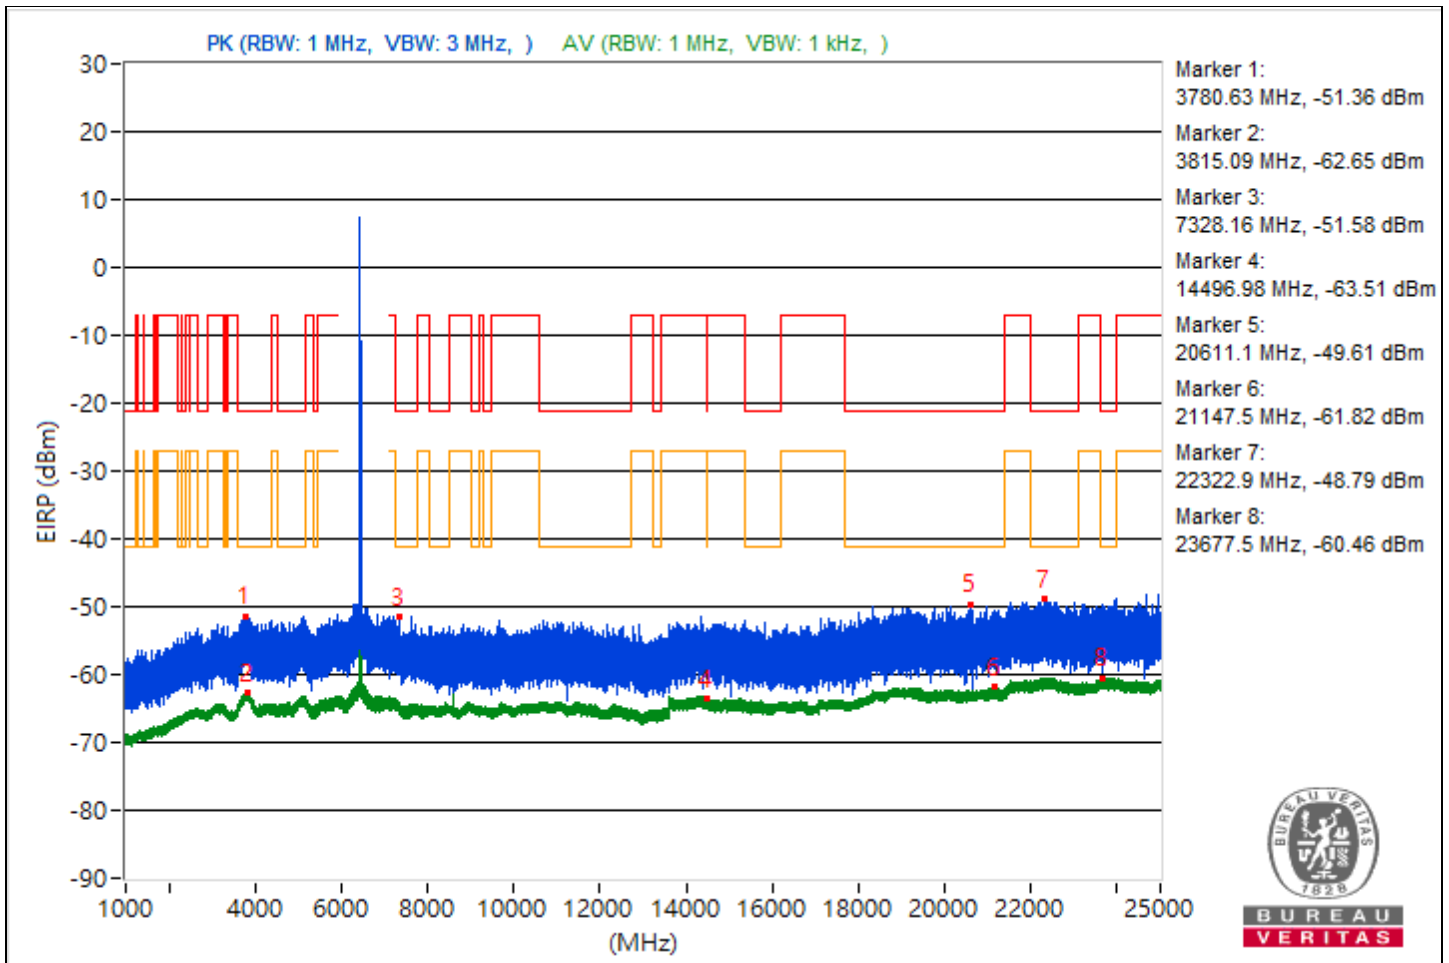

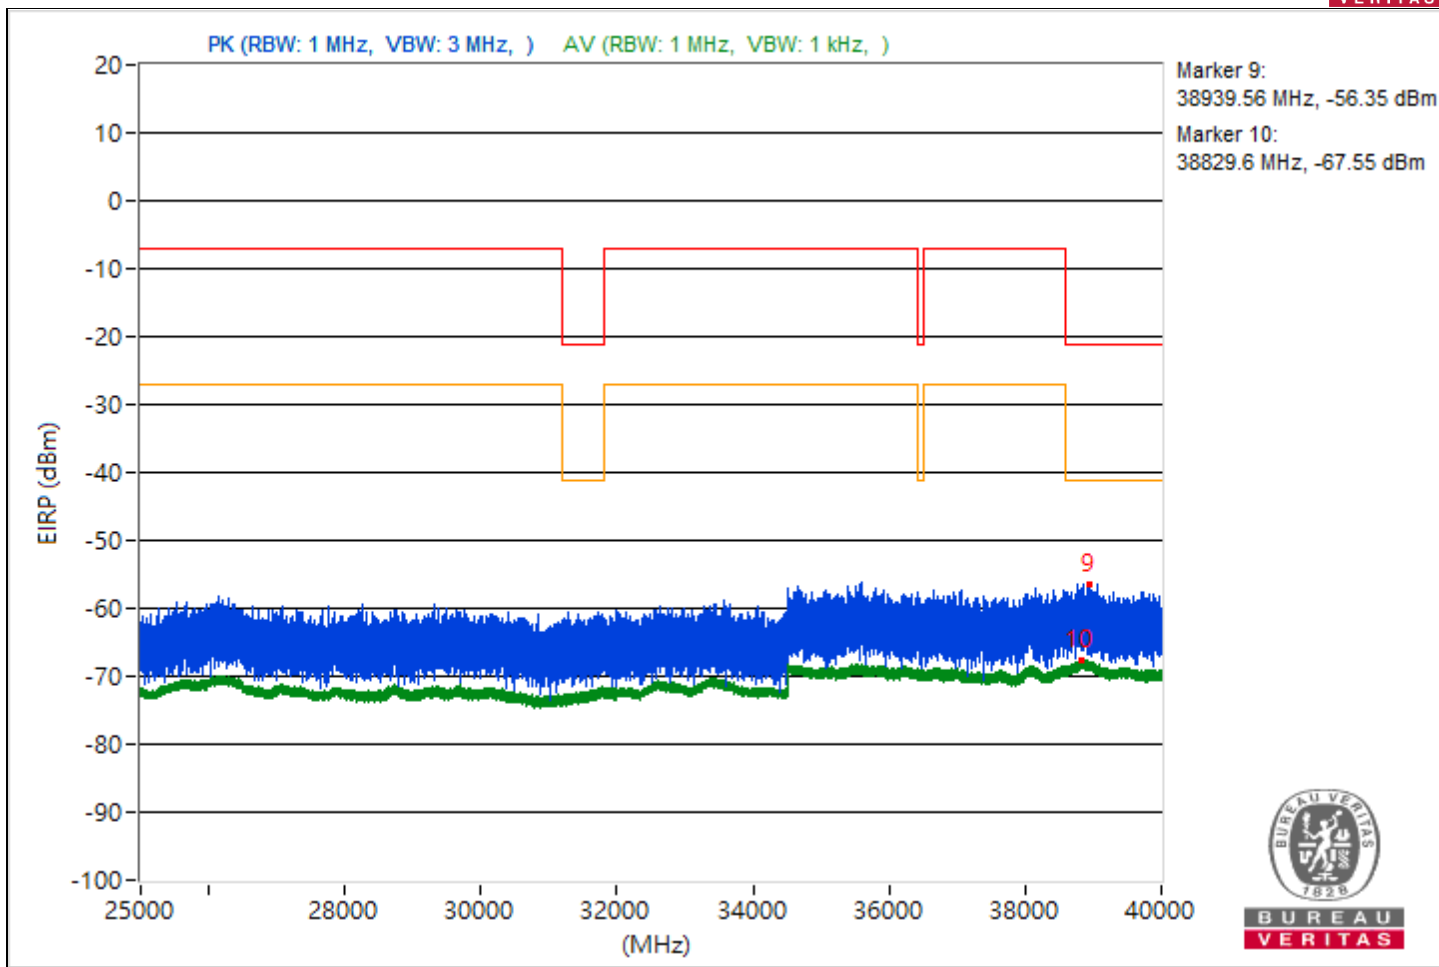





RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.5	43.96 PK	74	-30.04	-56.22	4.92	-51.3
2	3828	32.67 AV	54	-21.33	-67.51	4.92	-62.59
3	12405.42	43.74 PK	74	-30.26	-56.44	4.92	-51.52
4	7274.1	31.62 AV	54	-22.38	-68.56	4.92	-63.64
5	18999.9	45.38 PK	74	-28.62	-54.8	4.92	-49.88
6	21396.9	33.36 AV	54	-20.64	-66.82	4.92	-61.9
7	22247.8	46.63 PK	74	-27.37	-53.55	4.92	-48.63
8	23632.8	35.19 AV	54	-18.81	-64.99	4.92	-60.07
9	38955.29	38.99 PK	74	-35.01	-61.19	4.92	-56.27
10	38903.47	27.67 AV	54	-26.33	-72.51	4.92	-67.59

Note: Margin value = Emission Level - Limit value

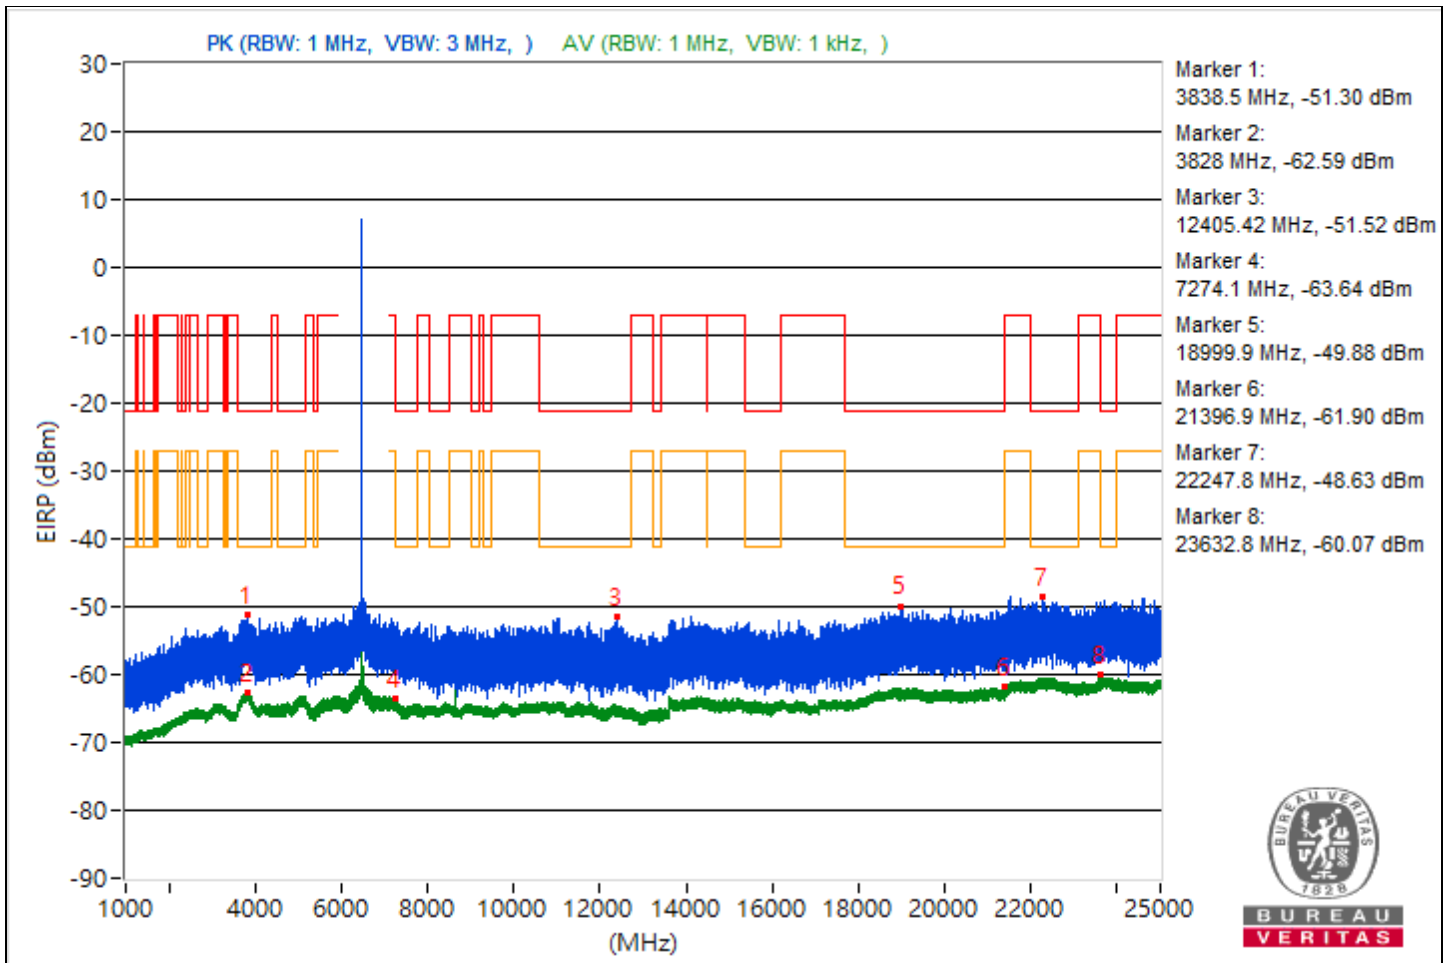

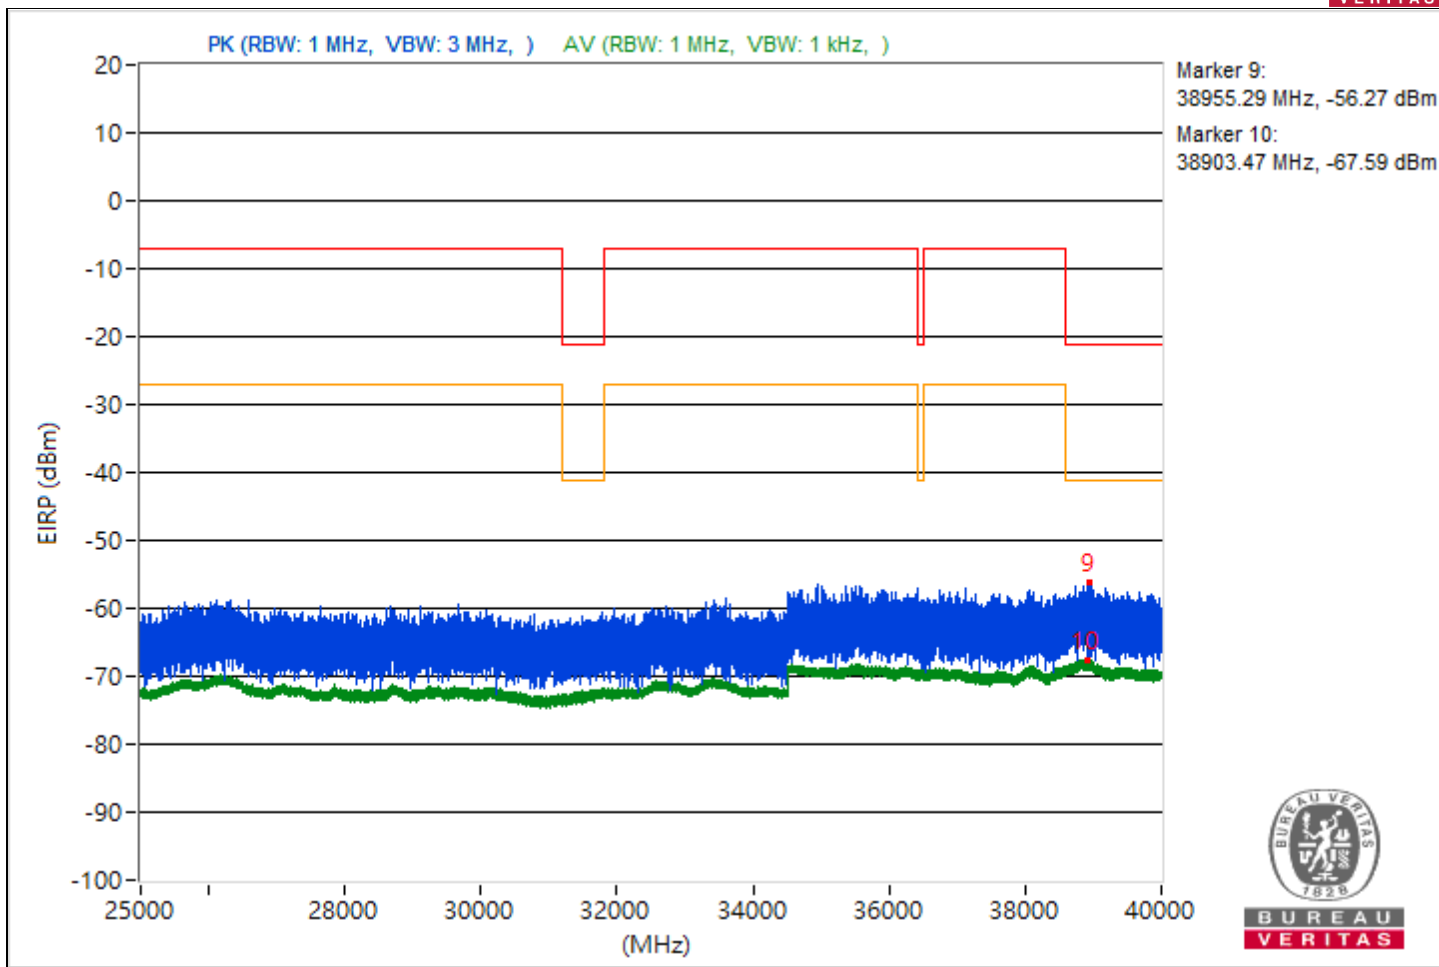





RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.42	44.81 PK	74	-29.19	-55.37	4.92	-50.45
2	3810.58	32.54 AV	54	-21.46	-67.64	4.92	-62.72
3	11101.78	43.44 PK	74	-30.56	-56.74	4.92	-51.82
4	7271.92	31.75 AV	54	-22.25	-68.43	4.92	-63.51
5	19194.3	46.43 PK	74	-27.57	-53.75	4.92	-48.83
6	21138.5	33.45 AV	54	-20.55	-66.73	4.92	-61.81
7	23628.7	47.13 PK	74	-26.87	-53.05	4.92	-48.13
8	22415.4	34.82 AV	54	-19.18	-65.36	4.92	-60.44
9	38791.2	38.71 PK	74	-35.29	-61.47	4.92	-56.55
10	38824.89	27.76 AV	54	-26.24	-72.42	4.92	-67.5

Note: Margin value = Emission Level - Limit value

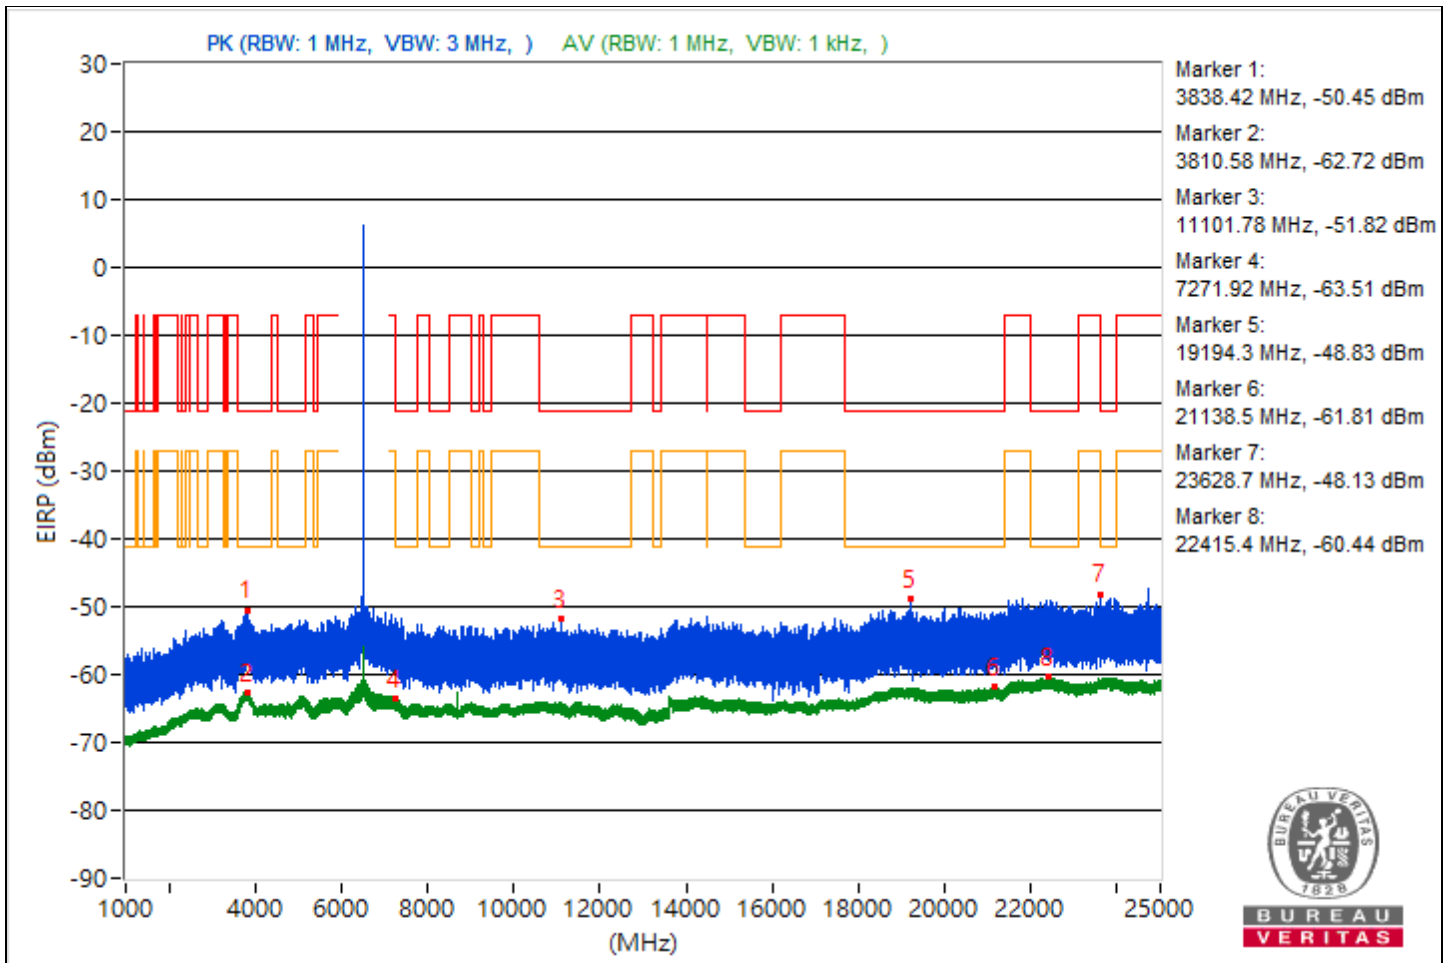

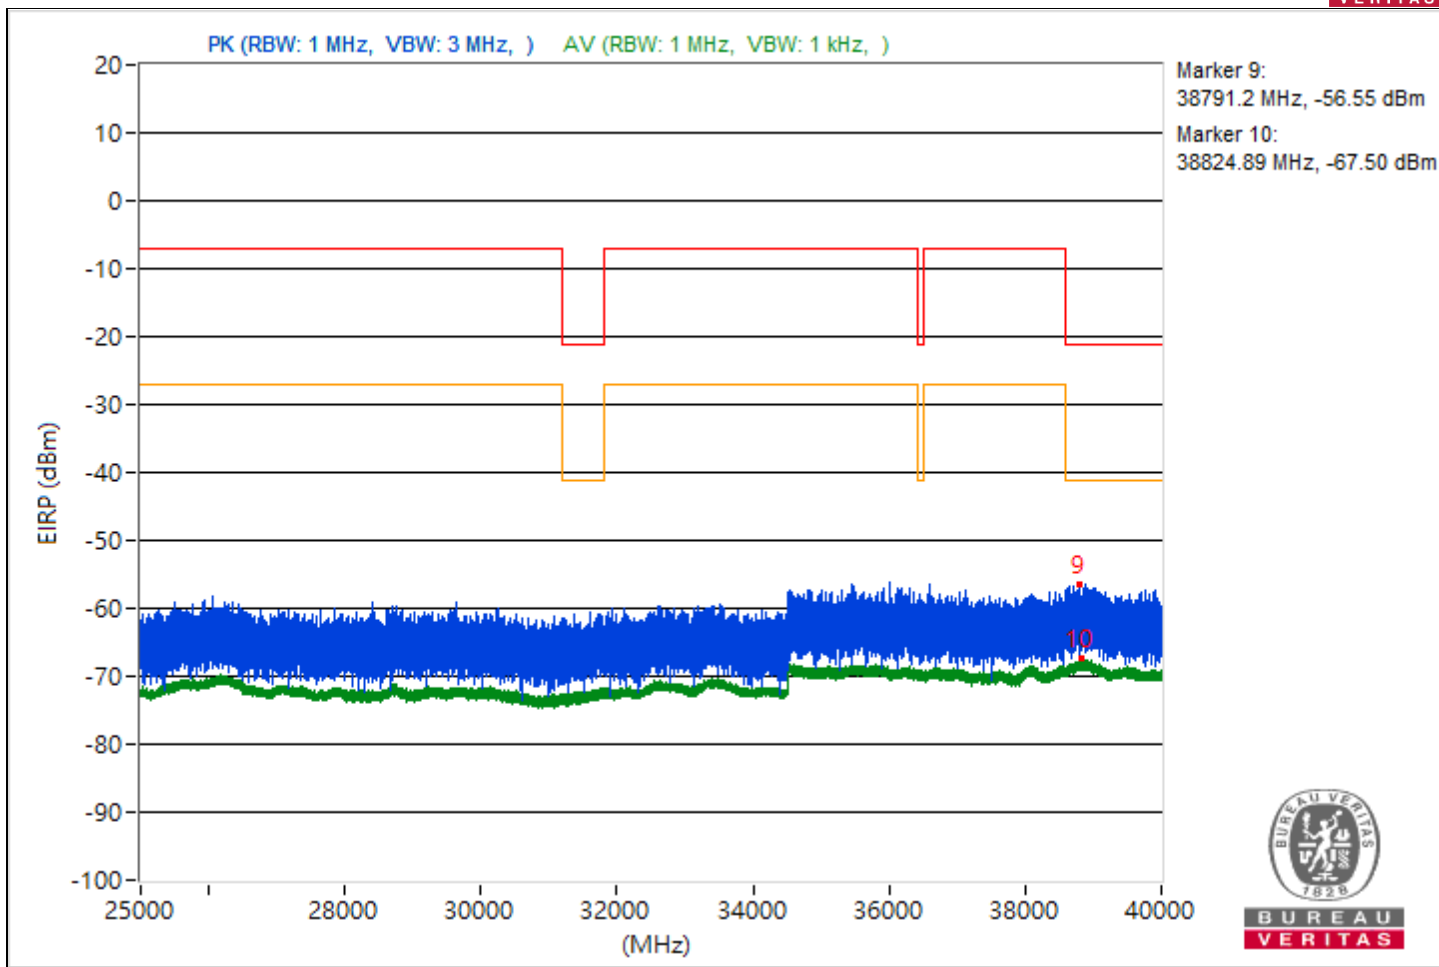





RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3869.22	43.99 PK	74	-30.01	-56.19	4.92	-51.27
2	3807.7	32.66 AV	54	-21.34	-67.52	4.92	-62.6
3	7369.92	43.6 PK	74	-30.4	-56.58	4.92	-51.66
4	14483.73	31.75 AV	54	-22.25	-68.43	4.92	-63.51
5	19102.8	45.29 PK	74	-28.71	-54.89	4.92	-49.97
6	21104.5	33.56 AV	54	-20.44	-66.62	4.92	-61.7
7	22633.8	46.95 PK	74	-27.05	-53.23	4.92	-48.31
8	23644.9	34.82 AV	54	-19.18	-65.36	4.92	-60.44
9	38727.29	40 PK	74	-34	-60.18	4.92	-55.26
10	38862.84	27.7 AV	54	-26.3	-72.48	4.92	-67.56

Note: Margin value = Emission Level - Limit value

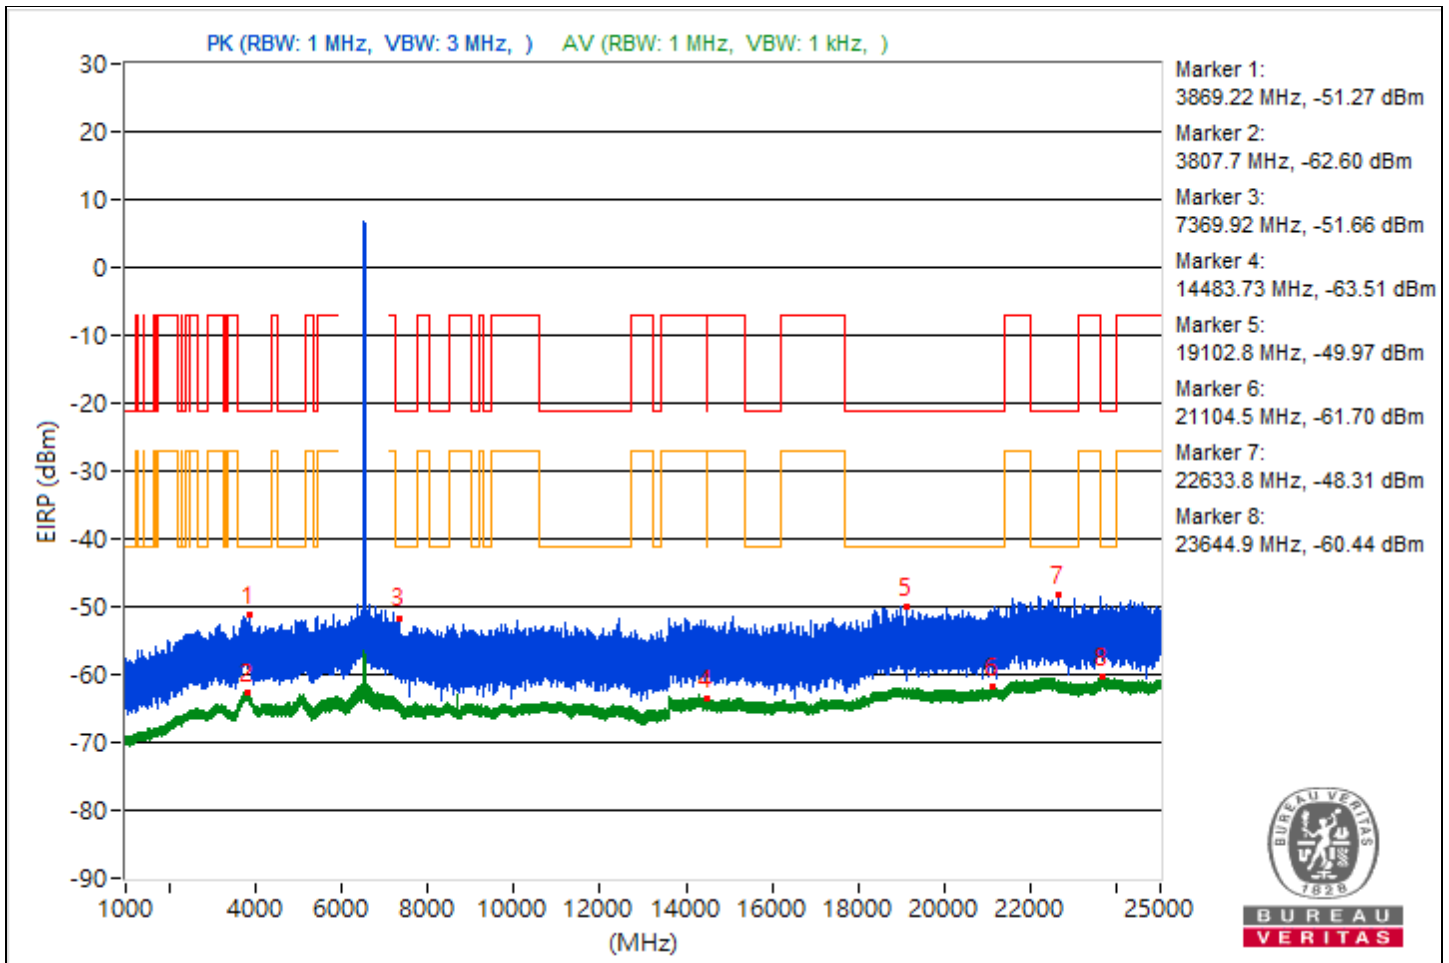

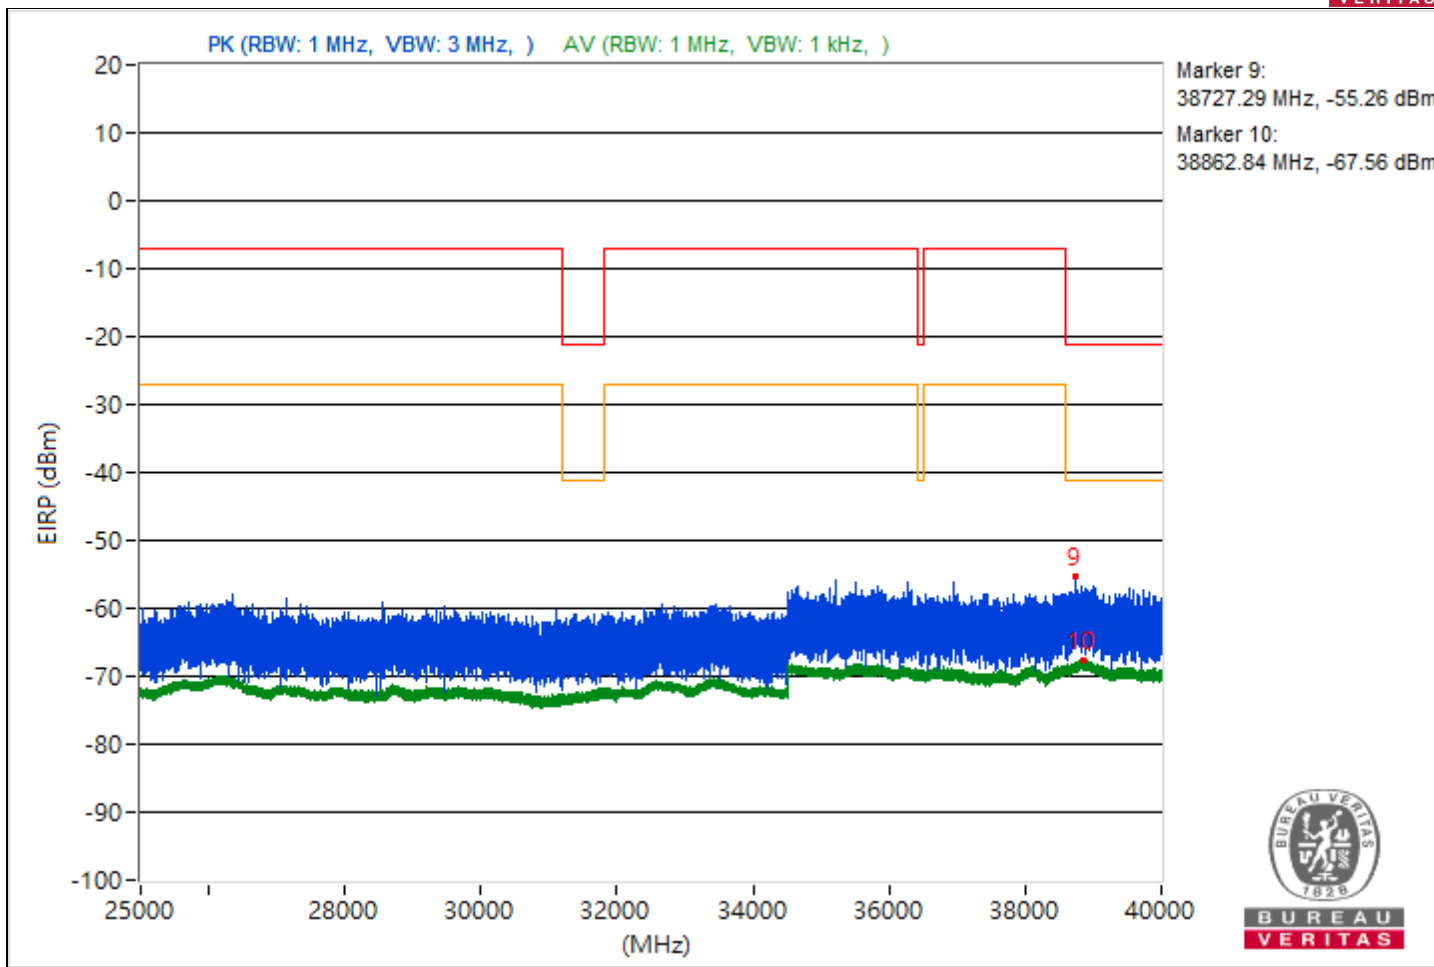





RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3881.9	45.05 PK	74	-28.95	-55.13	4.92	-50.21
2	3799.92	32.57 AV	54	-21.43	-67.61	4.92	-62.69
3	11845.78	43.45 PK	74	-30.55	-56.73	4.92	-51.81
4	7271.3	32.19 AV	54	-21.81	-67.99	4.92	-63.07
5	21093	46.59 PK	74	-27.41	-53.59	4.92	-48.67
6	20816.1	33.51 AV	54	-20.49	-66.67	4.92	-61.75
7	23754.3	46.83 PK	74	-27.17	-53.35	4.92	-48.43
8	22434.2	34.78 AV	54	-19.22	-65.4	4.92	-60.48
9	38747.29	39.55 PK	74	-34.45	-60.63	4.92	-55.71
10	38844.36	27.71 AV	54	-26.29	-72.47	4.92	-67.55

Note: Margin value = Emission Level - Limit value

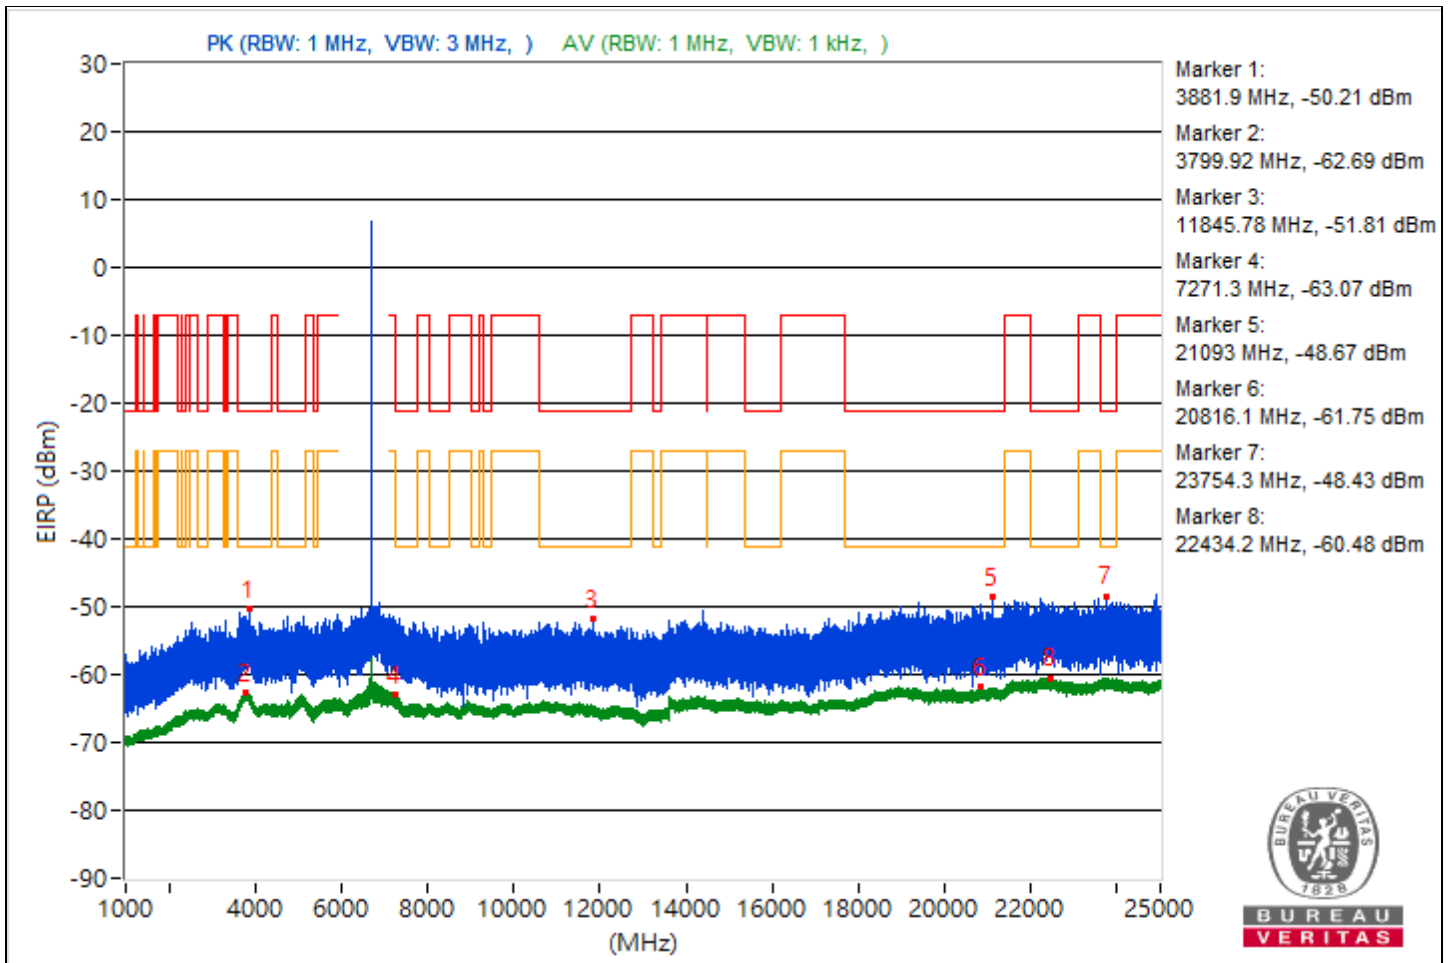

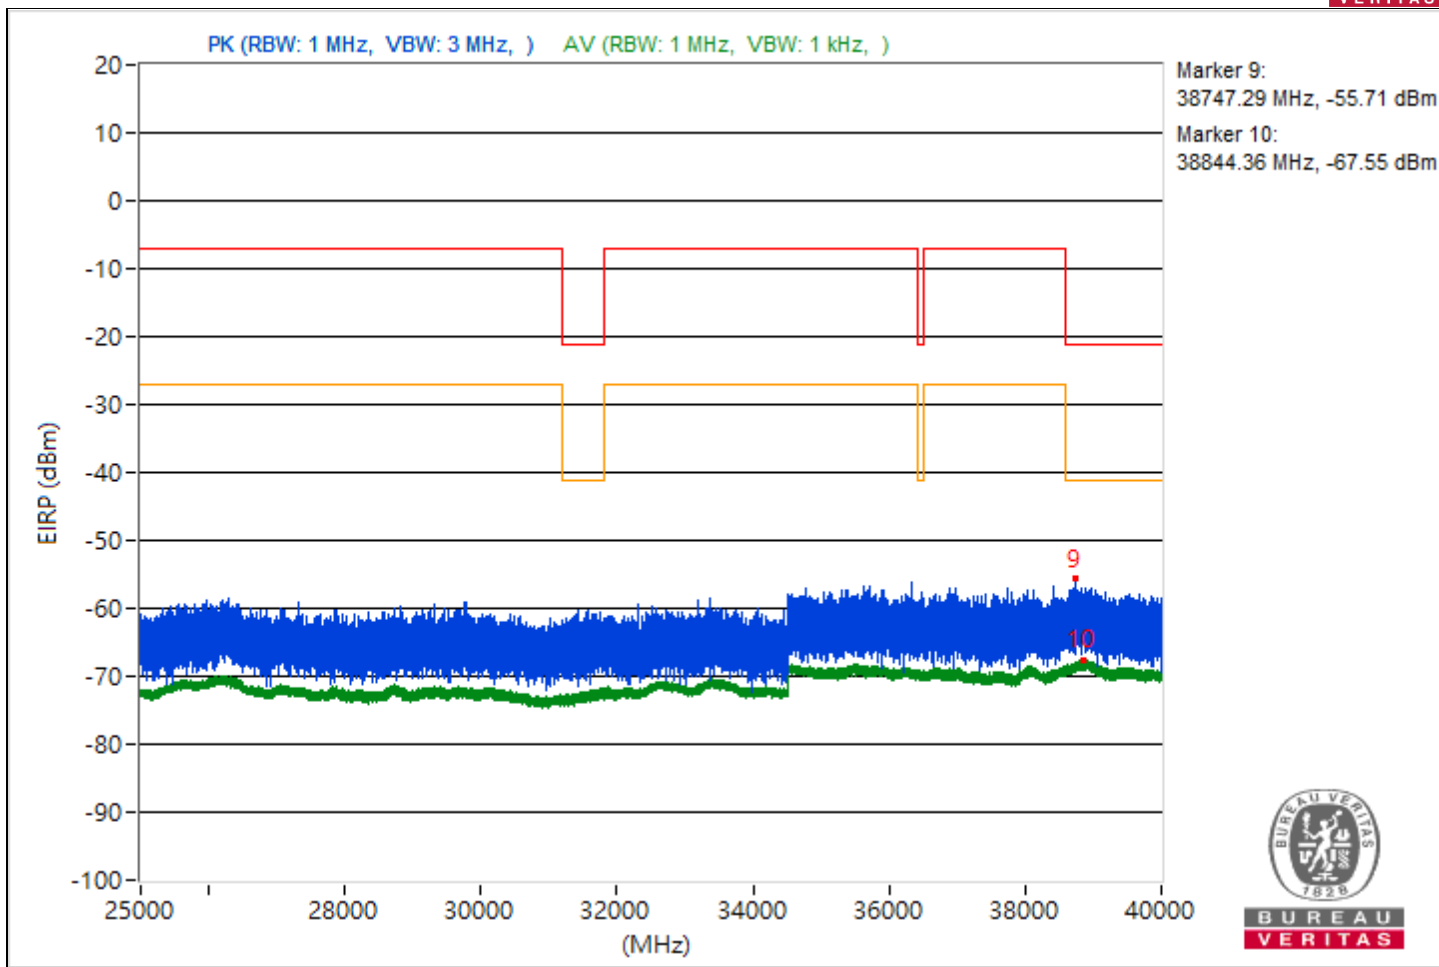




BUREAU VERITAS


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.63	44.23 PK	74	-29.77	-55.95	4.92	-51.03
2	3815.17	32.72 AV	54	-21.28	-67.46	4.92	-62.54
3	7259.79	43.61 PK	74	-30.39	-56.57	4.92	-51.65
4	7258.23	32.47 AV	54	-21.53	-67.71	4.92	-62.79
5	18929.6	45.82 PK	74	-28.18	-54.36	4.92	-49.44
6	19315.7	33.37 AV	54	-20.63	-66.81	4.92	-61.89
7	22461.2	46.14 PK	74	-27.86	-54.04	4.92	-49.12
8	23690.4	34.86 AV	54	-19.14	-65.32	4.92	-60.4
9	38631.56	39.12 PK	74	-34.88	-61.06	4.92	-56.14
10	38885.78	27.88 AV	54	-26.12	-72.3	4.92	-67.38

Note: Margin value = Emission Level - Limit value

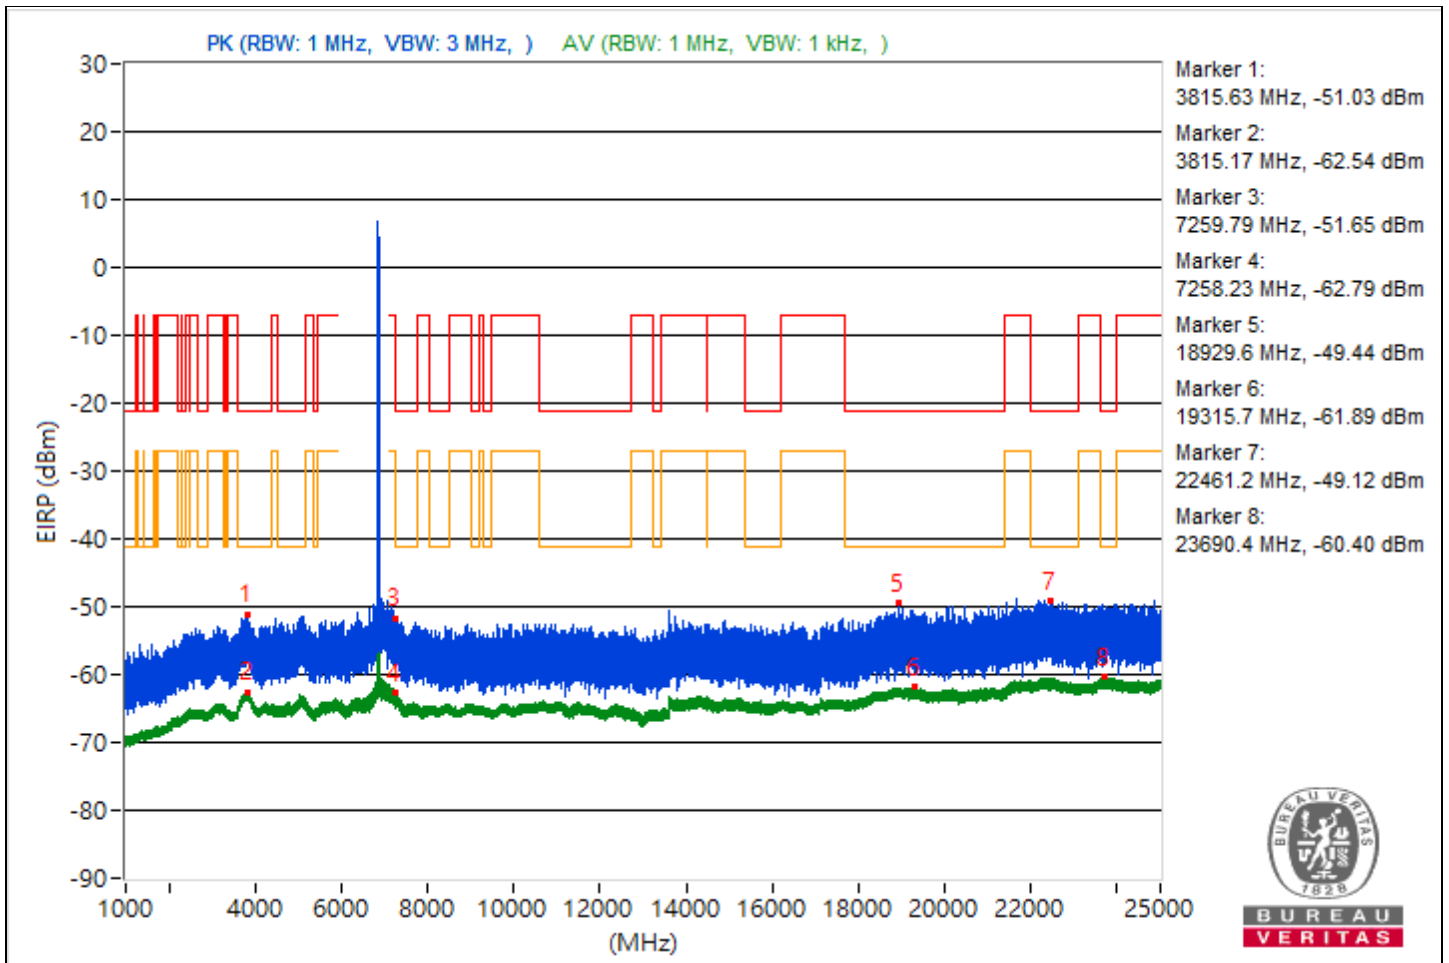

BUREAU VERITAS

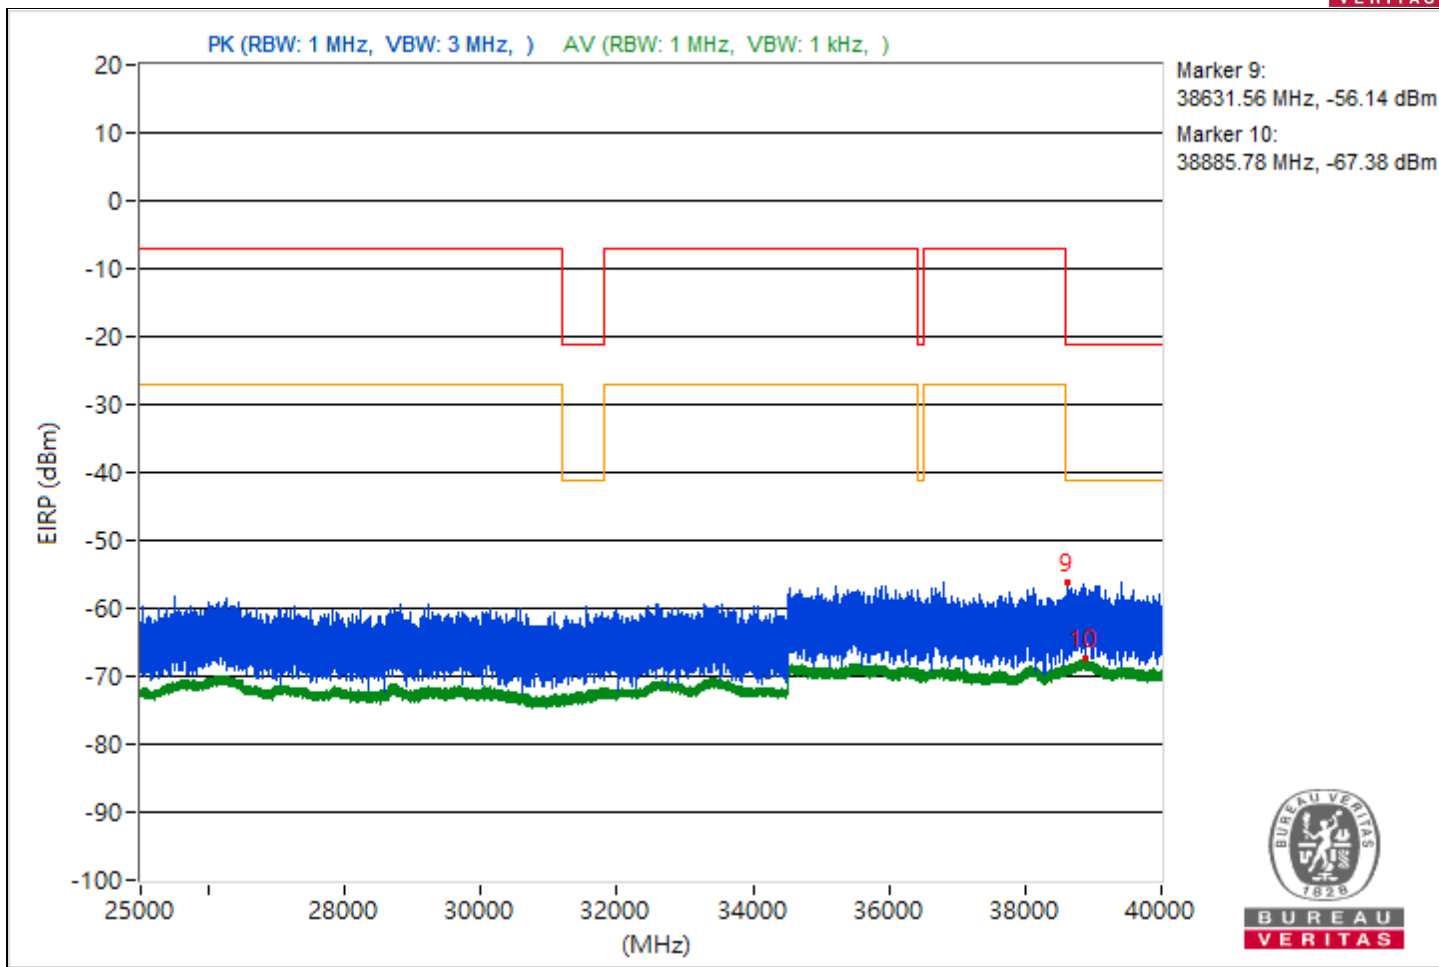





RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4982.46	44.38 PK	74	-29.62	-55.8	4.92	-50.88
2	3807.31	32.67 AV	54	-21.33	-67.51	4.92	-62.59
3	10629.96	45.13 PK	74	-28.87	-55.05	4.92	-50.13
4	7255.74	32.78 AV	54	-21.22	-67.4	4.92	-62.48
5	19858	45.29 PK	74	-28.71	-54.89	4.92	-49.97
6	21122.6	33.5 AV	54	-20.5	-66.68	4.92	-61.76
7	23625	46.65 PK	74	-27.35	-53.53	4.92	-48.61
8	23745.5	34.99 AV	54	-19.01	-65.19	4.92	-60.27
9	39374.49	38.93 PK	74	-35.07	-61.25	4.92	-56.33
10	38919.11	27.61 AV	54	-26.39	-72.57	4.92	-67.65

Note: Margin value = Emission Level - Limit value

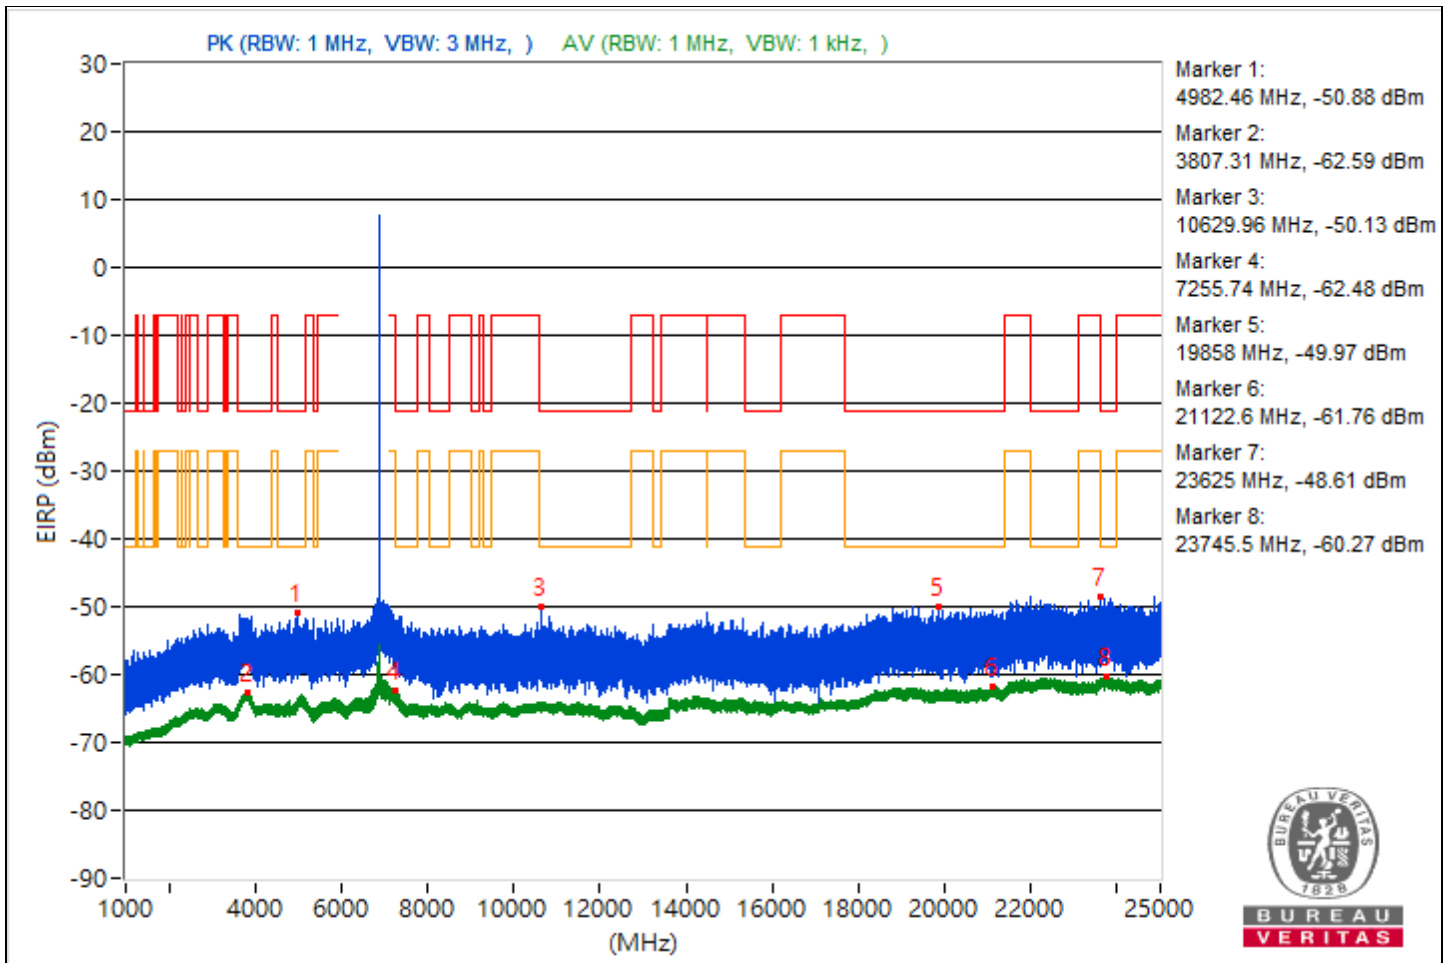

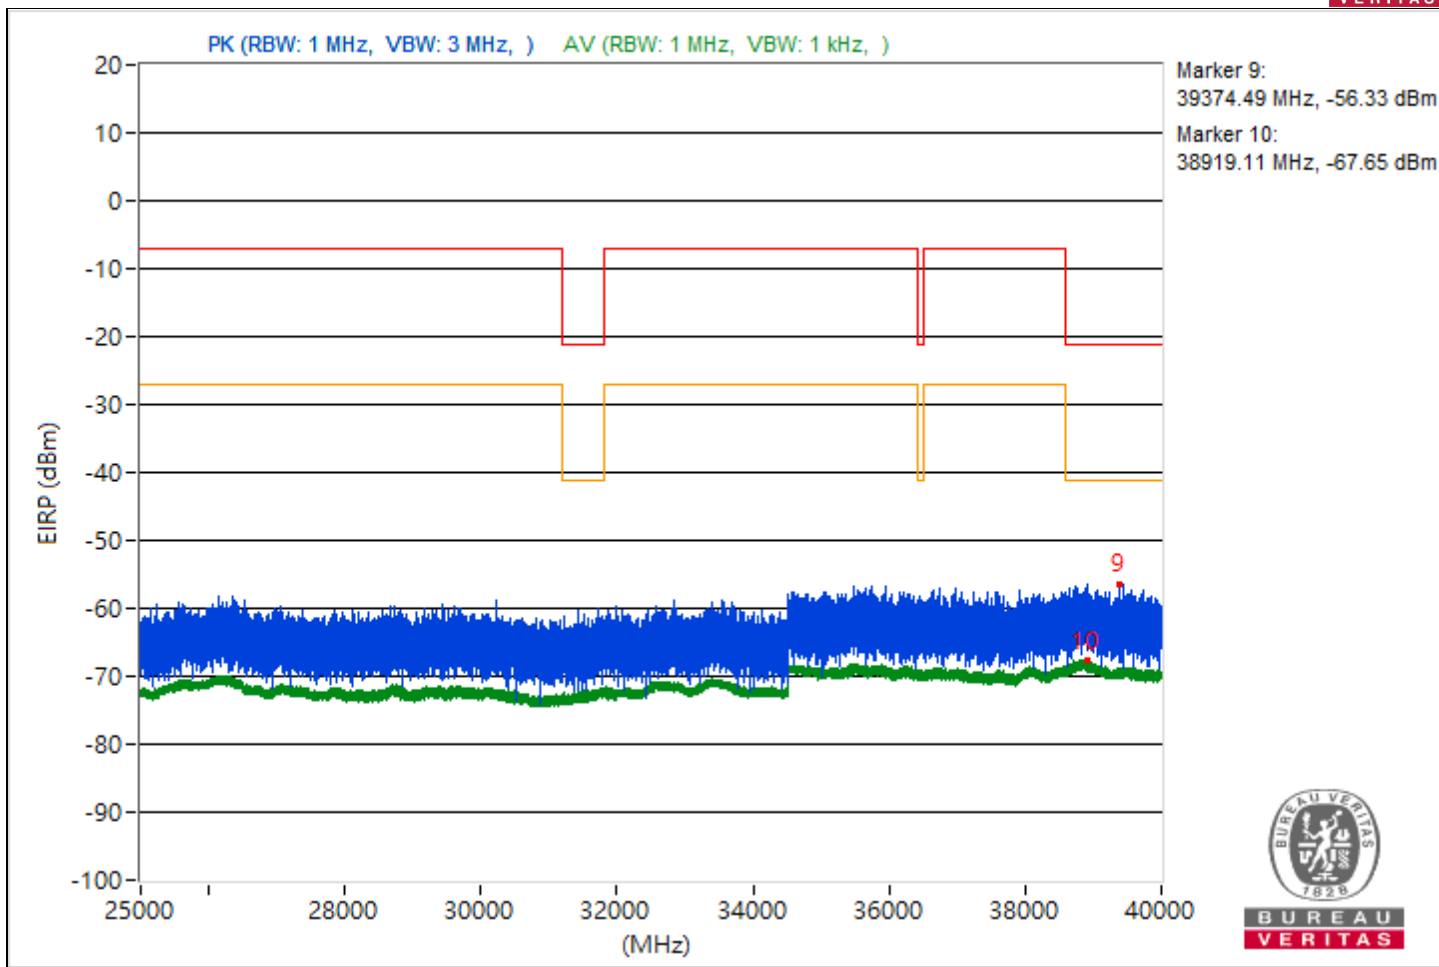





RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.68	43.65 PK	74	-30.35	-56.53	4.92	-51.61
2	3825.36	32.73 AV	54	-21.27	-67.45	4.92	-62.53
3	7316.18	44.94 PK	74	-29.06	-55.24	4.92	-50.32
4	7271.46	33.93 AV	54	-20.07	-66.25	4.92	-61.33
5	18835.4	45.54 PK	74	-28.46	-54.64	4.92	-49.72
6	18857.2	33.4 AV	54	-20.6	-66.78	4.92	-61.86
7	22689.4	46.65 PK	74	-27.35	-53.53	4.92	-48.61
8	22229.3	34.85 AV	54	-19.15	-65.33	4.92	-60.41
9	38895.38	39.34 PK	74	-34.66	-60.84	4.92	-55.92
10	38833.78	27.67 AV	54	-26.33	-72.51	4.92	-67.59

Note: Margin value = Emission Level - Limit value

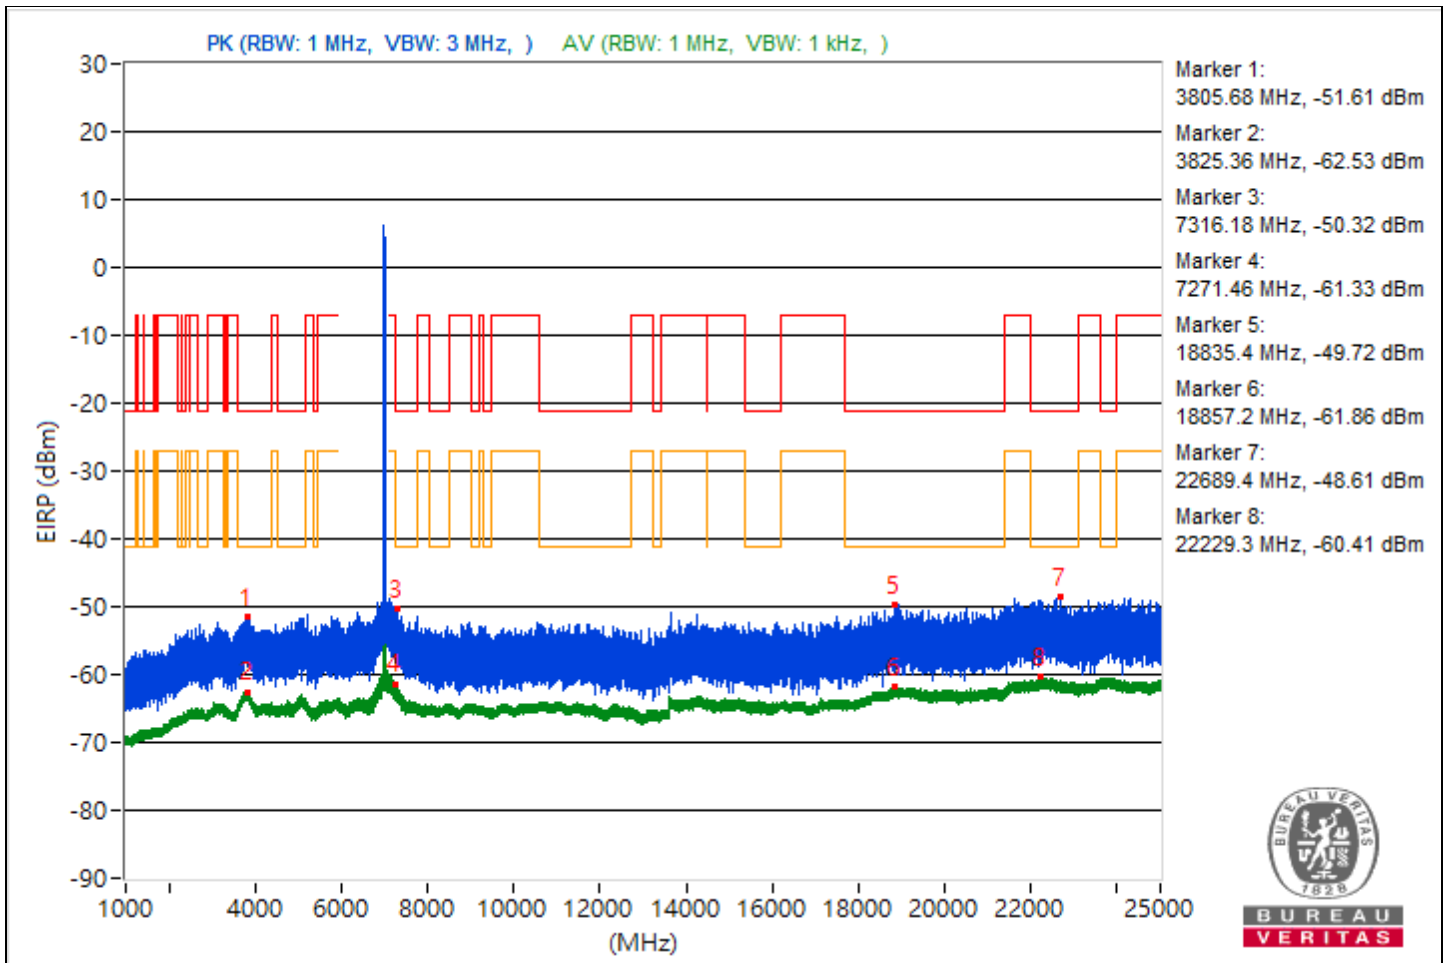

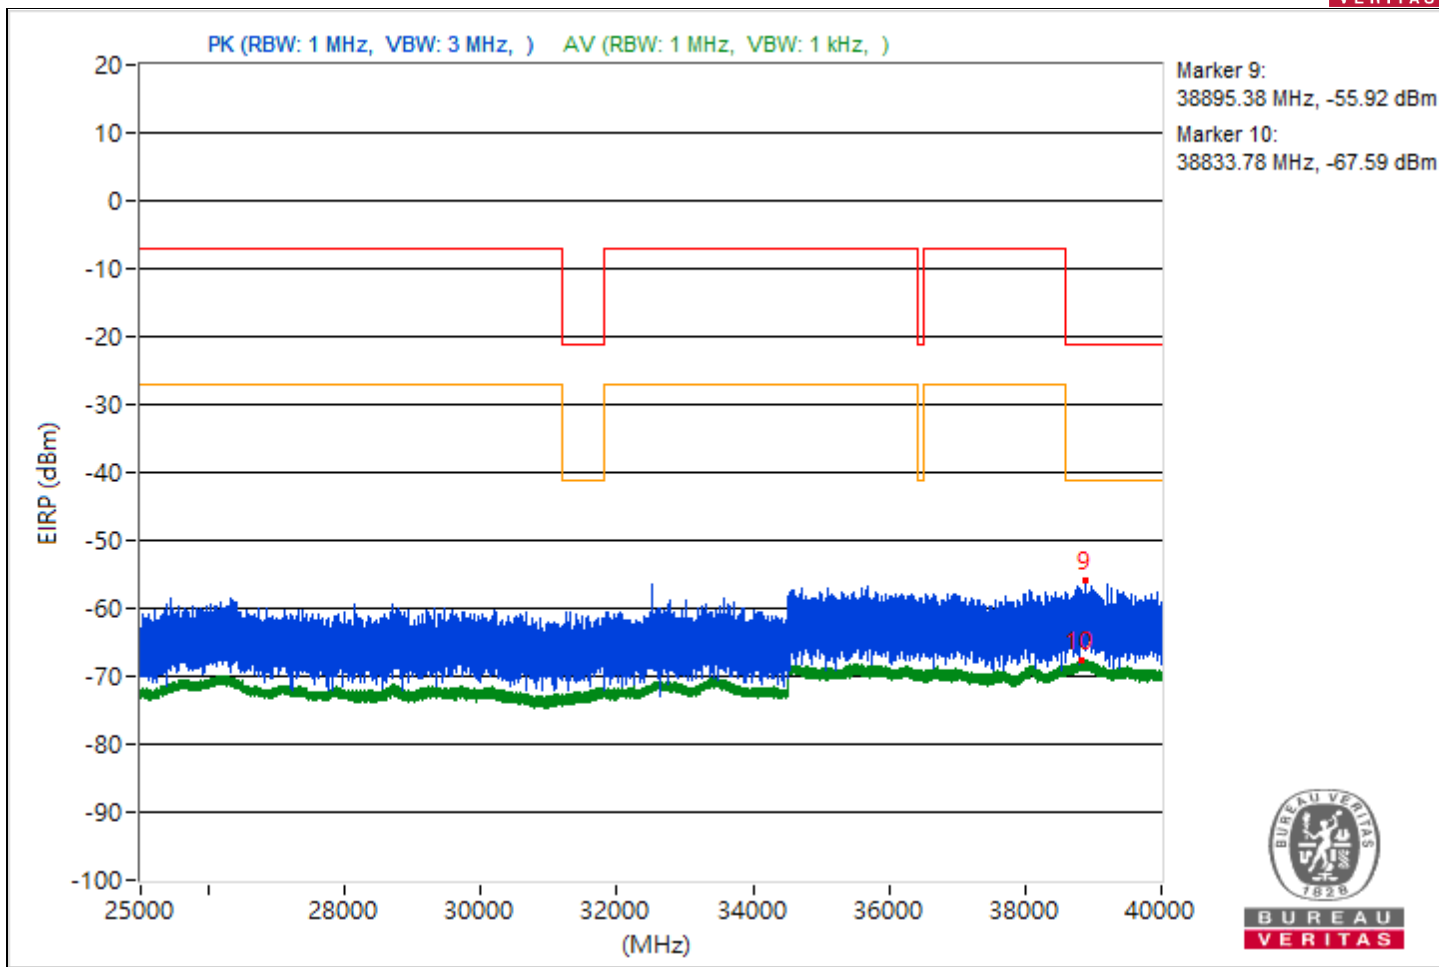





RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.01	44.11 PK	74	-29.89	-56.07	4.92	-51.15
2	3786.39	32.63 AV	54	-21.37	-67.55	4.92	-62.63
3	7257.77	44.86 PK	74	-29.14	-55.32	4.92	-50.4
4	7252.32	34.94 AV	54	-19.06	-65.24	4.92	-60.32
5	19951	45.44 PK	74	-28.56	-54.74	4.92	-49.82
6	21161.9	33.44 AV	54	-20.56	-66.74	4.92	-61.82
7	23043.4	46.93 PK	74	-27.07	-53.25	4.92	-48.33
8	22263.2	34.86 AV	54	-19.14	-65.32	4.92	-60.4
9	38659.02	39.16 PK	74	-34.84	-61.02	4.92	-56.1
10	38918.31	27.72 AV	54	-26.28	-72.46	4.92	-67.54

Note: Margin value = Emission Level - Limit value

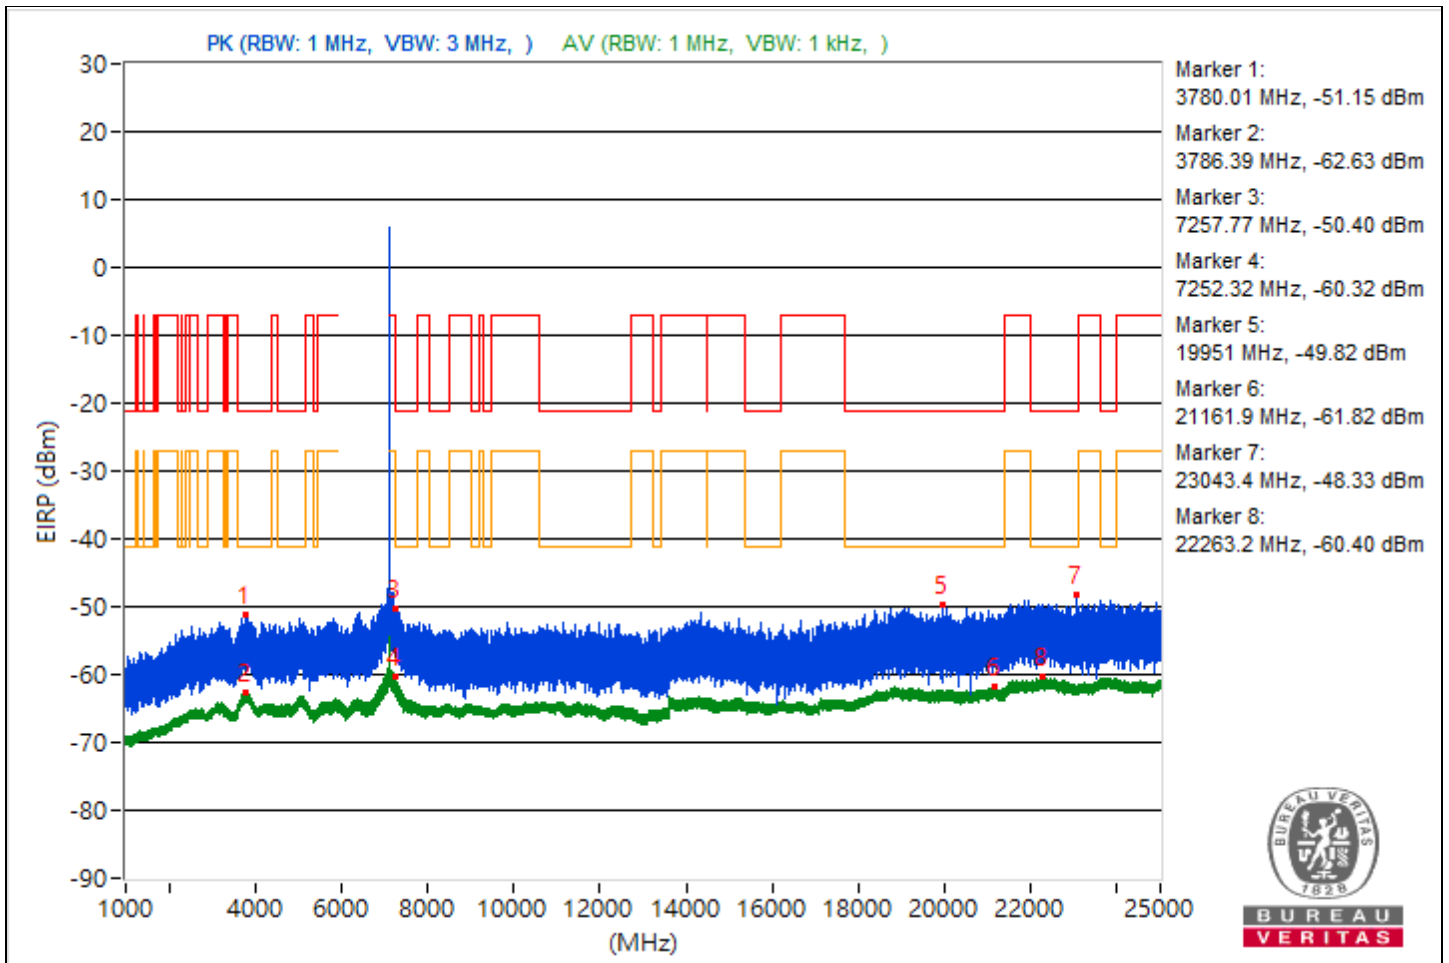

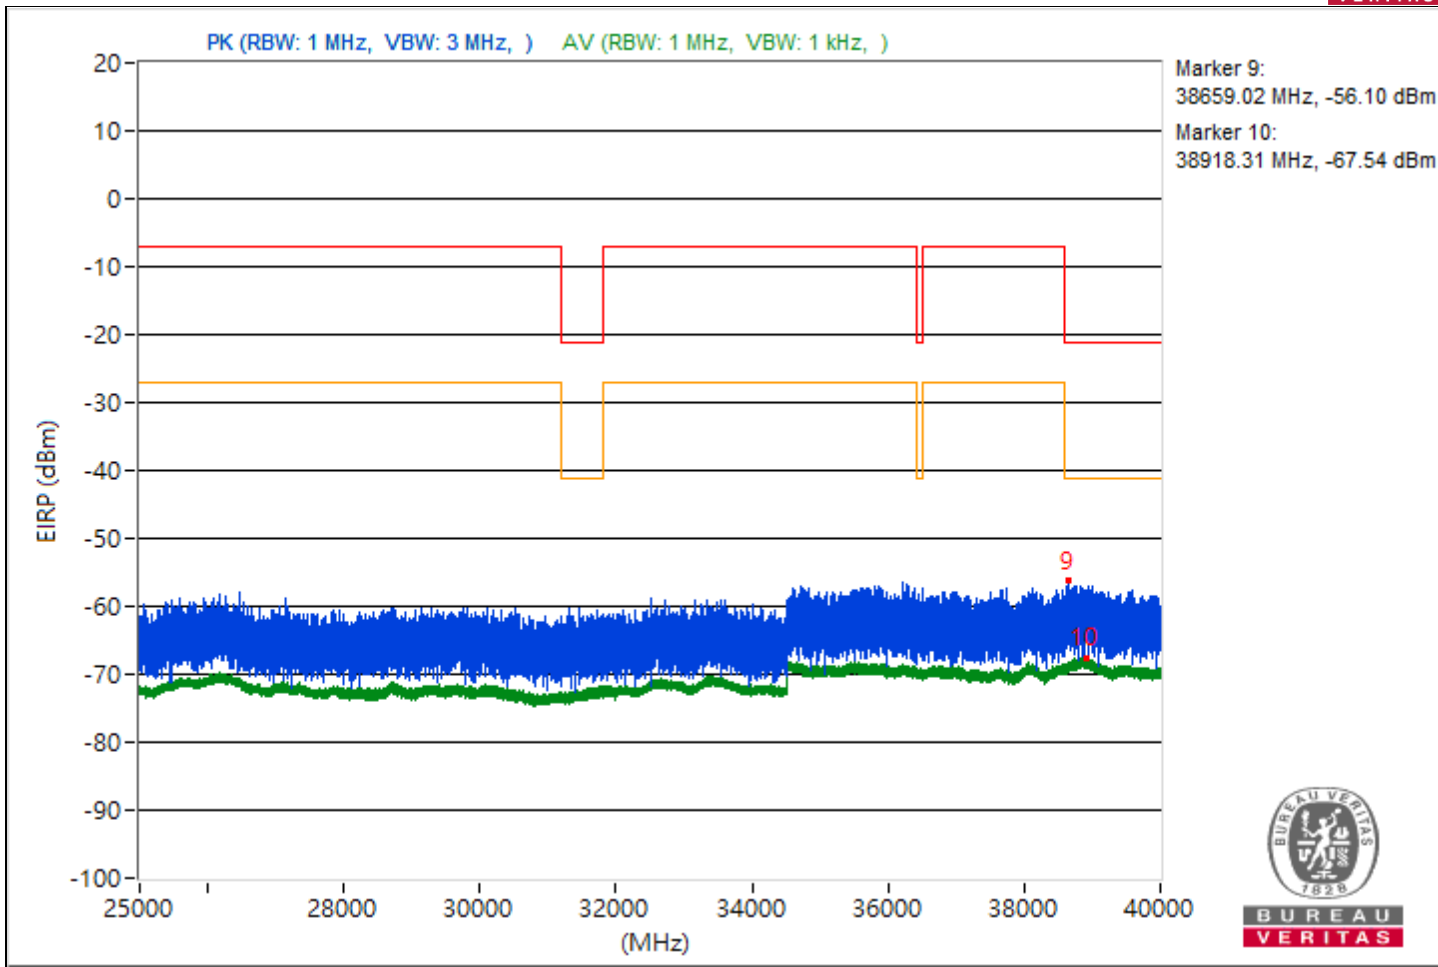


Conducted Band Edges

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5957.18	102.55 PK			2.53	4.76	7.29
2	*5953.55	91.99 AV			-8.03	4.76	-3.27
3	#5903.43	62.54 PK	88.26	-25.72	-37.48	4.76	-32.72
4	#5863.6	50.6 AV	68.26	-17.66	-49.42	4.76	-44.66

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

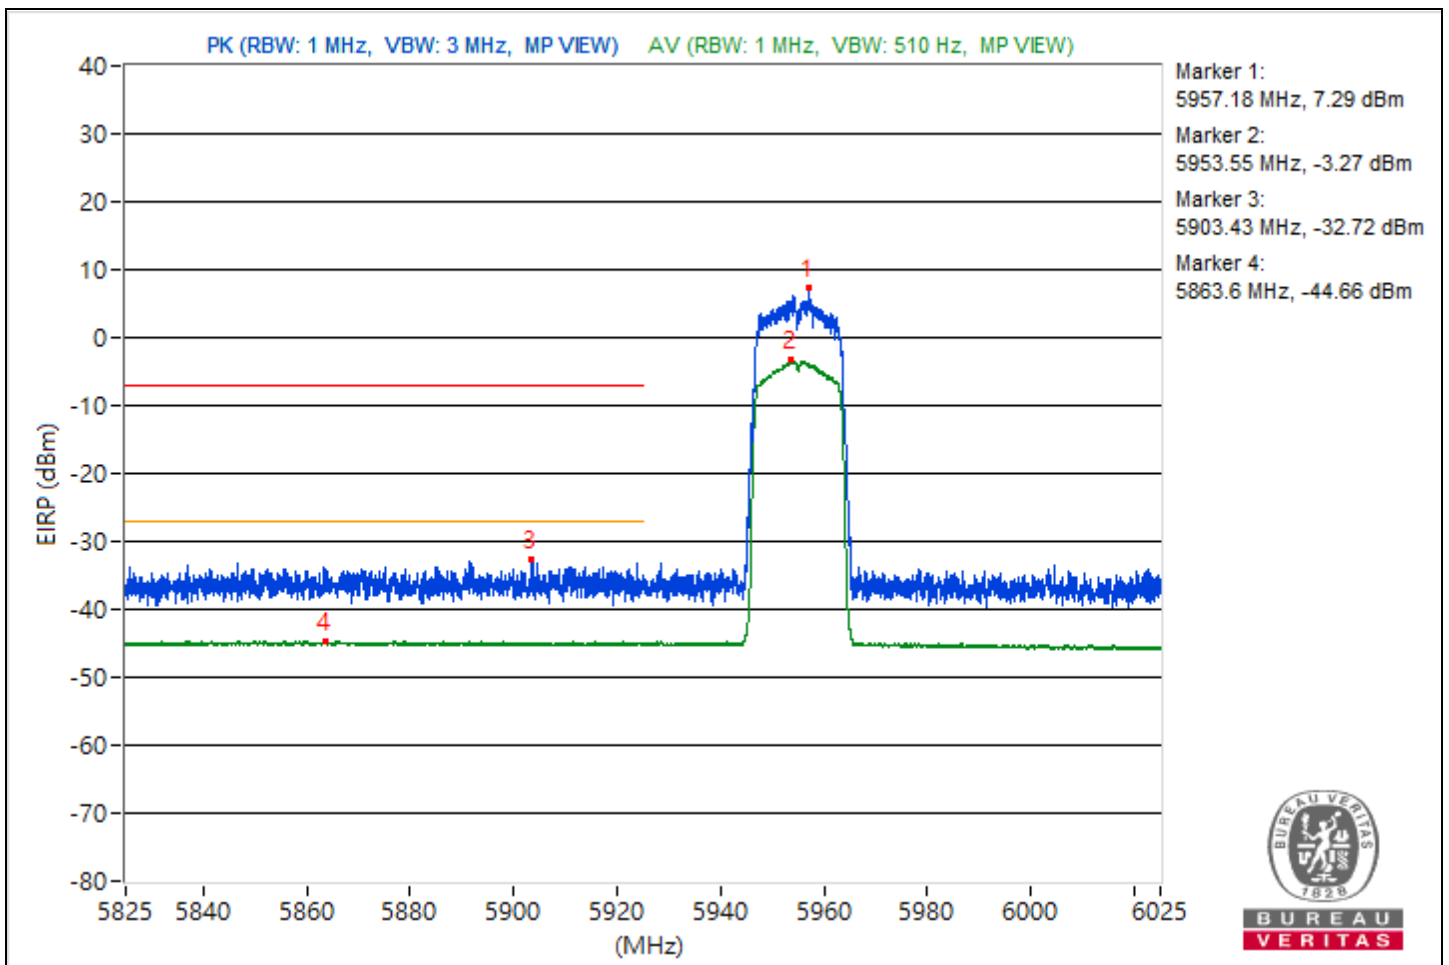


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.15	99.63 PK			0.28	4.09	4.37
2	*7114.27	91.03 AV			-8.32	4.09	-4.23
3	#7125	64.03 PK	88.26	-24.23	-35.32	4.09	-31.23
4	#7125	45.64 AV	68.26	-22.62	-53.71	4.09	-49.62

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

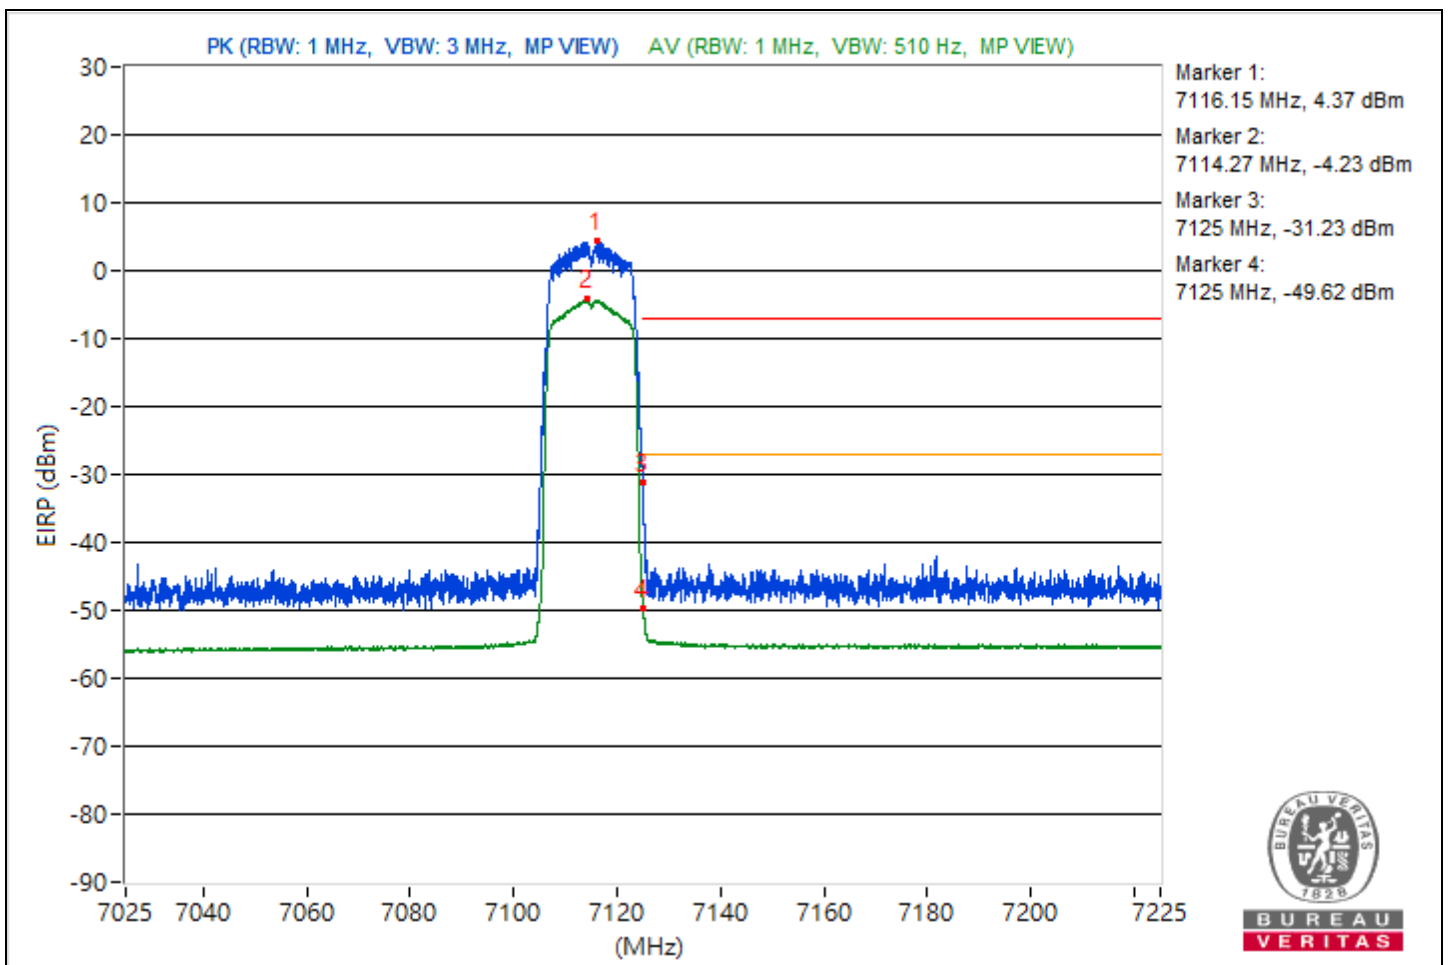





For 1S1T

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3879.8	44.07 PK	74	-29.93	-56.11	4.92	-51.19
2	3802.26	32.67 AV	54	-21.33	-67.51	4.92	-62.59
3	11035.11	43.79 PK	74	-30.21	-56.39	4.92	-51.47
4	14493.33	31.58 AV	54	-22.42	-68.6	4.92	-63.68
5	19443.7	45.43 PK	74	-28.57	-54.75	4.92	-49.83
6	18849.1	33.42 AV	54	-20.58	-66.76	4.92	-61.84
7	22471.6	47.22 PK	74	-26.78	-52.96	4.92	-48.04
8	22445.4	34.85 AV	54	-19.15	-65.33	4.92	-60.41
9	38958.67	38.92 PK	74	-35.08	-61.26	4.92	-56.34
10	38889.87	27.7 AV	54	-26.3	-72.48	4.92	-67.56

Note: Margin value = Emission Level - Limit value

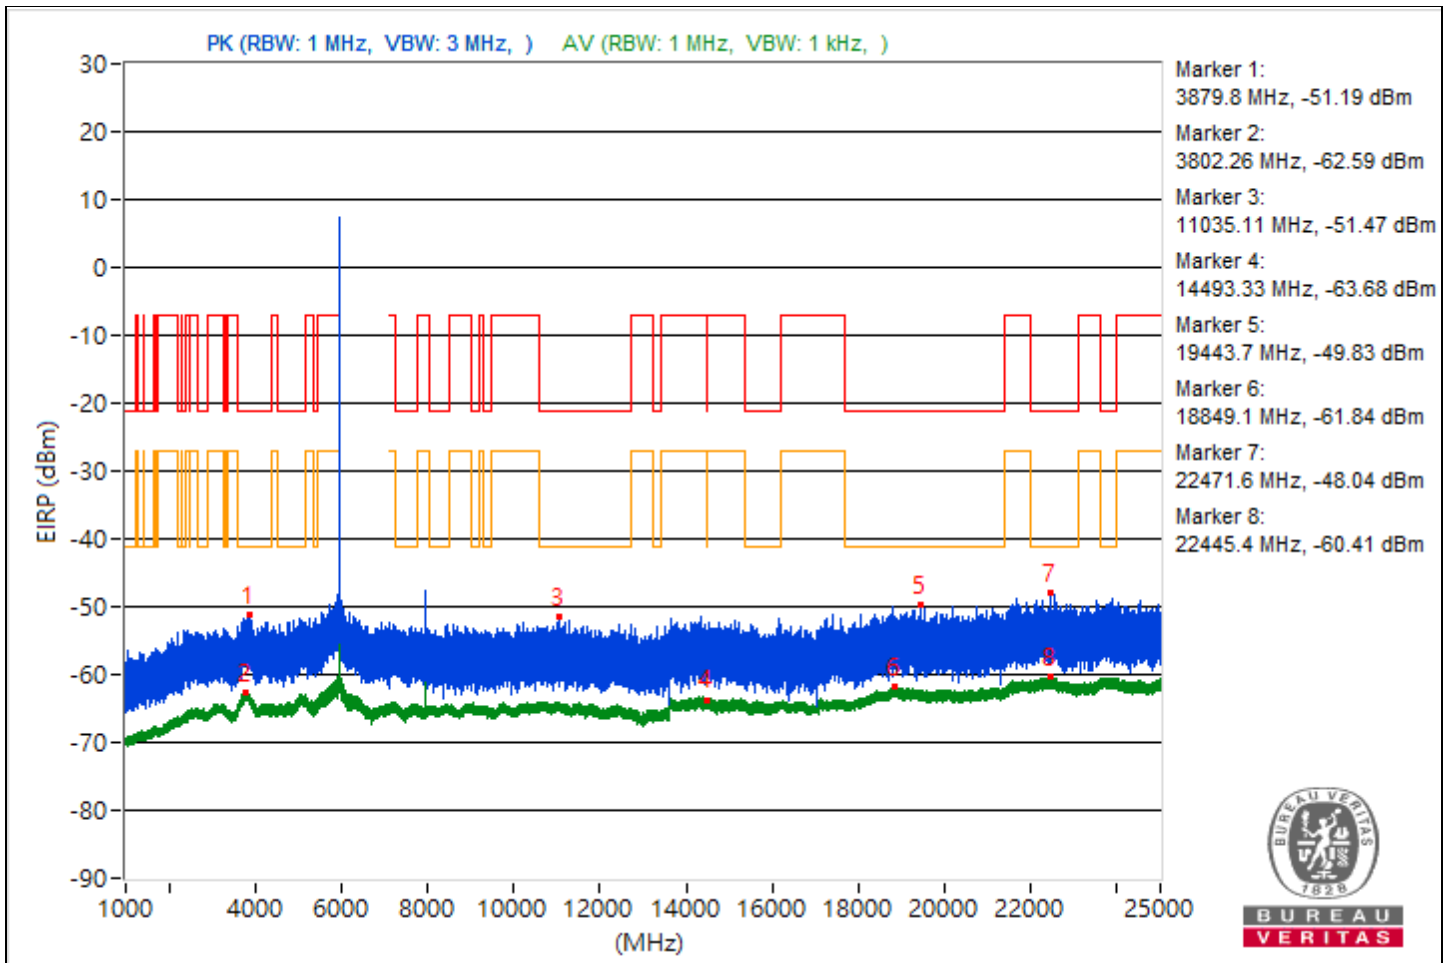

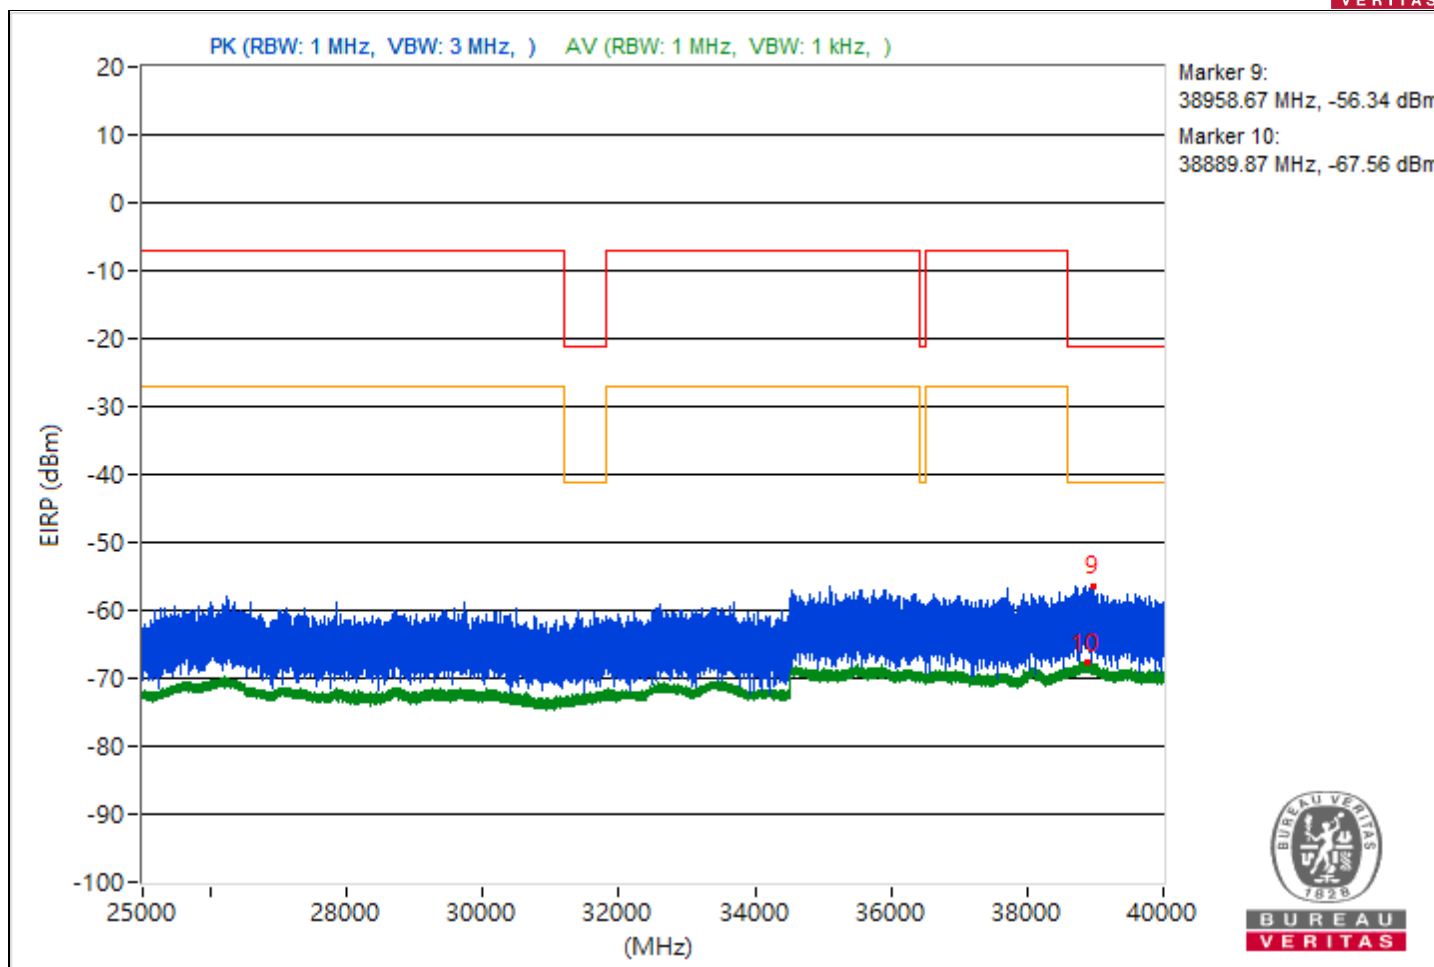





RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.88	44.95 PK	74	-29.05	-55.23	4.92	-50.31
2	3813.14	32.76 AV	54	-21.24	-67.42	4.92	-62.5
3	8233.42	45.47 PK	74	-28.53	-54.71	4.92	-49.79
4	8233.33	43.84 AV	54	-10.16	-56.34	4.92	-51.42
5	19189	46.17 PK	74	-27.83	-54.01	4.92	-49.09
6	21158.2	33.37 AV	54	-20.63	-66.81	4.92	-61.89
7	23670.7	47.02 PK	74	-26.98	-53.16	4.92	-48.24
8	23696.1	34.85 AV	54	-19.15	-65.33	4.92	-60.41
9	38817.96	38.97 PK	74	-35.03	-61.21	4.92	-56.29
10	38849.87	27.92 AV	54	-26.08	-72.26	4.92	-67.34

Note: Margin value = Emission Level - Limit value

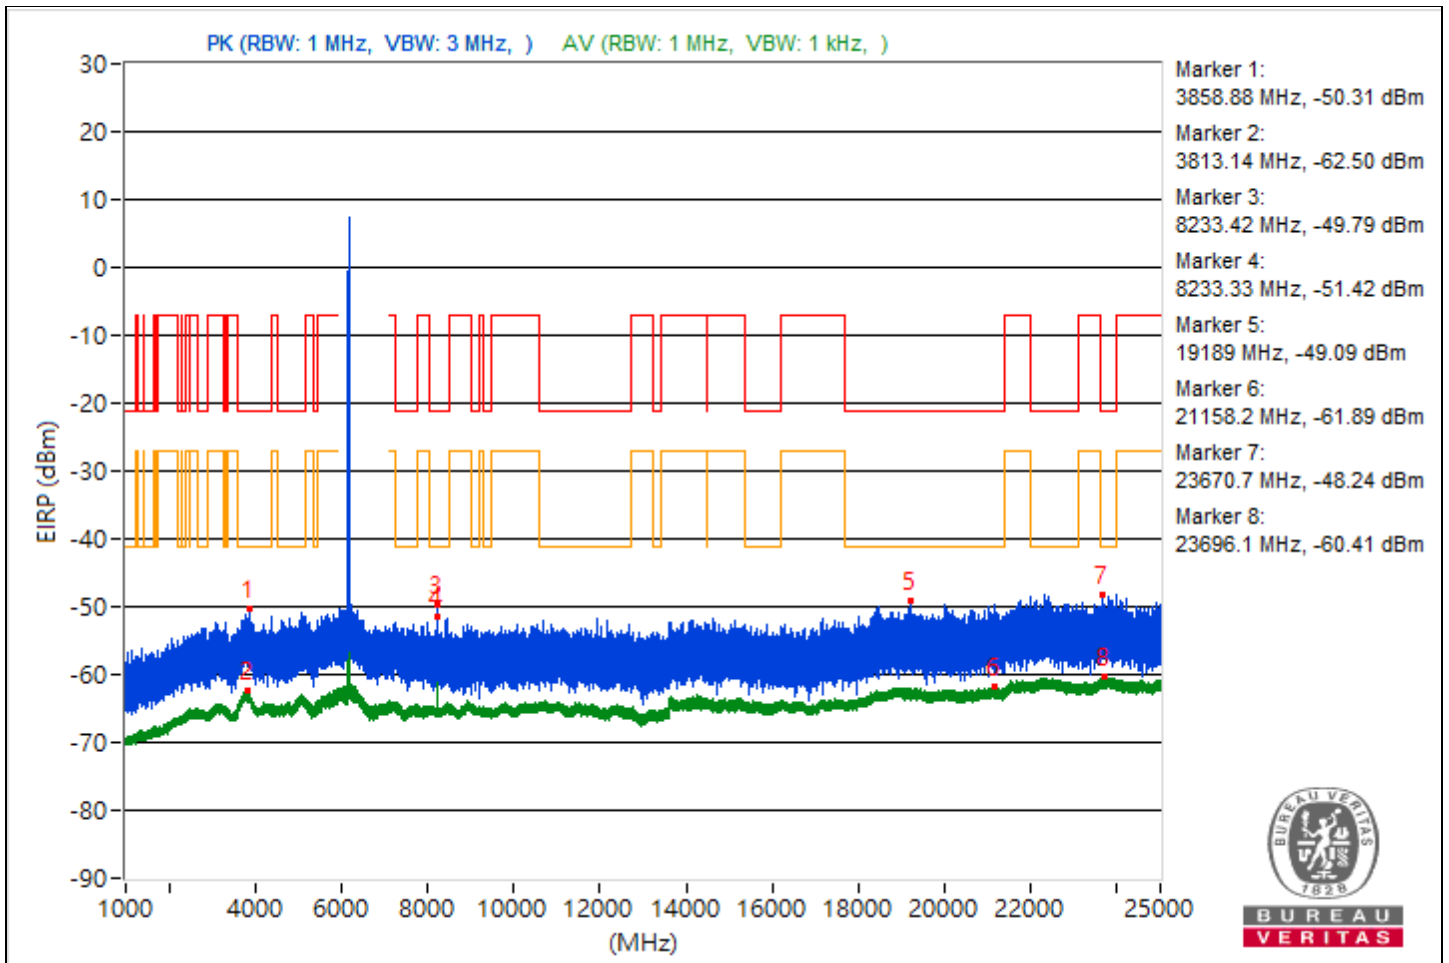

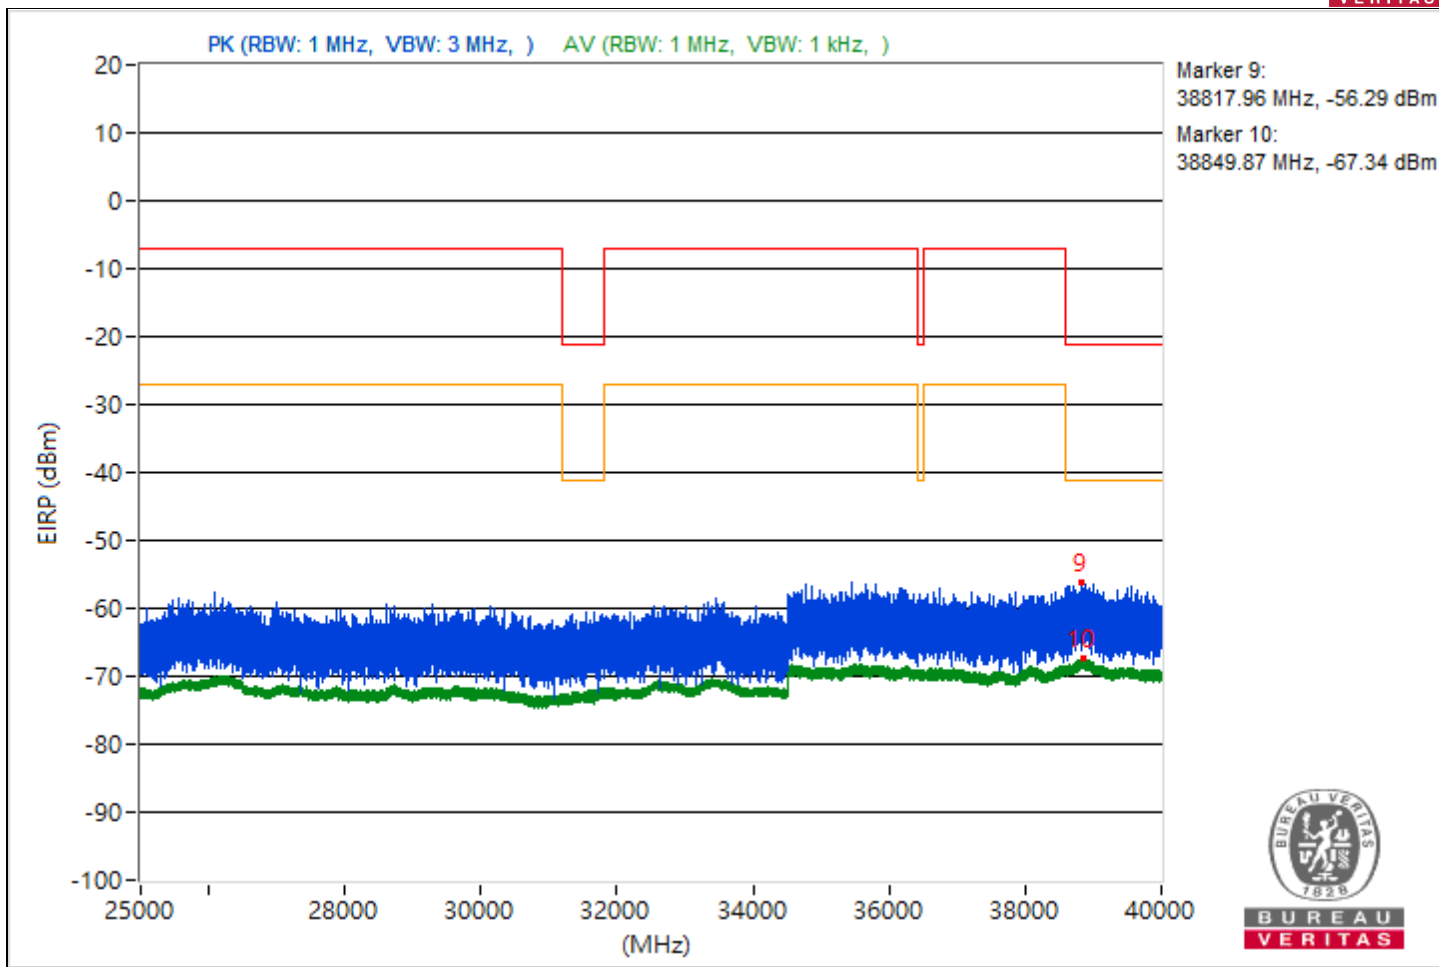





RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.3	45.19 PK	74	-28.81	-54.99	4.92	-50.07
2	3772	32.76 AV	54	-21.24	-67.42	4.92	-62.5
3	7270.6	44.23 PK	74	-29.77	-55.95	4.92	-51.03
4	7263.21	31.63 AV	54	-22.37	-68.55	4.92	-63.63
5	21149.9	46.64 PK	74	-27.36	-53.54	4.92	-48.62
6	21392.9	33.32 AV	54	-20.68	-66.86	4.92	-61.94
7	23810.1	46.52 PK	74	-27.48	-53.66	4.92	-48.74
8	23789.1	34.93 AV	54	-19.07	-65.25	4.92	-60.33
9	39877.16	38.86 PK	74	-35.14	-61.32	4.92	-56.4
10	38860.62	28.09 AV	54	-25.91	-72.09	4.92	-67.17

Note: Margin value = Emission Level - Limit value

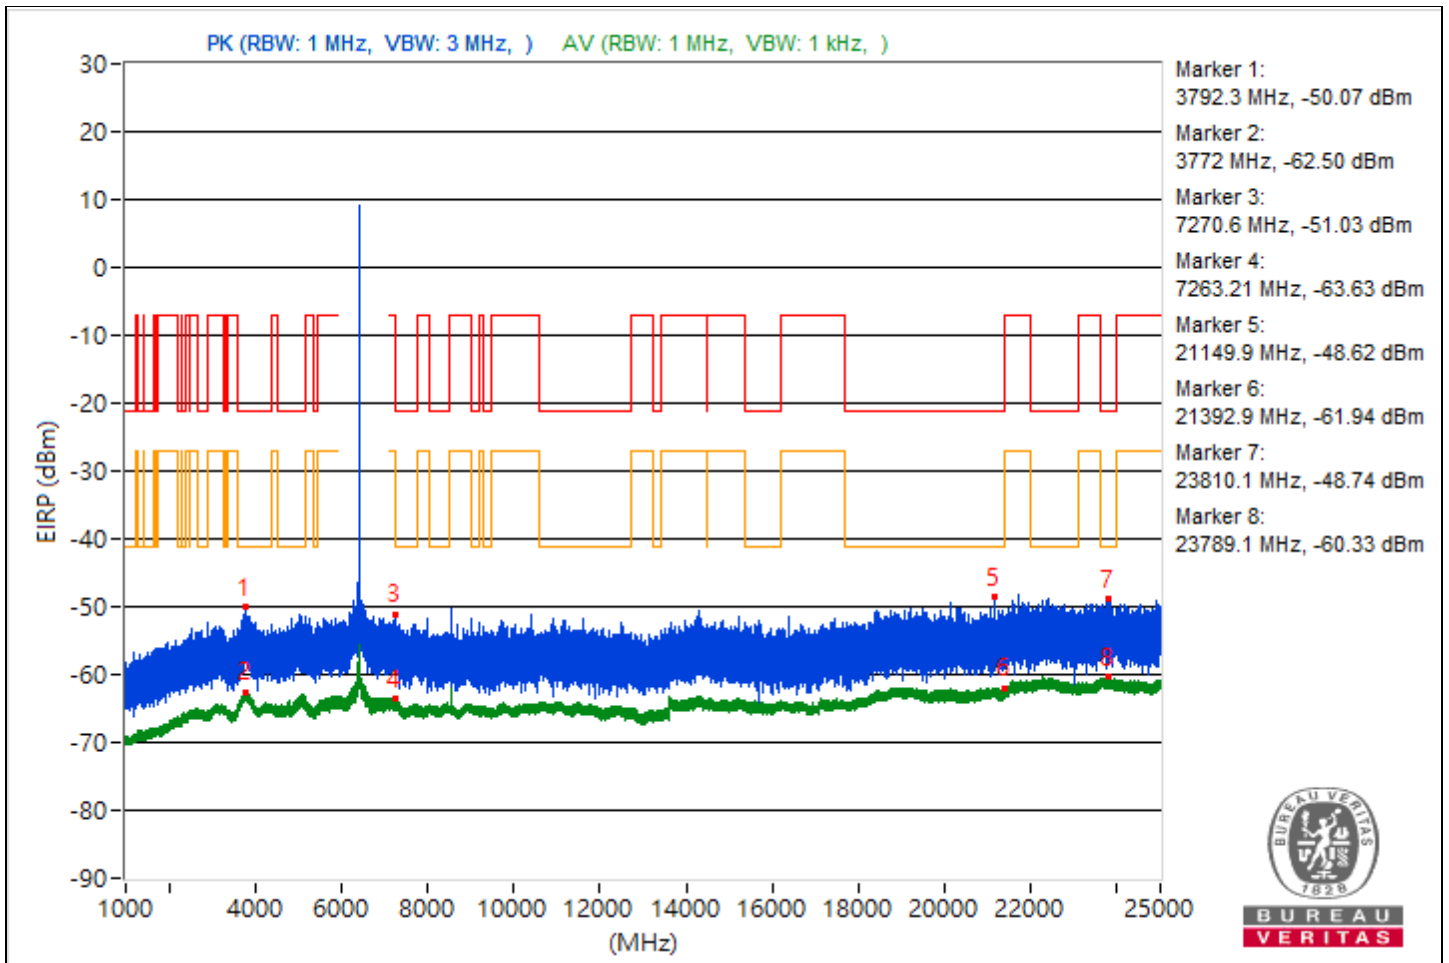

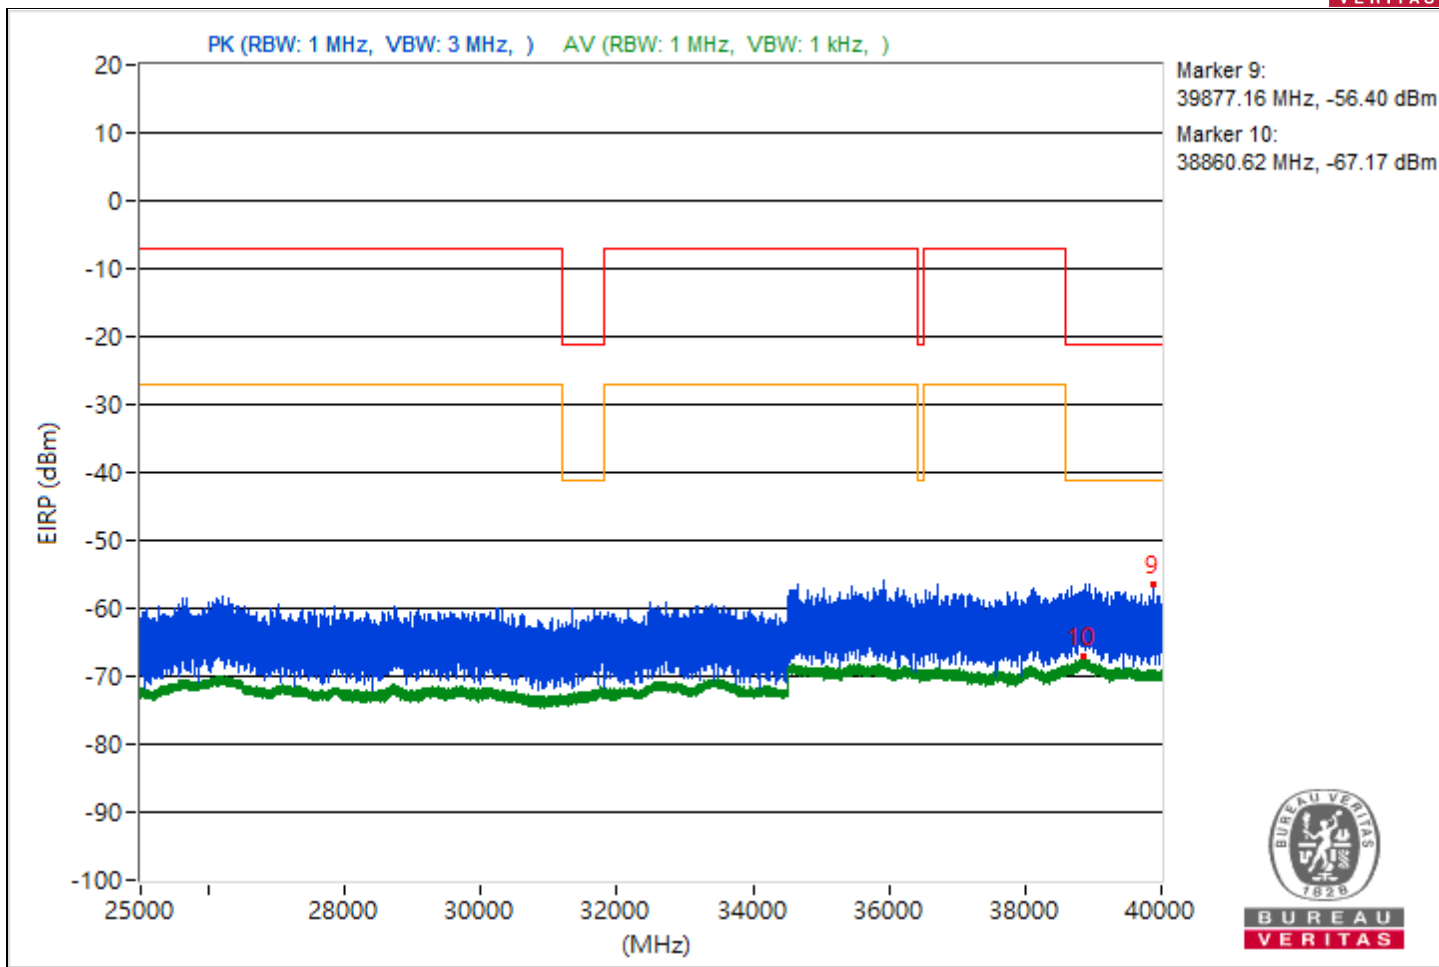





RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.19	44.93 PK	74	-29.07	-55.25	4.92	-50.33
2	3821	32.84 AV	54	-21.16	-67.34	4.92	-62.42
3	9097.33	43.06 PK	74	-30.94	-57.12	4.92	-52.2
4	7255.04	31.58 AV	54	-22.42	-68.6	4.92	-63.68
5	20515.2	45.36 PK	74	-28.64	-54.82	4.92	-49.9
6	21142.9	33.37 AV	54	-20.63	-66.81	4.92	-61.89
7	22151.4	47.05 PK	74	-26.95	-53.13	4.92	-48.21
8	23801.9	34.84 AV	54	-19.16	-65.34	4.92	-60.42
9	38834.58	38.92 PK	74	-35.08	-61.26	4.92	-56.34
10	38892.8	27.84 AV	54	-26.16	-72.34	4.92	-67.42

Note: Margin value = Emission Level - Limit value

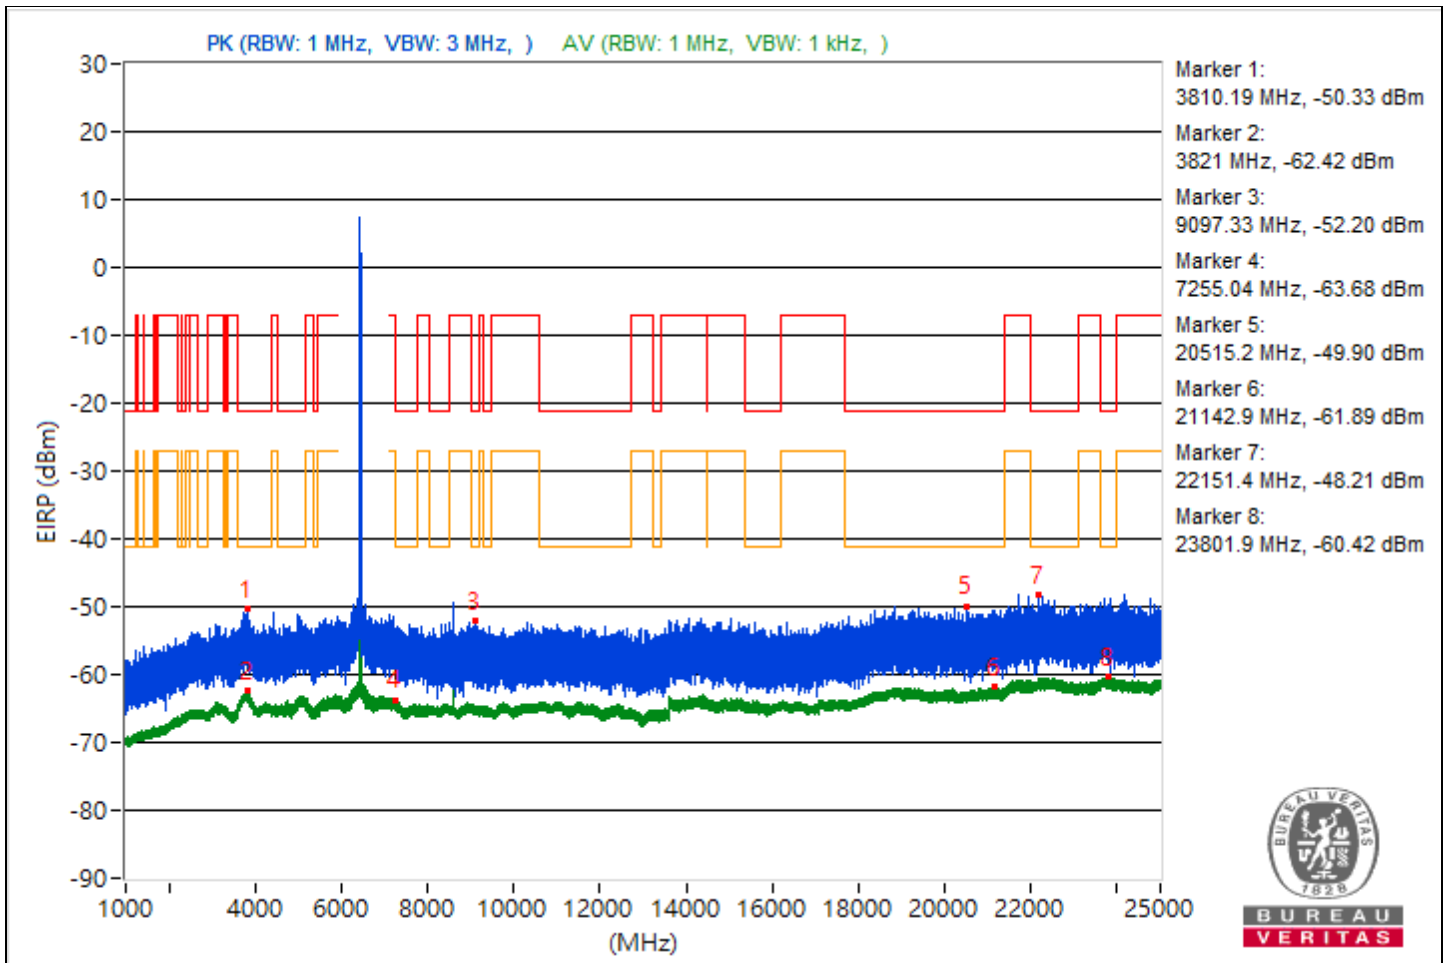

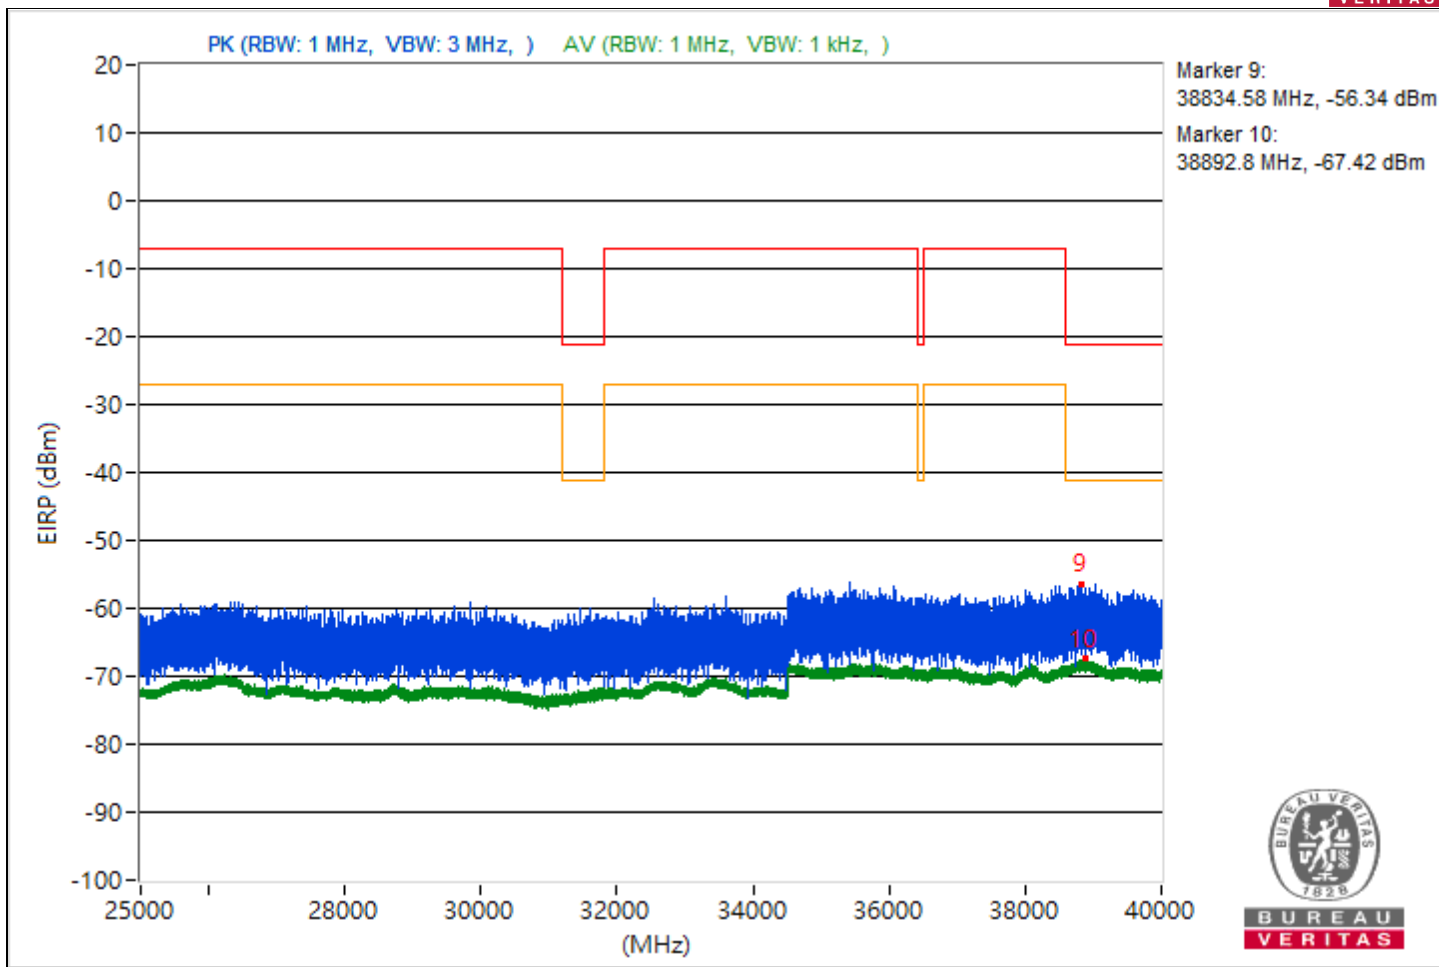





RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.76	44.58 PK	74	-29.42	-55.6	4.92	-50.68
2	3776.98	32.61 AV	54	-21.39	-67.57	4.92	-62.65
3	15621.16	43.28 PK	74	-30.72	-56.9	4.92	-51.98
4	14486.93	31.87 AV	54	-22.13	-68.31	4.92	-63.39
5	18985.3	45.46 PK	74	-28.54	-54.72	4.92	-49.8
6	21392.7	33.45 AV	54	-20.55	-66.73	4.92	-61.81
7	22567.9	46.81 PK	74	-27.19	-53.37	4.92	-48.45
8	23668.4	34.85 AV	54	-19.15	-65.33	4.92	-60.41
9	38737.6	39.02 PK	74	-34.98	-61.16	4.92	-56.24
10	38846.67	27.75 AV	54	-26.25	-72.43	4.92	-67.51

Note: Margin value = Emission Level - Limit value

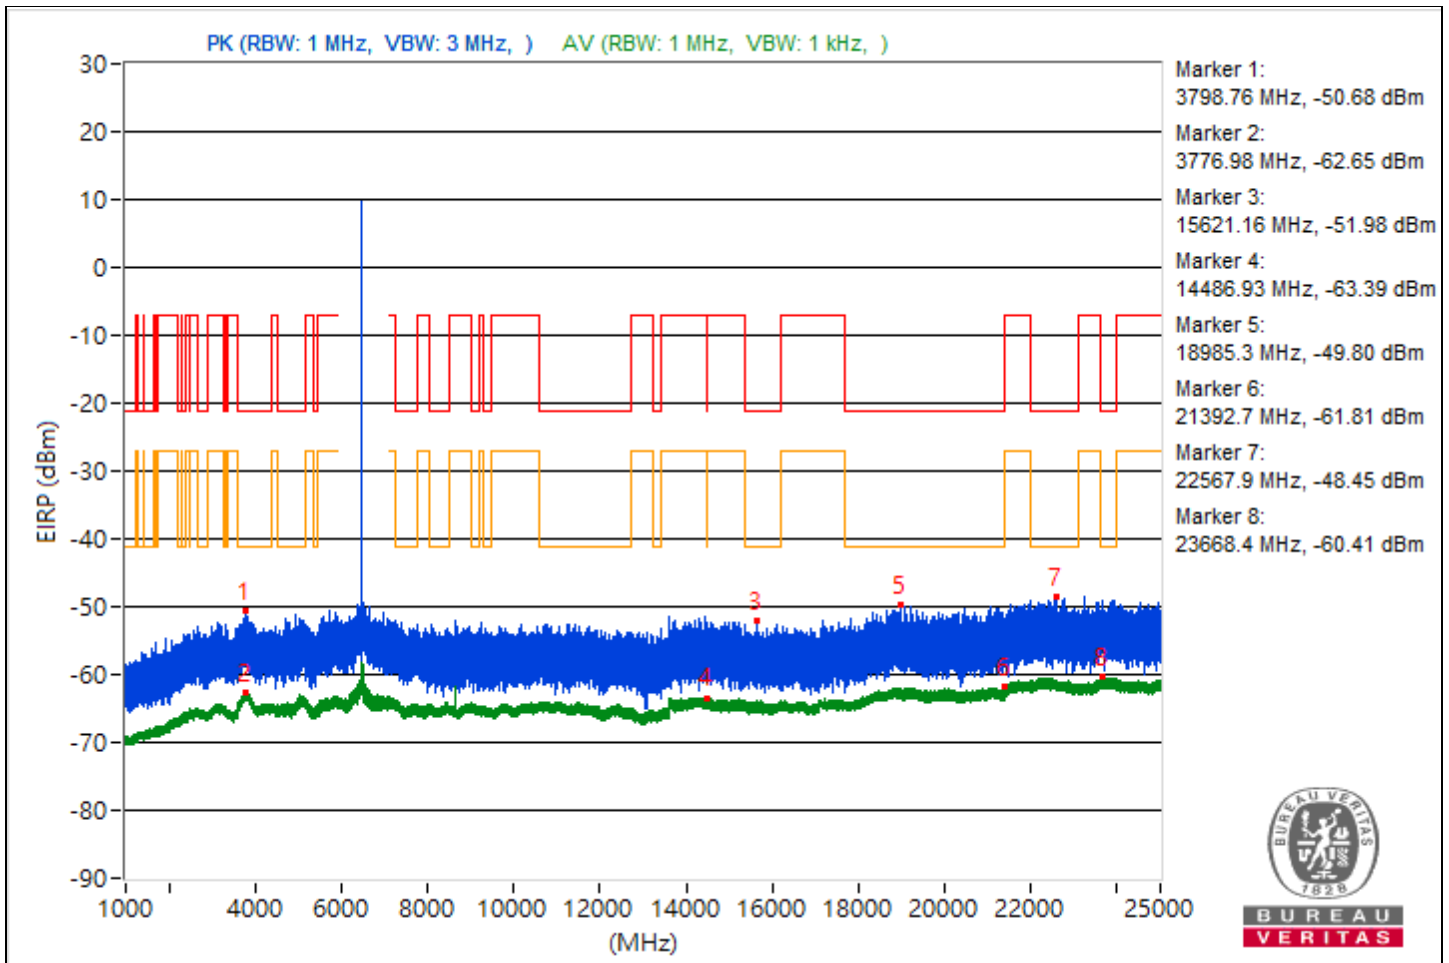

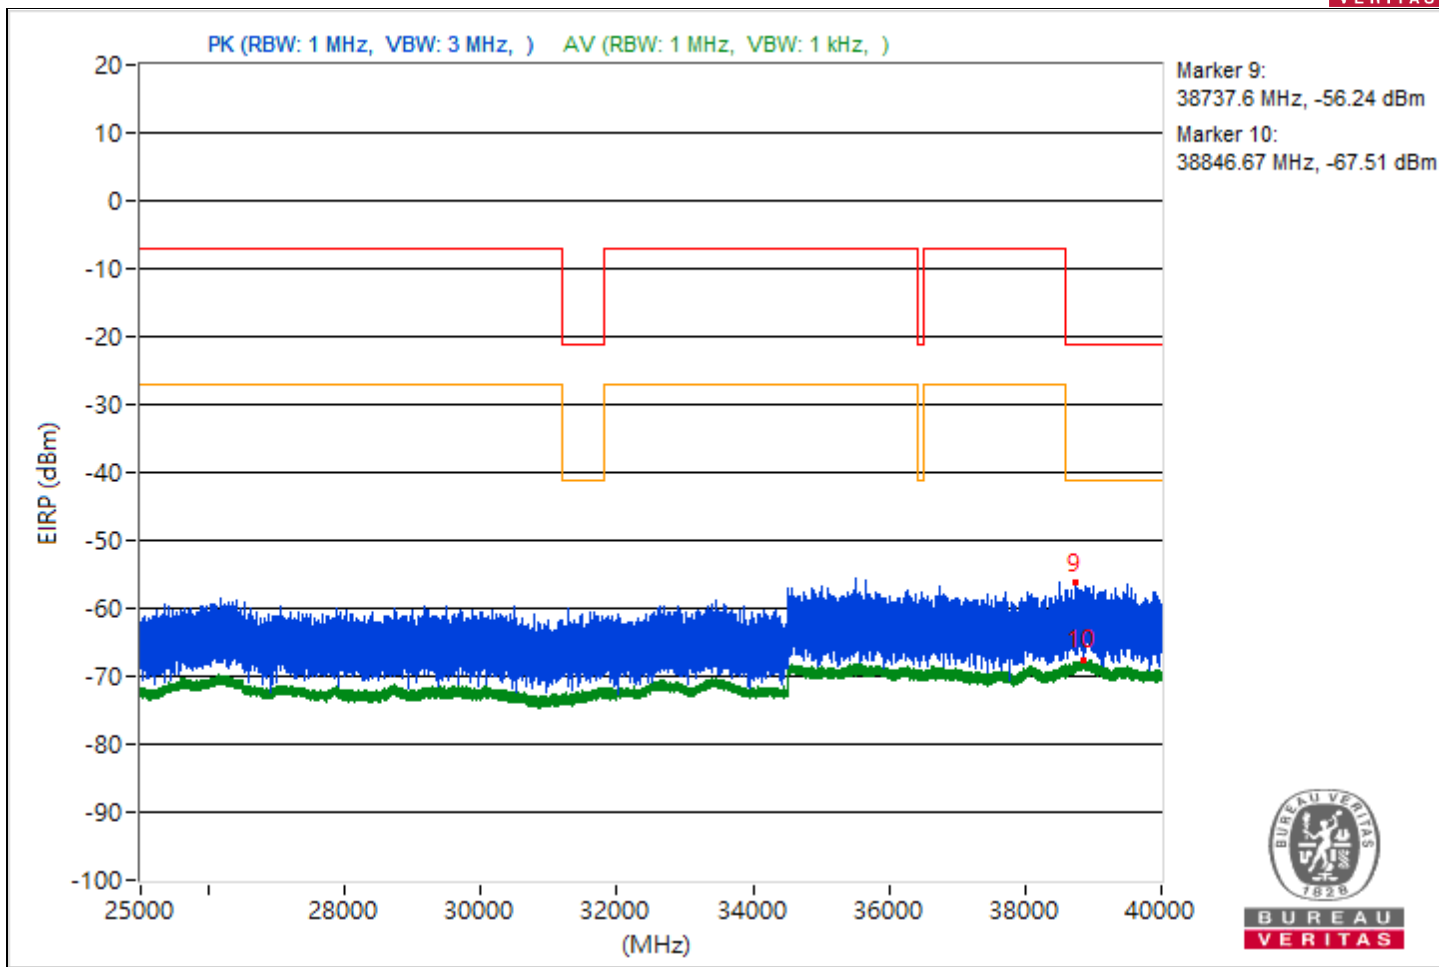





RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.58	44.6 PK	74	-29.4	-55.58	4.92	-50.66
2	3791.44	32.62 AV	54	-21.38	-67.56	4.92	-62.64
3	11113.33	43.7 PK	74	-30.3	-56.48	4.92	-51.56
4	7259.87	31.71 AV	54	-22.29	-68.47	4.92	-63.55
5	19221.7	45.36 PK	74	-28.64	-54.82	4.92	-49.9
6	18995.1	33.4 AV	54	-20.6	-66.78	4.92	-61.86
7	23634.7	47.15 PK	74	-26.85	-53.03	4.92	-48.11
8	23677.8	34.87 AV	54	-19.13	-65.31	4.92	-60.39
9	38767.2	40.32 PK	74	-33.68	-59.86	4.92	-54.94
10	38844.8	27.77 AV	54	-26.23	-72.41	4.92	-67.49

Note: Margin value = Emission Level - Limit value

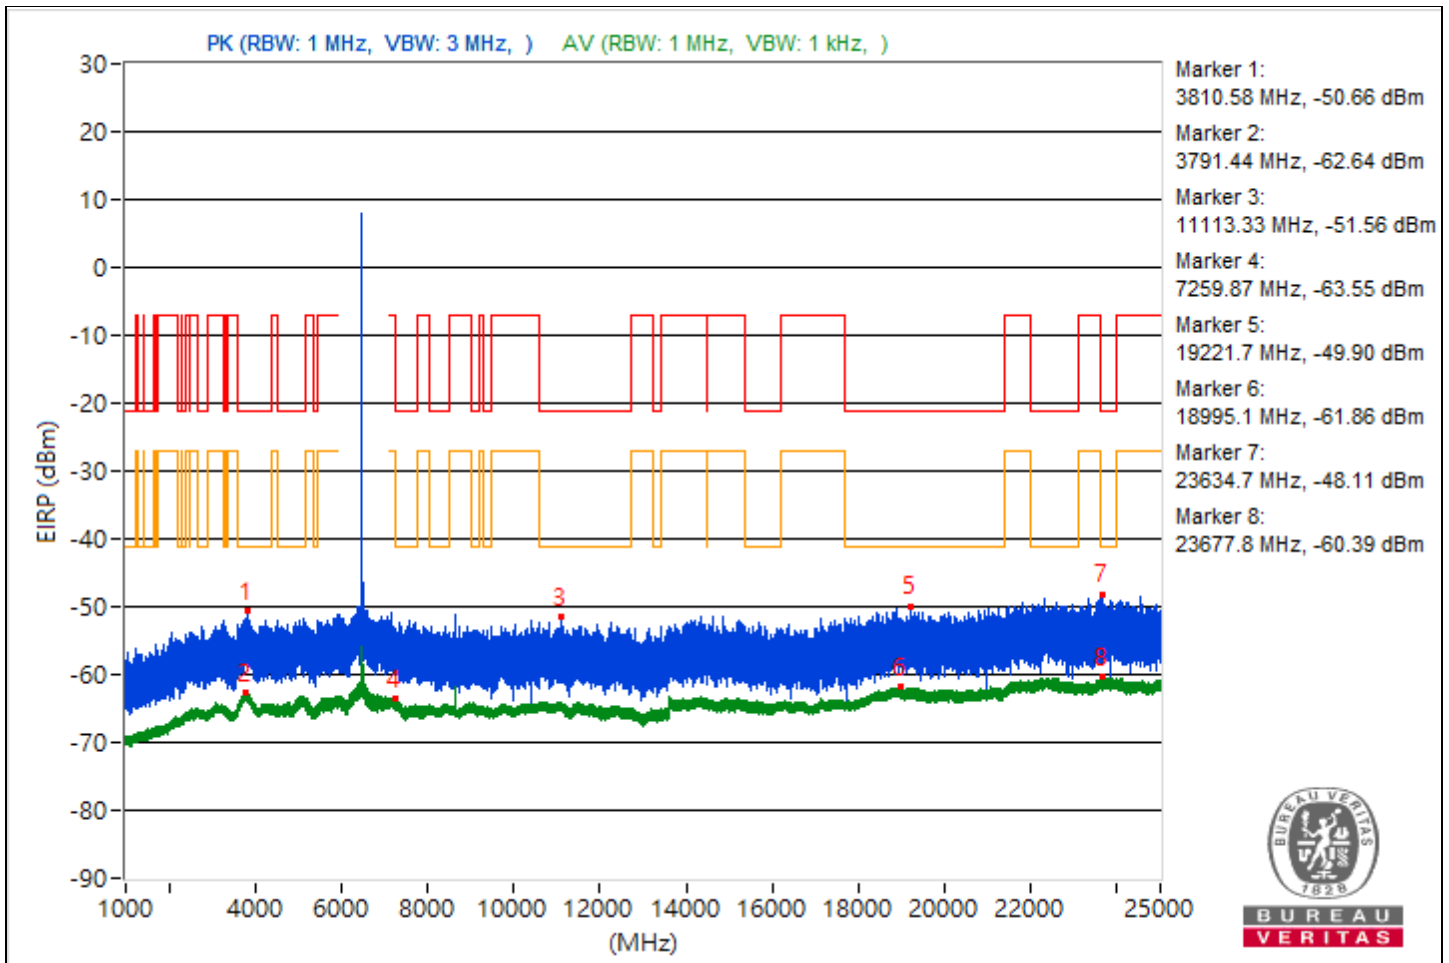

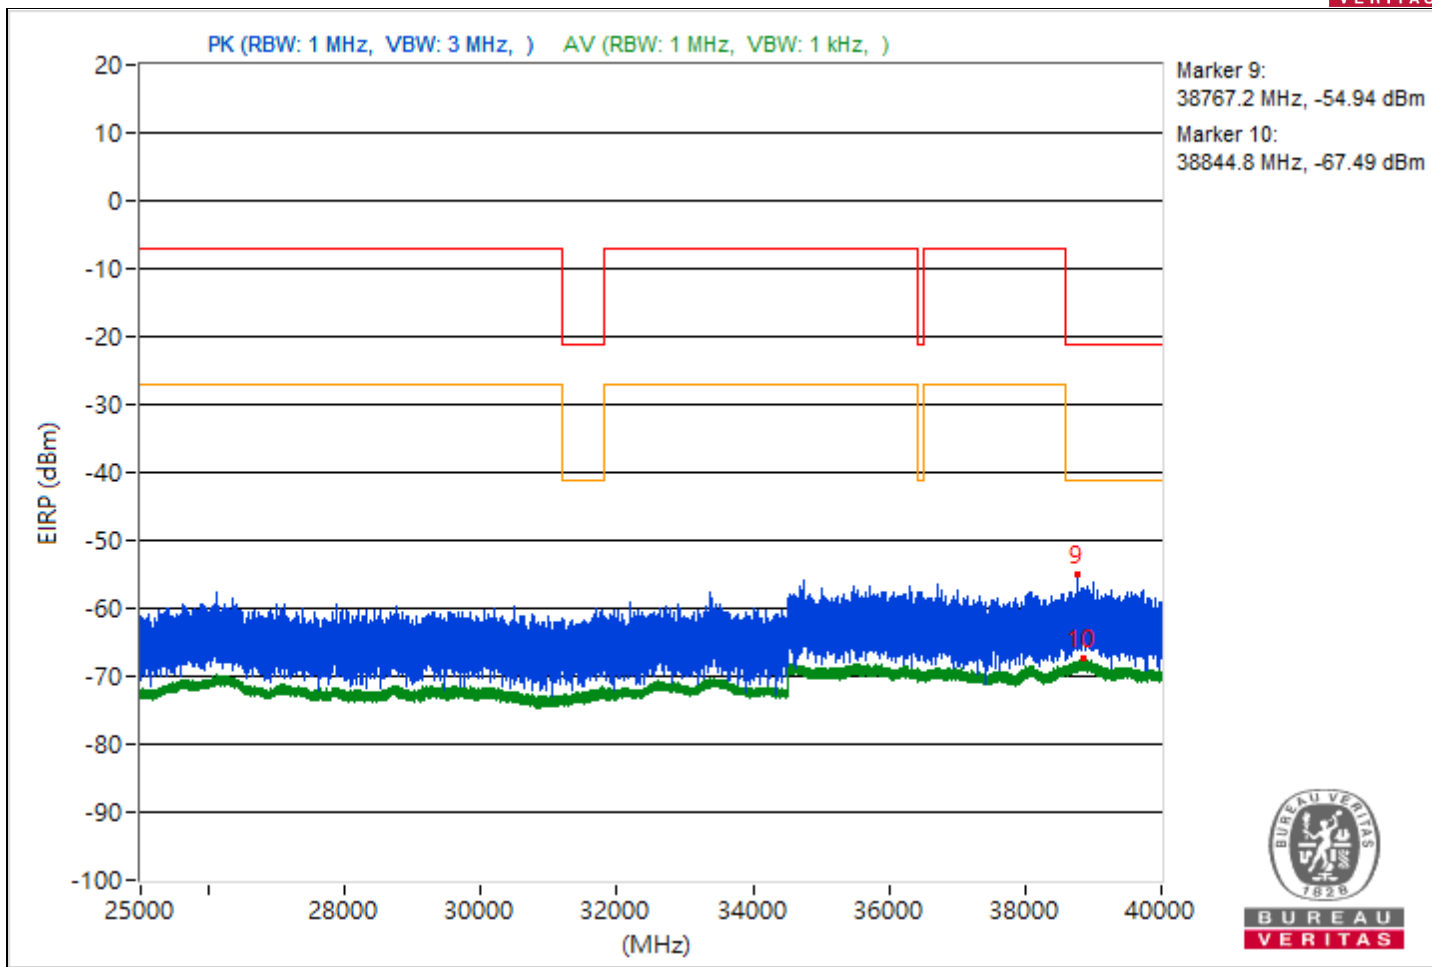





RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5103.48	44.18 PK	74	-29.82	-56	4.92	-51.08
2	3805.83	32.64 AV	54	-21.36	-67.54	4.92	-62.62
3	7286.7	43.46 PK	74	-30.54	-56.72	4.92	-51.8
4	14472.62	31.56 AV	54	-22.44	-68.62	4.92	-63.7
5	18835.3	45.85 PK	74	-28.15	-54.33	4.92	-49.41
6	21139.1	33.52 AV	54	-20.48	-66.66	4.92	-61.74
7	22234.5	46.52 PK	74	-27.48	-53.66	4.92	-48.74
8	22510.9	34.81 AV	54	-19.19	-65.37	4.92	-60.45
9	38875.73	39.67 PK	74	-34.33	-60.51	4.92	-55.59
10	38920.09	27.79 AV	54	-26.21	-72.39	4.92	-67.47

Note: Margin value = Emission Level - Limit value

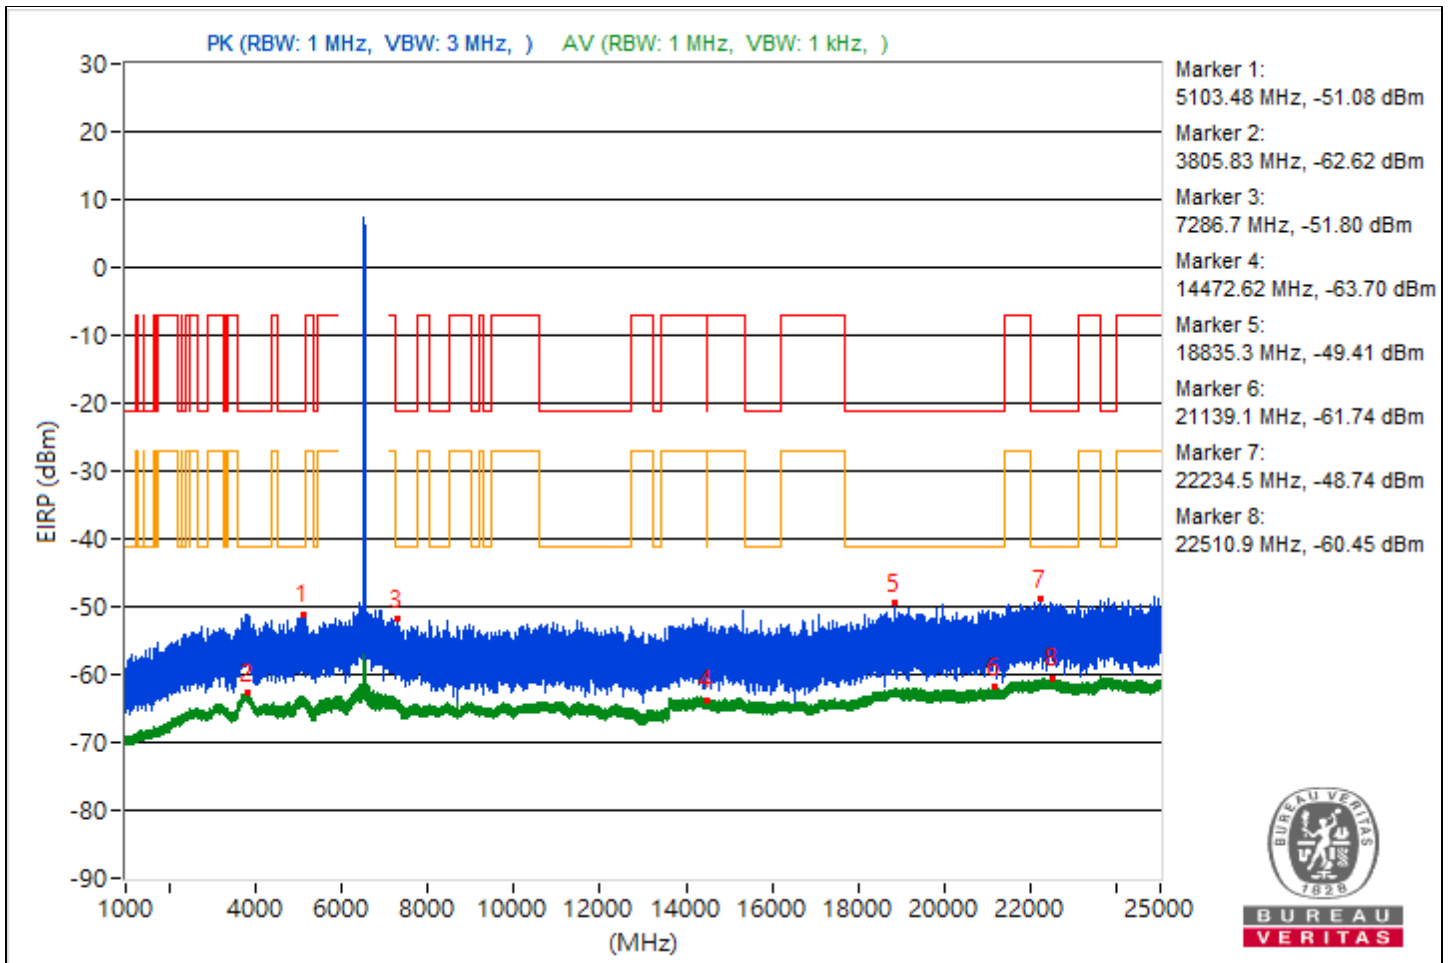

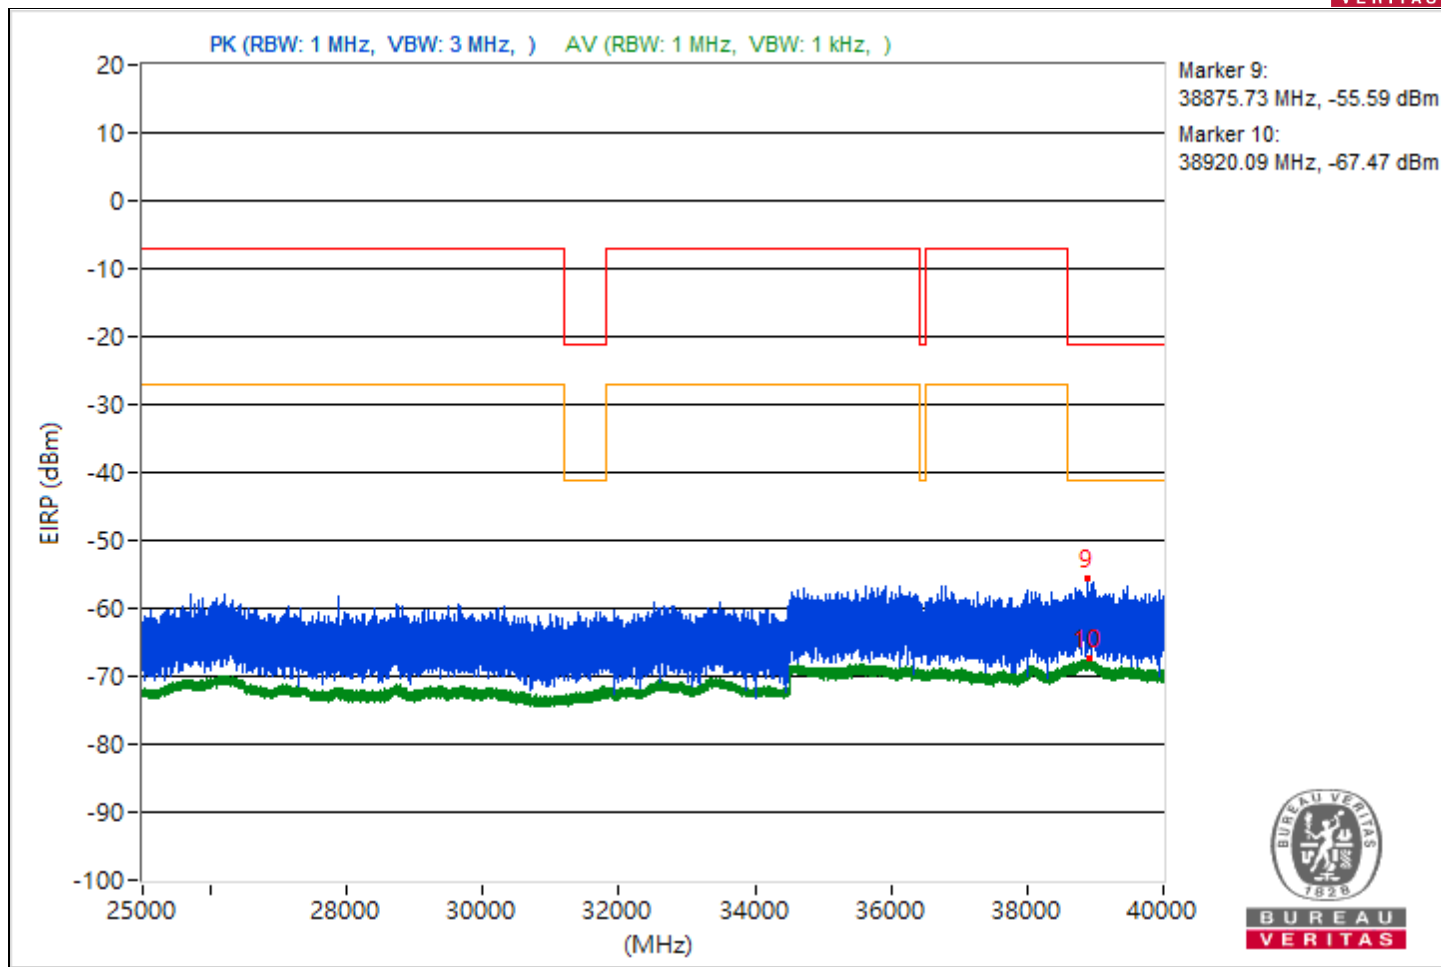





RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3861.37	44.47 PK	74	-29.53	-55.71	4.92	-50.79
2	3809.96	32.68 AV	54	-21.32	-67.5	4.92	-62.58
3	7254.19	43.12 PK	74	-30.88	-57.06	4.92	-52.14
4	7255.43	32.02 AV	54	-21.98	-68.16	4.92	-63.24
5	19223.9	45.3 PK	74	-28.7	-54.88	4.92	-49.96
6	21154.6	33.49 AV	54	-20.51	-66.69	4.92	-61.77
7	22711.4	46.79 PK	74	-27.21	-53.39	4.92	-48.47
8	22218.7	34.81 AV	54	-19.19	-65.37	4.92	-60.45
9	39027.2	38.94 PK	74	-35.06	-61.24	4.92	-56.32
10	38829.87	27.74 AV	54	-26.26	-72.44	4.92	-67.52

Note: Margin value = Emission Level - Limit value

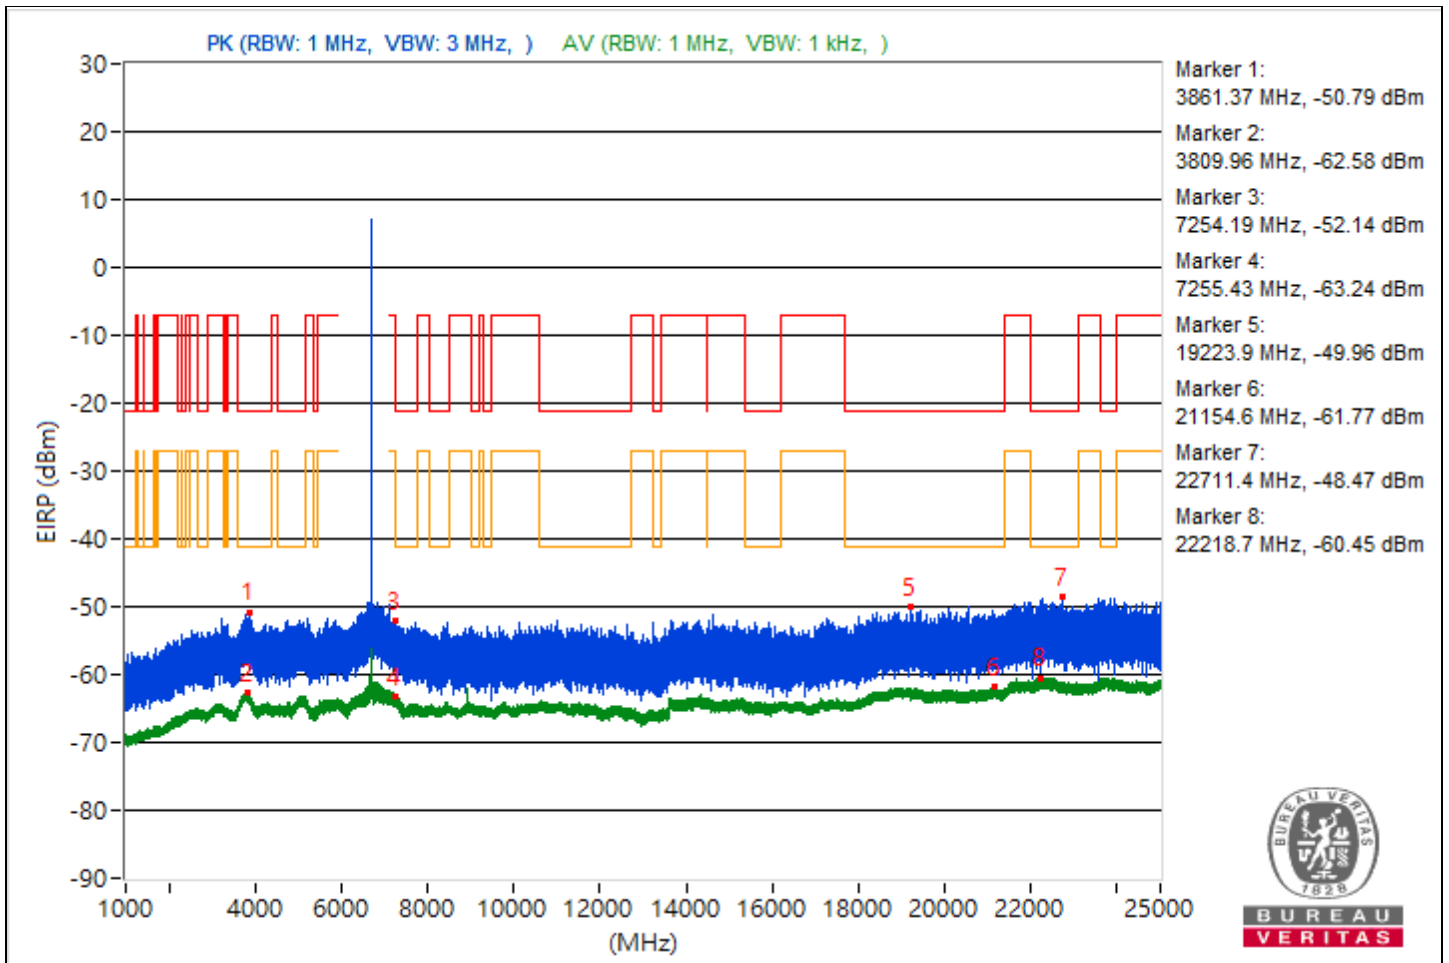

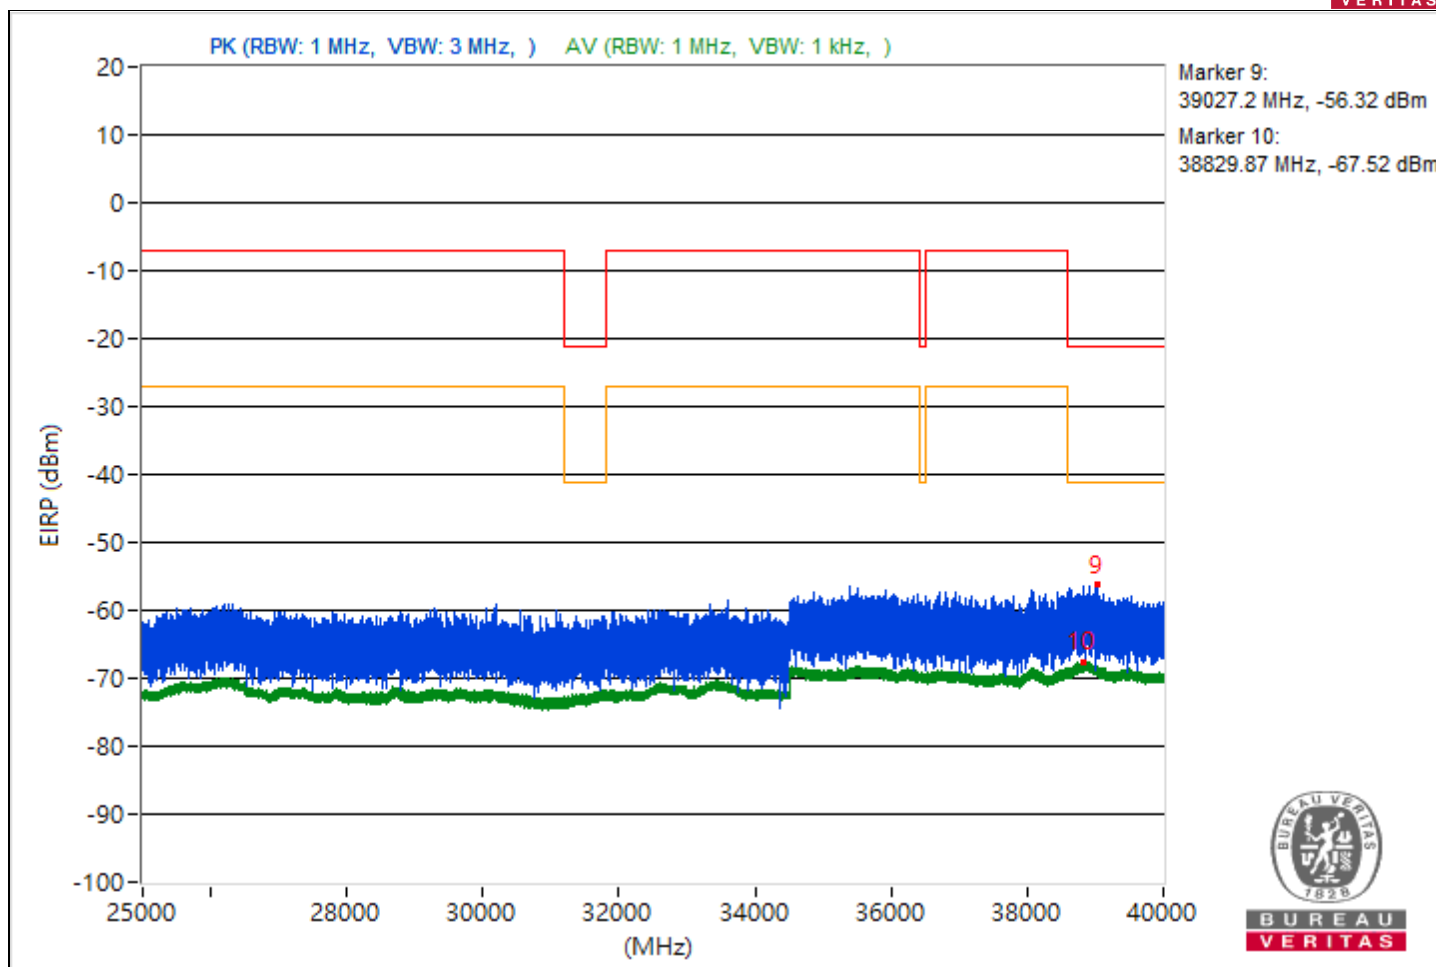





RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.52	44.59 PK	74	-29.41	-55.59	4.92	-50.67
2	3790.59	32.58 AV	54	-21.42	-67.6	4.92	-62.68
3	7446.46	43.57 PK	74	-30.43	-56.61	4.92	-51.69
4	7261.81	32.53 AV	54	-21.47	-67.65	4.92	-62.73
5	21354.7	45.24 PK	74	-28.76	-54.94	4.92	-50.02
6	21123.1	33.34 AV	54	-20.66	-66.84	4.92	-61.92
7	23921.2	47.07 PK	74	-26.93	-53.11	4.92	-48.19
8	23770.9	34.82 AV	54	-19.18	-65.36	4.92	-60.44
9	38897.87	38.74 PK	74	-35.26	-61.44	4.92	-56.52
10	38842.49	27.76 AV	54	-26.24	-72.42	4.92	-67.5

Note: Margin value = Emission Level - Limit value

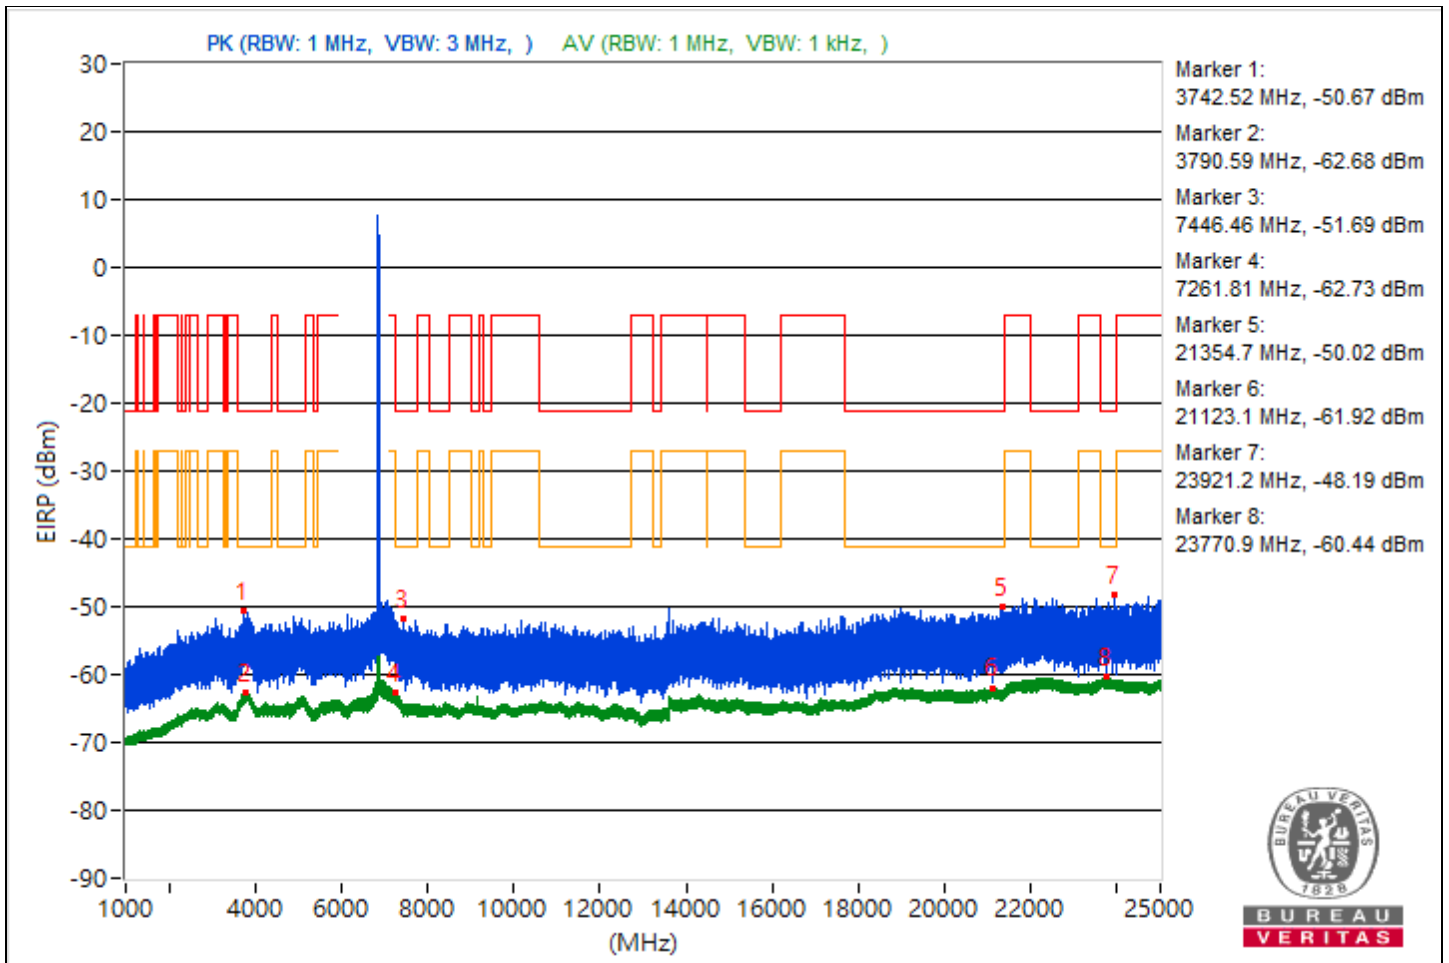

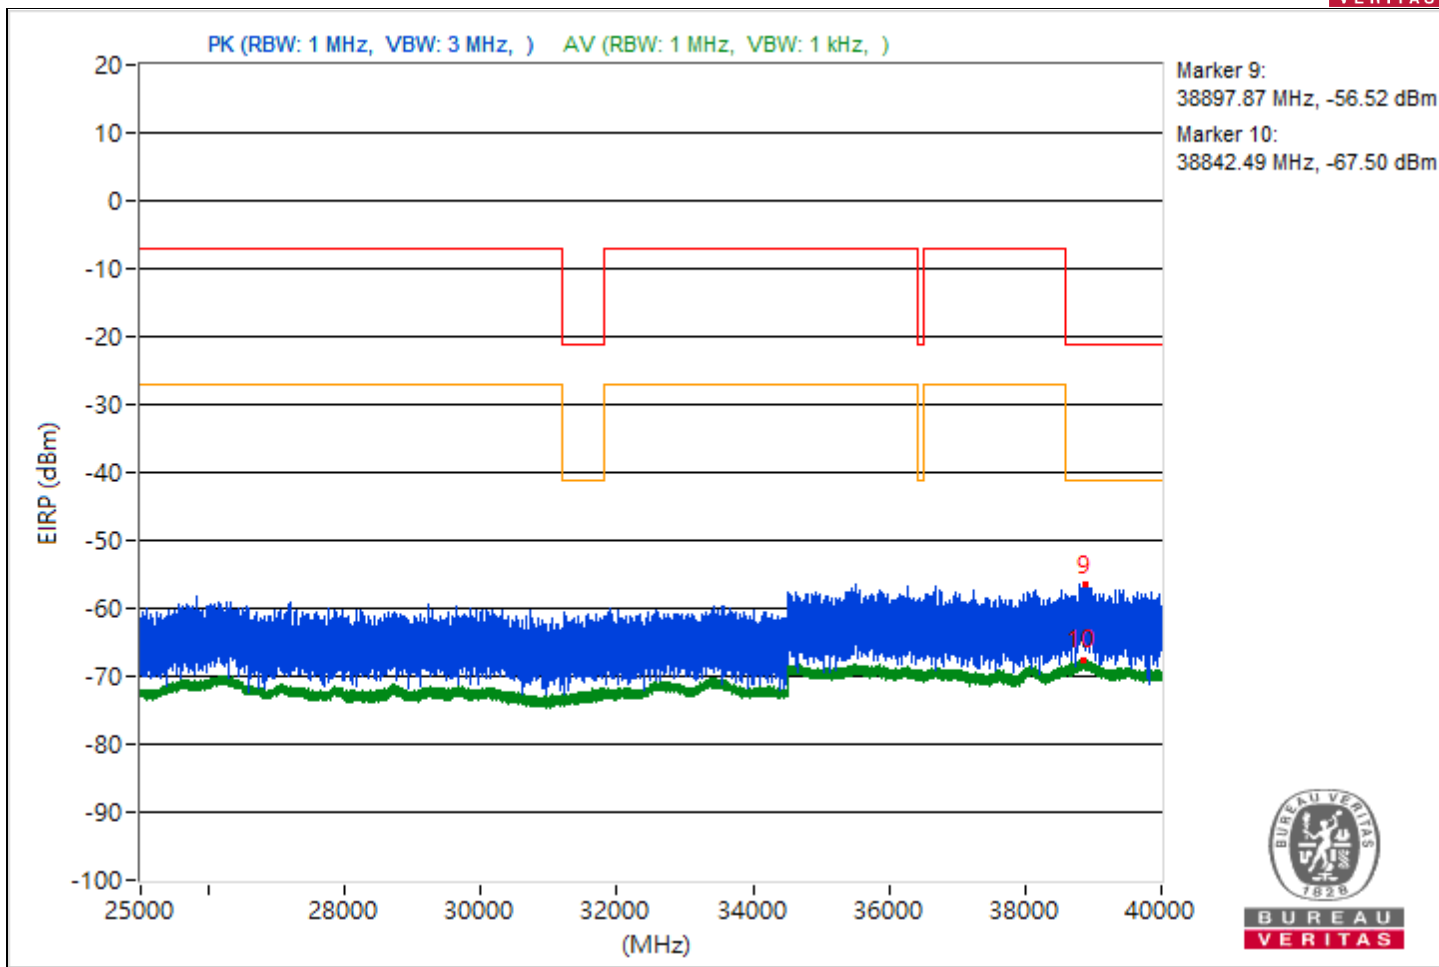





RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.33	44.18 PK	74	-29.82	-56	4.92	-51.08
2	3787.79	32.62 AV	54	-21.38	-67.56	4.92	-62.64
3	7270.29	44.49 PK	74	-29.51	-55.69	4.92	-50.77
4	7253.26	32.66 AV	54	-21.34	-67.52	4.92	-62.6
5	19176.9	45.64 PK	74	-28.36	-54.54	4.92	-49.62
6	20092.8	33.35 AV	54	-20.65	-66.83	4.92	-61.91
7	22512.1	47.41 PK	74	-26.59	-52.77	4.92	-47.85
8	23856.3	34.84 AV	54	-19.16	-65.34	4.92	-60.42
9	38786.76	39 PK	74	-35	-61.18	4.92	-56.26
10	38857.87	27.69 AV	54	-26.31	-72.49	4.92	-67.57

Note: Margin value = Emission Level - Limit value

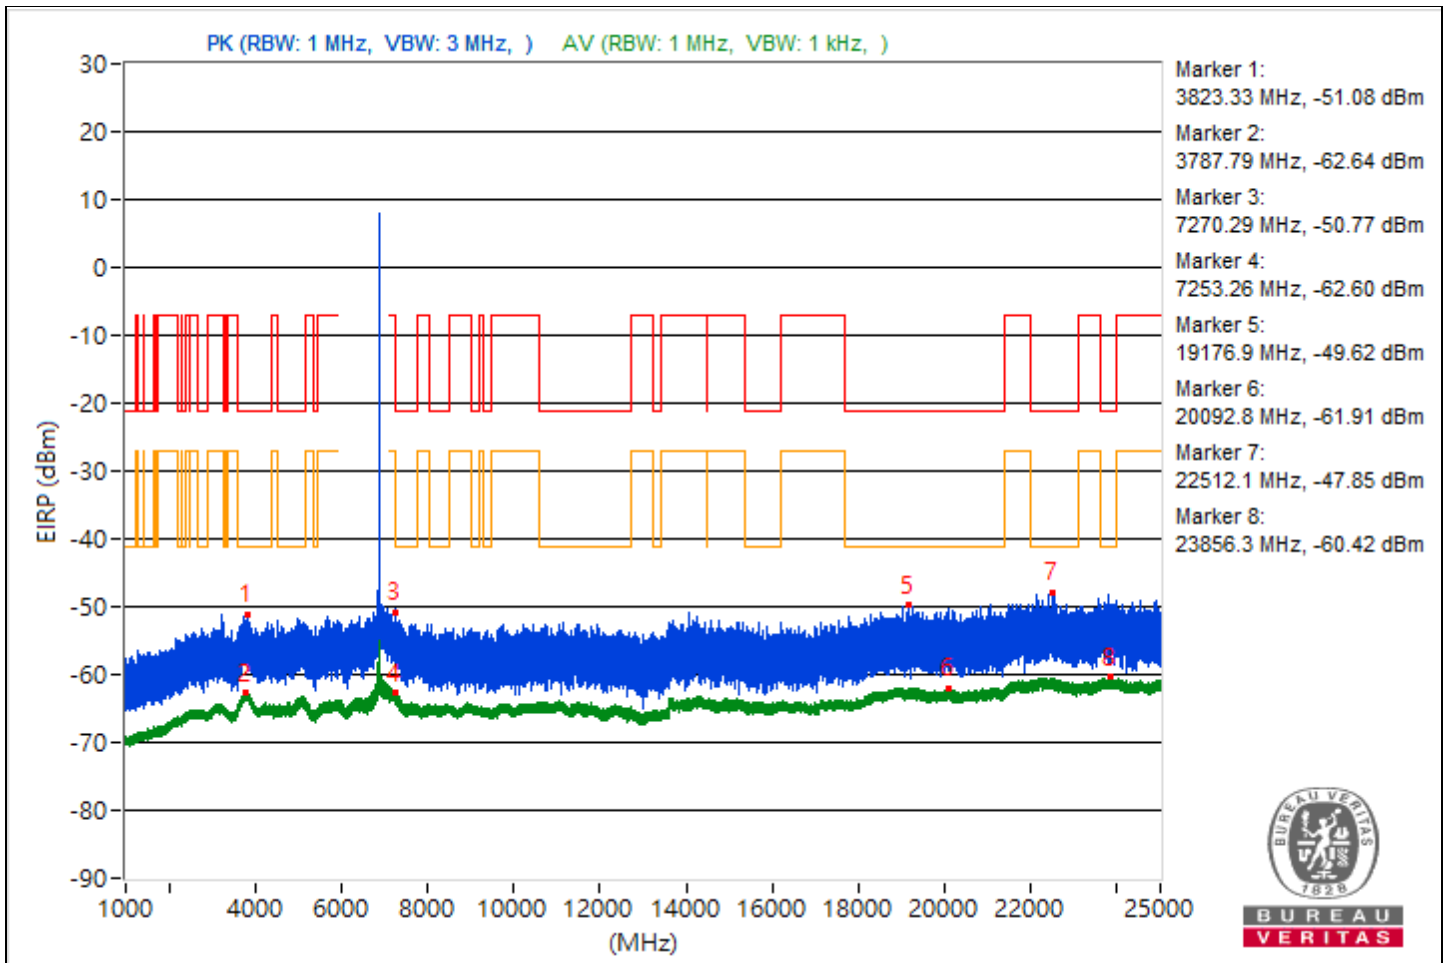

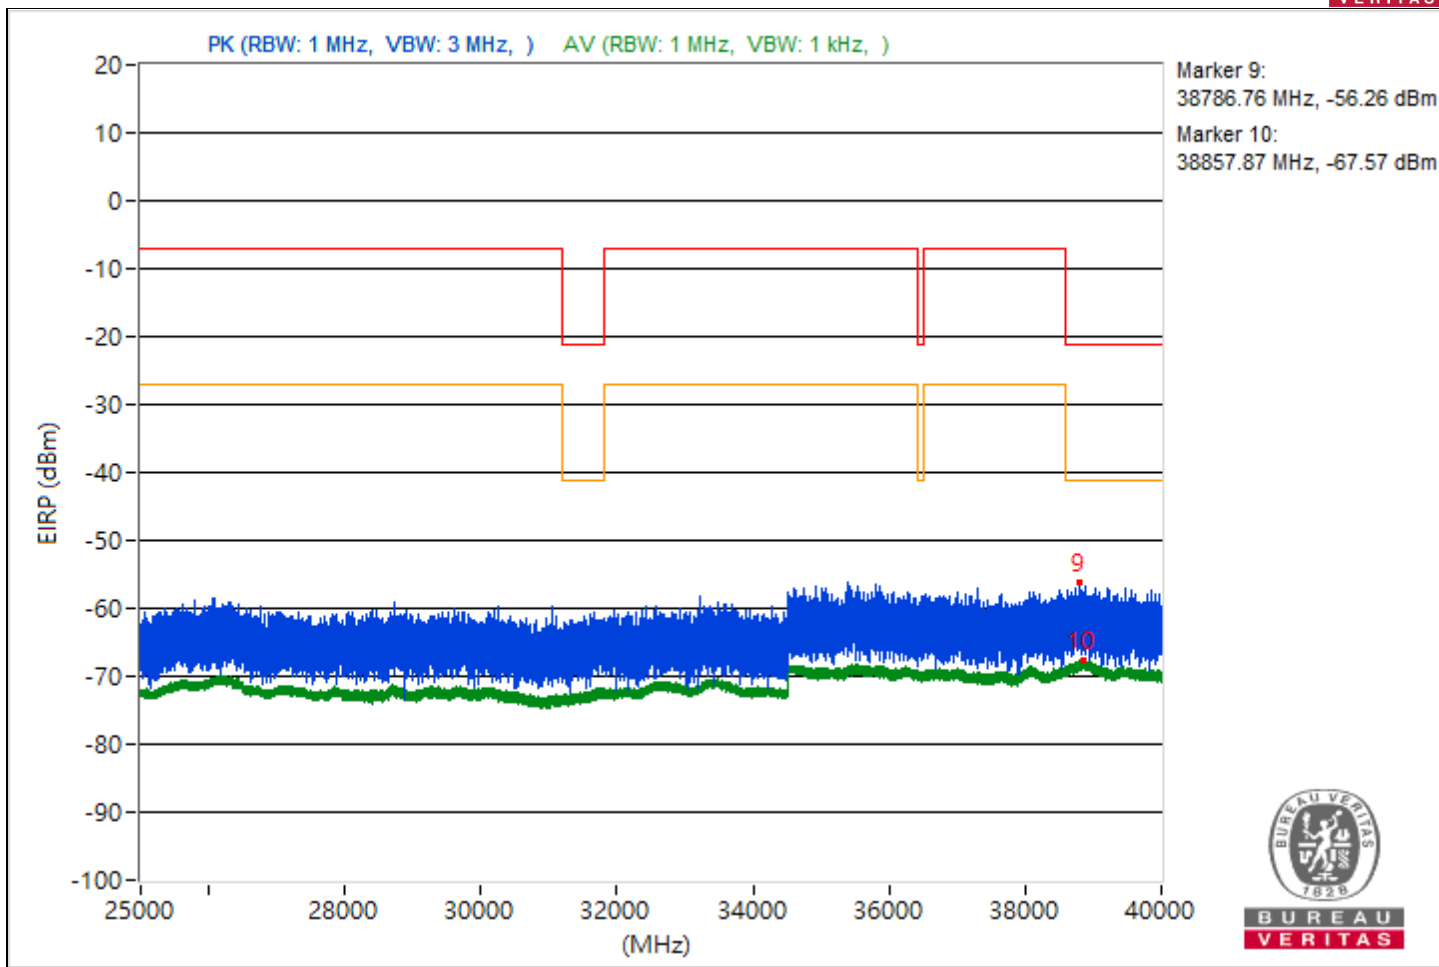





RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.54	44.29 PK	74	-29.71	-55.89	4.92	-50.97
2	3831.5	32.64 AV	54	-21.36	-67.54	4.92	-62.62
3	7323.57	45.33 PK	74	-28.67	-54.85	4.92	-49.93
4	7257.38	33.72 AV	54	-20.28	-66.46	4.92	-61.54
5	21018.8	45.8 PK	74	-28.2	-54.38	4.92	-49.46
6	21122.4	33.36 AV	54	-20.64	-66.82	4.92	-61.9
7	23747.7	47.72 PK	74	-26.28	-52.46	4.92	-47.54
8	23818.3	34.95 AV	54	-19.05	-65.23	4.92	-60.31
9	39189.51	38.51 PK	74	-35.49	-61.67	4.92	-56.75
10	38894.13	27.79 AV	54	-26.21	-72.39	4.92	-67.47

Note: Margin value = Emission Level - Limit value

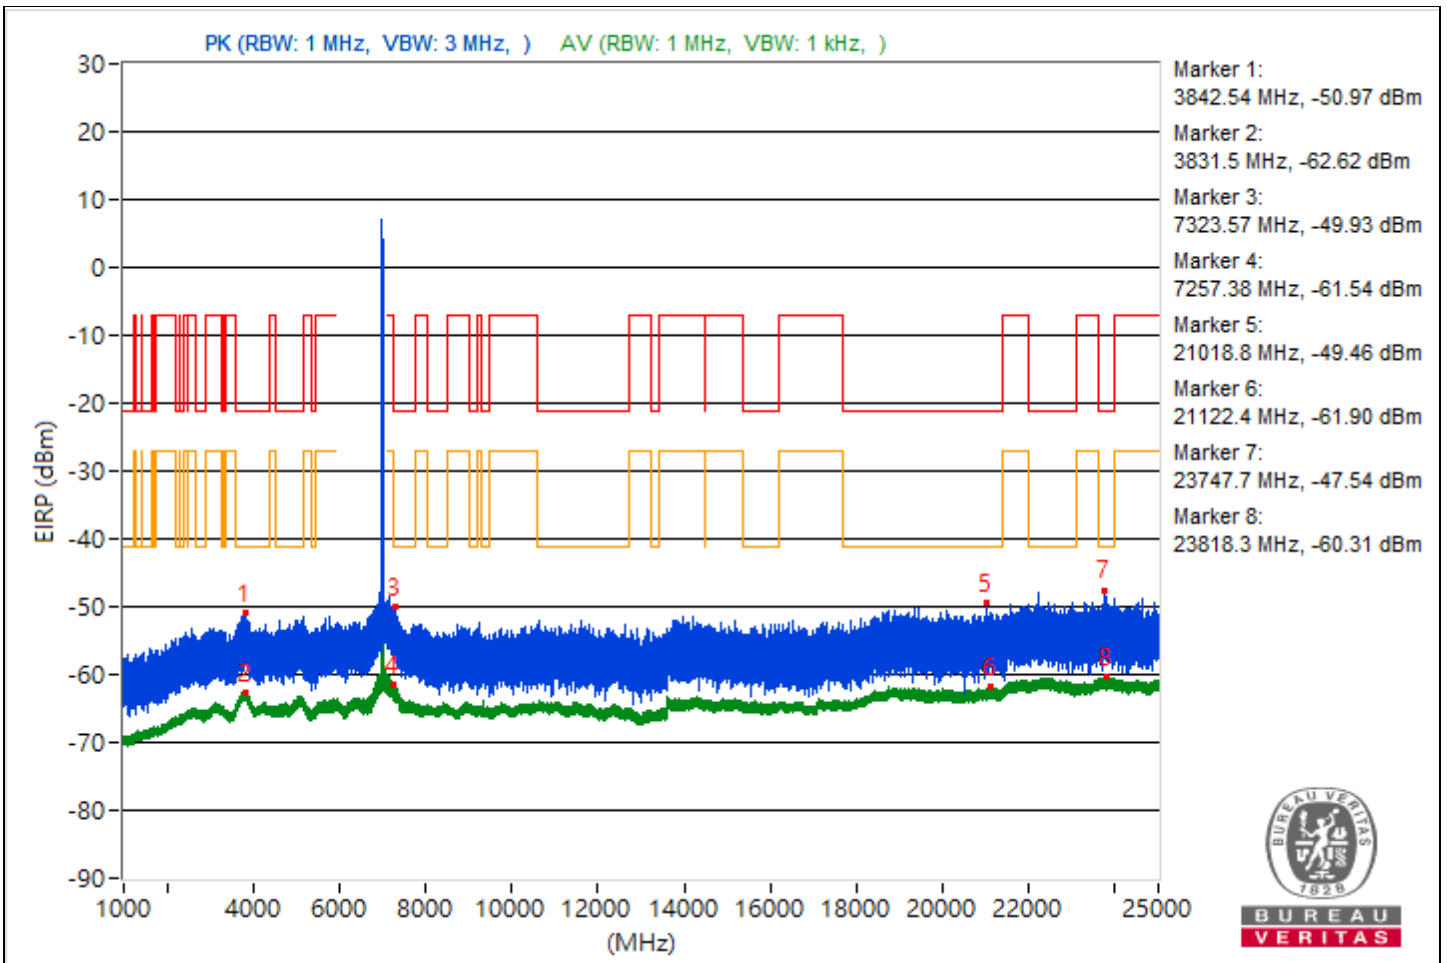

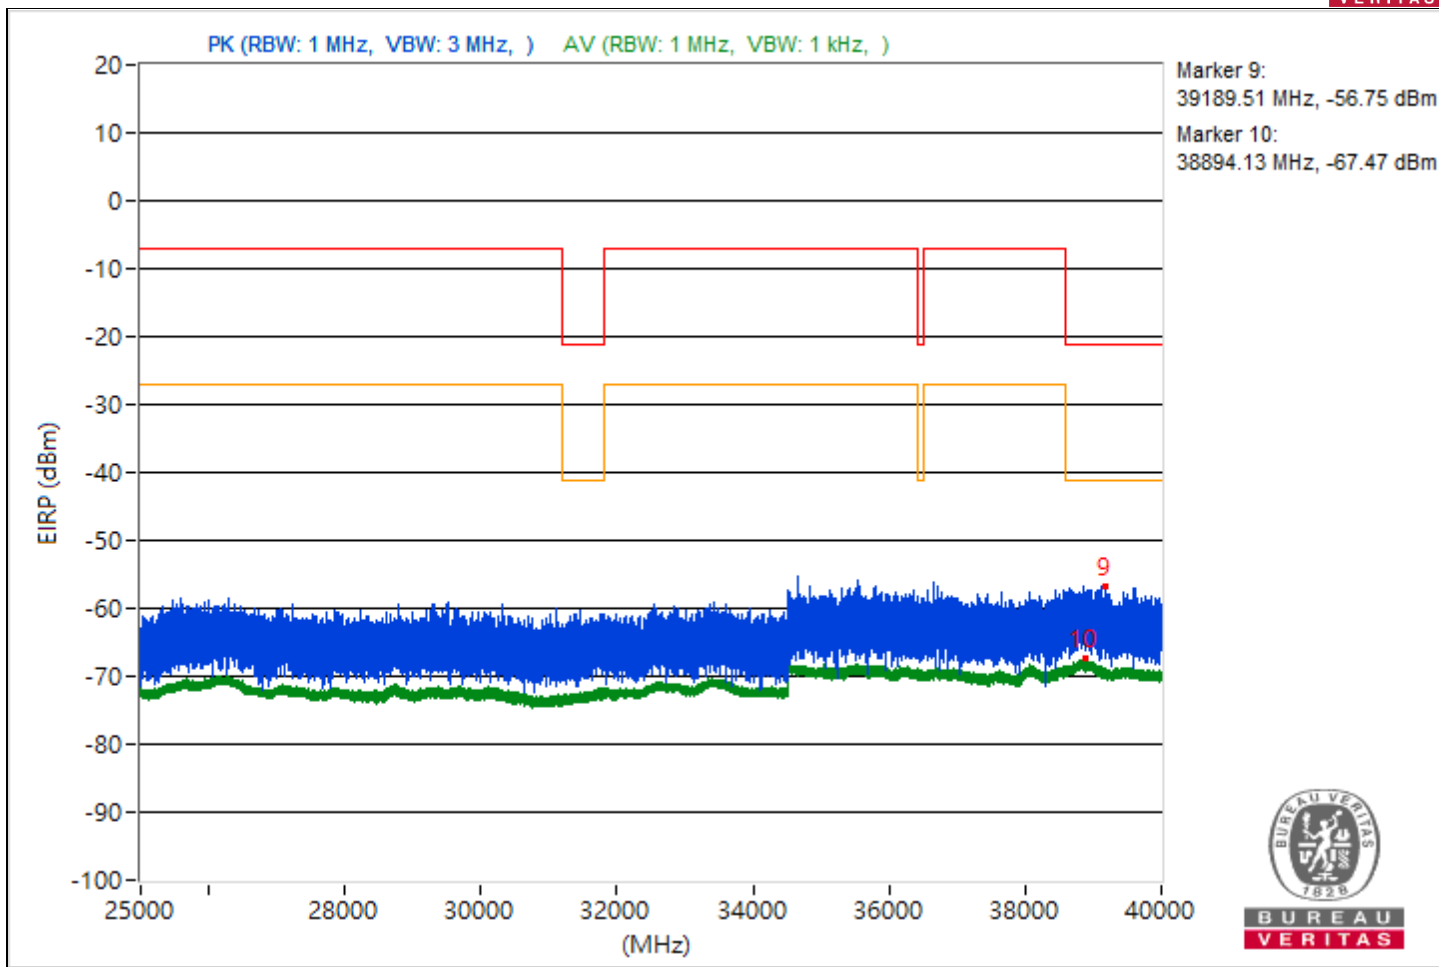





RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3639.62	44.62 PK	74	-29.38	-55.56	4.92	-50.64
2	3814.39	32.64 AV	54	-21.36	-67.54	4.92	-62.62
3	7272.08	45.26 PK	74	-28.74	-54.92	4.92	-50
4	7257.69	34.53 AV	54	-19.47	-65.65	4.92	-60.73
5	19098.6	45.01 PK	74	-28.99	-55.17	4.92	-50.25
6	21155.4	33.41 AV	54	-20.59	-66.77	4.92	-61.85
7	23079	46.9 PK	74	-27.1	-53.28	4.92	-48.36
8	23721.1	34.77 AV	54	-19.23	-65.41	4.92	-60.49
9	38950.49	40.75 PK	74	-33.25	-59.43	4.92	-54.51
10	38845.16	27.71 AV	54	-26.29	-72.47	4.92	-67.55

Note: Margin value = Emission Level - Limit value

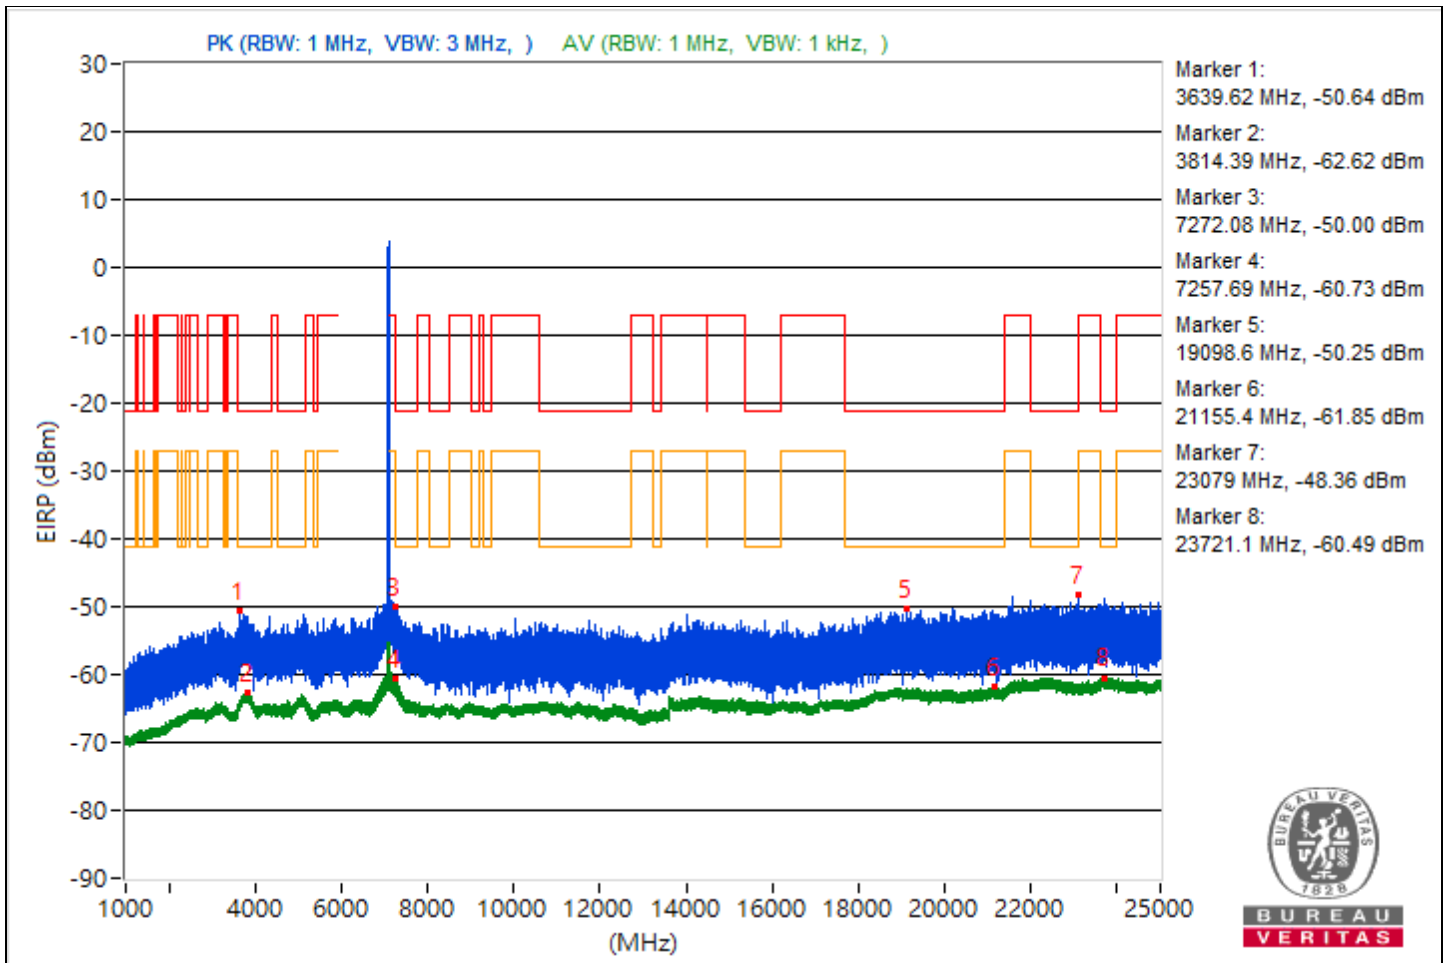

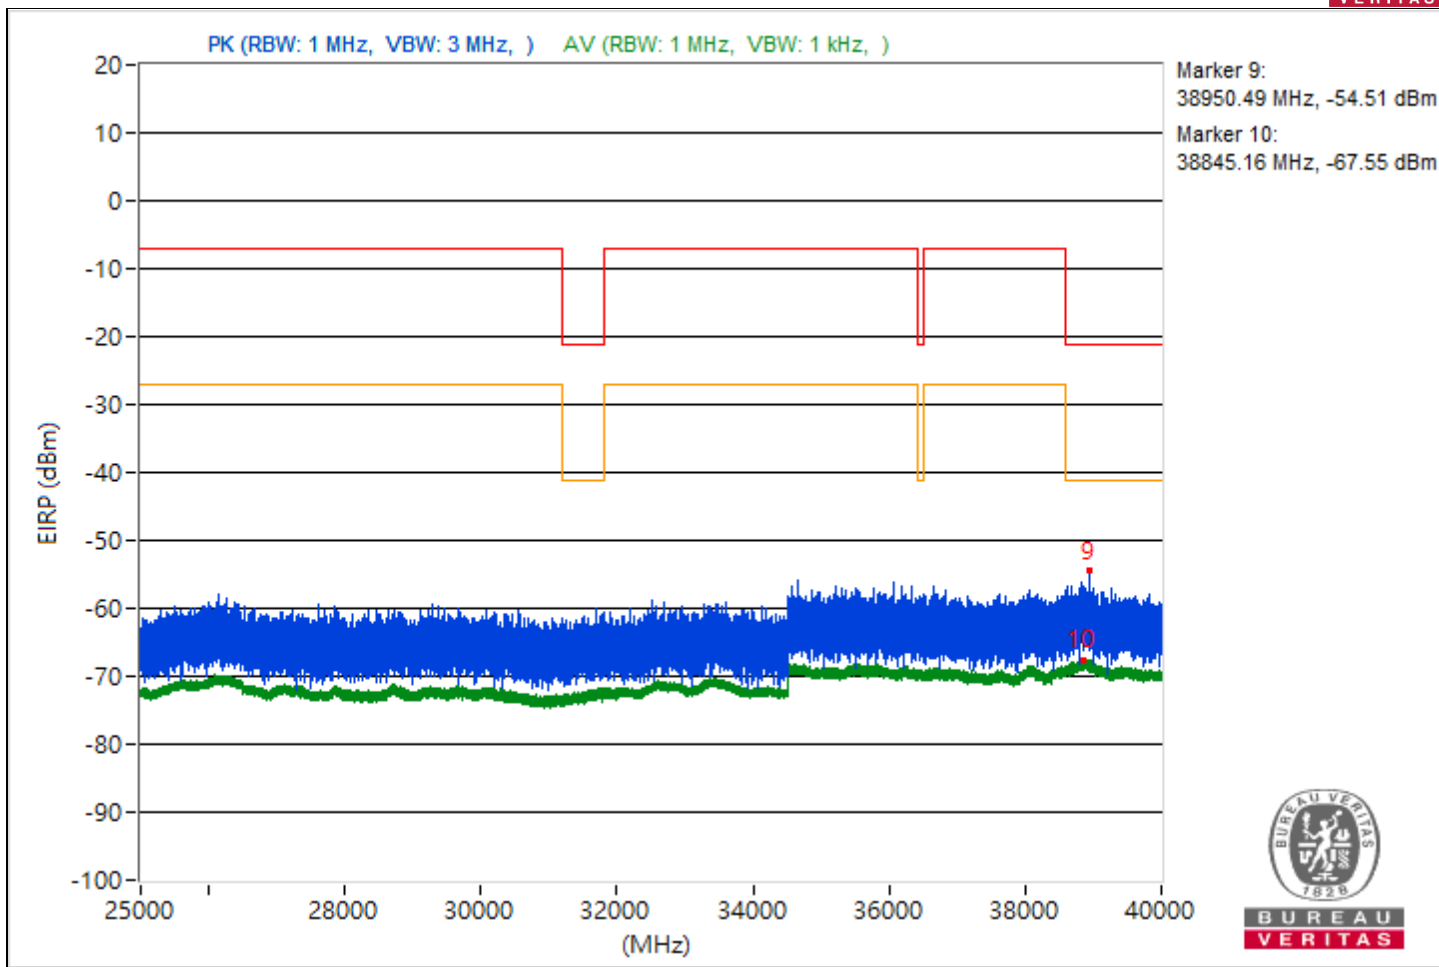





RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5435.36	46.95 PK	74	-27.05	-53.23	4.92	-48.31
2	5443.91	35.33 AV	54	-18.67	-64.85	4.92	-59.93
3	7250.46	43.35 PK	74	-30.65	-56.83	4.92	-51.91
4	#7953.33	48.81 AV	68.26	-19.45	-51.37	4.92	-46.45
5	20634.7	45.59 PK	74	-28.41	-54.59	4.92	-49.67
6	21120.9	33.47 AV	54	-20.53	-66.71	4.92	-61.79
7	22296.9	46.65 PK	74	-27.35	-53.53	4.92	-48.61
8	22362.6	34.87 AV	54	-19.13	-65.31	4.92	-60.39
9	38782.22	38.2 PK	74	-35.8	-61.98	4.92	-57.06
10	38845.78	27.67 AV	54	-26.33	-72.51	4.92	-67.59

Notes:

1. Margin value = Emission Level - Limit value
2. "#": The radiated frequency is out of the restricted band.

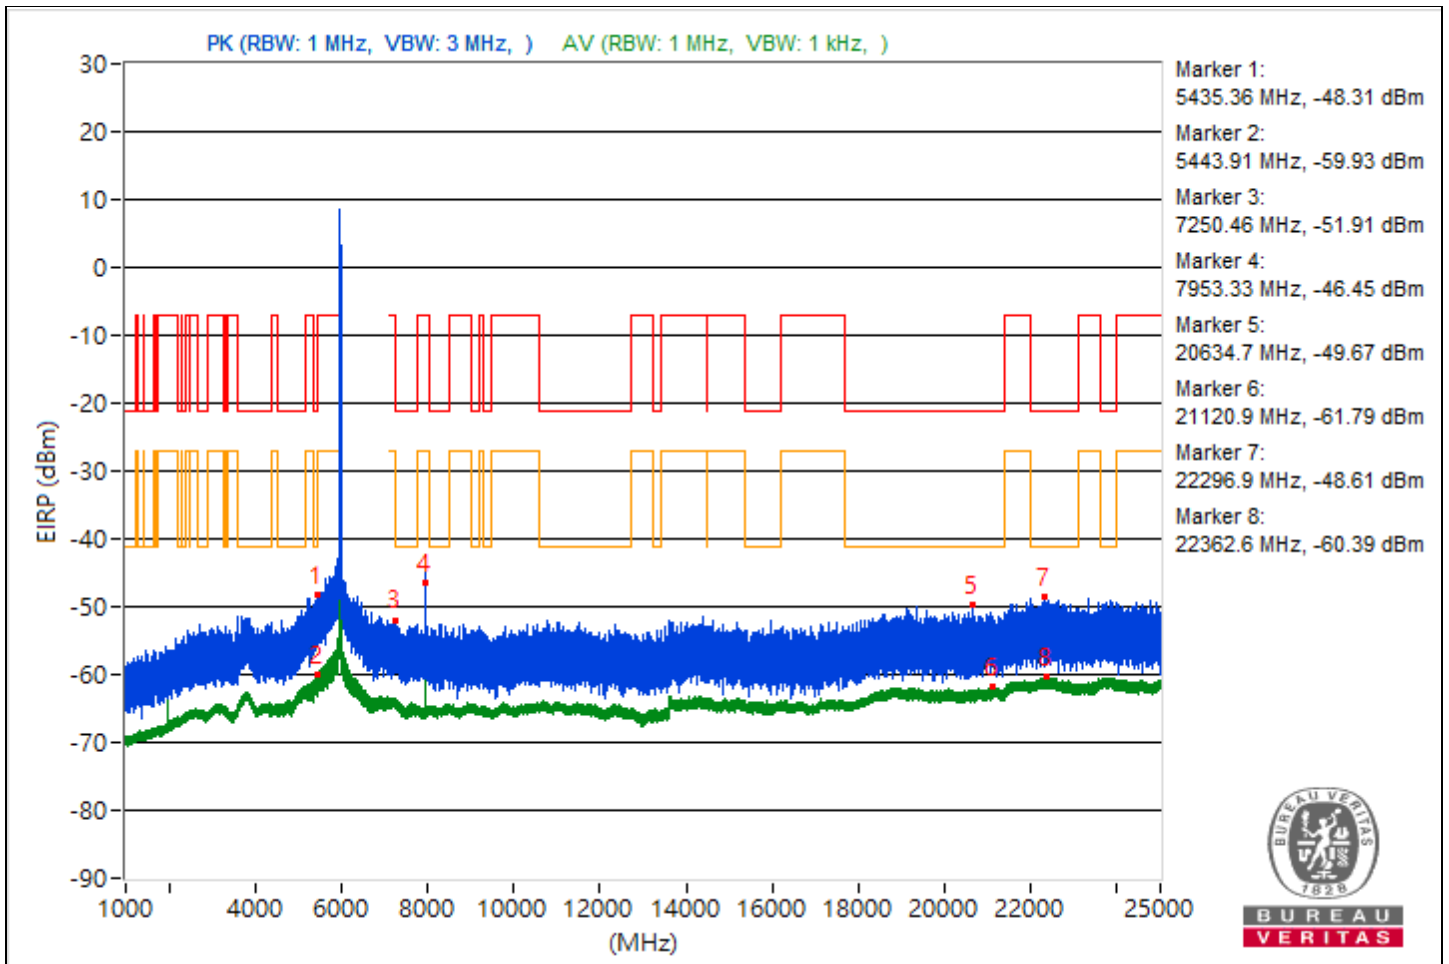

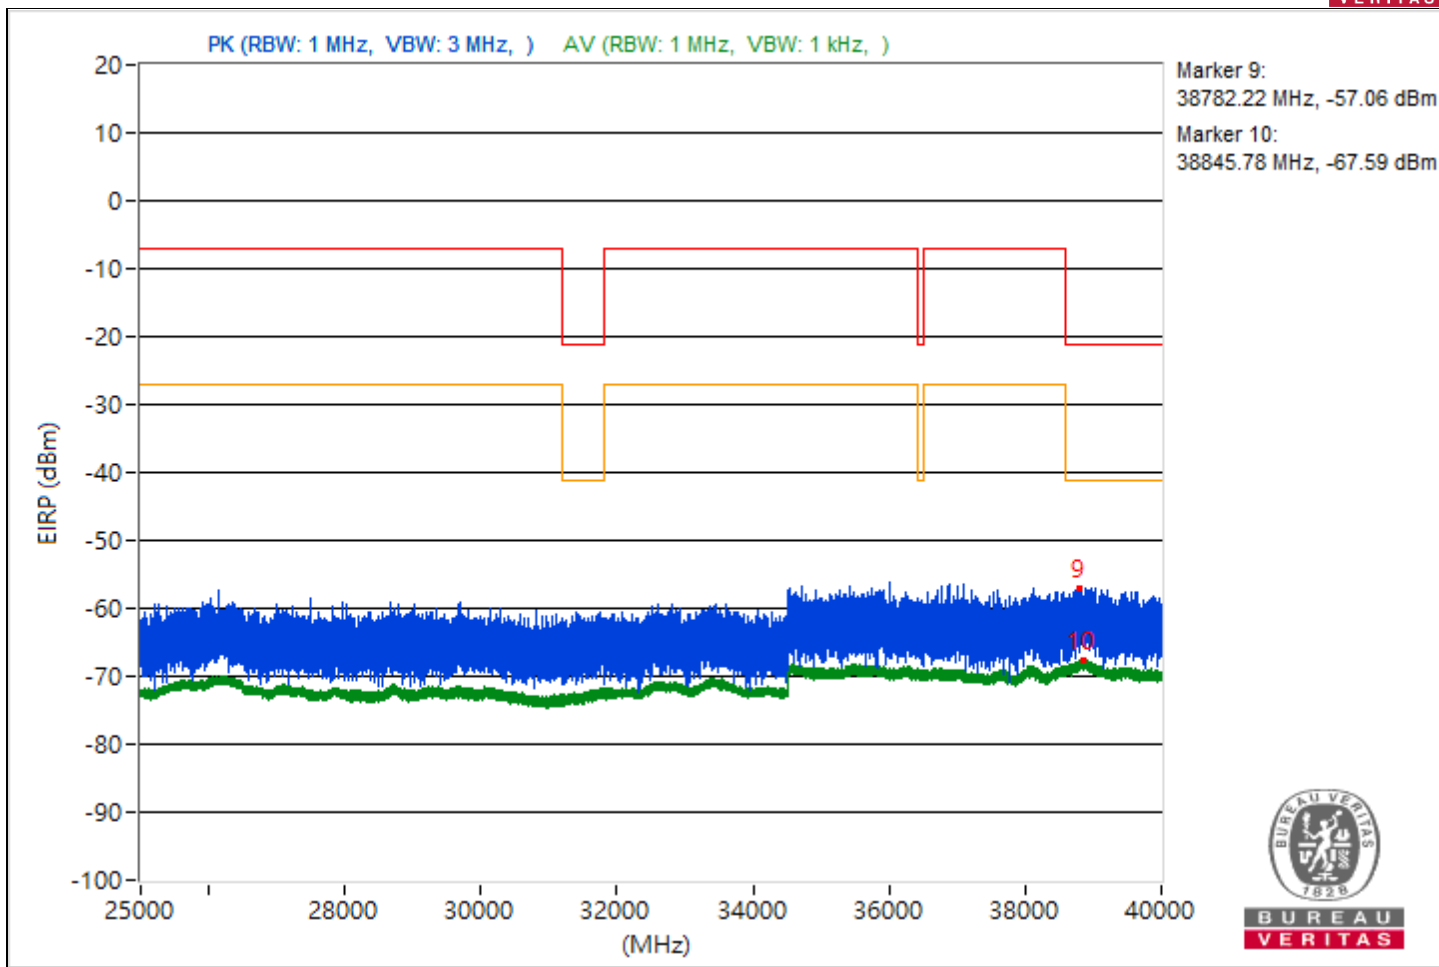





RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5457.99	45.23 PK	74	-28.77	-54.95	4.92	-50.03
2	5455.5	34.26 AV	54	-19.74	-65.92	4.92	-61
3	8220.09	48.4 PK	74	-25.6	-51.78	4.92	-46.86
4	8220	47.86 AV	54	-6.14	-52.32	4.92	-47.4
5	21028.1	45 PK	74	-29	-55.18	4.92	-50.26
6	21109	33.35 AV	54	-20.65	-66.83	4.92	-61.91
7	23601.4	46.06 PK	74	-27.94	-54.12	4.92	-49.2
8	23793.8	34.76 AV	54	-19.24	-65.42	4.92	-60.5
9	39024.18	39 PK	74	-35	-61.18	4.92	-56.26
10	38838.67	27.99 AV	54	-26.01	-72.19	4.92	-67.27

Note: Margin value = Emission Level - Limit value

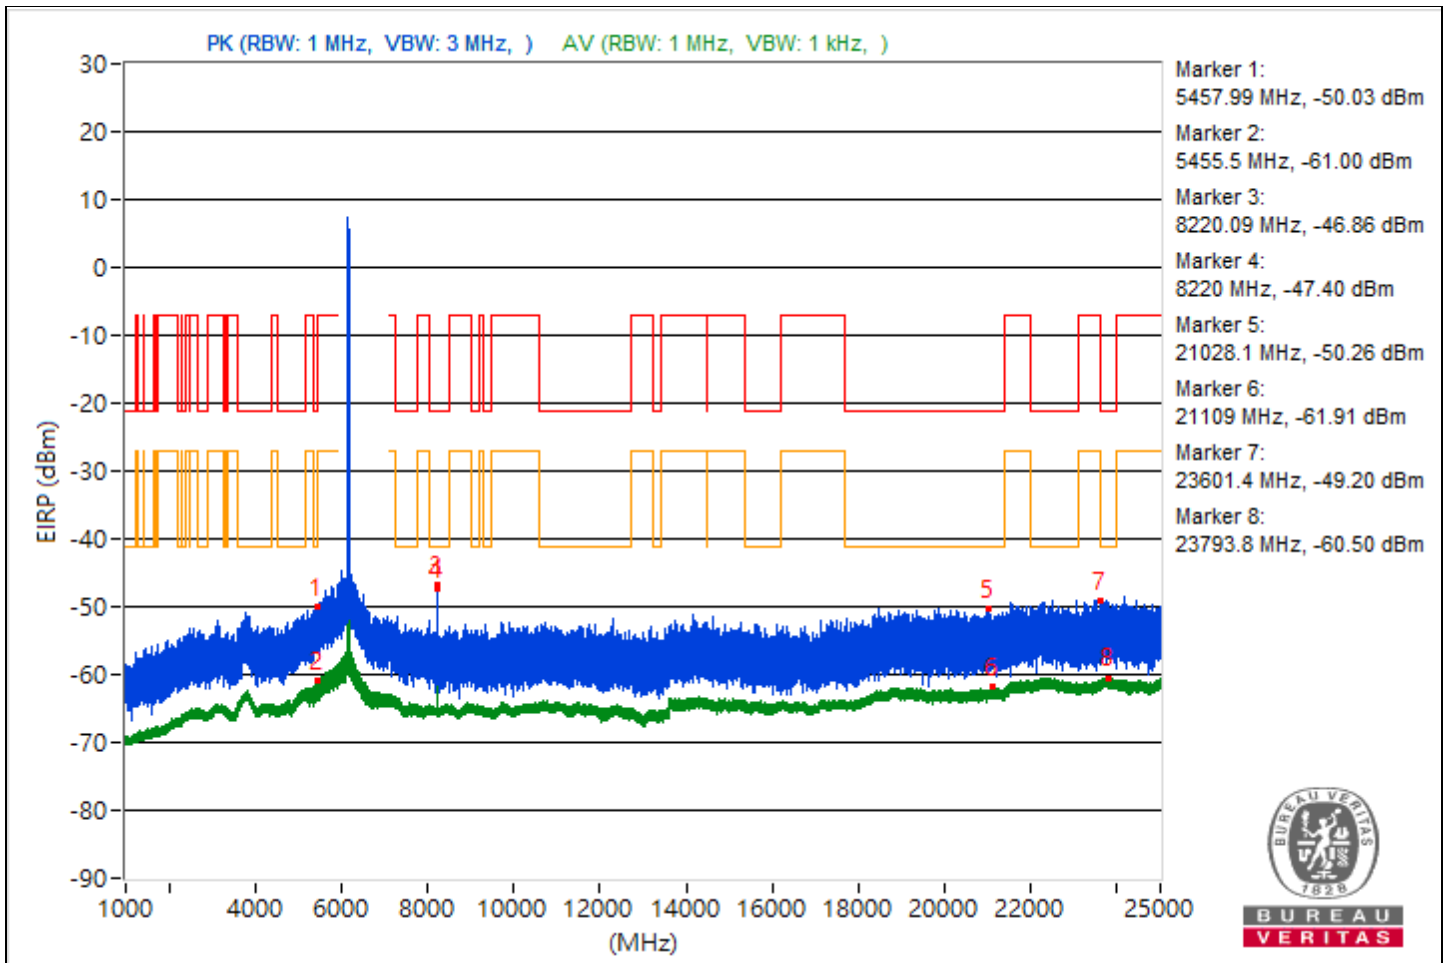

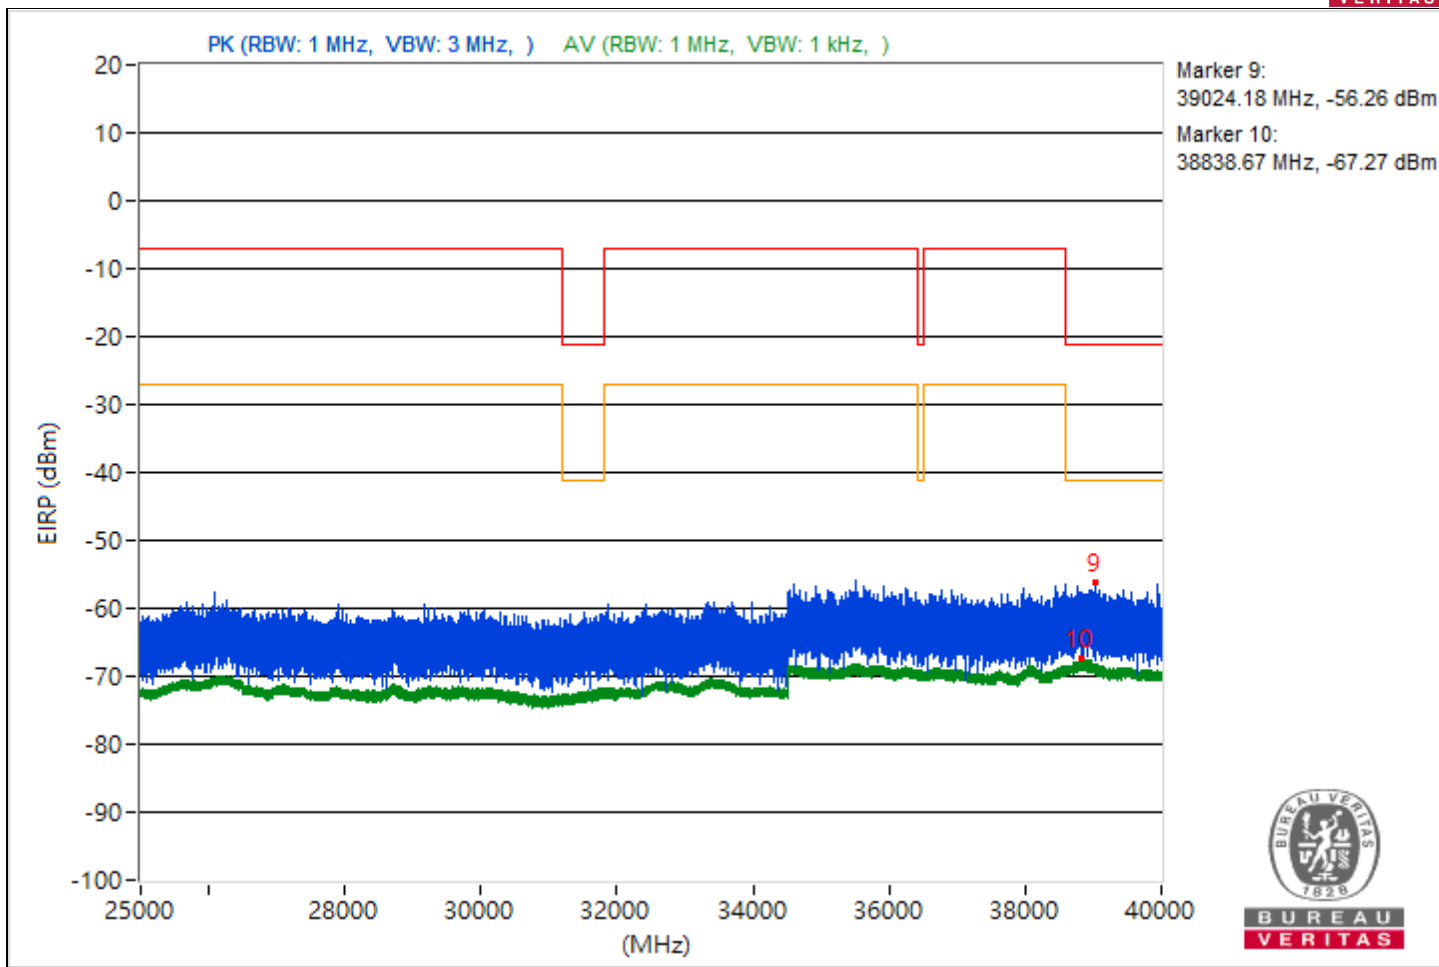





RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5428.04	44.91 PK	74	-29.09	-55.27	4.92	-50.35
2	5457.91	33.11 AV	54	-20.89	-67.07	4.92	-62.15
3	8483.82	43.99 PK	74	-30.01	-56.19	4.92	-51.27
4	7259.4	32.42 AV	54	-21.58	-67.76	4.92	-62.84
5	20008.4	45.59 PK	74	-28.41	-54.59	4.92	-49.67
6	18881.4	33.66 AV	54	-20.34	-66.52	4.92	-61.6
7	22455.1	47.3 PK	74	-26.7	-52.88	4.92	-47.96
8	22321.2	34.9 AV	54	-19.1	-65.28	4.92	-60.36
9	38924.44	38.44 PK	74	-35.56	-61.74	4.92	-56.82
10	38843.47	27.8 AV	54	-26.2	-72.38	4.92	-67.46

Note: Margin value = Emission Level - Limit value

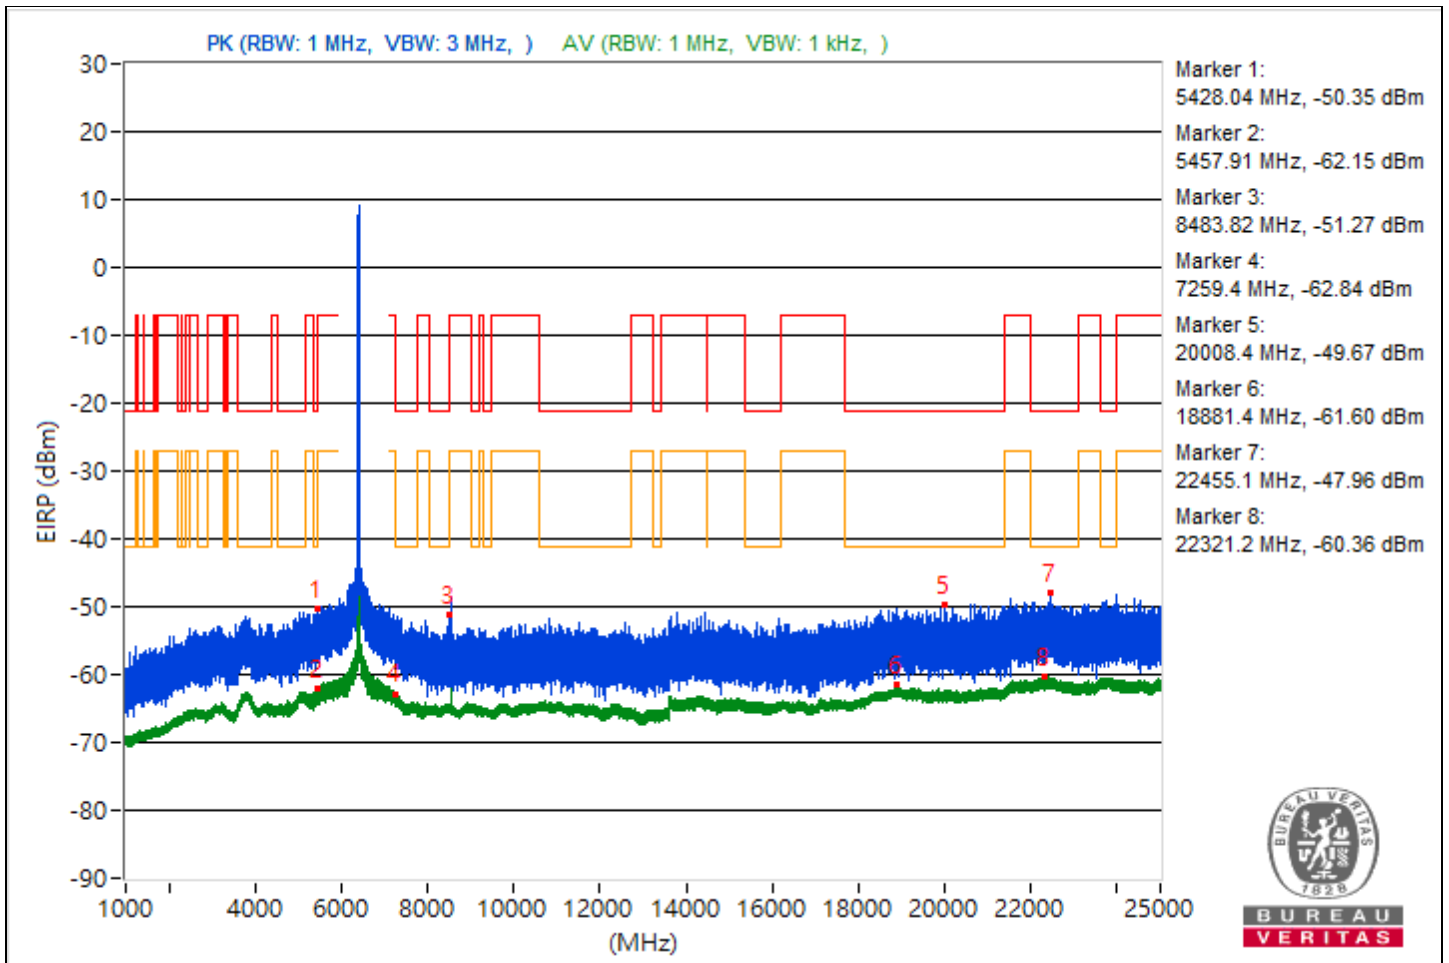

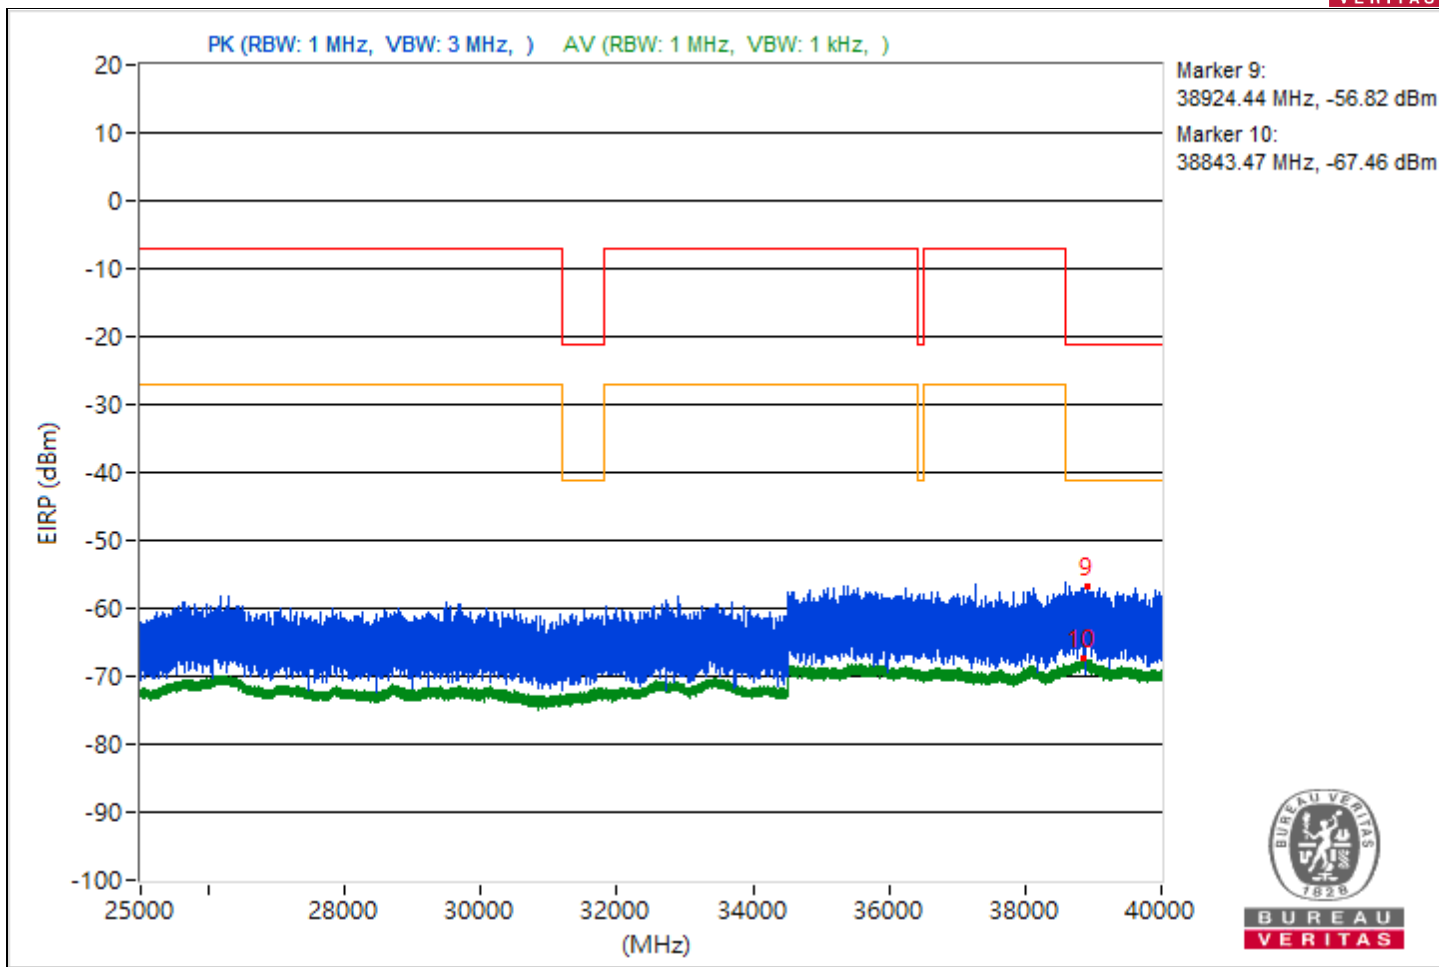





RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5422.68	45.39 PK	74	-28.61	-54.79	4.92	-49.87
2	5452.54	32.92 AV	54	-21.08	-67.26	4.92	-62.34
3	7304.12	44.38 PK	74	-29.62	-55.8	4.92	-50.88
4	7260.1	32.95 AV	54	-21.05	-67.23	4.92	-62.31
5	21130.2	45.32 PK	74	-28.68	-54.86	4.92	-49.94
6	21176.4	33.44 AV	54	-20.56	-66.74	4.92	-61.82
7	22122.9	46.42 PK	74	-27.58	-53.76	4.92	-48.84
8	22550.1	34.89 AV	54	-19.11	-65.29	4.92	-60.37
9	38835.56	39.55 PK	74	-34.45	-60.63	4.92	-55.71
10	38817.69	27.66 AV	54	-26.34	-72.52	4.92	-67.6

Note: Margin value = Emission Level - Limit value

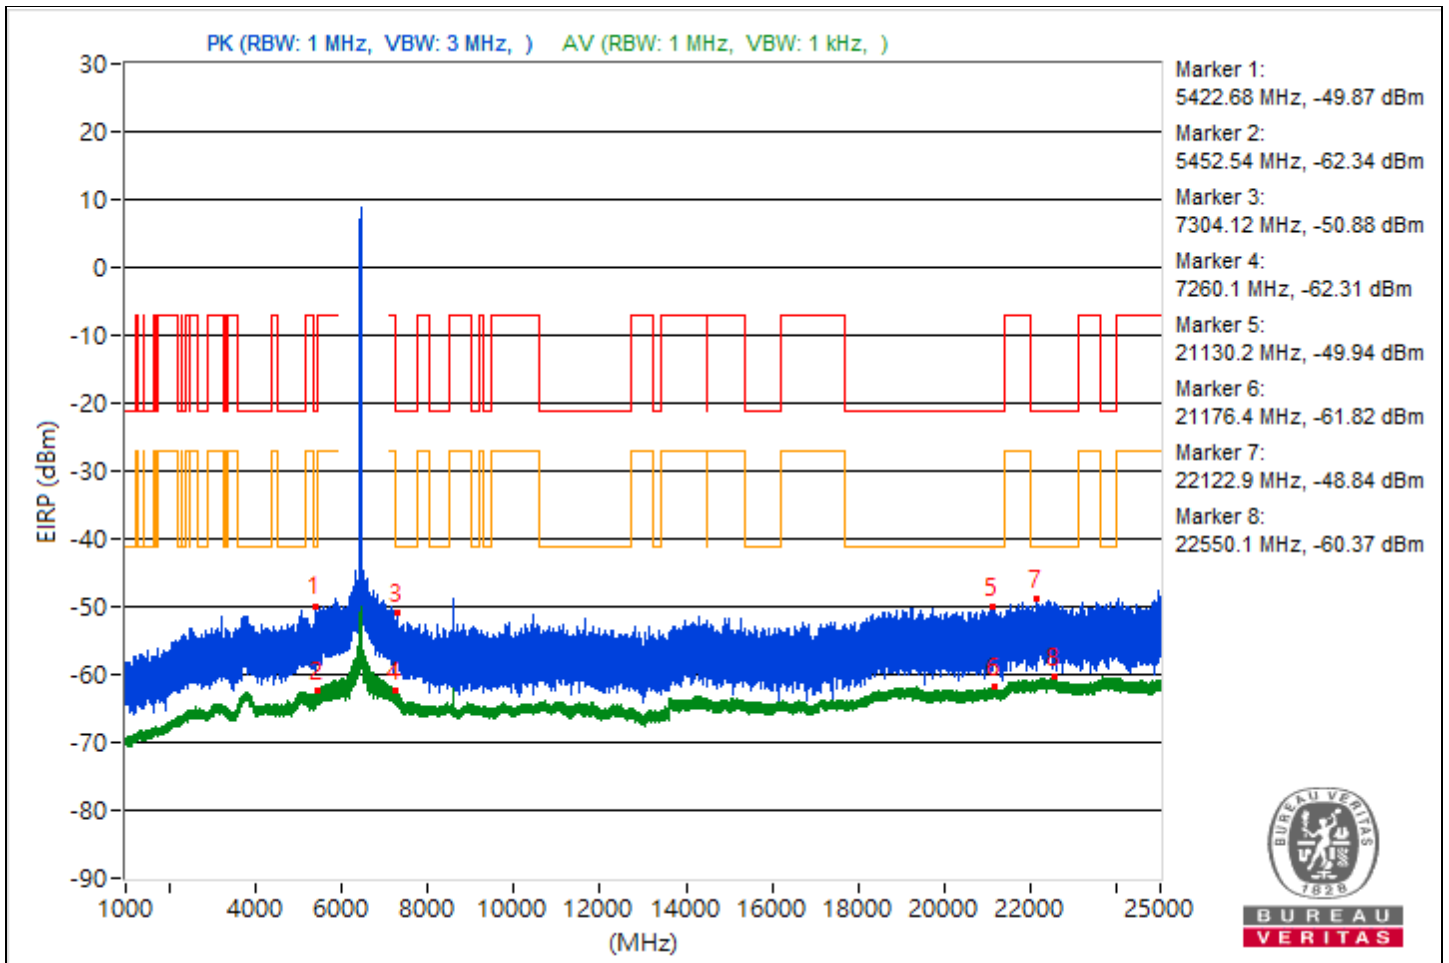

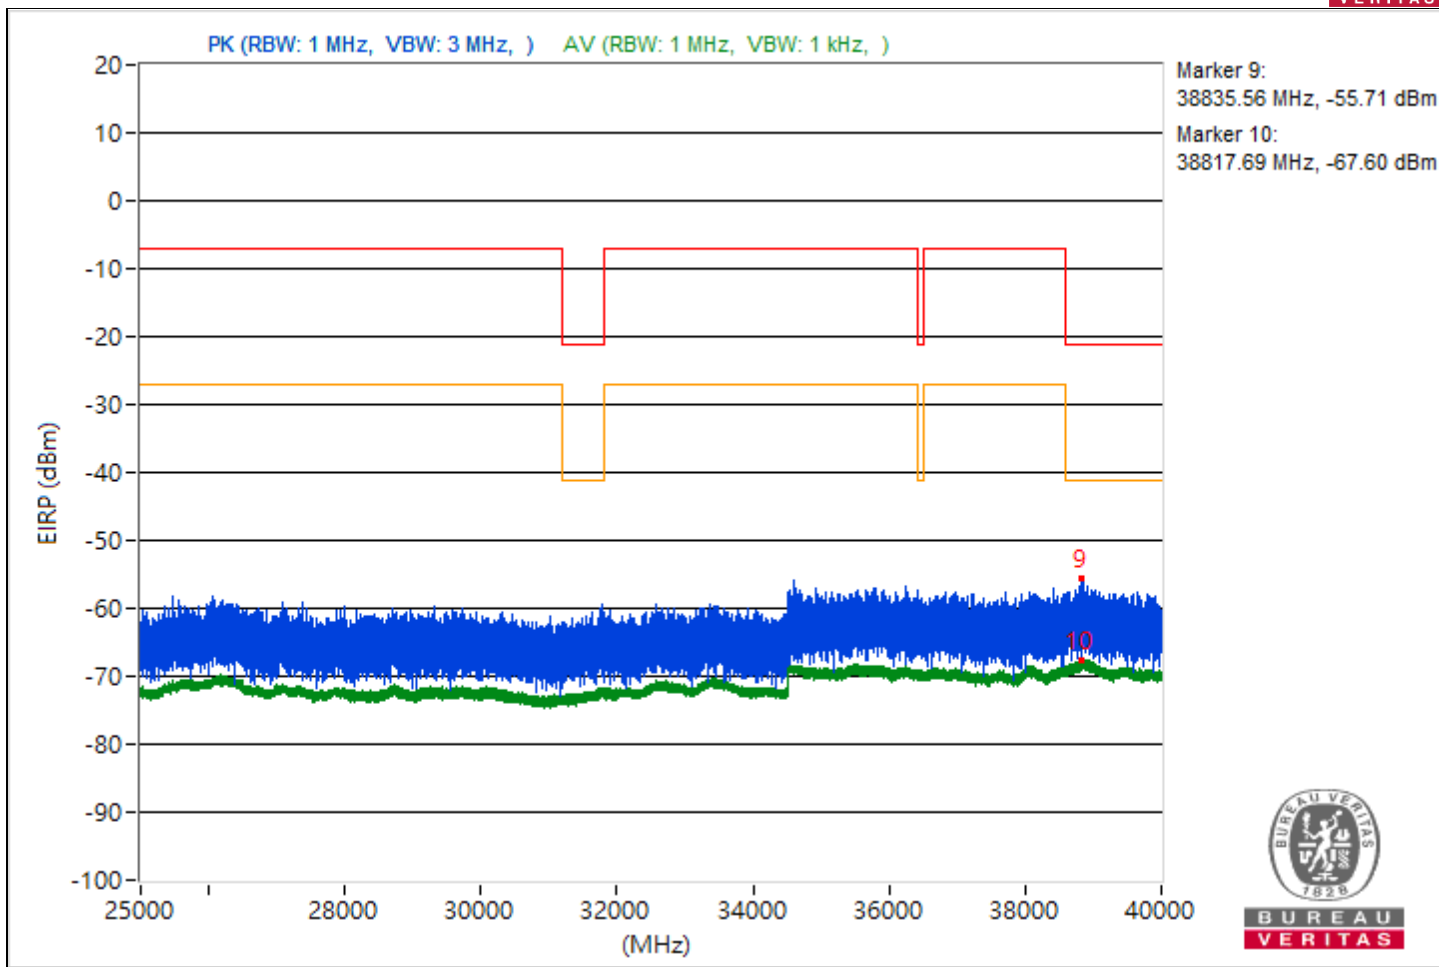





RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3730.78	46.08 PK	74	-27.92	-54.1	4.92	-49.18
2	5453.4	32.87 AV	54	-21.13	-67.31	4.92	-62.39
3	7277.91	44.24 PK	74	-29.76	-55.94	4.92	-51.02
4	7250.22	32.92 AV	54	-21.08	-67.26	4.92	-62.34
5	18813.9	45.93 PK	74	-28.07	-54.25	4.92	-49.33
6	19341.2	33.33 AV	54	-20.67	-66.85	4.92	-61.93
7	23837.1	47.02 PK	74	-26.98	-53.16	4.92	-48.24
8	22276.7	34.81 AV	54	-19.19	-65.37	4.92	-60.45
9	38835.82	38.99 PK	74	-35.01	-61.19	4.92	-56.27
10	38875.2	27.63 AV	54	-26.37	-72.55	4.92	-67.63

Note: Margin value = Emission Level - Limit value

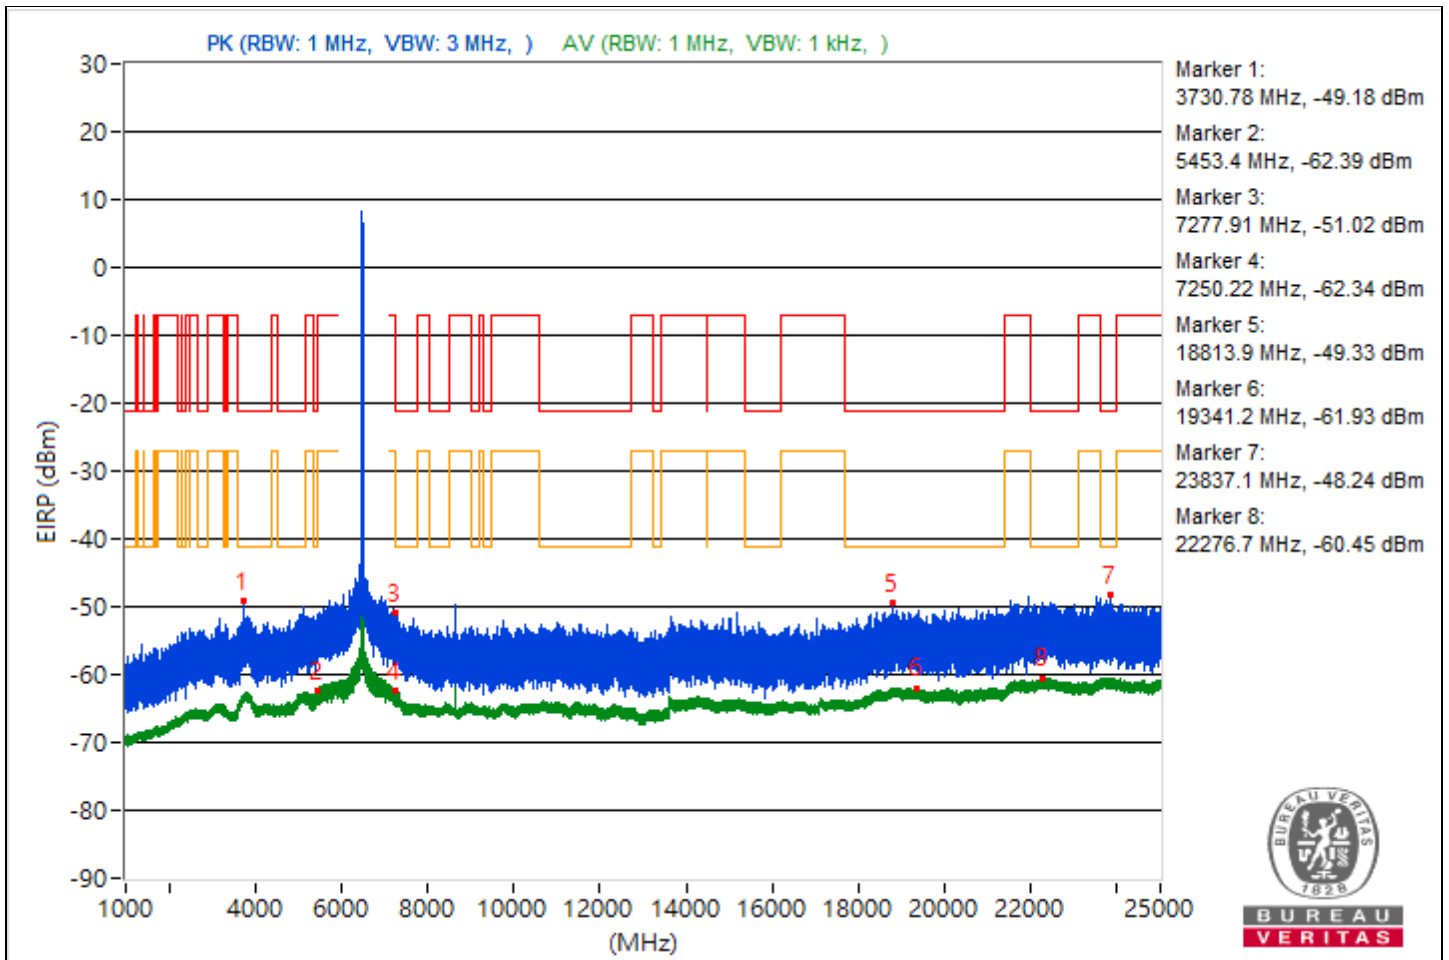

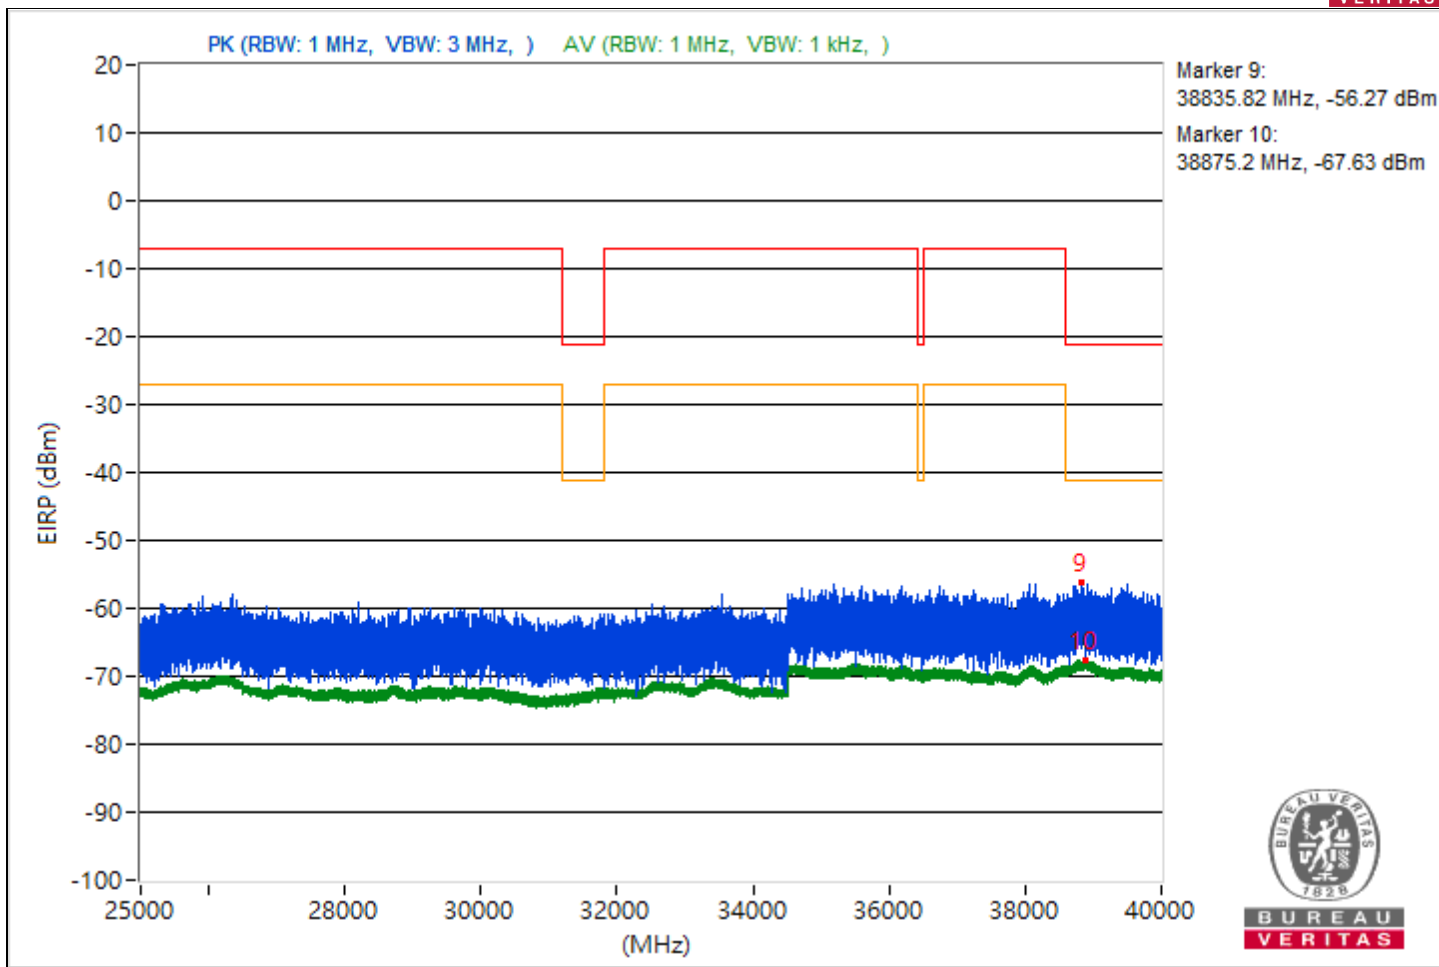





RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5112.66	44.64 PK	74	-29.36	-55.54	4.92	-50.62
2	3788.41	32.71 AV	54	-21.29	-67.47	4.92	-62.55
3	8328.71	43.79 PK	74	-30.21	-56.39	4.92	-51.47
4	7281.1	32.49 AV	54	-21.51	-67.69	4.92	-62.77
5	20601.7	45.6 PK	74	-28.4	-54.58	4.92	-49.66
6	19313	33.36 AV	54	-20.64	-66.82	4.92	-61.9
7	22770.3	46.79 PK	74	-27.21	-53.39	4.92	-48.47
8	23716.6	34.72 AV	54	-19.28	-65.46	4.92	-60.54
9	38839.11	38.94 PK	74	-35.06	-61.24	4.92	-56.32
10	38827.29	27.8 AV	54	-26.2	-72.38	4.92	-67.46

Note: Margin value = Emission Level - Limit value

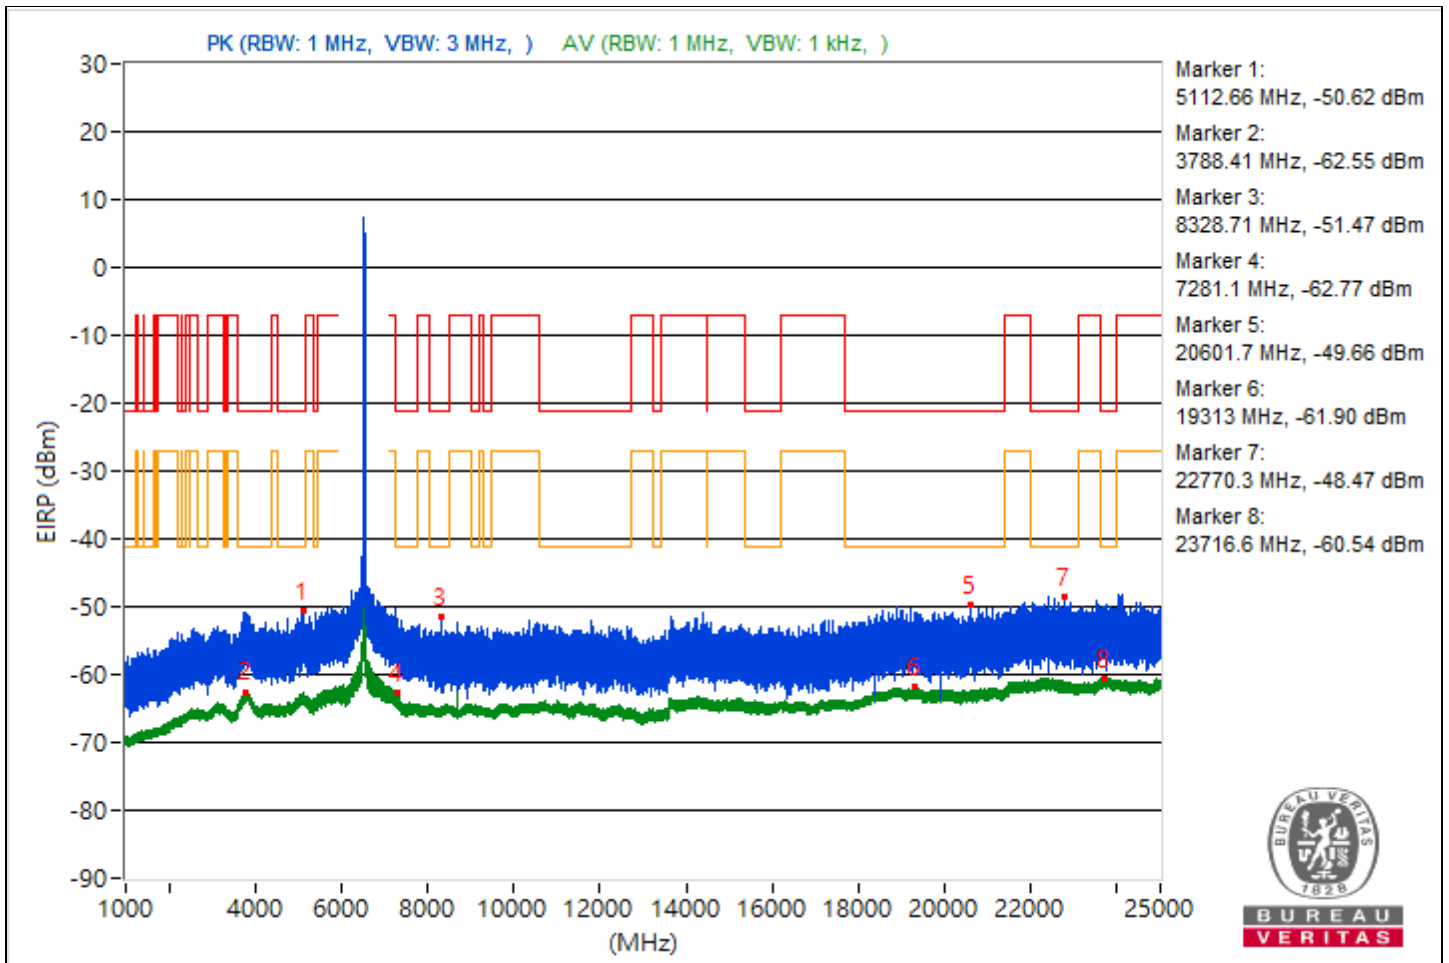

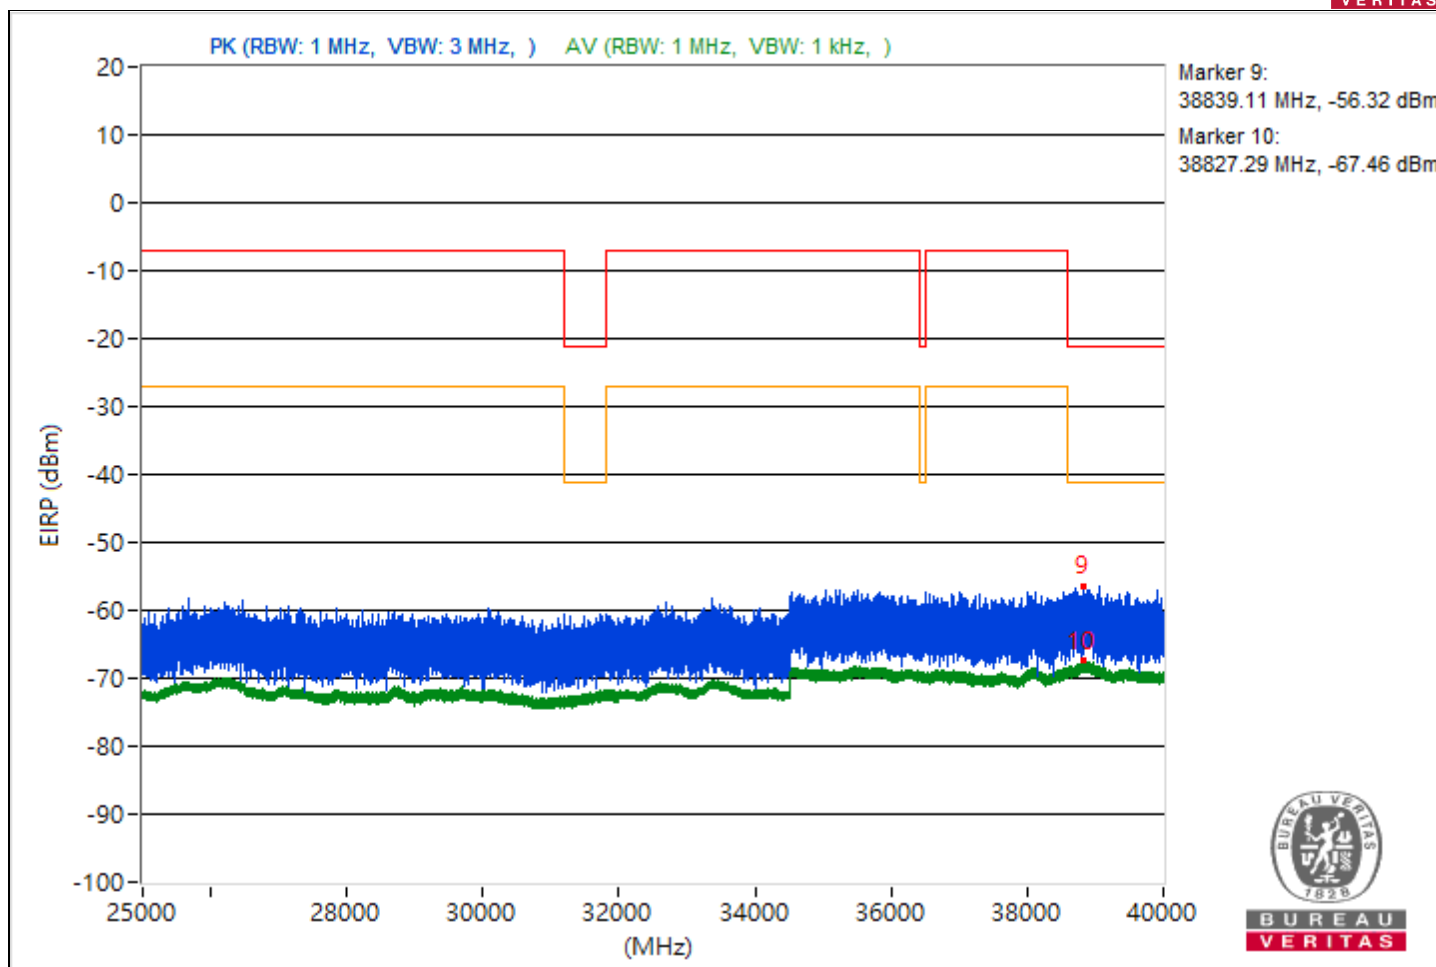





RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3764.69	44.25 PK	74	-29.75	-55.93	4.92	-51.01
2	3825.98	32.73 AV	54	-21.27	-67.45	4.92	-62.53
3	15778.04	45.23 PK	74	-28.77	-54.95	4.92	-50.03
4	7272.31	32.63 AV	54	-21.37	-67.55	4.92	-62.63
5	19462.8	44.88 PK	74	-29.12	-55.3	4.92	-50.38
6	21089.2	33.36 AV	54	-20.64	-66.82	4.92	-61.9
7	22255.2	46.81 PK	74	-27.19	-53.37	4.92	-48.45
8	22371.8	34.81 AV	54	-19.19	-65.37	4.92	-60.45
9	38807.73	38.51 PK	74	-35.49	-61.67	4.92	-56.75
10	38853.51	27.69 AV	54	-26.31	-72.49	4.92	-67.57

Note: Margin value = Emission Level - Limit value

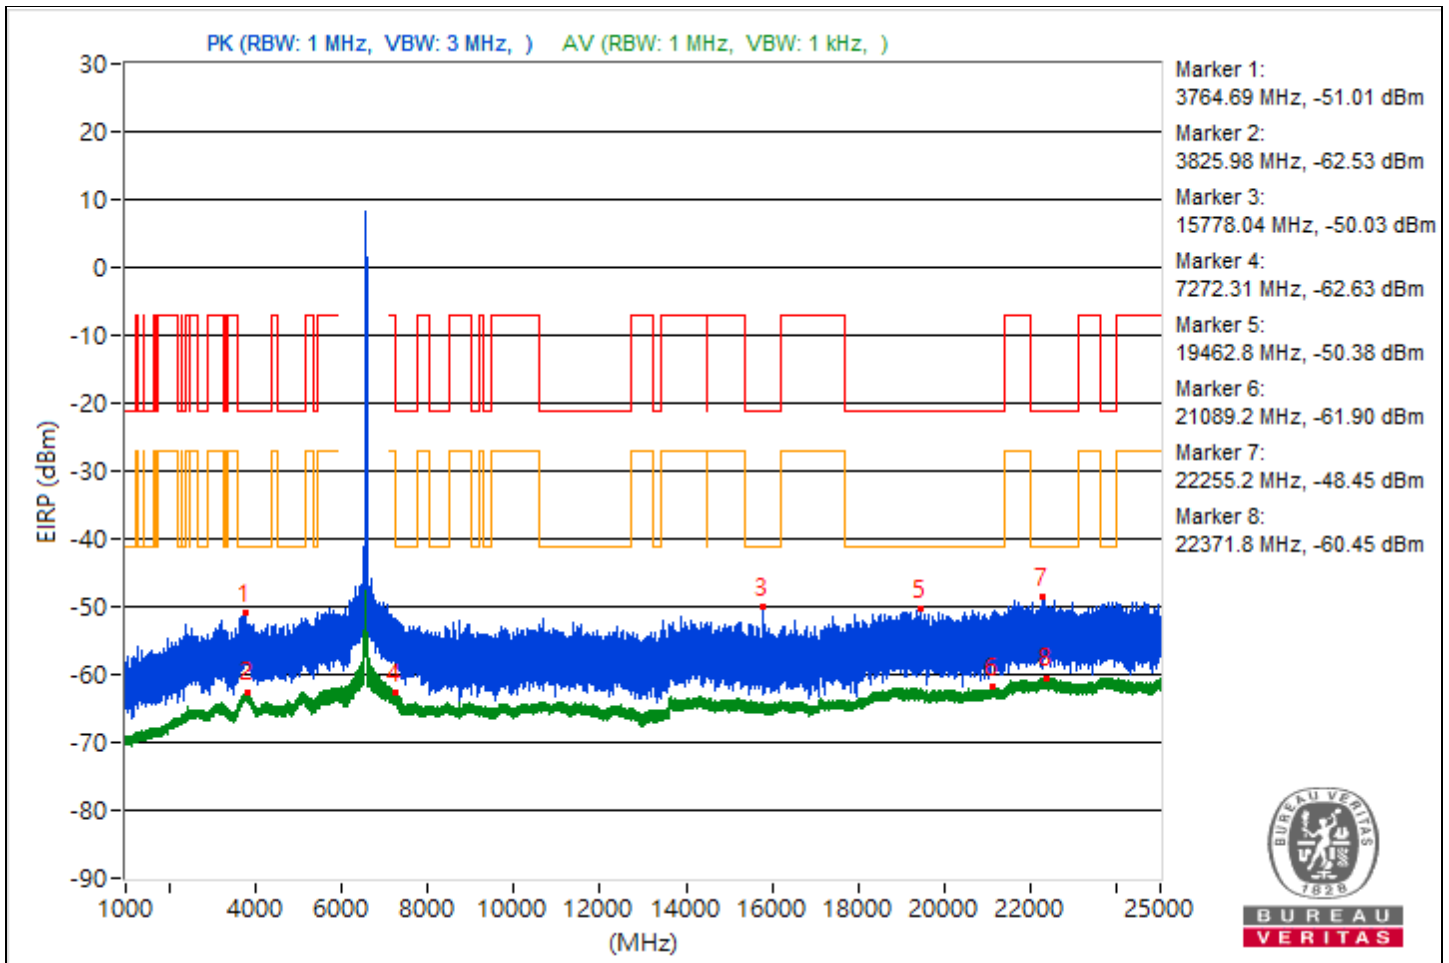

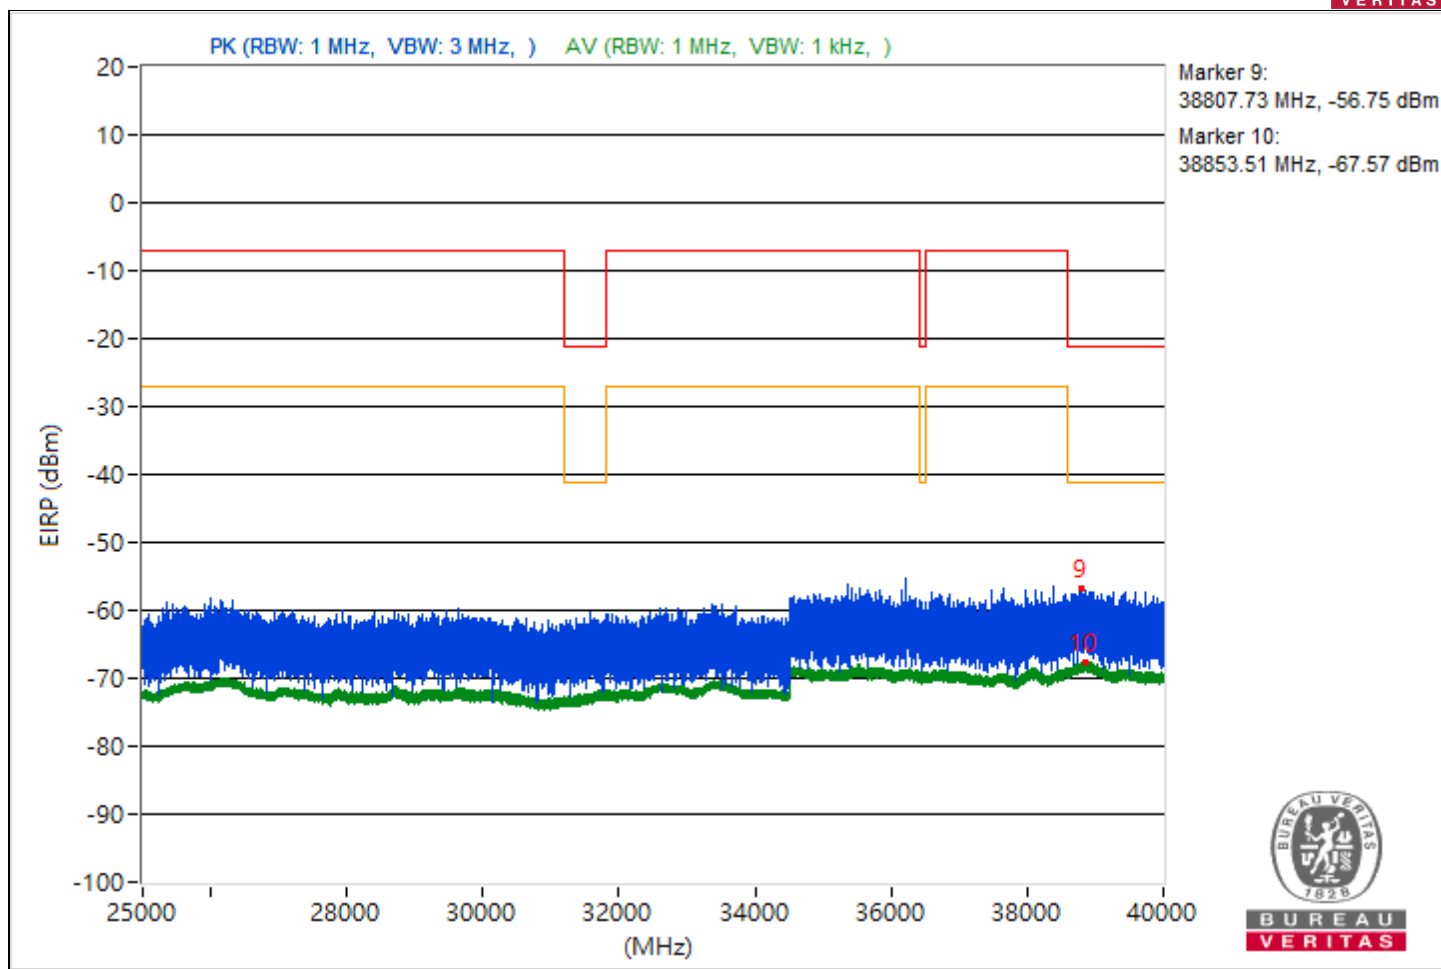





RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.76	44.78 PK	74	-29.22	-55.4	4.92	-50.48
2	3820.77	32.63 AV	54	-21.37	-67.55	4.92	-62.63
3	7289.34	44.02 PK	74	-29.98	-56.16	4.92	-51.24
4	7256.21	33.42 AV	54	-20.58	-66.76	4.92	-61.84
5	20964.6	46.29 PK	74	-27.71	-53.89	4.92	-48.97
6	21138.6	33.39 AV	54	-20.61	-66.79	4.92	-61.87
7	23779.2	46.51 PK	74	-27.49	-53.67	4.92	-48.75
8	23741.3	34.89 AV	54	-19.11	-65.29	4.92	-60.37
9	38836.53	38.92 PK	74	-35.08	-61.26	4.92	-56.34
10	38826.58	27.81 AV	54	-26.19	-72.37	4.92	-67.45

Note: Margin value = Emission Level - Limit value

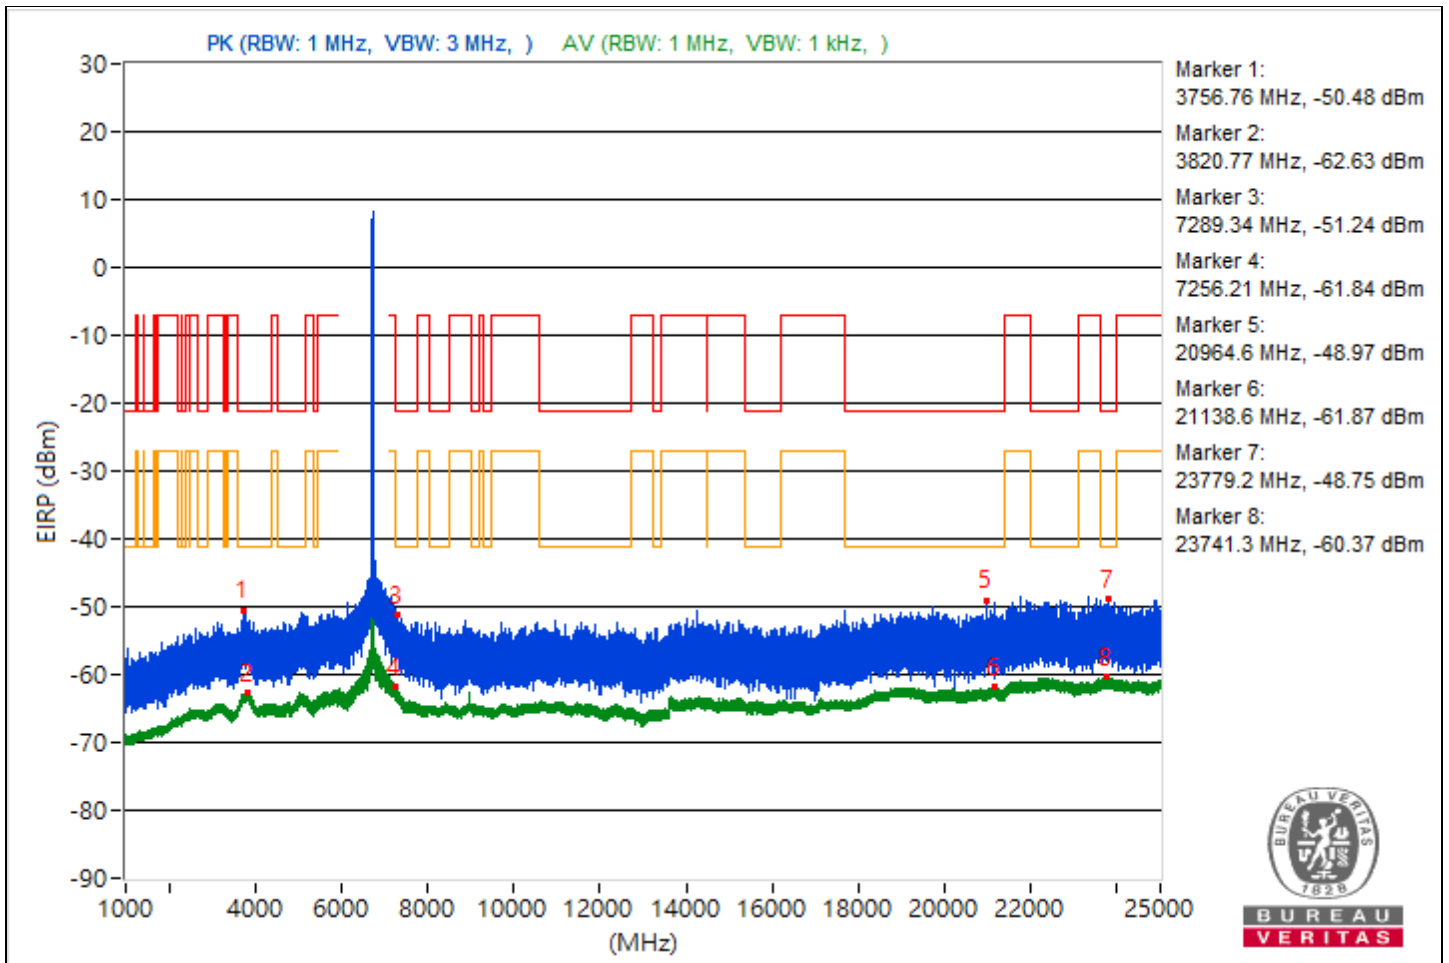

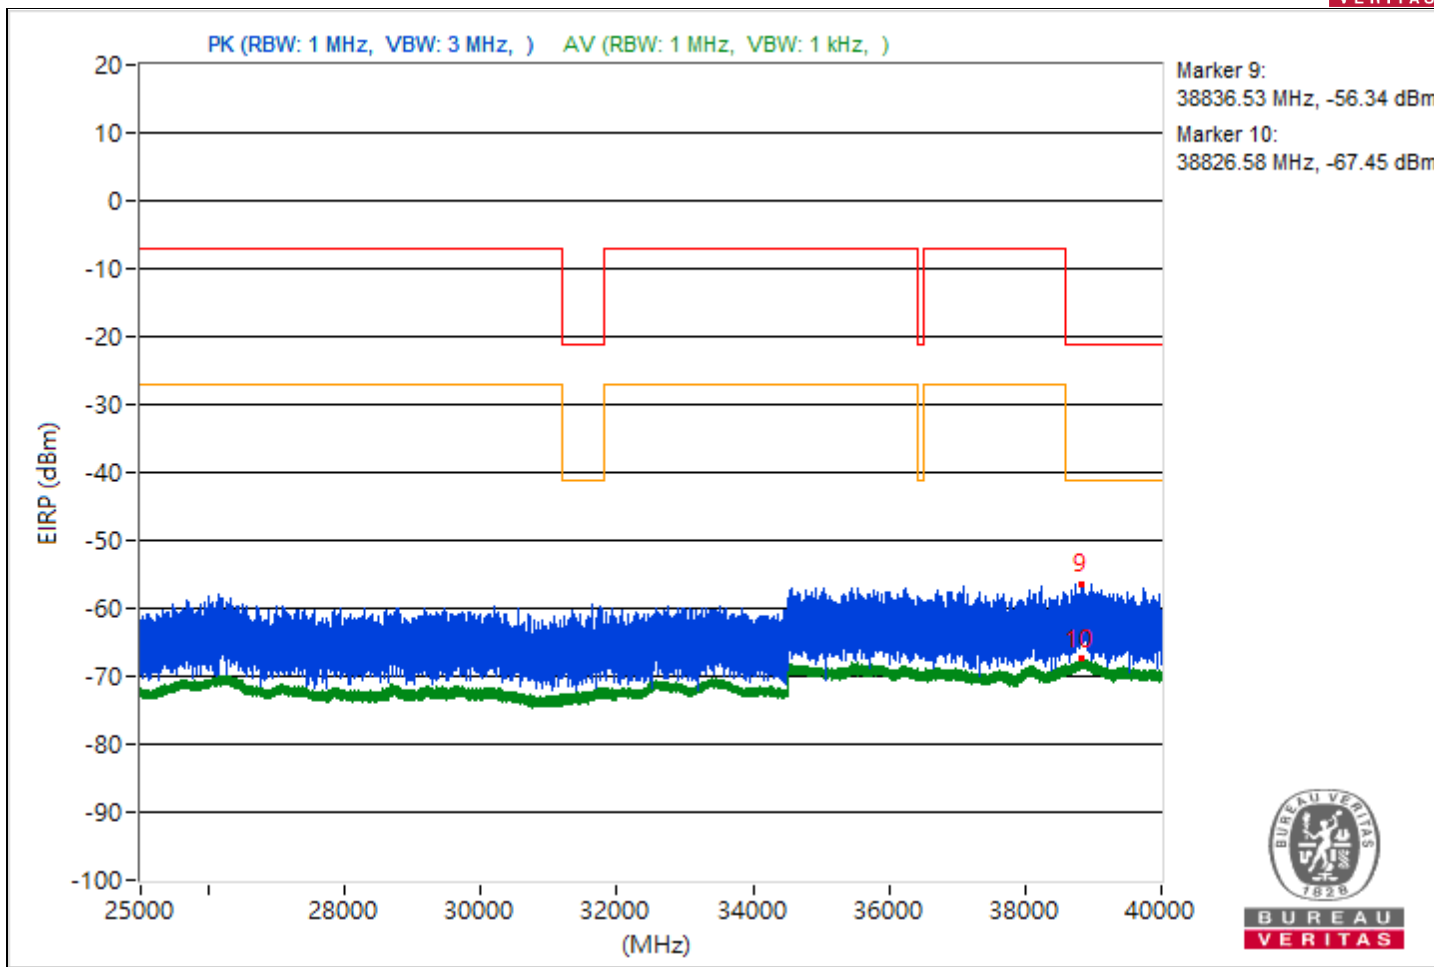





RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5004.62	44.94 PK	74	-29.06	-55.24	4.92	-50.32
2	3776.59	32.71 AV	54	-21.29	-67.47	4.92	-62.55
3	7330.1	46.08 PK	74	-27.92	-54.1	4.92	-49.18
4	7250.77	34.29 AV	54	-19.71	-65.89	4.92	-60.97
5	18840.9	45.29 PK	74	-28.71	-54.89	4.92	-49.97
6	21138.8	33.39 AV	54	-20.61	-66.79	4.92	-61.87
7	23675.9	46.95 PK	74	-27.05	-53.23	4.92	-48.31
8	23745.3	34.96 AV	54	-19.04	-65.22	4.92	-60.3
9	38819.47	38.7 PK	74	-35.3	-61.48	4.92	-56.56
10	38860.09	27.9 AV	54	-26.1	-72.28	4.92	-67.36

Note: Margin value = Emission Level - Limit value

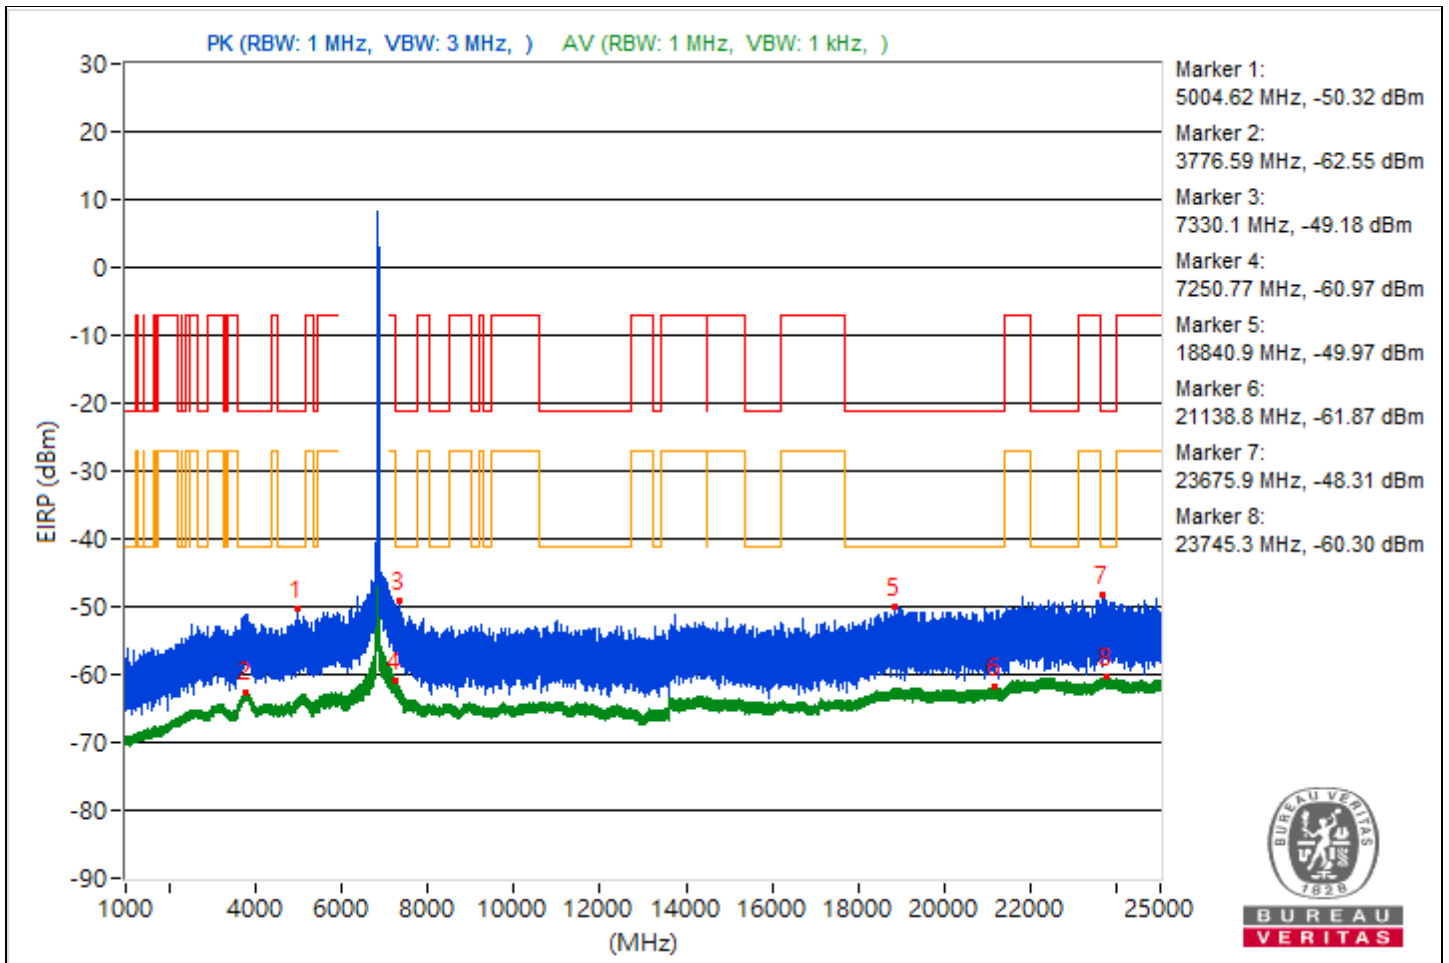

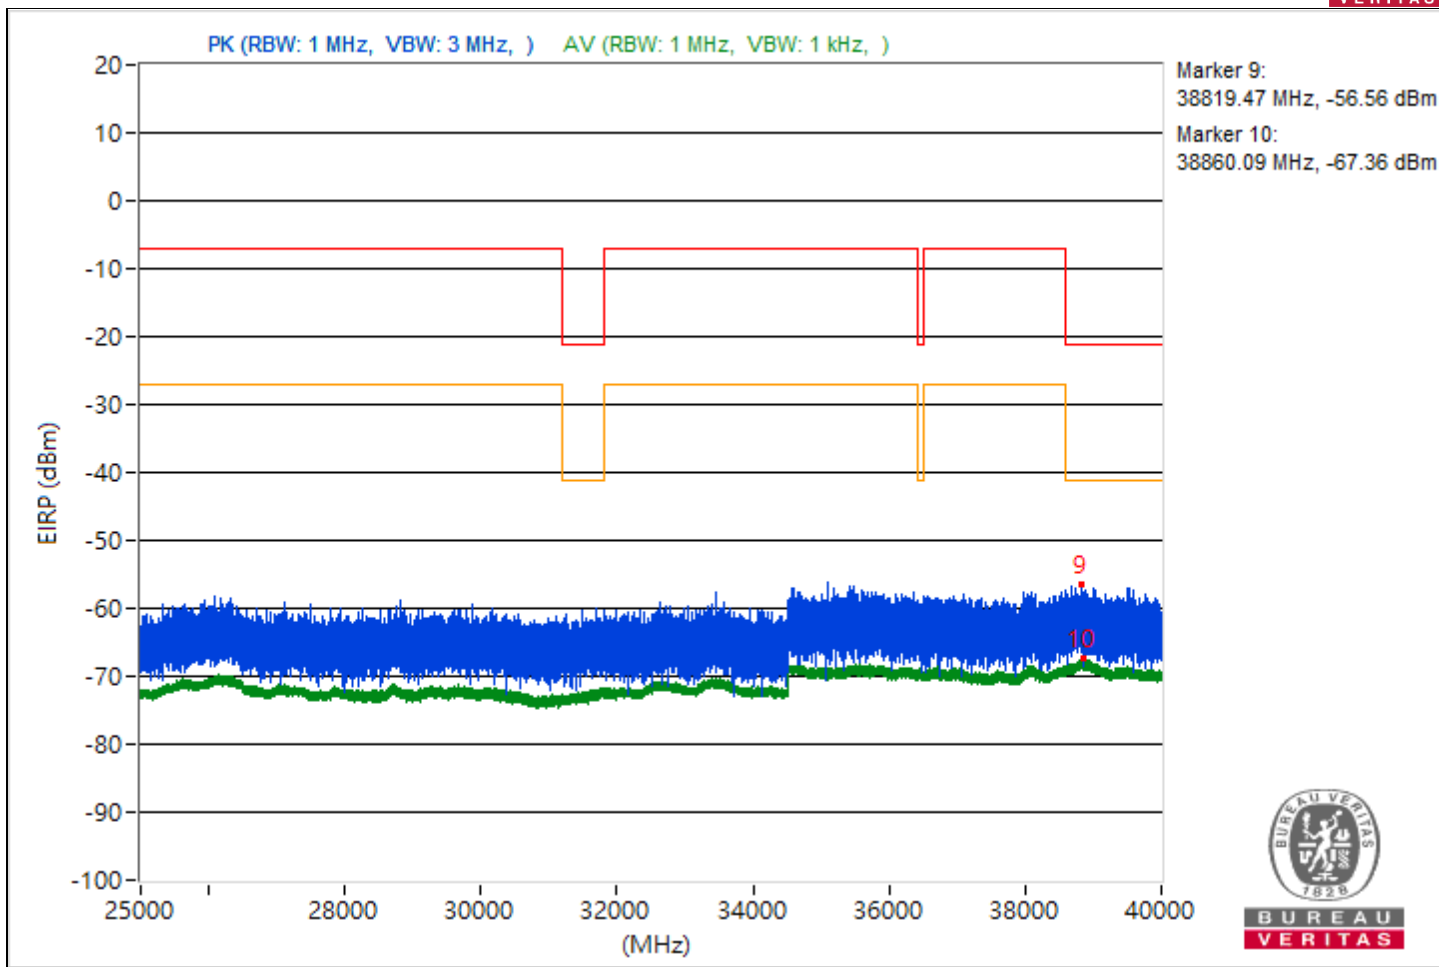





RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.6	44.23 PK	74	-29.77	-55.95	4.92	-51.03
2	3816.64	32.85 AV	54	-21.15	-67.33	4.92	-62.41
3	7266.09	44.85 PK	74	-29.15	-55.33	4.92	-50.41
4	7250.61	34.3 AV	54	-19.7	-65.88	4.92	-60.96
5	20114.8	45.34 PK	74	-28.66	-54.84	4.92	-49.92
6	18963.6	33.43 AV	54	-20.57	-66.75	4.92	-61.83
7	22405	46.94 PK	74	-27.06	-53.24	4.92	-48.32
8	23838	34.9 AV	54	-19.1	-65.28	4.92	-60.36
9	38936.36	38.52 PK	74	-35.48	-61.66	4.92	-56.74
10	38840.27	27.79 AV	54	-26.21	-72.39	4.92	-67.47

Note: Margin value = Emission Level - Limit value

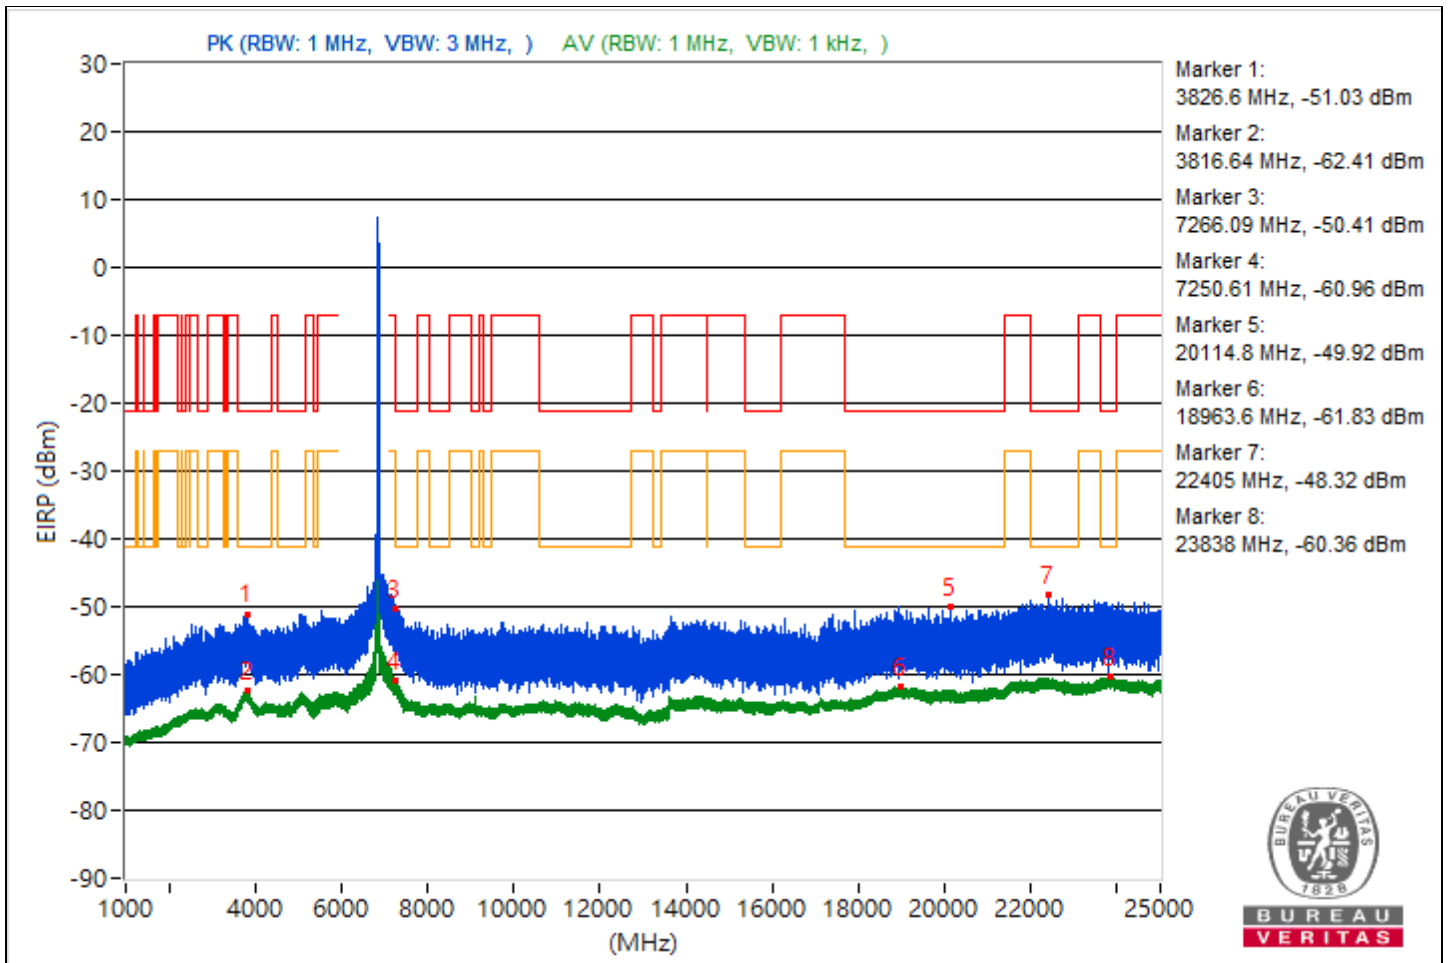

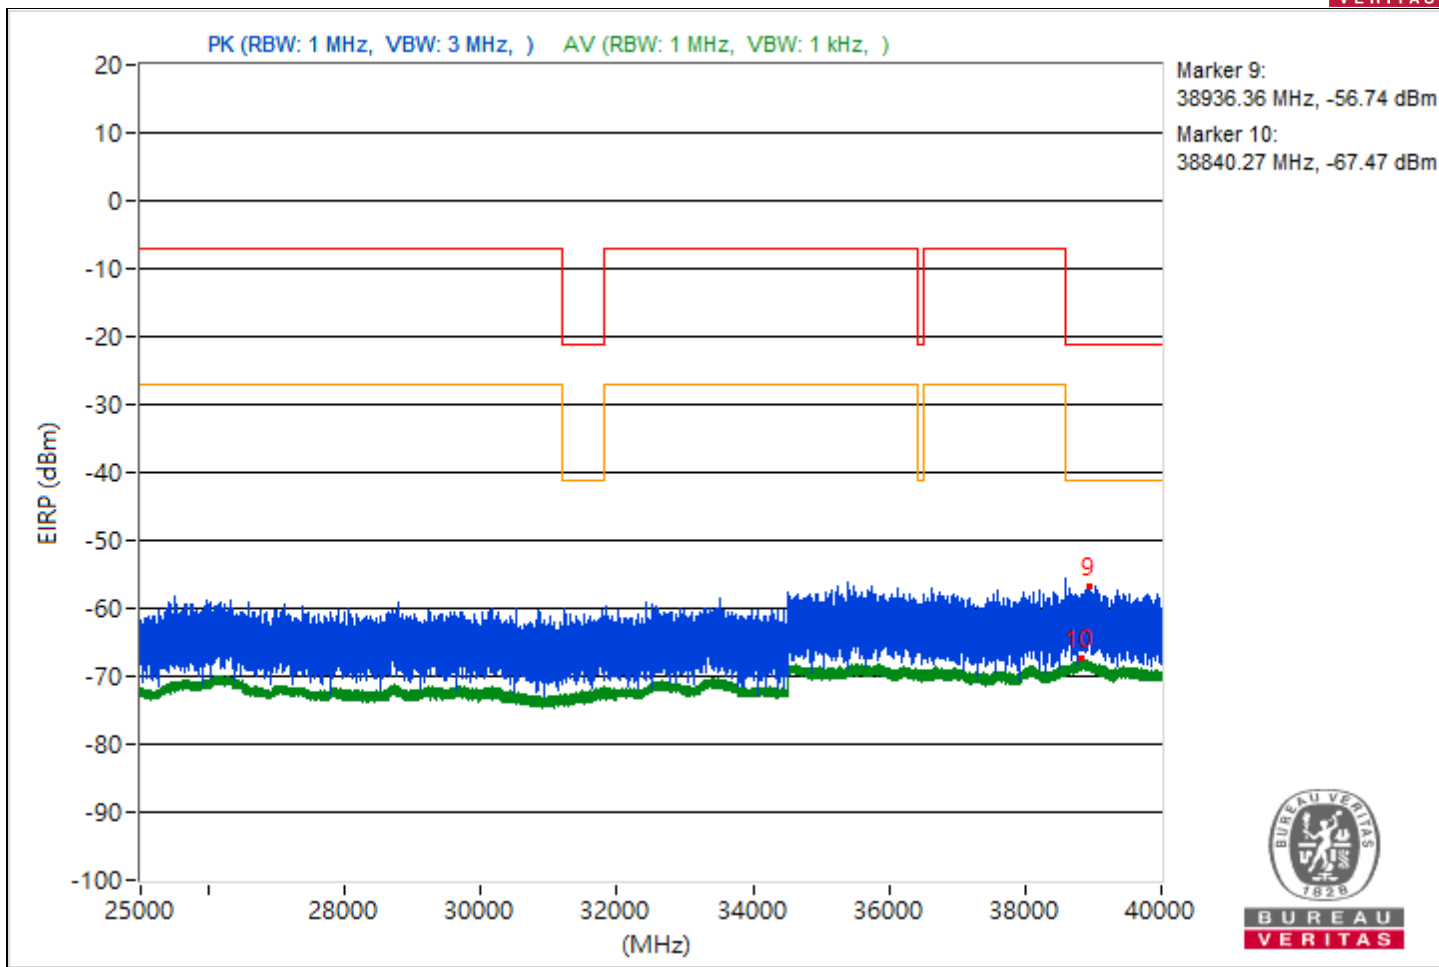





RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5019.94	44.45 PK	74	-29.55	-55.73	4.92	-50.81
2	3827.07	32.66 AV	54	-21.34	-67.52	4.92	-62.6
3	7289.97	47.61 PK	74	-26.39	-52.57	4.92	-47.65
4	7252.24	36.36 AV	54	-17.64	-63.82	4.92	-58.9
5	21100.5	45.92 PK	74	-28.08	-54.26	4.92	-49.34
6	18861.3	33.41 AV	54	-20.59	-66.77	4.92	-61.85
7	22241.2	47.23 PK	74	-26.77	-52.95	4.92	-48.03
8	23720.2	34.86 AV	54	-19.14	-65.32	4.92	-60.4
9	38901.87	38.62 PK	74	-35.38	-61.56	4.92	-56.64
10	38853.16	27.82 AV	54	-26.18	-72.36	4.92	-67.44

Note: Margin value = Emission Level - Limit value

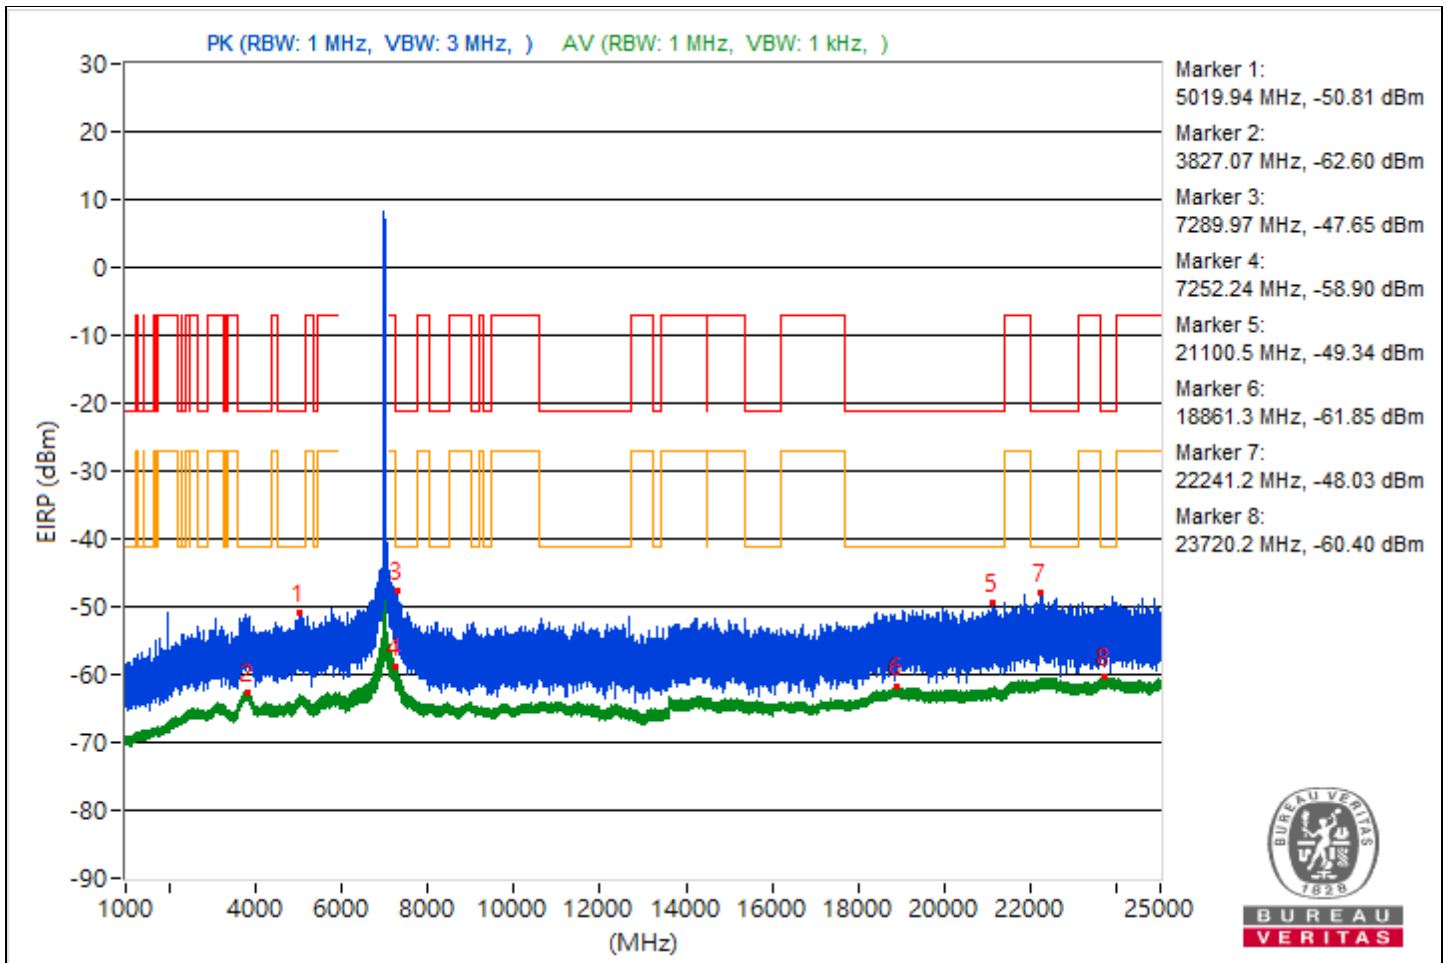

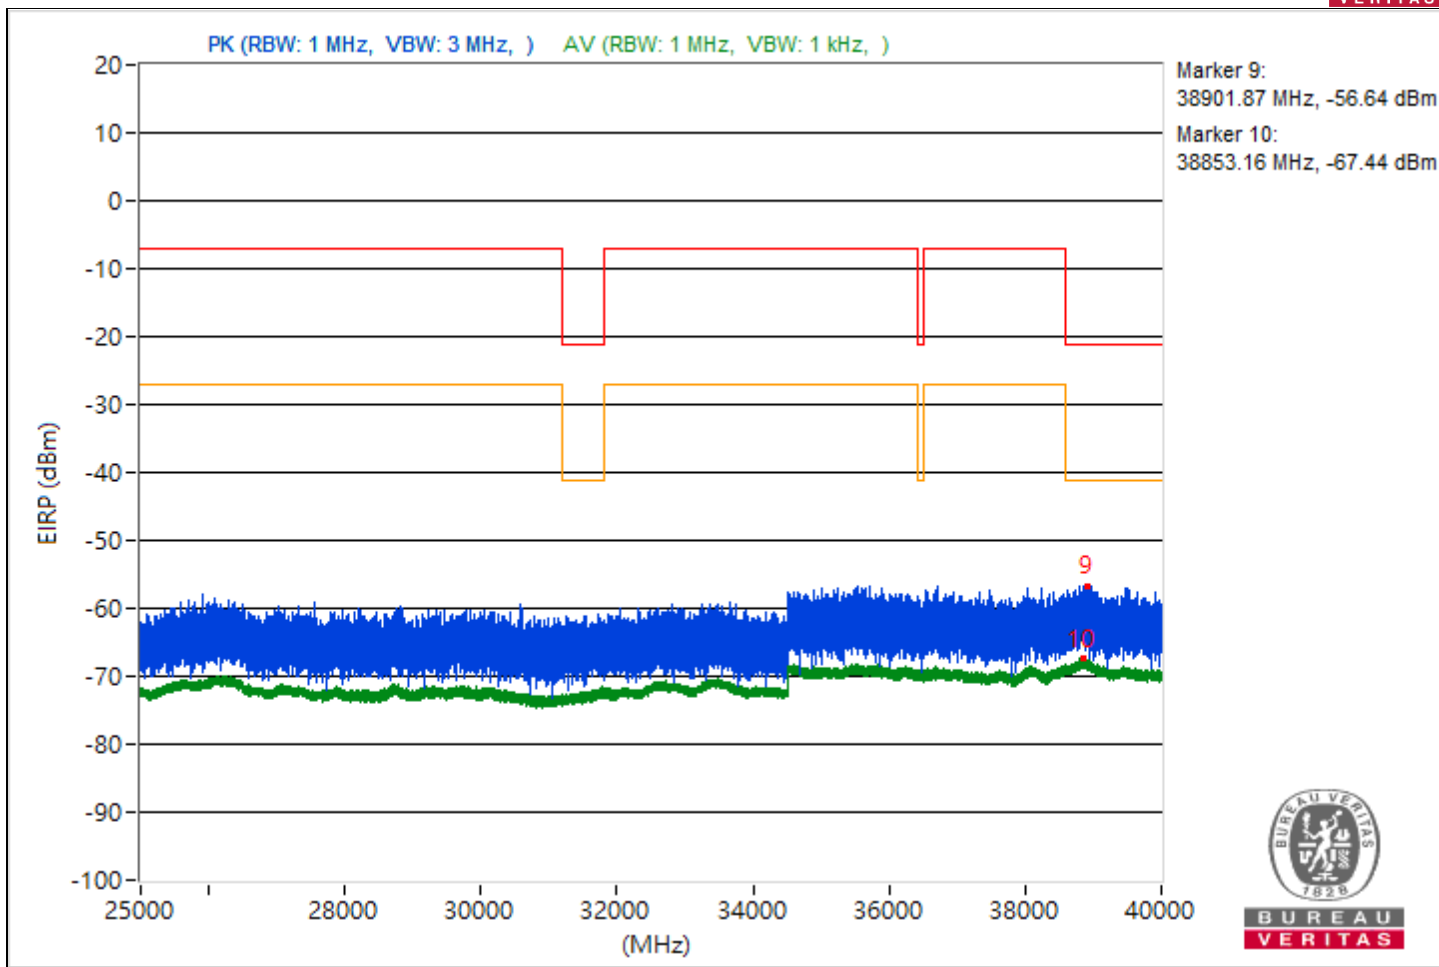





RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3854.29	44.87 PK	74	-29.13	-55.31	4.92	-50.39
2	3800.23	32.61 AV	54	-21.39	-67.57	4.92	-62.65
3	7253.26	49.62 PK	74	-24.38	-50.56	4.92	-45.64
4	7252.01	37.82 AV	54	-16.18	-62.36	4.92	-57.44
5	18582.6	46 PK	74	-28	-54.18	4.92	-49.26
6	21115	33.39 AV	54	-20.61	-66.79	4.92	-61.87
7	23632.9	46.8 PK	74	-27.2	-53.38	4.92	-48.46
8	23650	34.82 AV	54	-19.18	-65.36	4.92	-60.44
9	38887.29	40.57 PK	74	-33.43	-59.61	4.92	-54.69
10	38825.6	27.73 AV	54	-26.27	-72.45	4.92	-67.53

Note: Margin value = Emission Level - Limit value

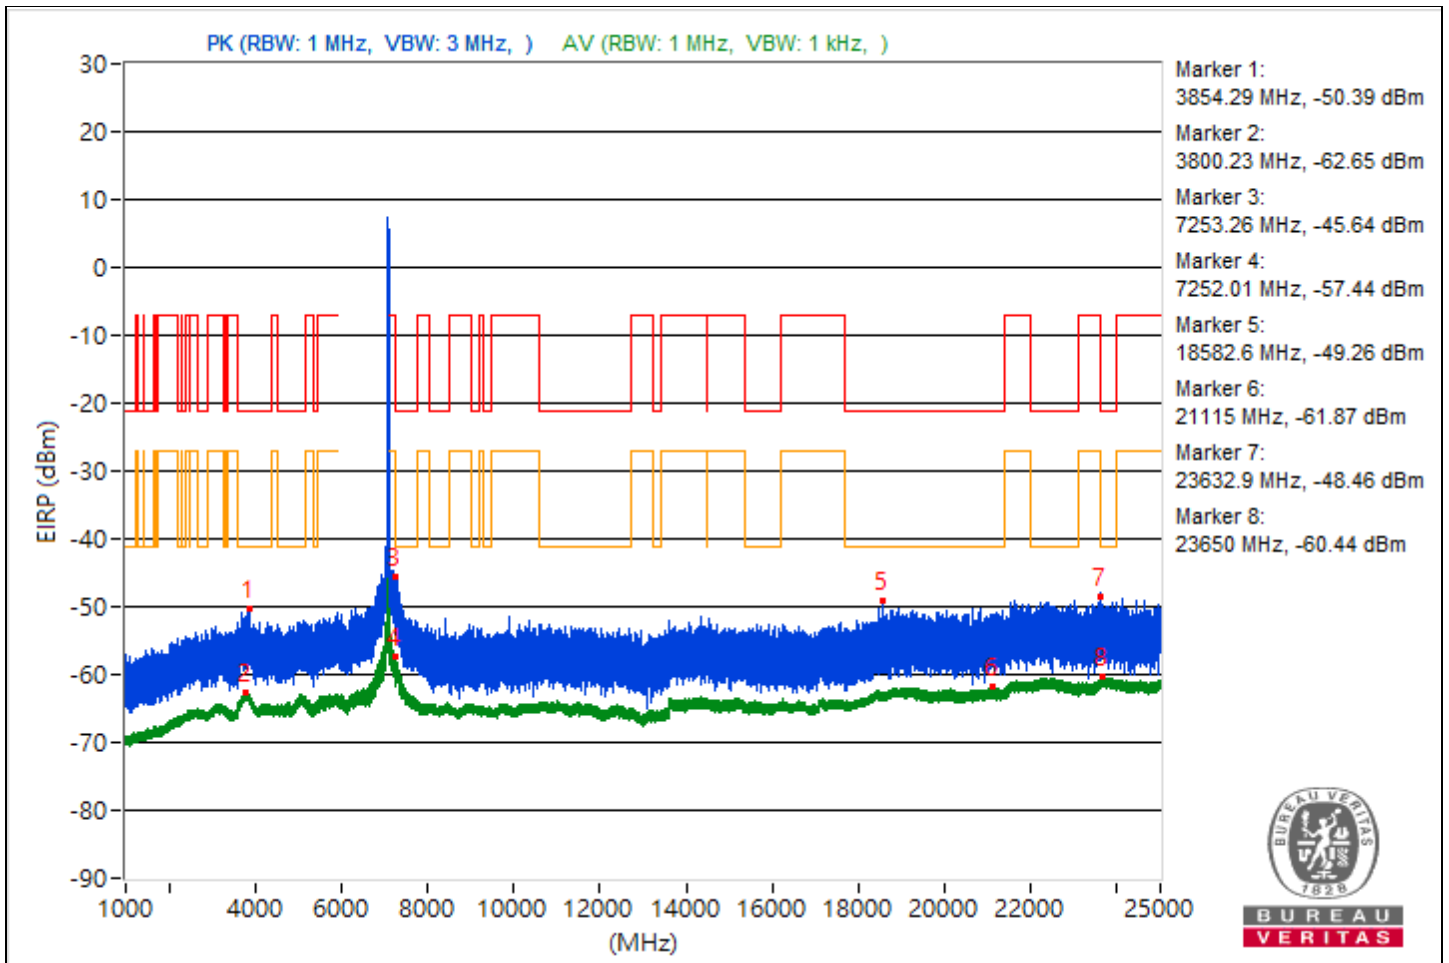

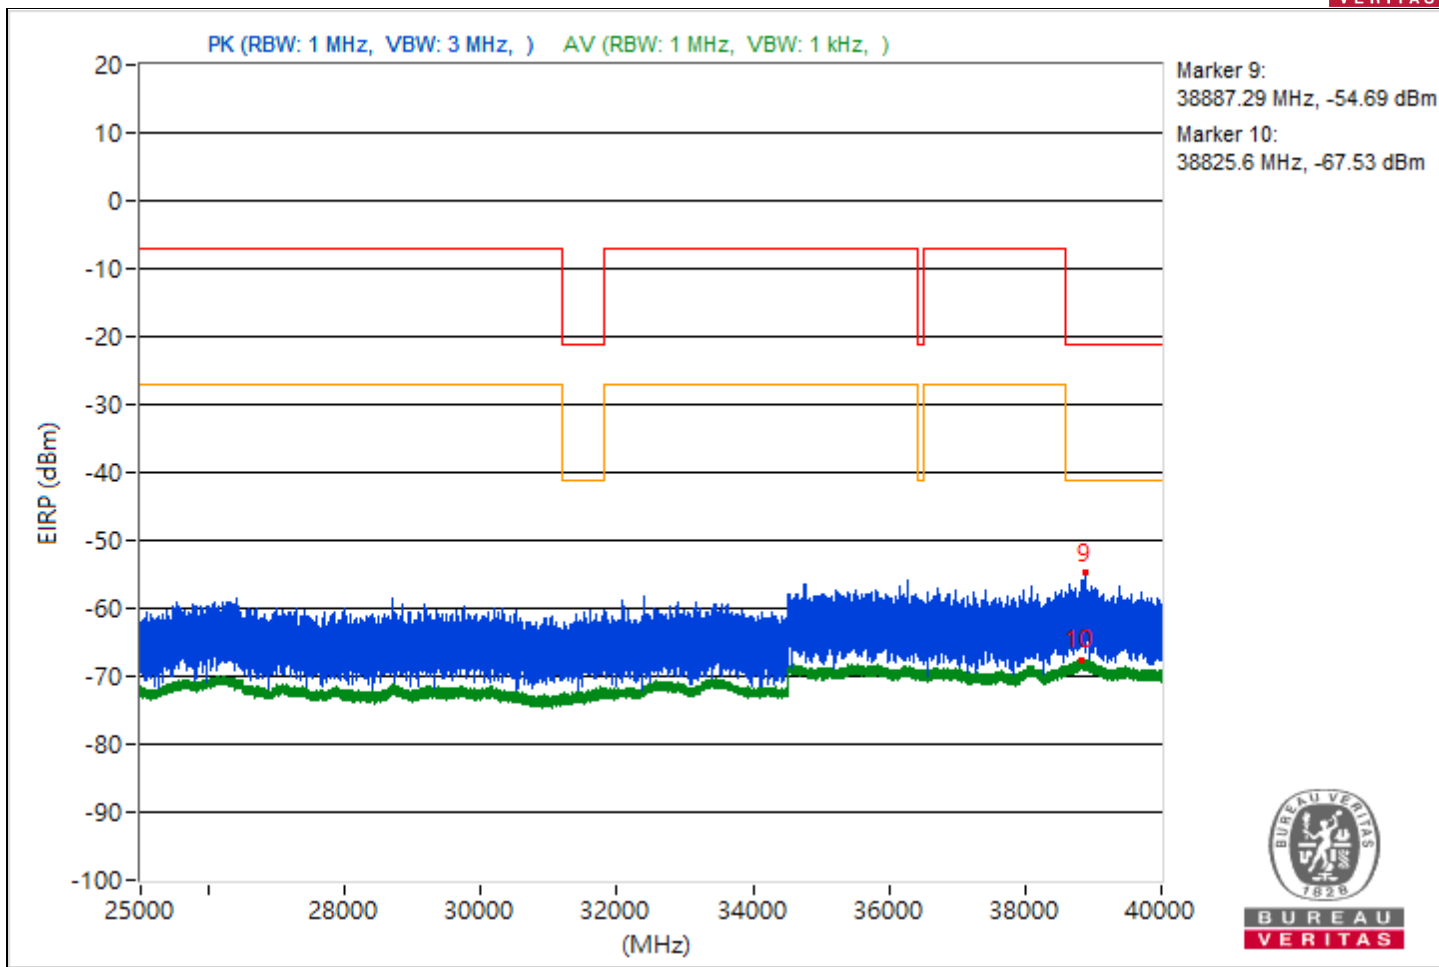



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5406.73	46.51 PK	74	-27.49	-53.67	4.92	-48.75
2	5452	35.61 AV	54	-18.39	-64.57	4.92	-59.65
3	7600.69	42.9 PK	74	-31.1	-57.28	4.92	-52.36
4	#7980.01	48.62 AV	68.26	-19.64	-51.56	4.92	-46.64
5	18954.6	45.9 PK	74	-28.1	-54.28	4.92	-49.36
6	21100.8	33.42 AV	54	-20.58	-66.76	4.92	-61.84
7	22385.1	46.41 PK	74	-27.59	-53.77	4.92	-48.85
8	22480.9	34.87 AV	54	-19.13	-65.31	4.92	-60.39
9	38907.91	40.29 PK	74	-33.71	-59.89	4.92	-54.97
10	38824.09	27.75 AV	54	-26.25	-72.43	4.92	-67.51

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.

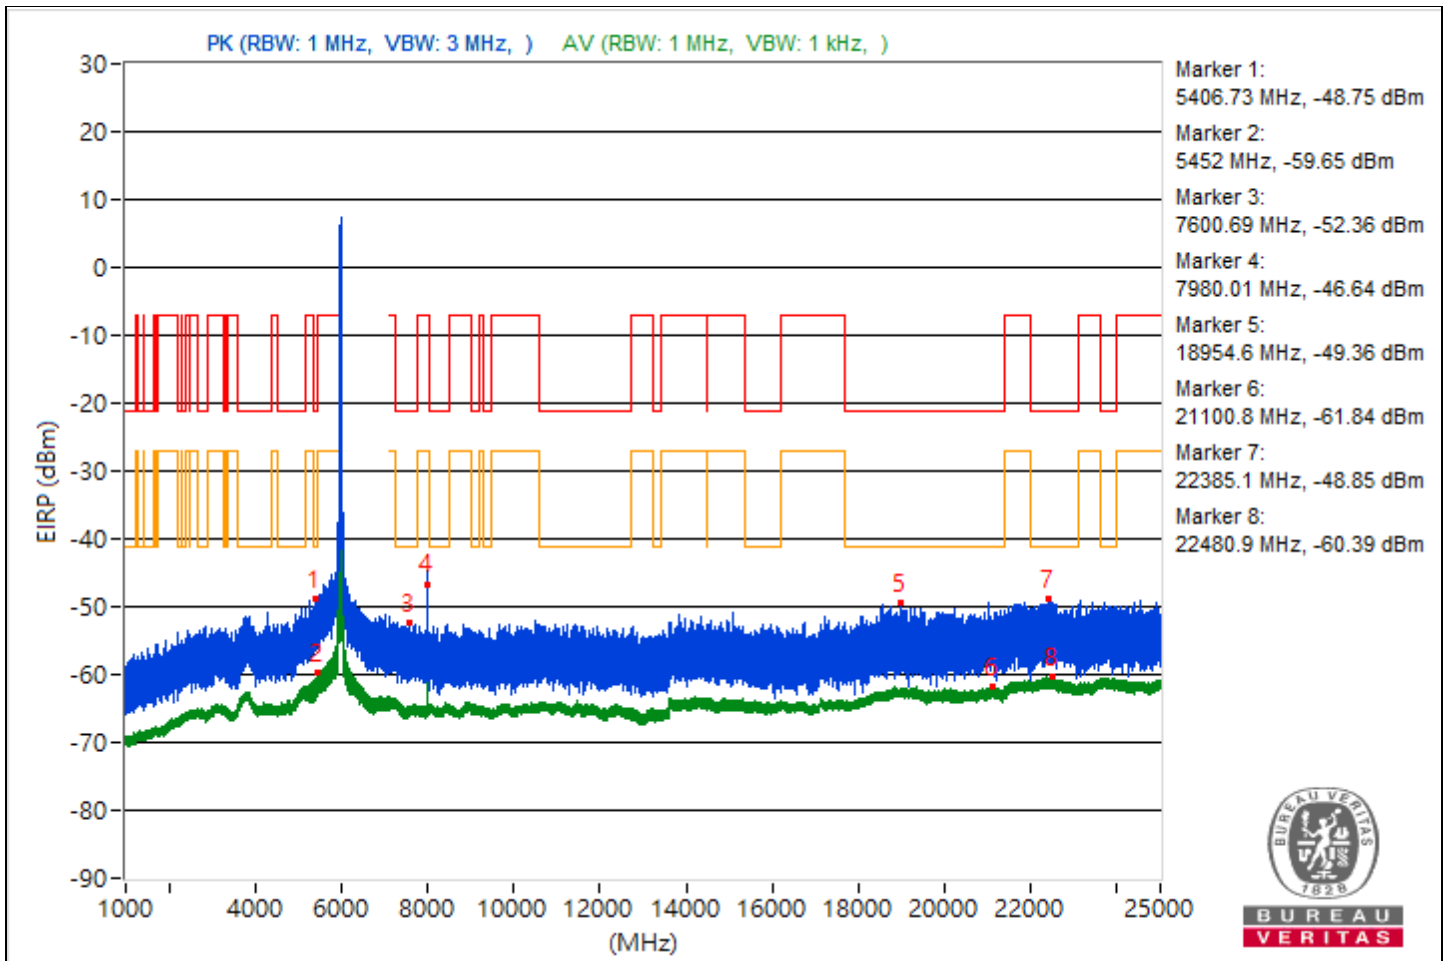

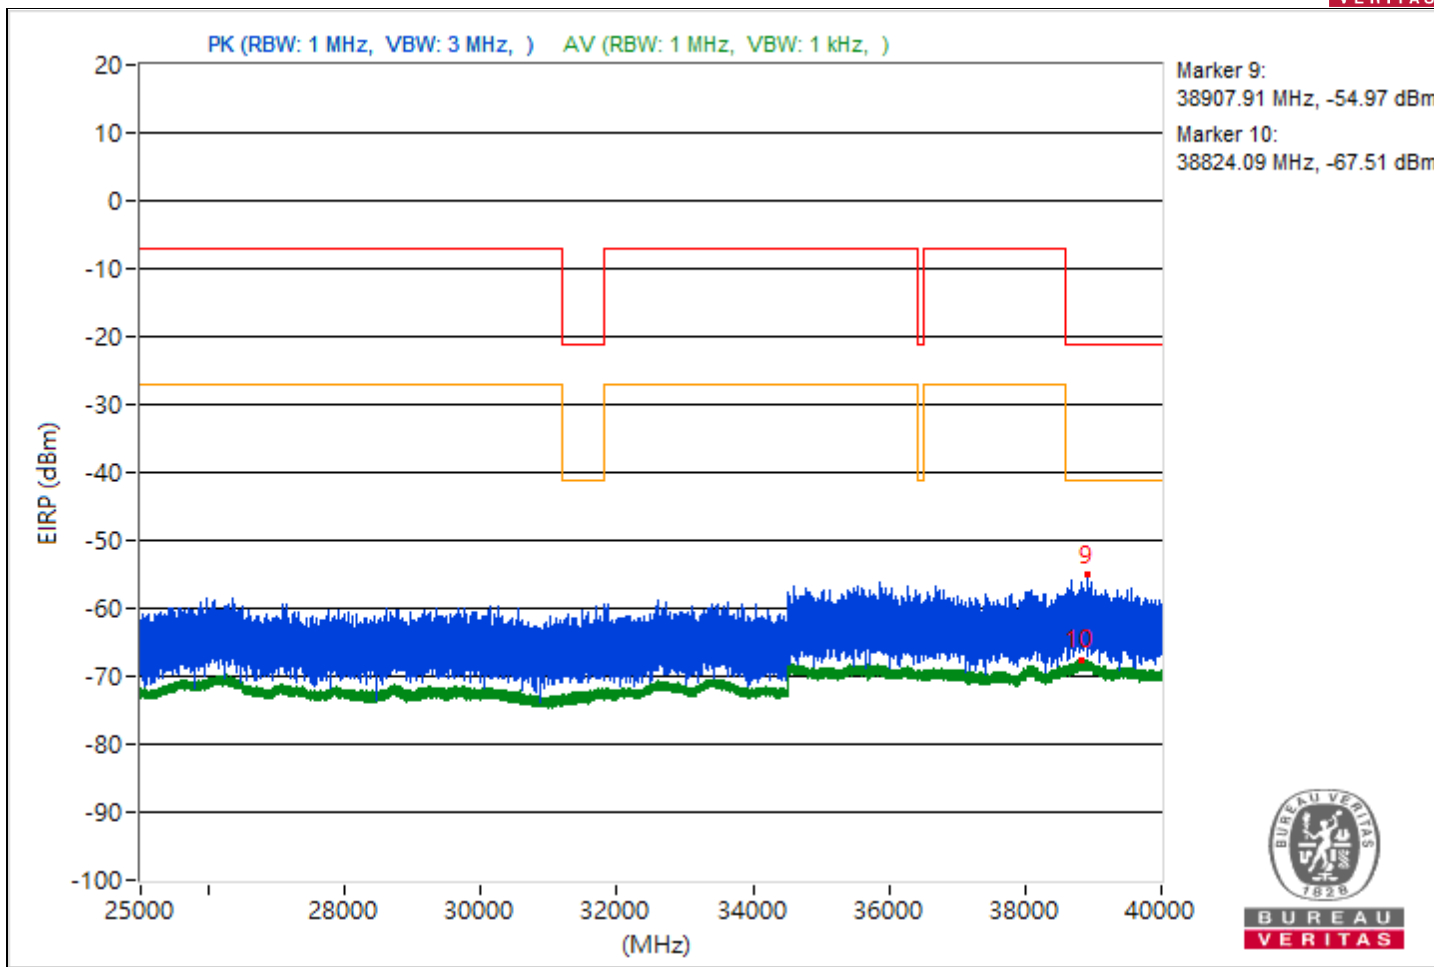





RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5450.37	44.66 PK	74	-29.34	-55.52	4.92	-50.6
2	5457.21	34.21 AV	54	-19.79	-65.97	4.92	-61.05
3	8193.33	48.79 PK	74	-25.21	-51.39	4.92	-46.47
4	8193.33	47.5 AV	54	-6.5	-52.68	4.92	-47.76
5	19831.1	45.38 PK	74	-28.62	-54.8	4.92	-49.88
6	21123.2	33.48 AV	54	-20.52	-66.7	4.92	-61.78
7	22598	47.19 PK	74	-26.81	-52.99	4.92	-48.07
8	22214.6	34.95 AV	54	-19.05	-65.23	4.92	-60.31
9	39494.76	38.62 PK	74	-35.38	-61.56	4.92	-56.64
10	38854.84	27.66 AV	54	-26.34	-72.52	4.92	-67.6

Note: Margin value = Emission Level - Limit value

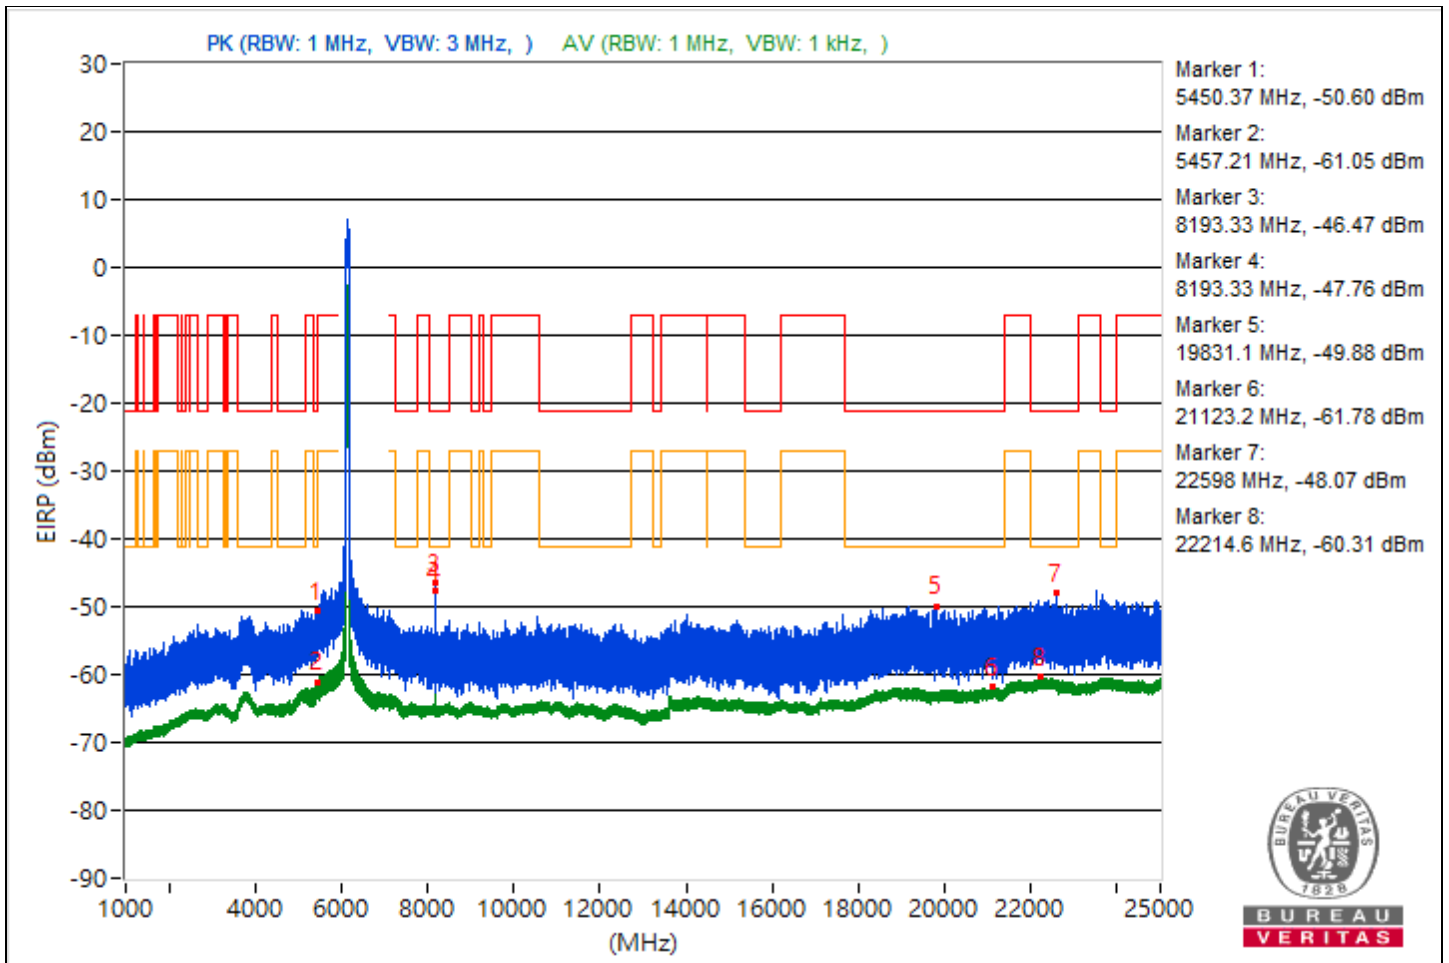

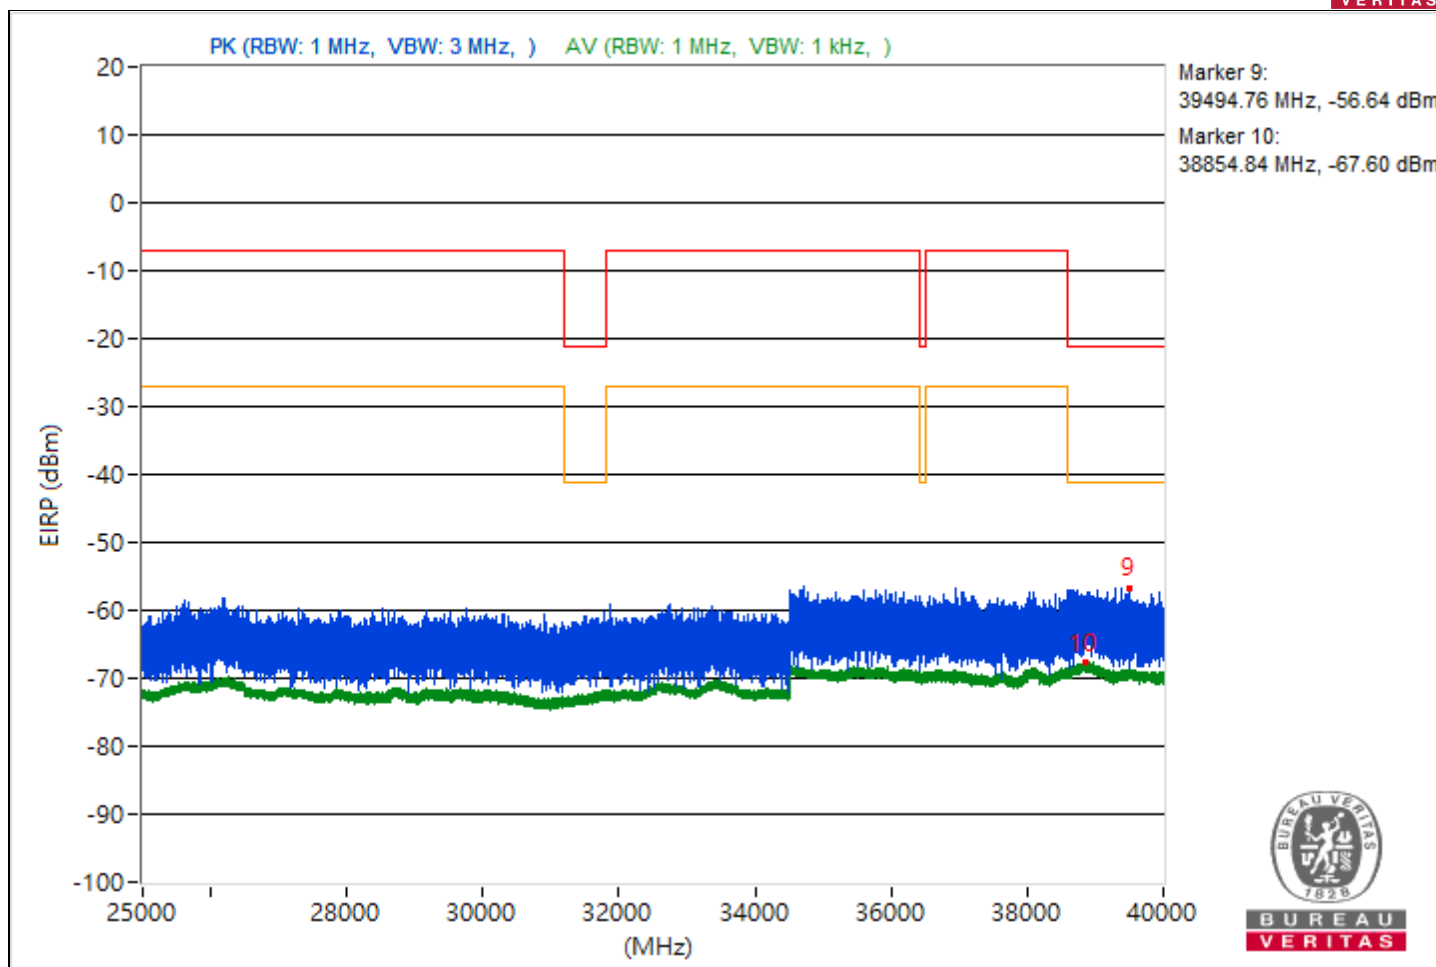





RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5433.88	45.83 PK	74	-28.17	-54.35	4.92	-49.43
2	5450.37	33.2 AV	54	-20.8	-66.98	4.92	-62.06
3	7301.09	44.21 PK	74	-29.79	-55.97	4.92	-51.05
4	7250.14	32.55 AV	54	-21.45	-67.63	4.92	-62.71
5	19286.8	45.23 PK	74	-28.77	-54.95	4.92	-50.03
6	19267.9	33.39 AV	54	-20.61	-66.79	4.92	-61.87
7	22376.7	46.9 PK	74	-27.1	-53.28	4.92	-48.36
8	22383.8	34.88 AV	54	-19.12	-65.3	4.92	-60.38
9	38832.44	38.99 PK	74	-35.01	-61.19	4.92	-56.27
10	38929.87	27.71 AV	54	-26.29	-72.47	4.92	-67.55

Note: Margin value = Emission Level - Limit value

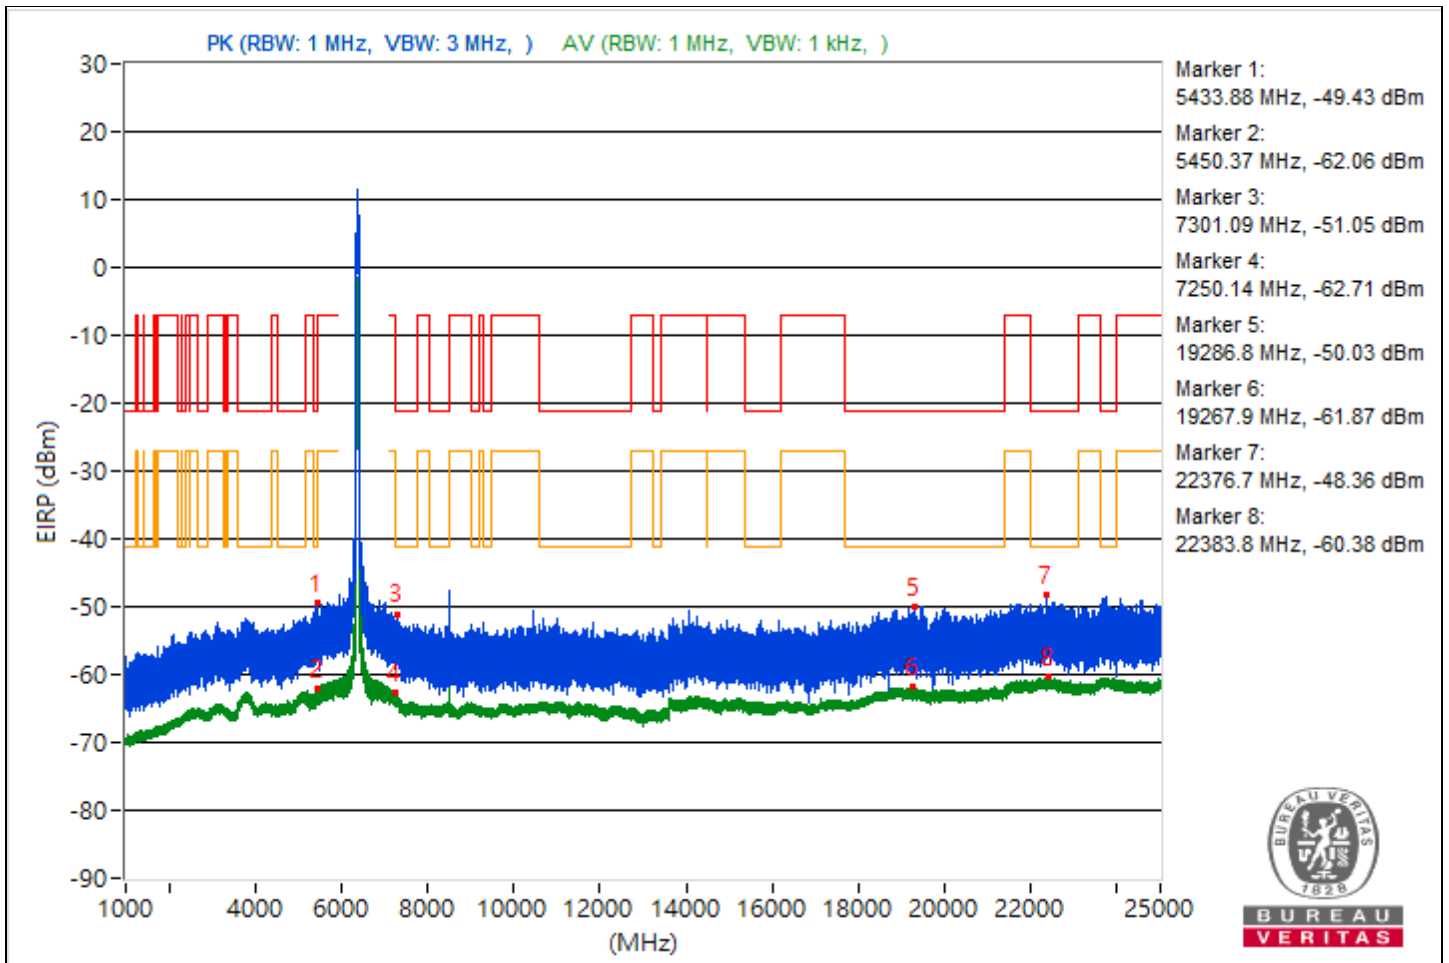

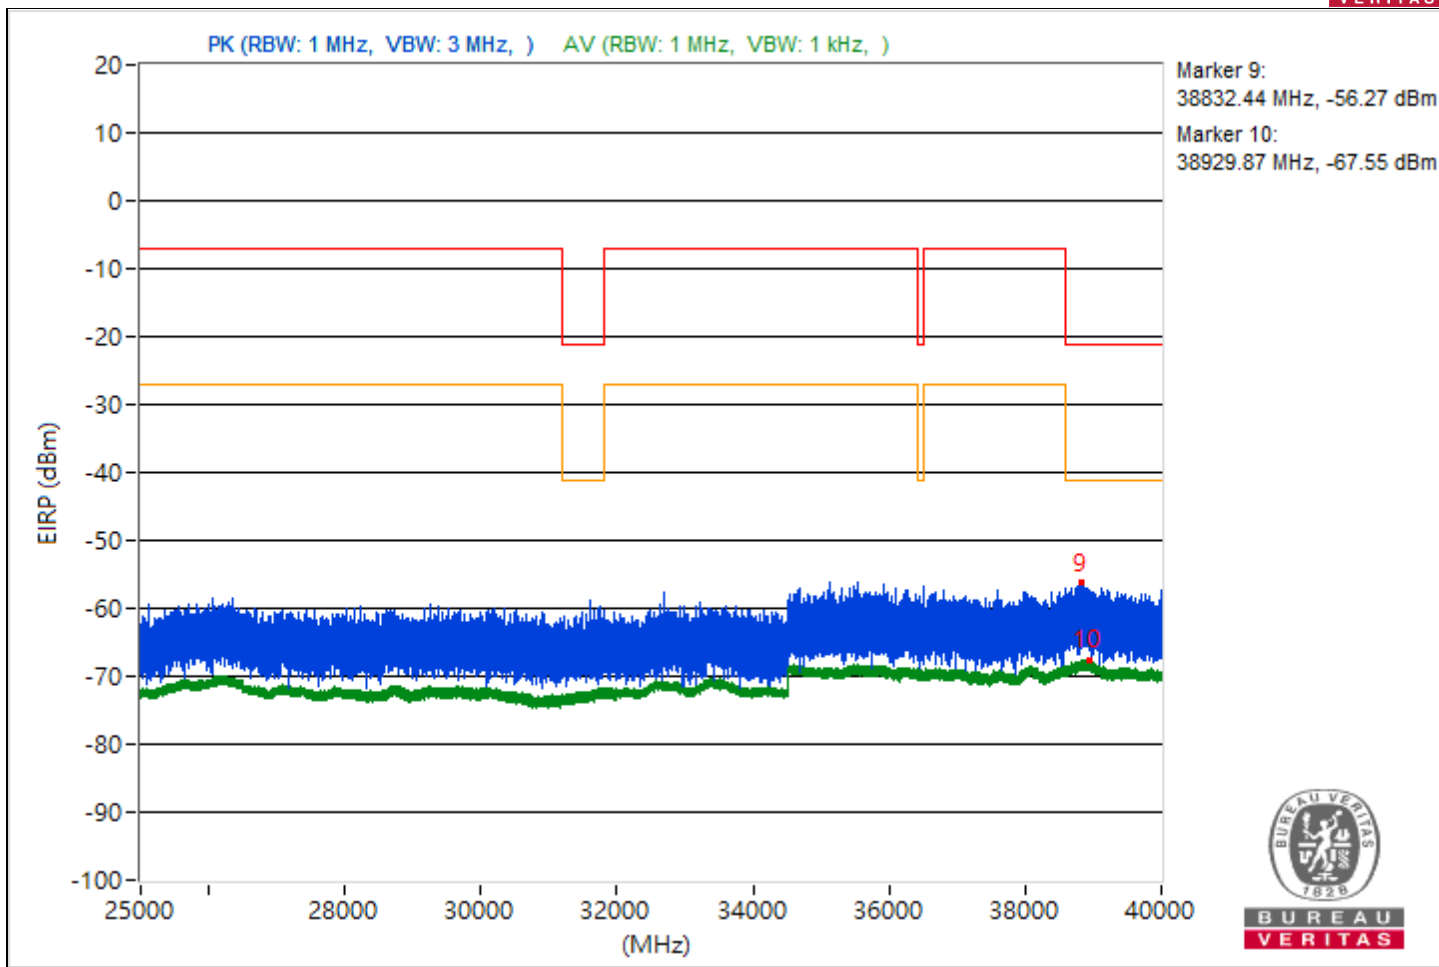





RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3832.74	45.51 PK	74	-28.49	-54.67	4.92	-49.75
2	5452.7	32.93 AV	54	-21.07	-67.25	4.92	-62.33
3	7731.04	42.82 PK	74	-31.18	-57.36	4.92	-52.44
4	7264.14	32.65 AV	54	-21.35	-67.53	4.92	-62.61
5	19807	45.32 PK	74	-28.68	-54.86	4.92	-49.94
6	21148	33.44 AV	54	-20.56	-66.74	4.92	-61.82
7	22694.1	46.27 PK	74	-27.73	-53.91	4.92	-48.99
8	22415.2	34.8 AV	54	-19.2	-65.38	4.92	-60.46
9	38946.58	38.9 PK	74	-35.1	-61.28	4.92	-56.36
10	38863.82	27.96 AV	54	-26.04	-72.22	4.92	-67.3

Note: Margin value = Emission Level - Limit value

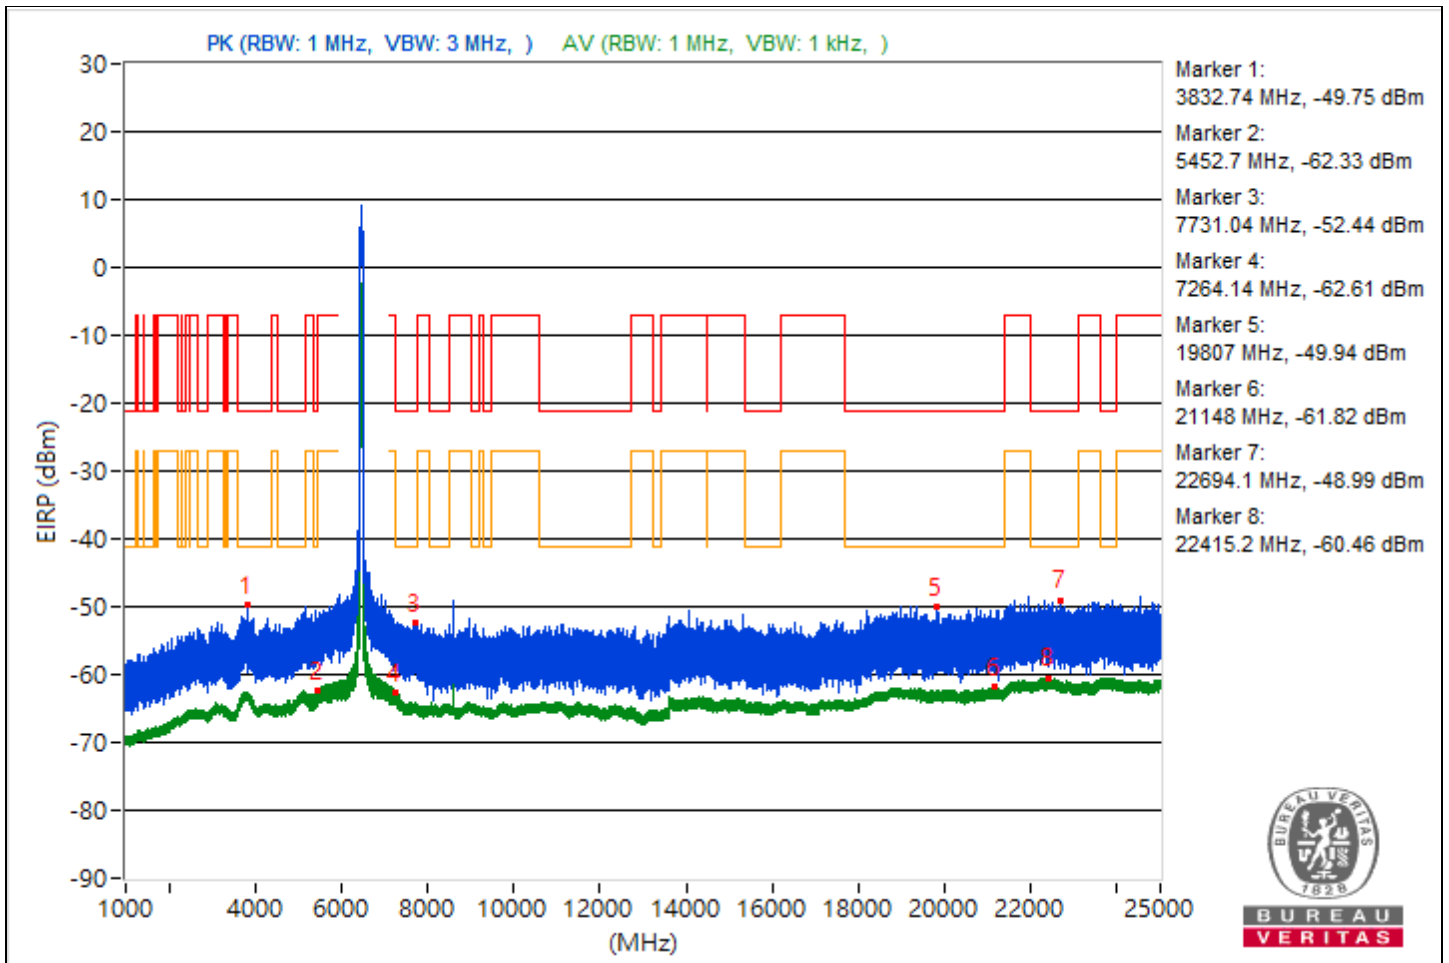

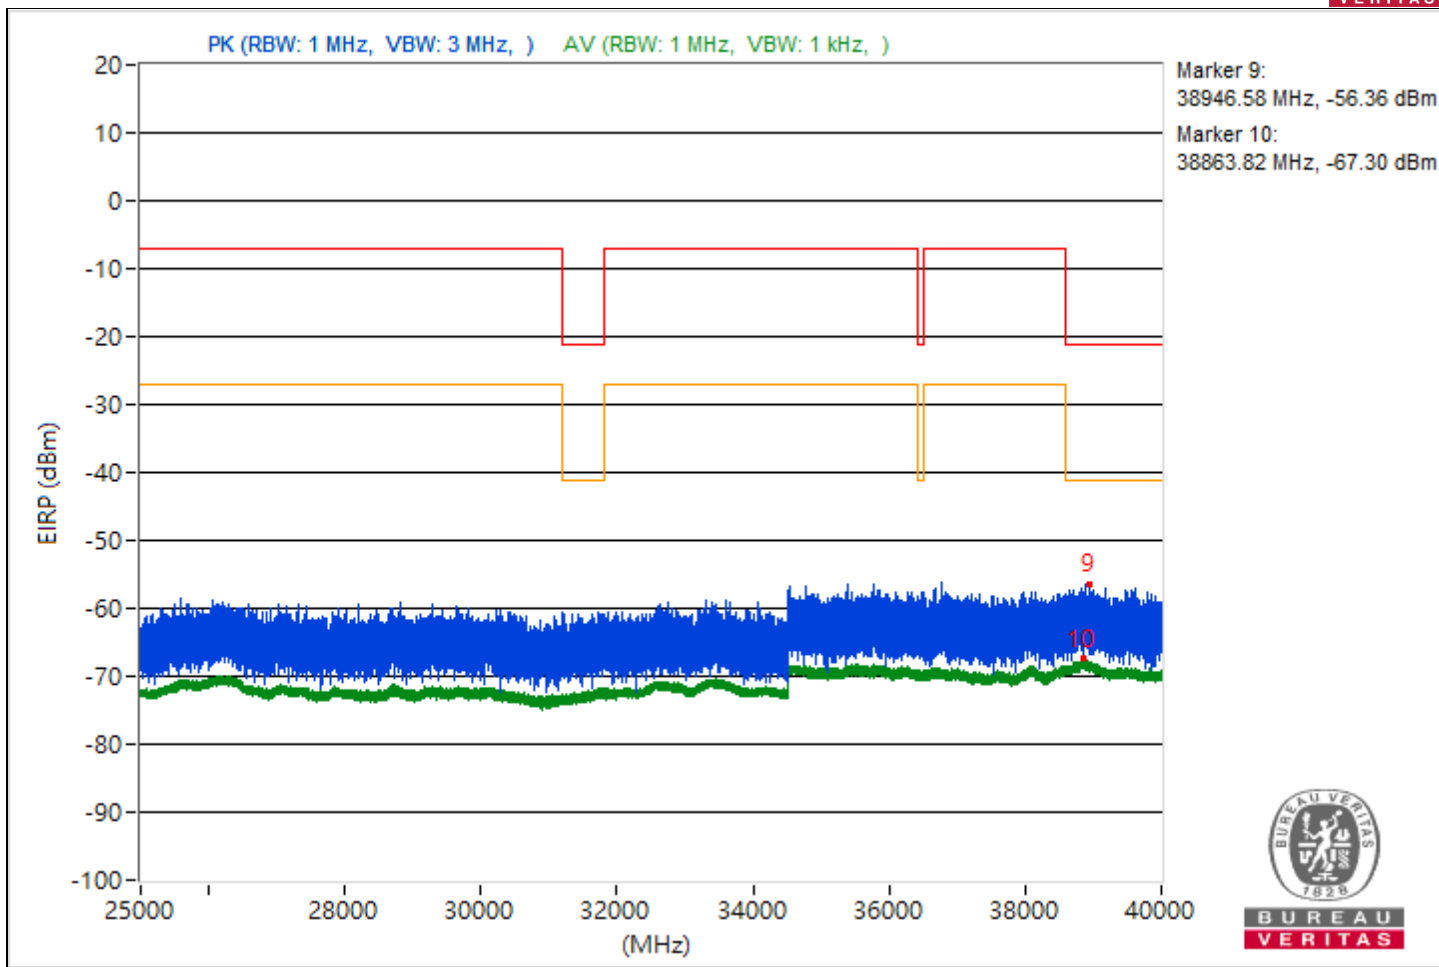





RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3856.16	43.81 PK	74	-30.19	-56.37	4.92	-51.45
2	3817.42	32.64 AV	54	-21.36	-67.54	4.92	-62.62
3	7272.16	43.51 PK	74	-30.49	-56.67	4.92	-51.75
4	7266.63	32.43 AV	54	-21.57	-67.75	4.92	-62.83
5	19866.4	45.2 PK	74	-28.8	-54.98	4.92	-50.06
6	21200.7	33.36 AV	54	-20.64	-66.82	4.92	-61.9
7	22029.3	46.91 PK	74	-27.09	-53.27	4.92	-48.35
8	23737.3	35 AV	54	-19	-65.18	4.92	-60.26
9	38802.84	40.03 PK	74	-33.97	-60.15	4.92	-55.23
10	38856.98	27.84 AV	54	-26.16	-72.34	4.92	-67.42

Note: Margin value = Emission Level - Limit value

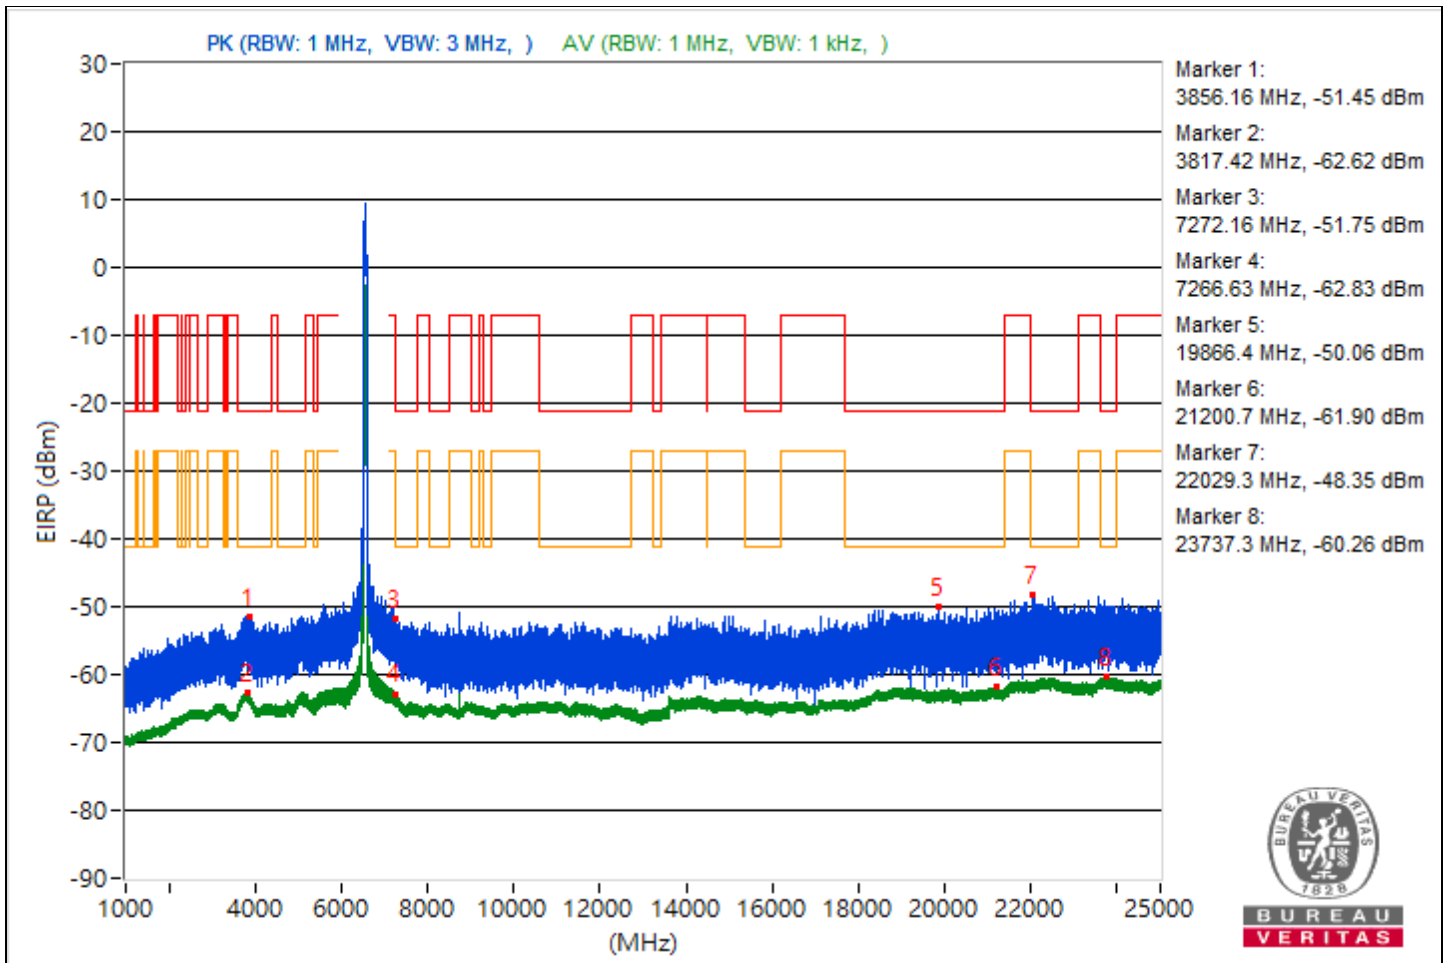

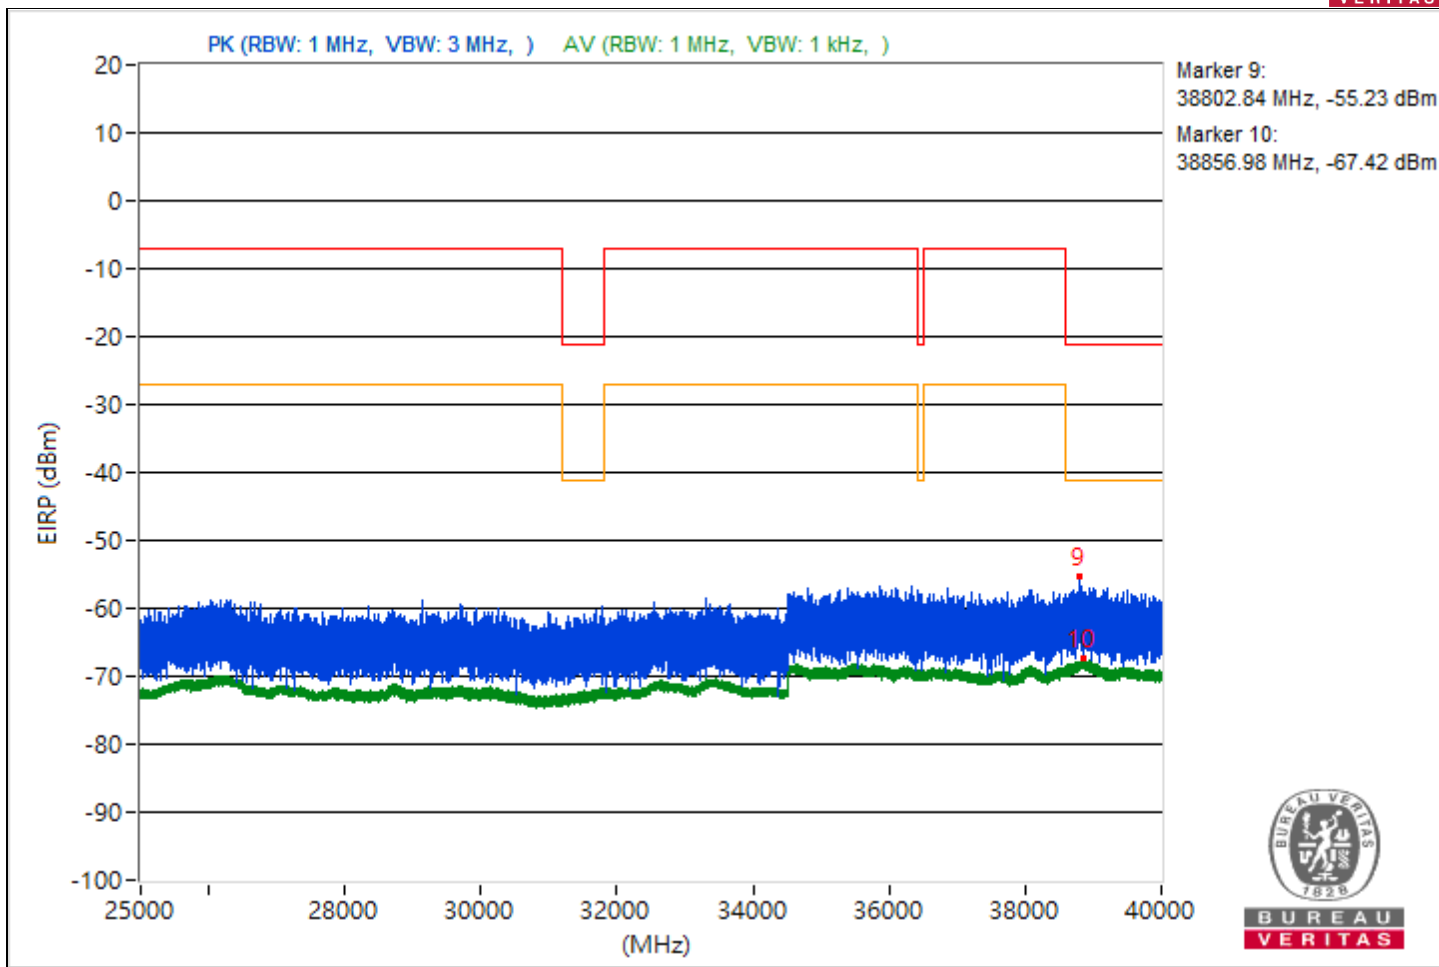





RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3895.67	44.85 PK	74	-29.15	-55.33	4.92	-50.41
2	3789.58	32.65 AV	54	-21.35	-67.53	4.92	-62.61
3	7251.62	45.49 PK	74	-28.51	-54.69	4.92	-49.77
4	7250.07	33.37 AV	54	-20.63	-66.81	4.92	-61.89
5	20605.6	46.19 PK	74	-27.81	-53.99	4.92	-49.07
6	21164	33.49 AV	54	-20.51	-66.69	4.92	-61.77
7	23650.3	46.8 PK	74	-27.2	-53.38	4.92	-48.46
8	23867.8	34.9 AV	54	-19.1	-65.28	4.92	-60.36
9	38928.8	38.71 PK	74	-35.29	-61.47	4.92	-56.55
10	38873.07	27.64 AV	54	-26.36	-72.54	4.92	-67.62

Note: Margin value = Emission Level - Limit value

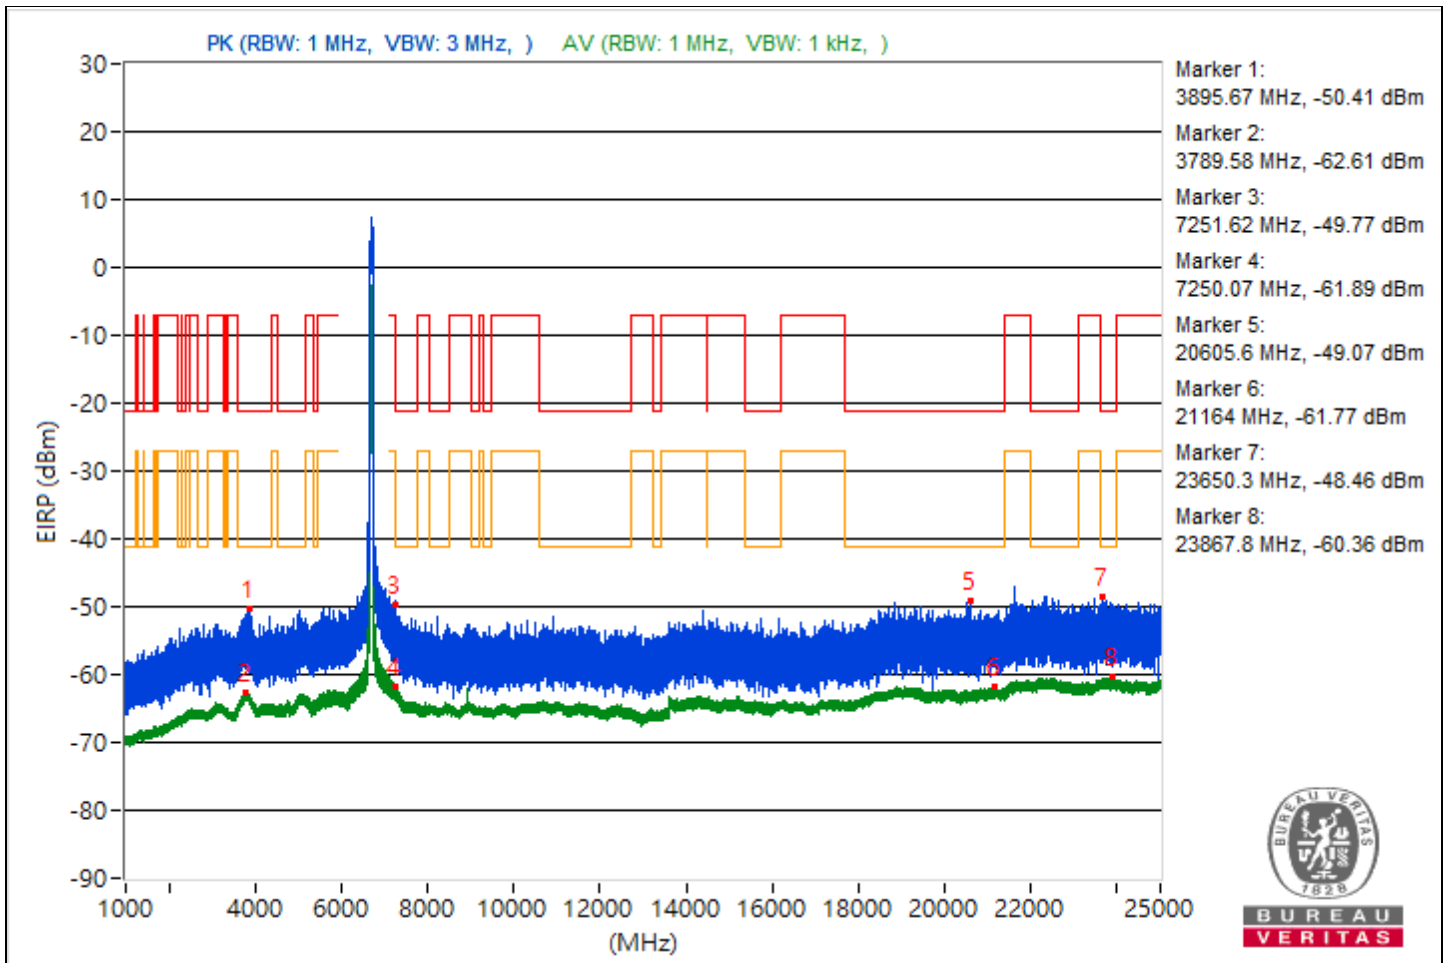

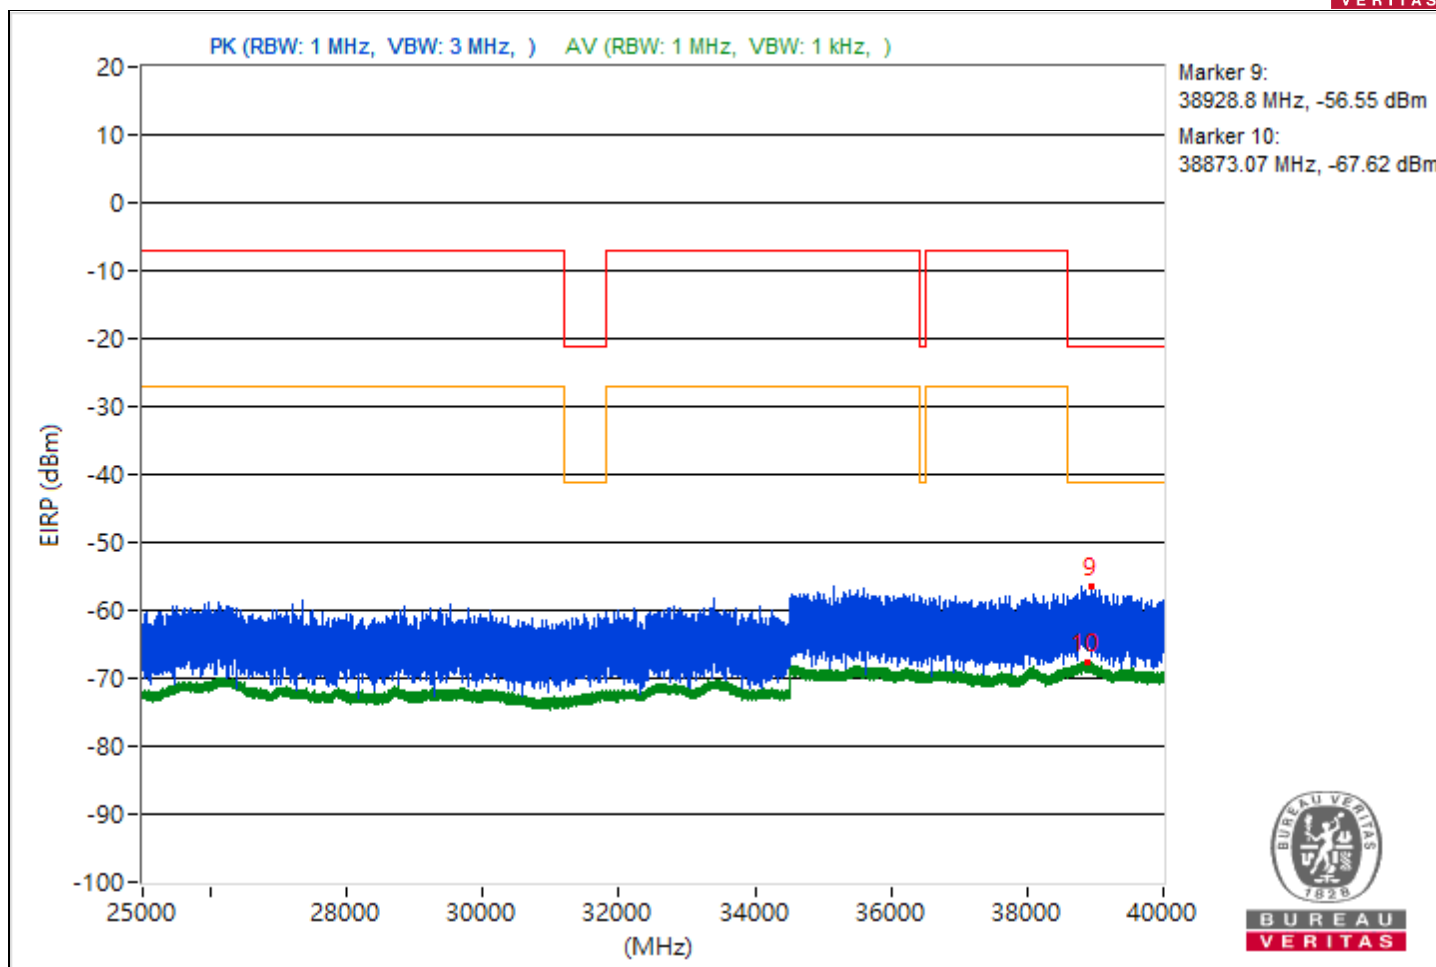





RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3877.78	44.01 PK	74	-29.99	-56.17	4.92	-51.25
2	3797.2	32.64 AV	54	-21.36	-67.54	4.92	-62.62
3	7267.57	45.74 PK	74	-28.26	-54.44	4.92	-49.52
4	7253.1	34.55 AV	54	-19.45	-65.63	4.92	-60.71
5	19237.3	45.64 PK	74	-28.36	-54.54	4.92	-49.62
6	21060.1	33.41 AV	54	-20.59	-66.77	4.92	-61.85
7	22382.5	47.17 PK	74	-26.83	-53.01	4.92	-48.09
8	22508.1	34.9 AV	54	-19.1	-65.28	4.92	-60.36
9	38791.82	39.18 PK	74	-34.82	-61	4.92	-56.08
10	38922.31	27.82 AV	54	-26.18	-72.36	4.92	-67.44

Note: Margin value = Emission Level - Limit value

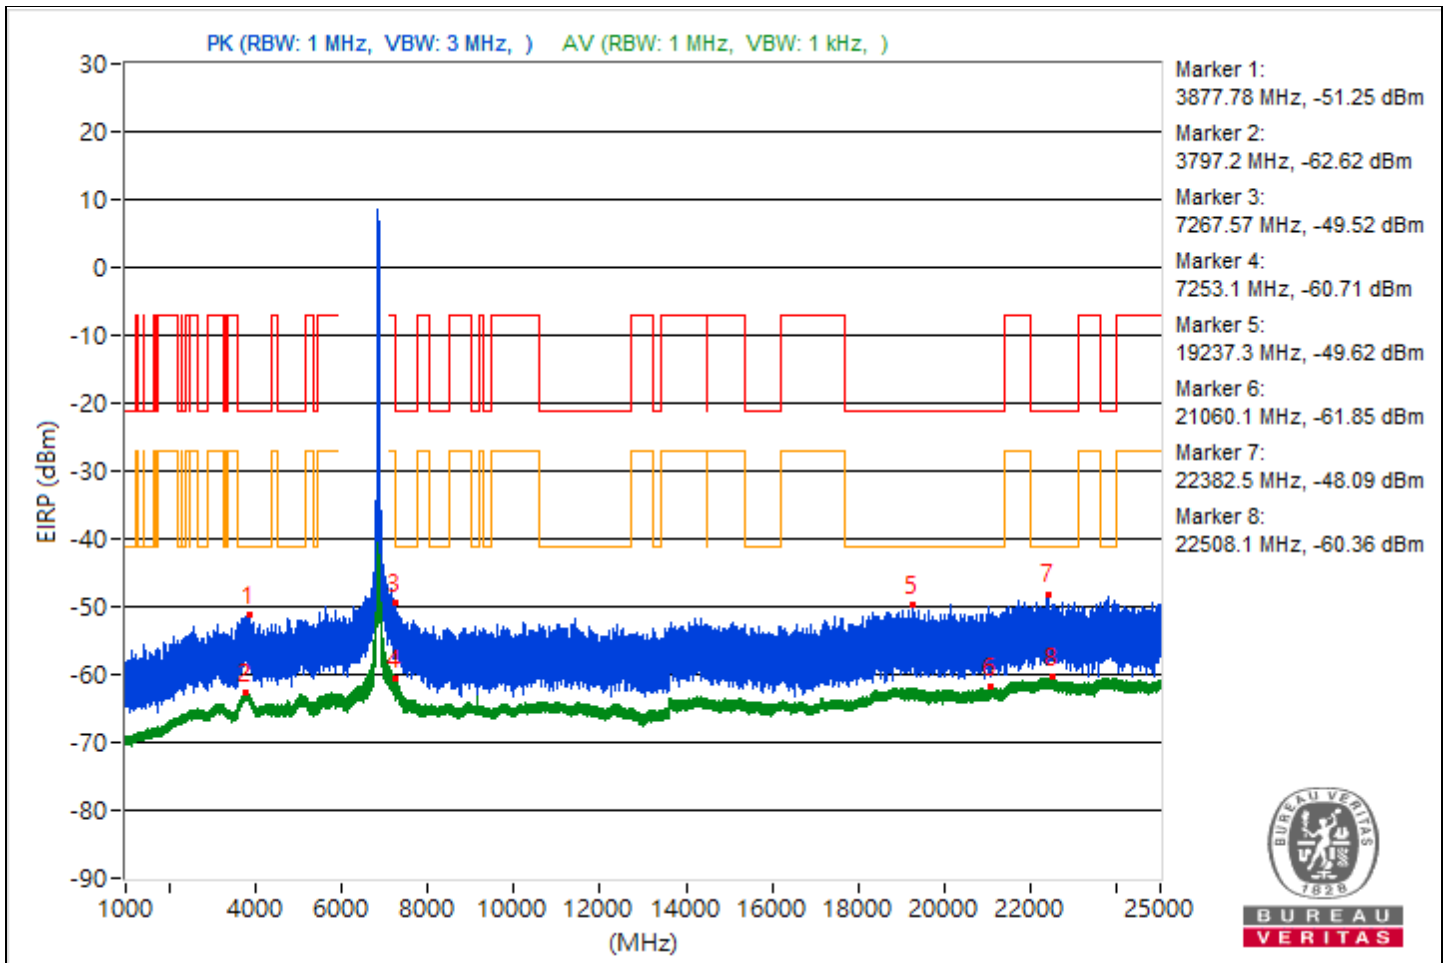

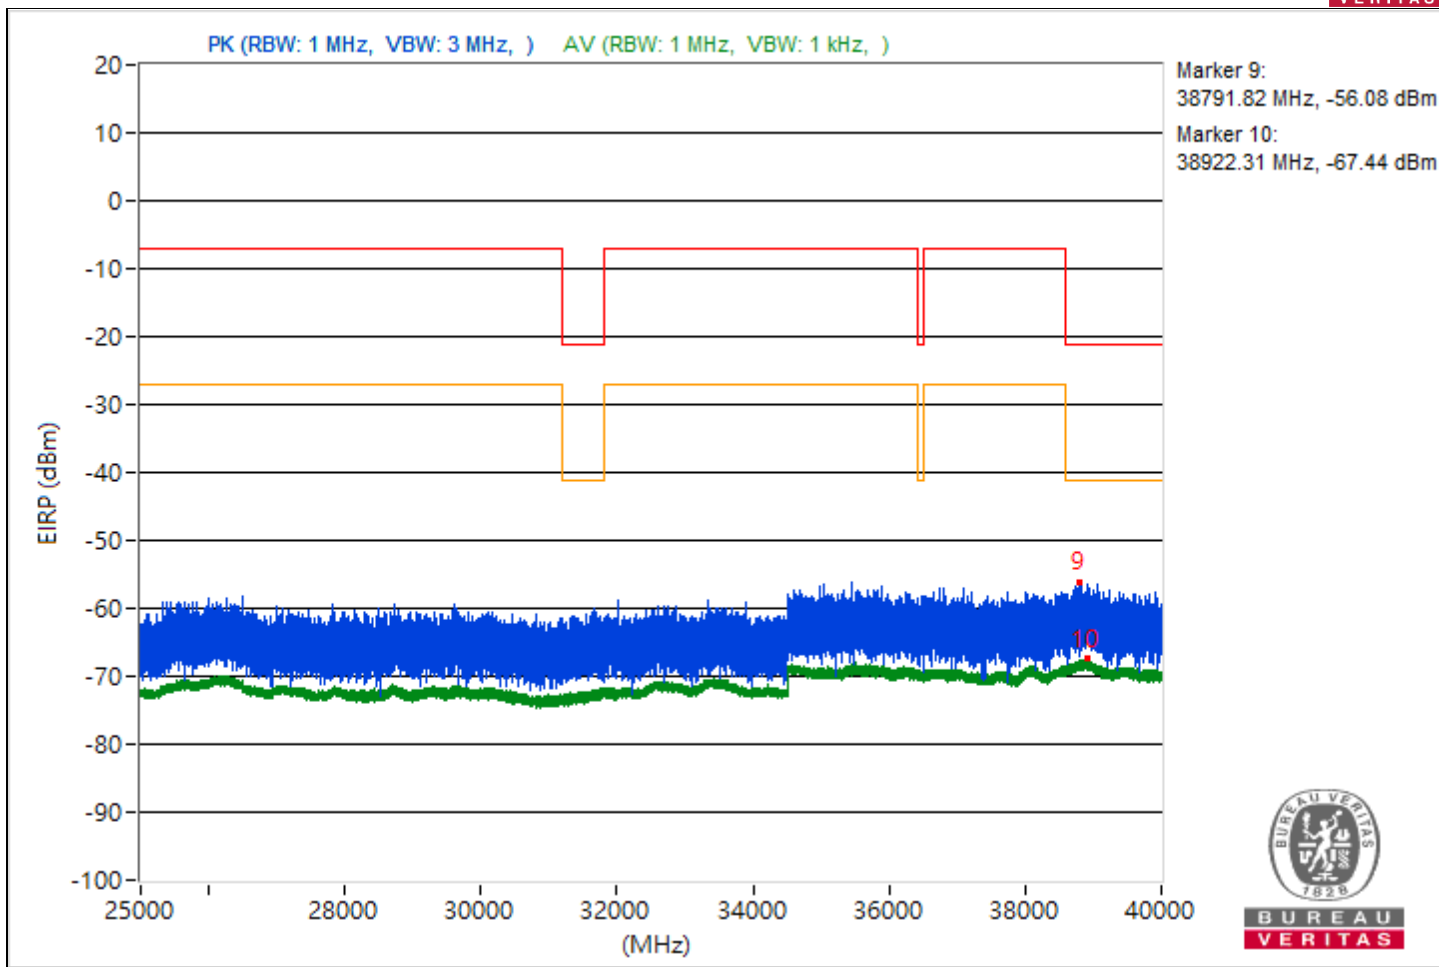





RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5025	44.21 PK	74	-29.79	-55.97	4.92	-51.05
2	3816.18	32.95 AV	54	-21.05	-67.23	4.92	-62.31
3	7286.54	46.41 PK	74	-27.59	-53.77	4.92	-48.85
4	7250.46	35.12 AV	54	-18.88	-65.06	4.92	-60.14
5	20949.7	46.02 PK	74	-27.98	-54.16	4.92	-49.24
6	18820.5	33.39 AV	54	-20.61	-66.79	4.92	-61.87
7	23805.4	46.84 PK	74	-27.16	-53.34	4.92	-48.42
8	22217.6	34.79 AV	54	-19.21	-65.39	4.92	-60.47
9	38692.27	38.87 PK	74	-35.13	-61.31	4.92	-56.39
10	38846.31	27.63 AV	54	-26.37	-72.55	4.92	-67.63

Note: Margin value = Emission Level - Limit value

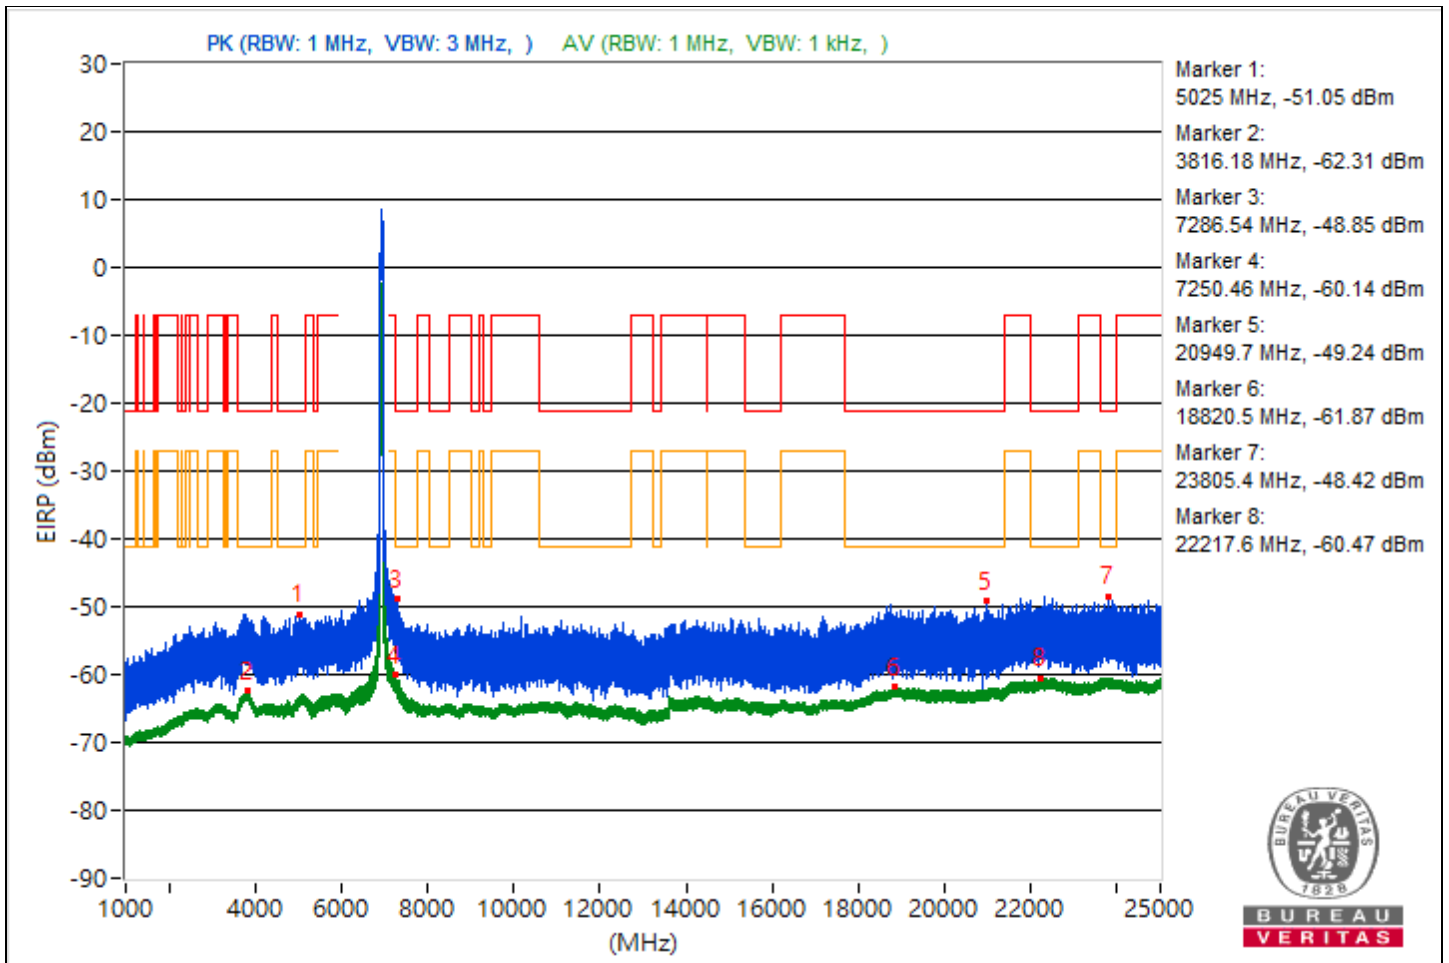

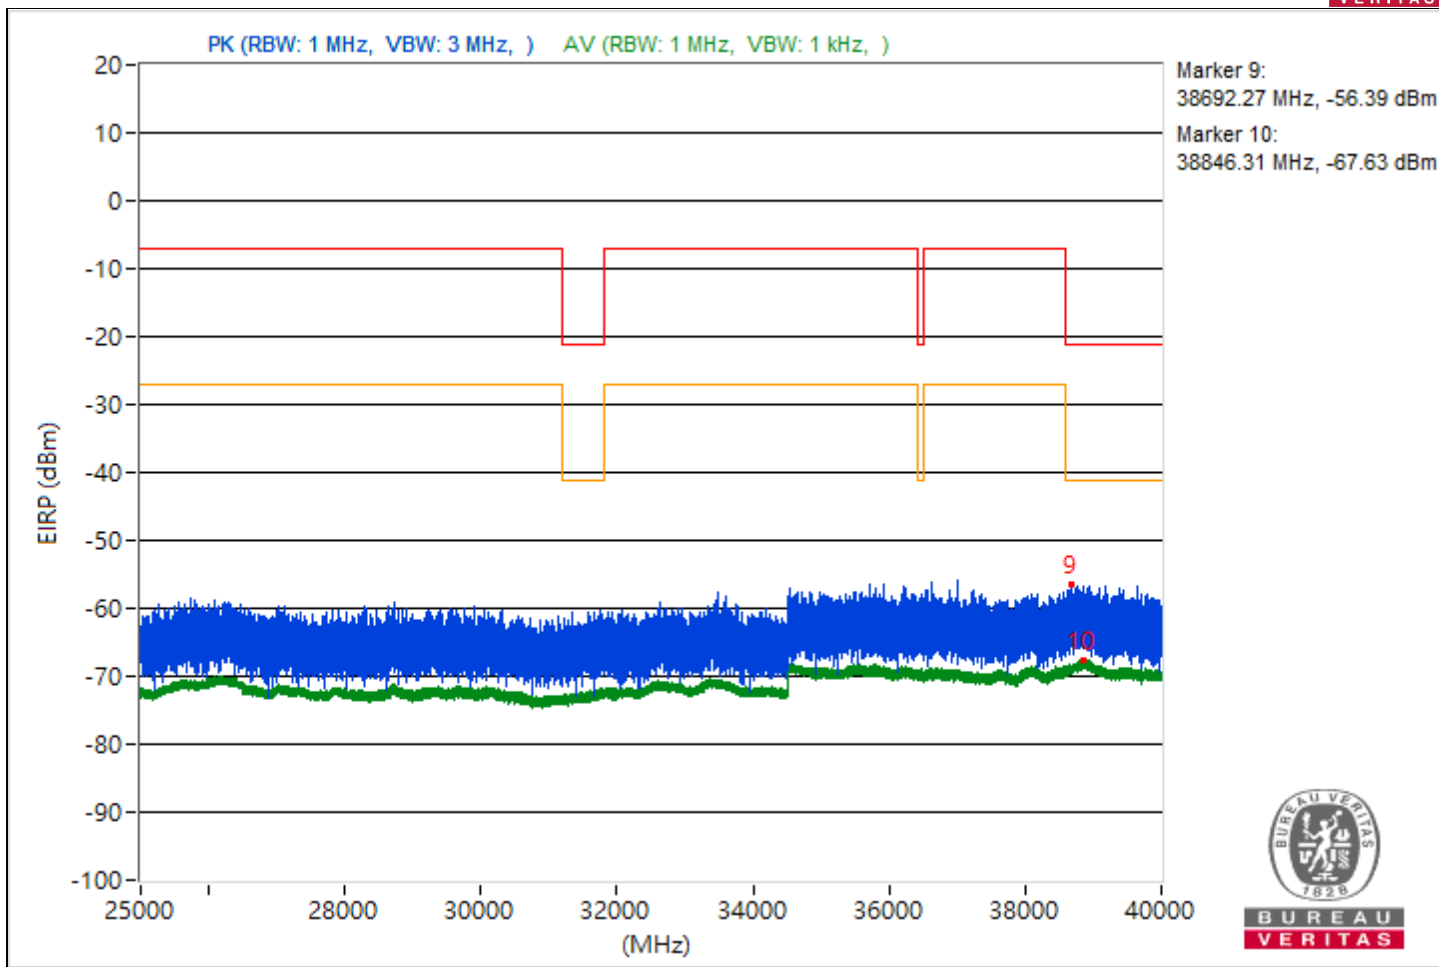





RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.67	45.4 PK	74	-28.6	-54.78	4.92	-49.86
2	3789.66	32.67 AV	54	-21.33	-67.51	4.92	-62.59
3	7258.62	46.95 PK	74	-27.05	-53.23	4.92	-48.31
4	7254.97	36.55 AV	54	-17.45	-63.63	4.92	-58.71
5	19004.3	45.65 PK	74	-28.35	-54.53	4.92	-49.61
6	21152.4	33.44 AV	54	-20.56	-66.74	4.92	-61.82
7	22469.7	46.7 PK	74	-27.3	-53.48	4.92	-48.56
8	23794.1	34.85 AV	54	-19.15	-65.33	4.92	-60.41
9	38719.73	38.84 PK	74	-35.16	-61.34	4.92	-56.42
10	38903.11	27.71 AV	54	-26.29	-72.47	4.92	-67.55

Note: Margin value = Emission Level - Limit value

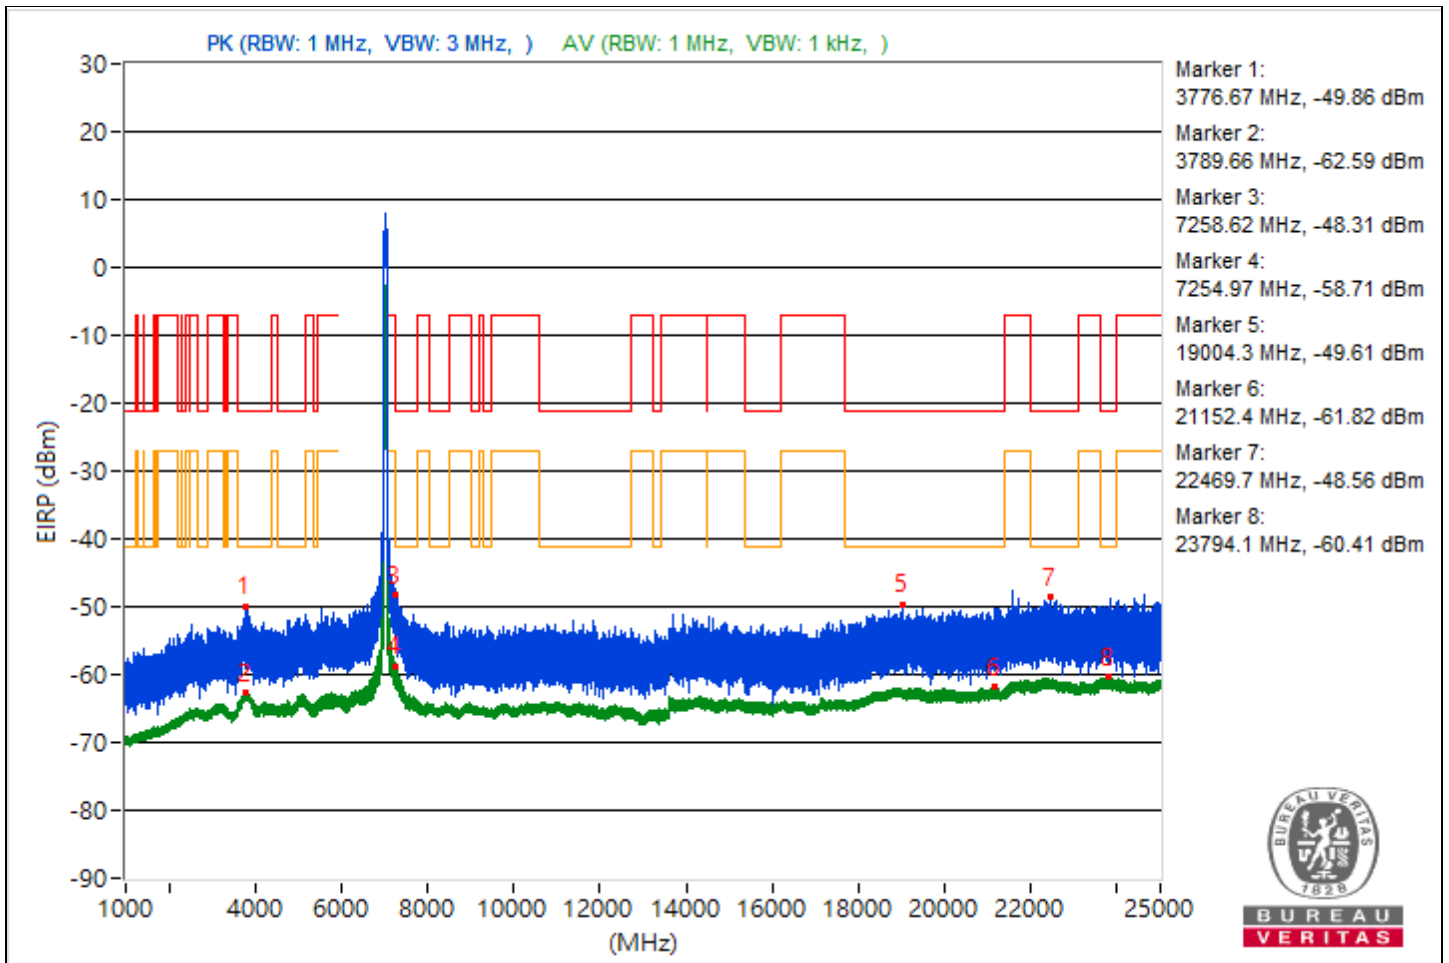

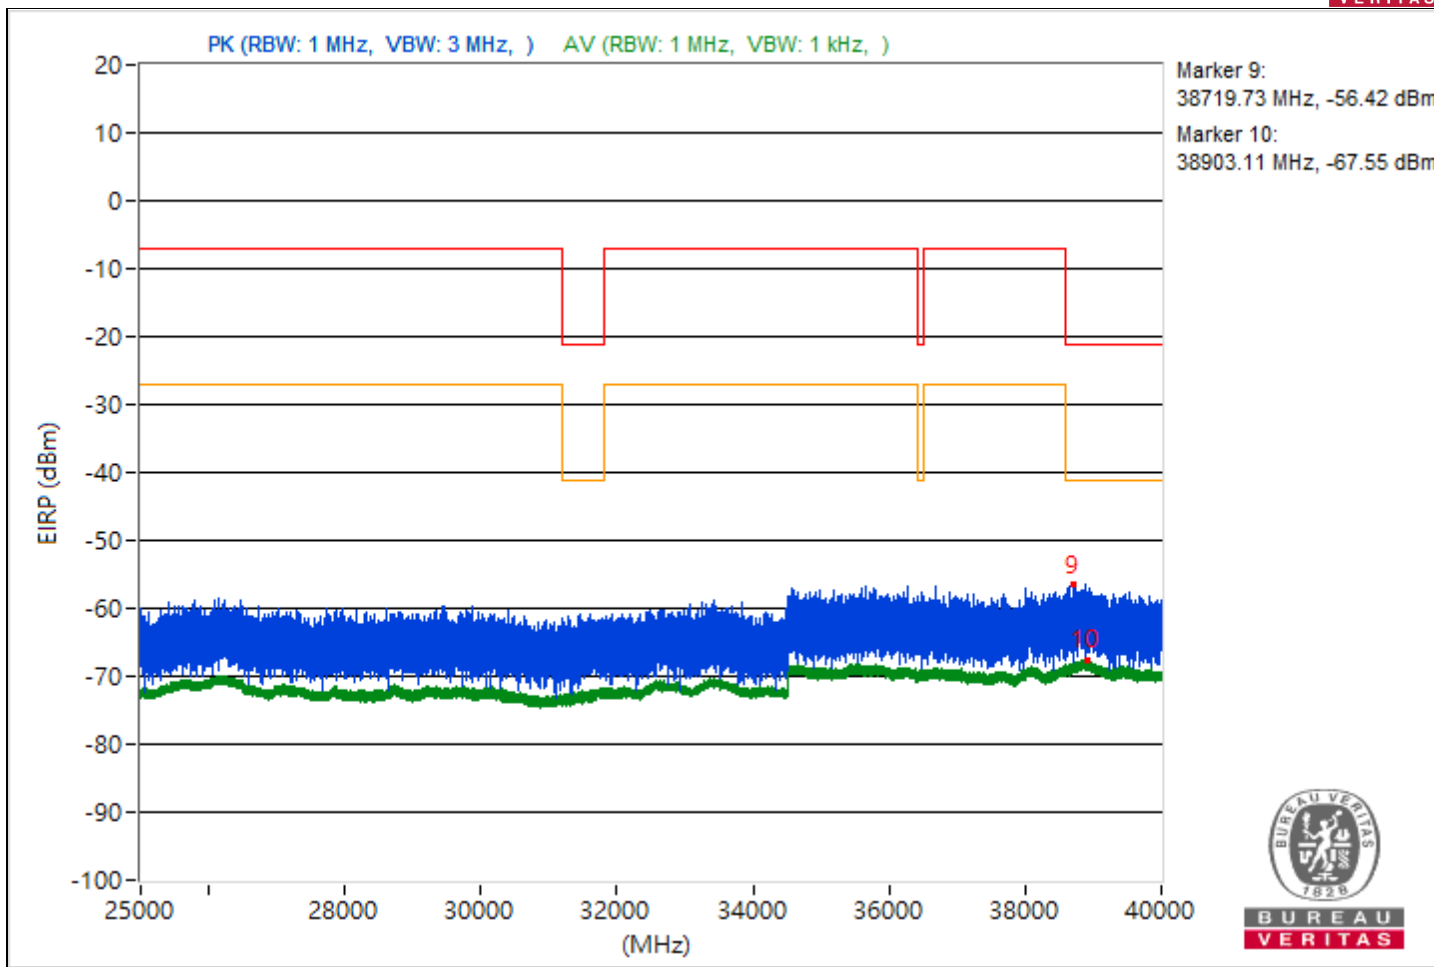





RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5371.11	46.19 PK	74	-27.81	-53.99	4.92	-49.07
2	5446.56	35.28 AV	54	-18.72	-64.9	4.92	-59.98
3	8033.42	49.66 PK	74	-24.34	-50.52	4.92	-45.6
4	8033.33	47.58 AV	54	-6.42	-52.6	4.92	-47.68
5	21132.9	46.4 PK	74	-27.6	-53.78	4.92	-48.86
6	21392.4	33.95 AV	54	-20.05	-66.23	4.92	-61.31
7	22758	47.06 PK	74	-26.94	-53.12	4.92	-48.2
8	23983.4	35.3 AV	54	-18.7	-64.88	4.92	-59.96
9	38910.58	40.52 PK	74	-33.48	-59.66	4.92	-54.74
10	38871.47	28.48 AV	54	-25.52	-71.7	4.92	-66.78

Note: Margin value = Emission Level - Limit value

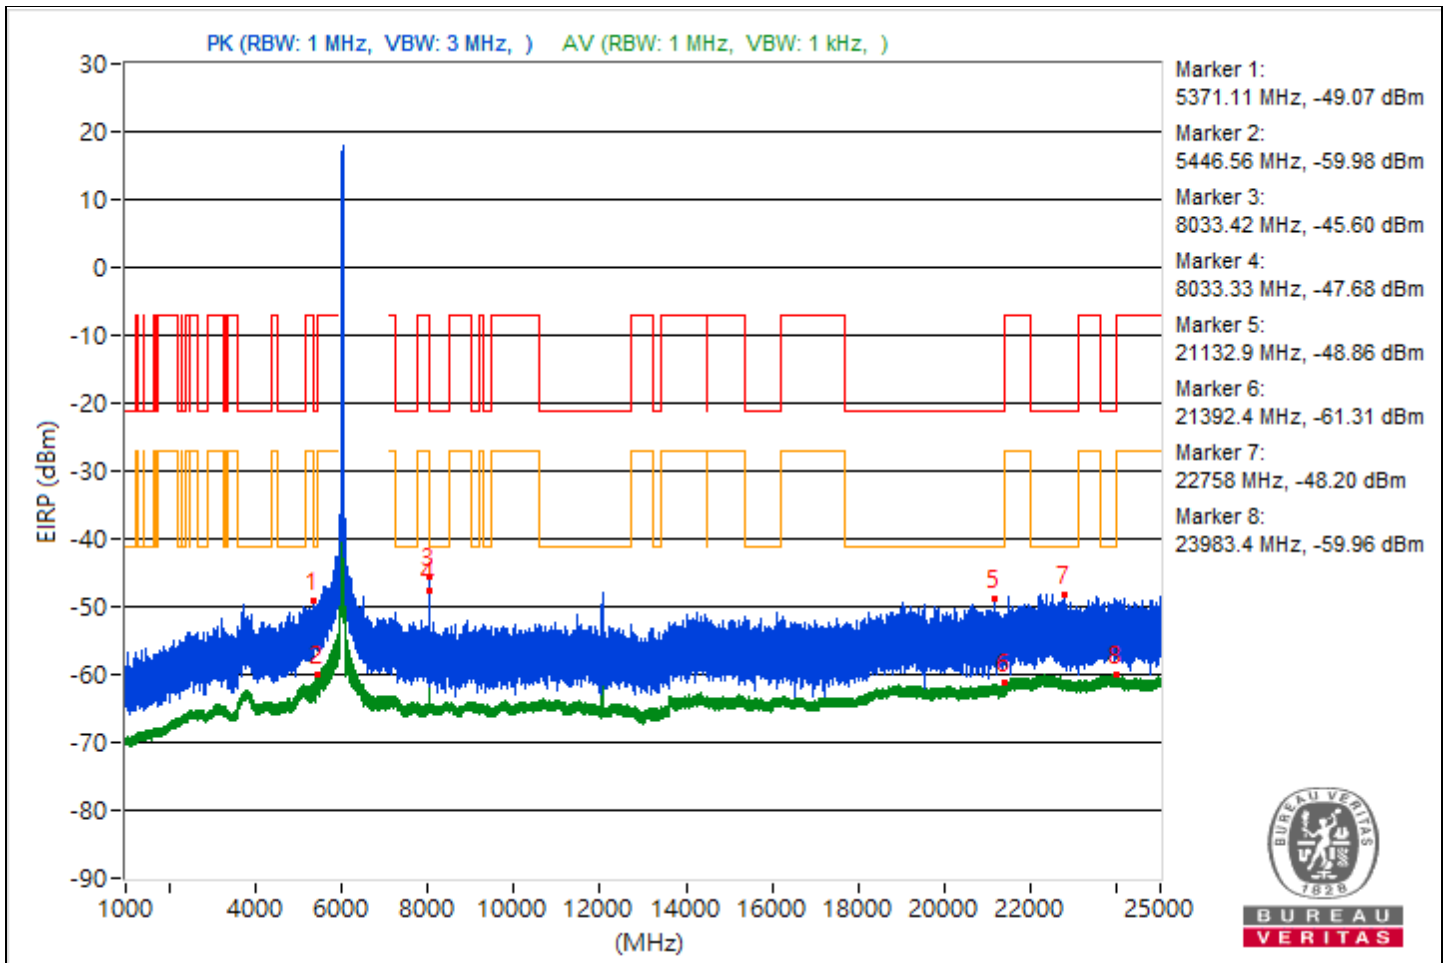

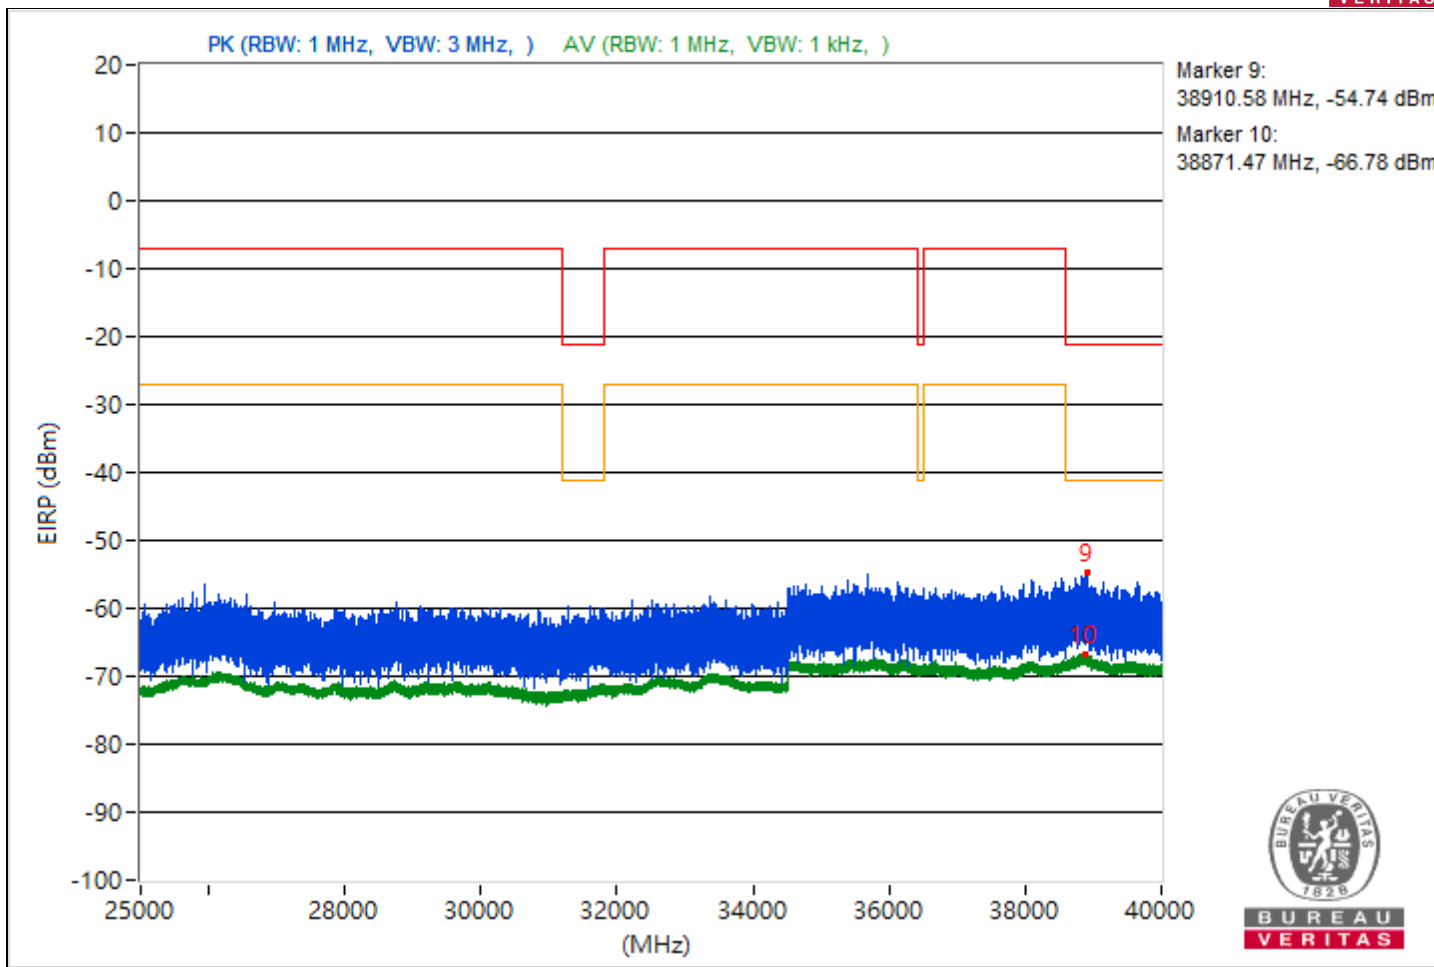





RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5400.9	45.21 PK	74	-28.79	-54.97	4.92	-50.05
2	5454.64	33.97 AV	54	-20.03	-66.21	4.92	-61.29
3	8246.76	48.6 PK	74	-25.4	-51.58	4.92	-46.66
4	8246.67	46.67 AV	54	-7.33	-53.51	4.92	-48.59
5	18989.7	45.93 PK	74	-28.07	-54.25	4.92	-49.33
6	18811.2	33.82 AV	54	-20.18	-66.36	4.92	-61.44
7	23916.5	46.59 PK	74	-27.41	-53.59	4.92	-48.67
8	22223.4	35.21 AV	54	-18.79	-64.97	4.92	-60.05
9	38816.36	39.75 PK	74	-34.25	-60.43	4.92	-55.51
10	38824.98	28.69 AV	54	-25.31	-71.49	4.92	-66.57

Note: Margin value = Emission Level - Limit value

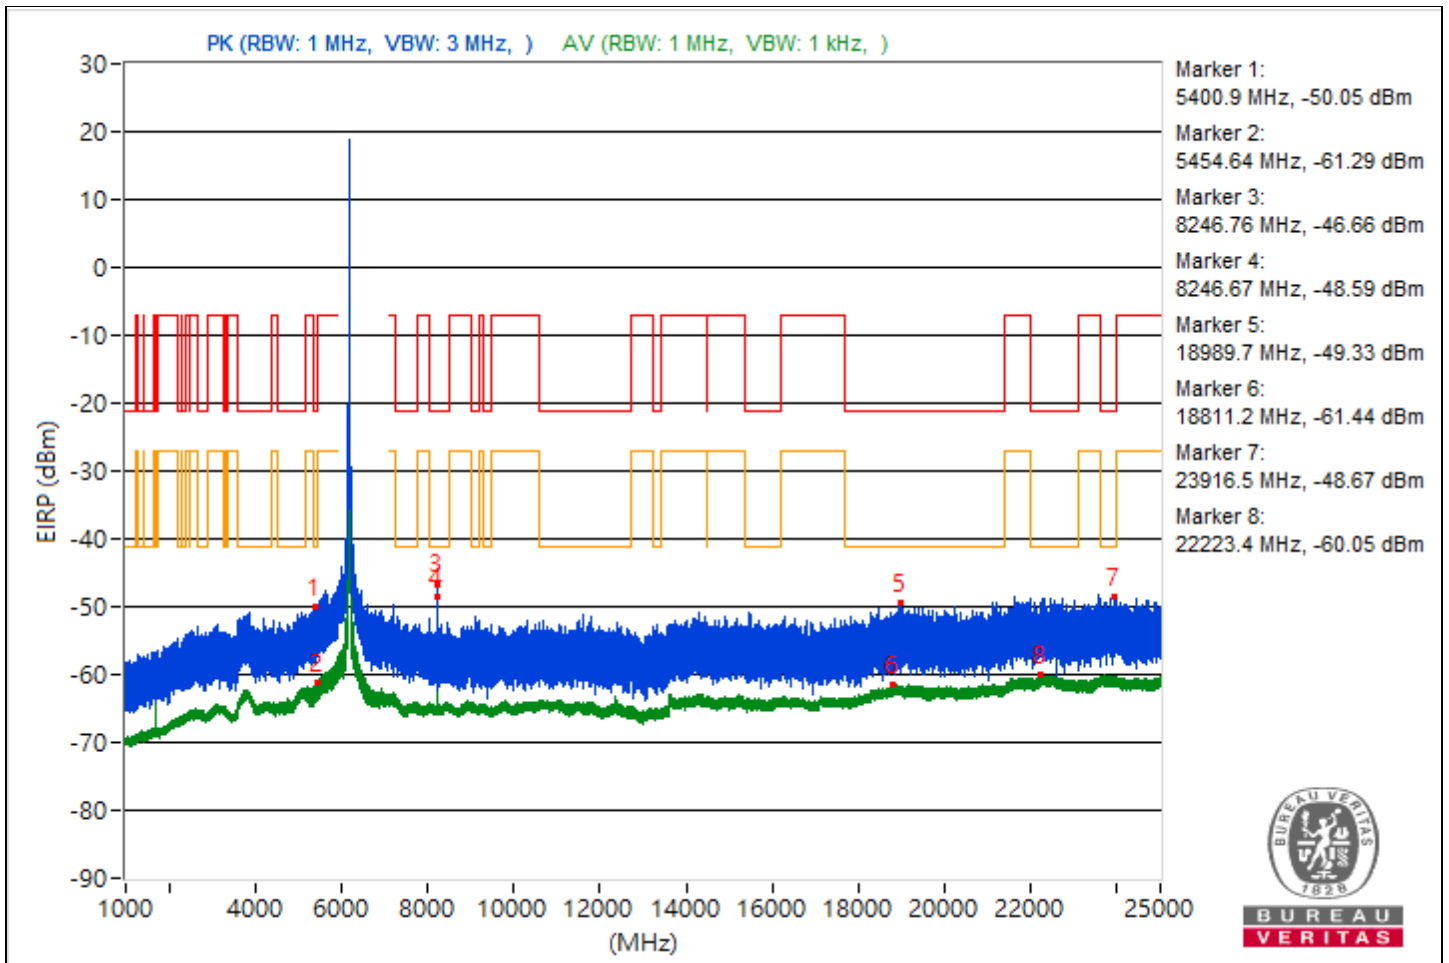

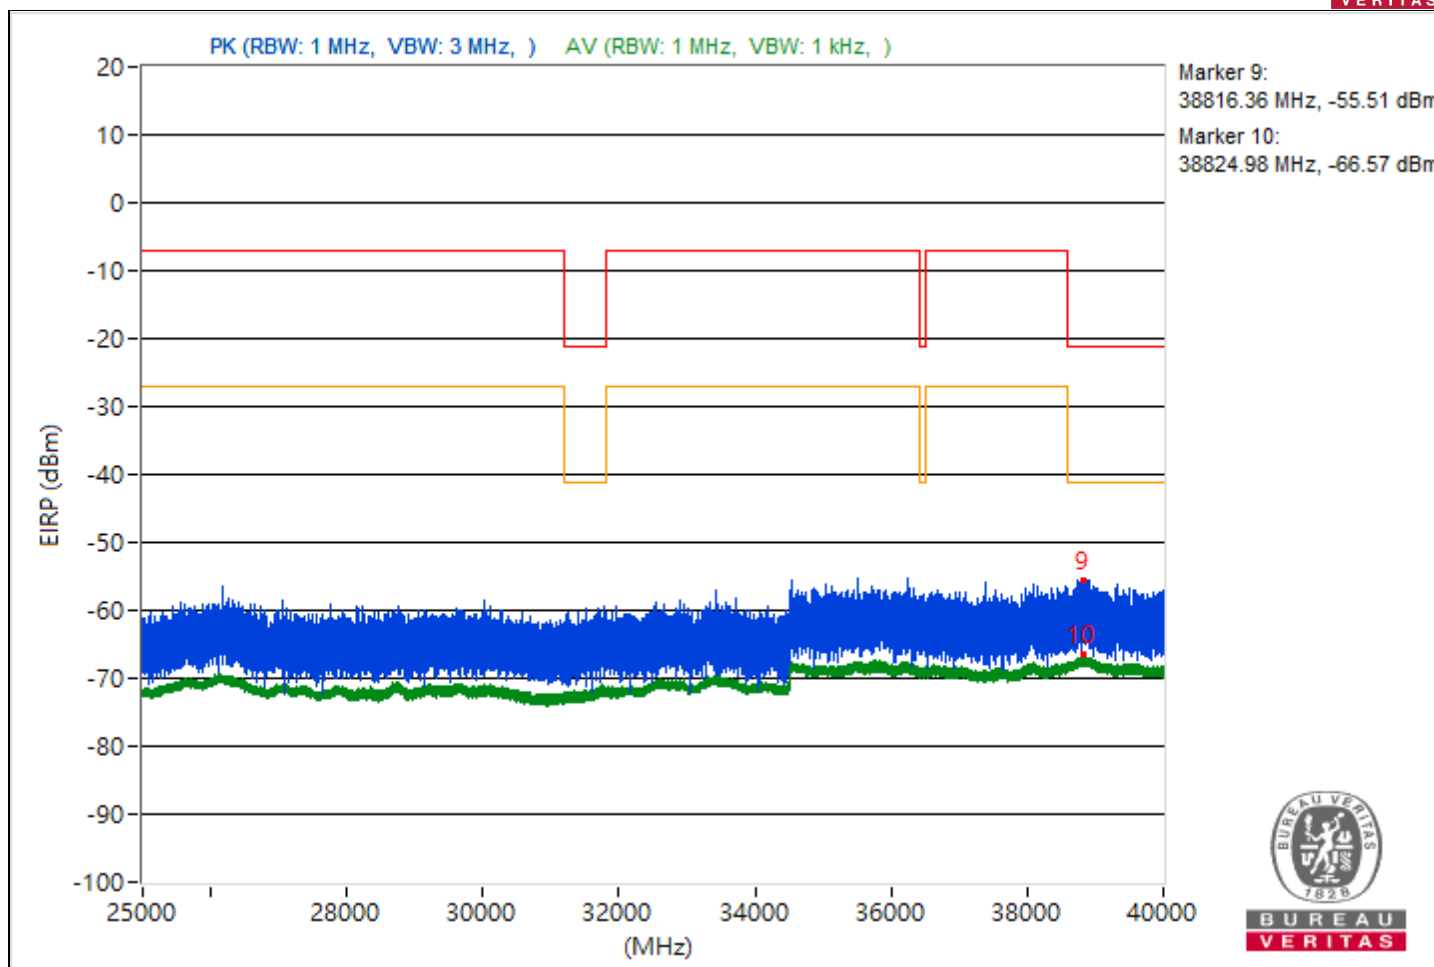





RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5141.98	44.82 PK	74	-29.18	-55.36	4.92	-50.44
2	5449.04	33.25 AV	54	-20.75	-66.93	4.92	-62.01
3	8460	46.79 PK	74	-27.21	-53.39	4.92	-48.47
4	8460.09	44.55 AV	54	-9.45	-55.63	4.92	-50.71
5	20797.4	46.45 PK	74	-27.55	-53.73	4.92	-48.81
6	21143.4	33.88 AV	54	-20.12	-66.3	4.92	-61.38
7	22504.4	46.55 PK	74	-27.45	-53.63	4.92	-48.71
8	23645.5	35.17 AV	54	-18.83	-65.01	4.92	-60.09
9	39955.56	40.21 PK	74	-33.79	-59.97	4.92	-55.05
10	38819.82	28.51 AV	54	-25.49	-71.67	4.92	-66.75

Note: Margin value = Emission Level - Limit value

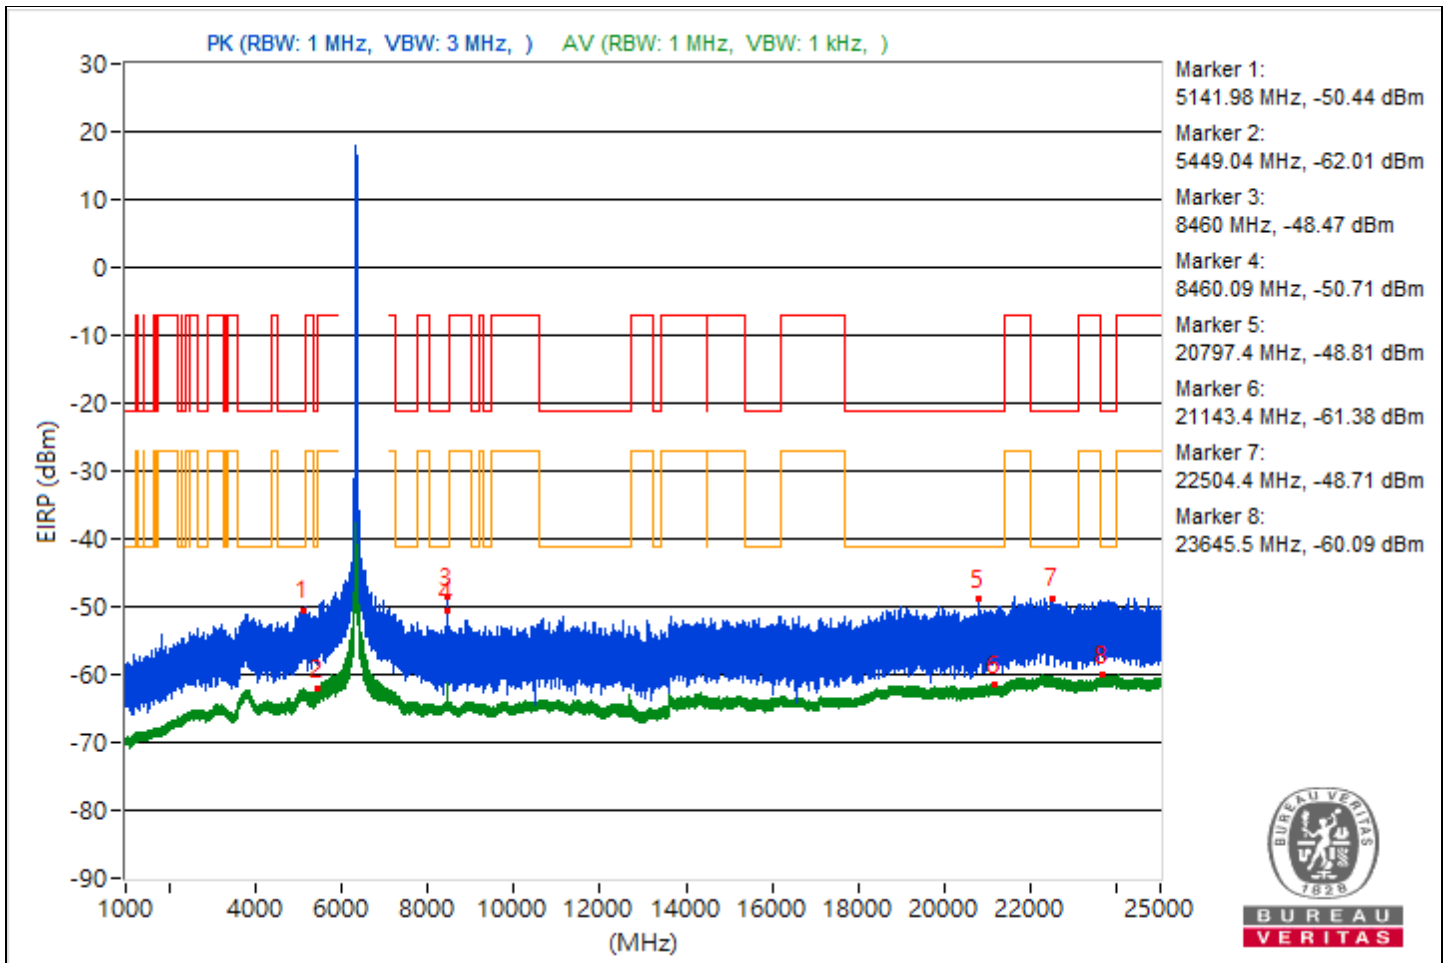

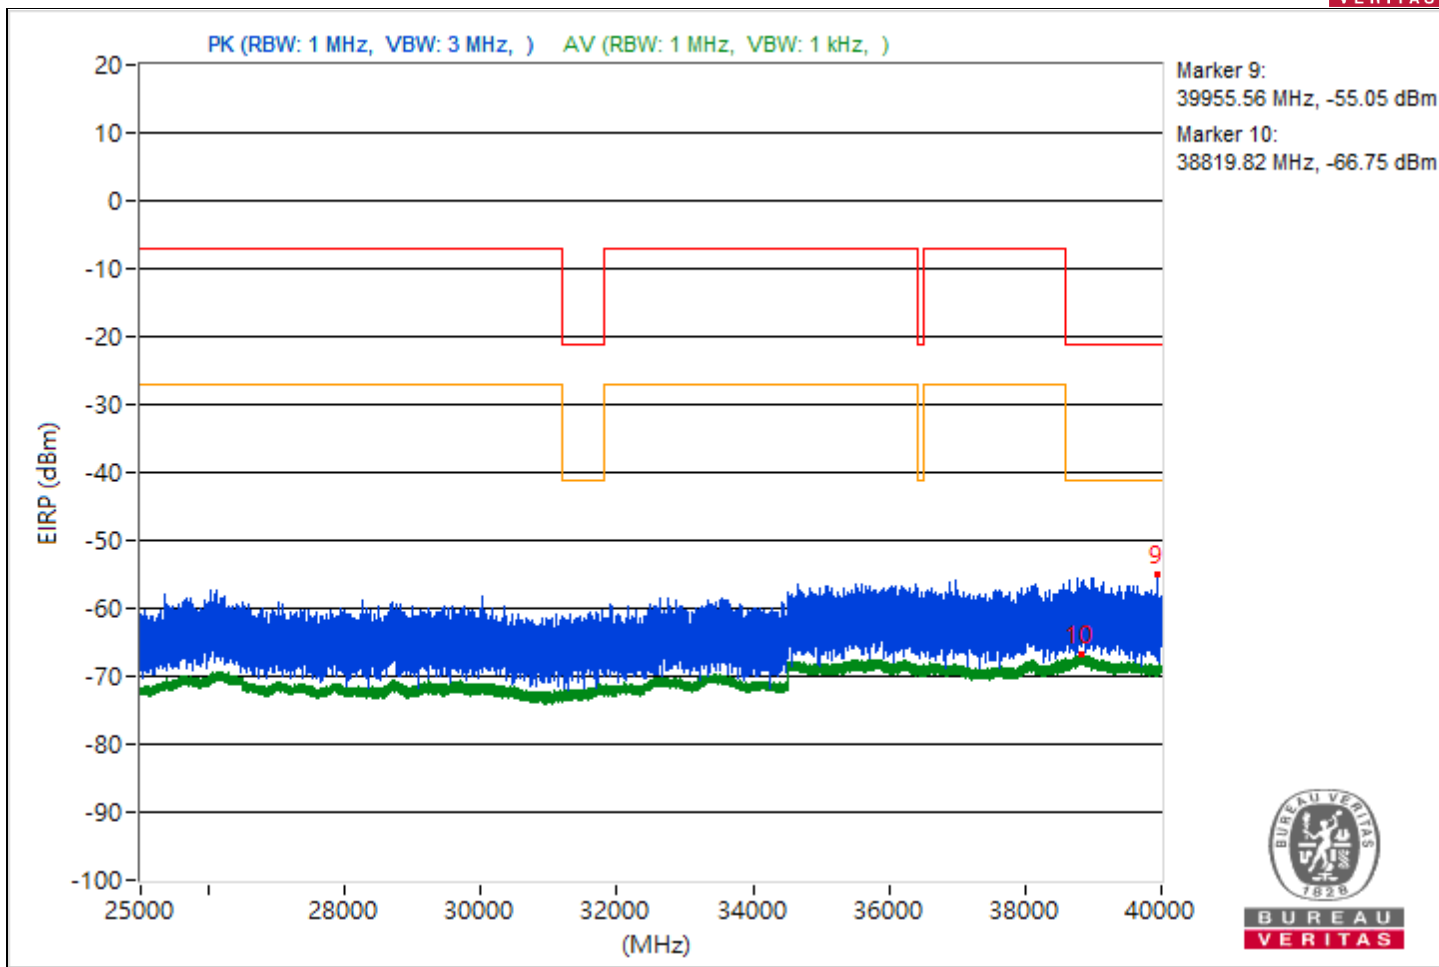





RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5420.11	44.68 PK	74	-29.32	-55.5	4.92	-50.58
2	5096.32	33.19 AV	54	-20.81	-66.99	4.92	-62.07
3	7260.18	44.36 PK	74	-29.64	-55.82	4.92	-50.9
4	7251.93	33.02 AV	54	-20.98	-67.16	4.92	-62.24
5	19459.4	45.89 PK	74	-28.11	-54.29	4.92	-49.37
6	21134.2	33.86 AV	54	-20.14	-66.32	4.92	-61.4
7	23644.9	47.28 PK	74	-26.72	-52.9	4.92	-47.98
8	23657.7	35.19 AV	54	-18.81	-64.99	4.92	-60.07
9	38980.44	39.62 PK	74	-34.38	-60.56	4.92	-55.64
10	38803.29	28.43 AV	54	-25.57	-71.75	4.92	-66.83

Note: Margin value = Emission Level - Limit value

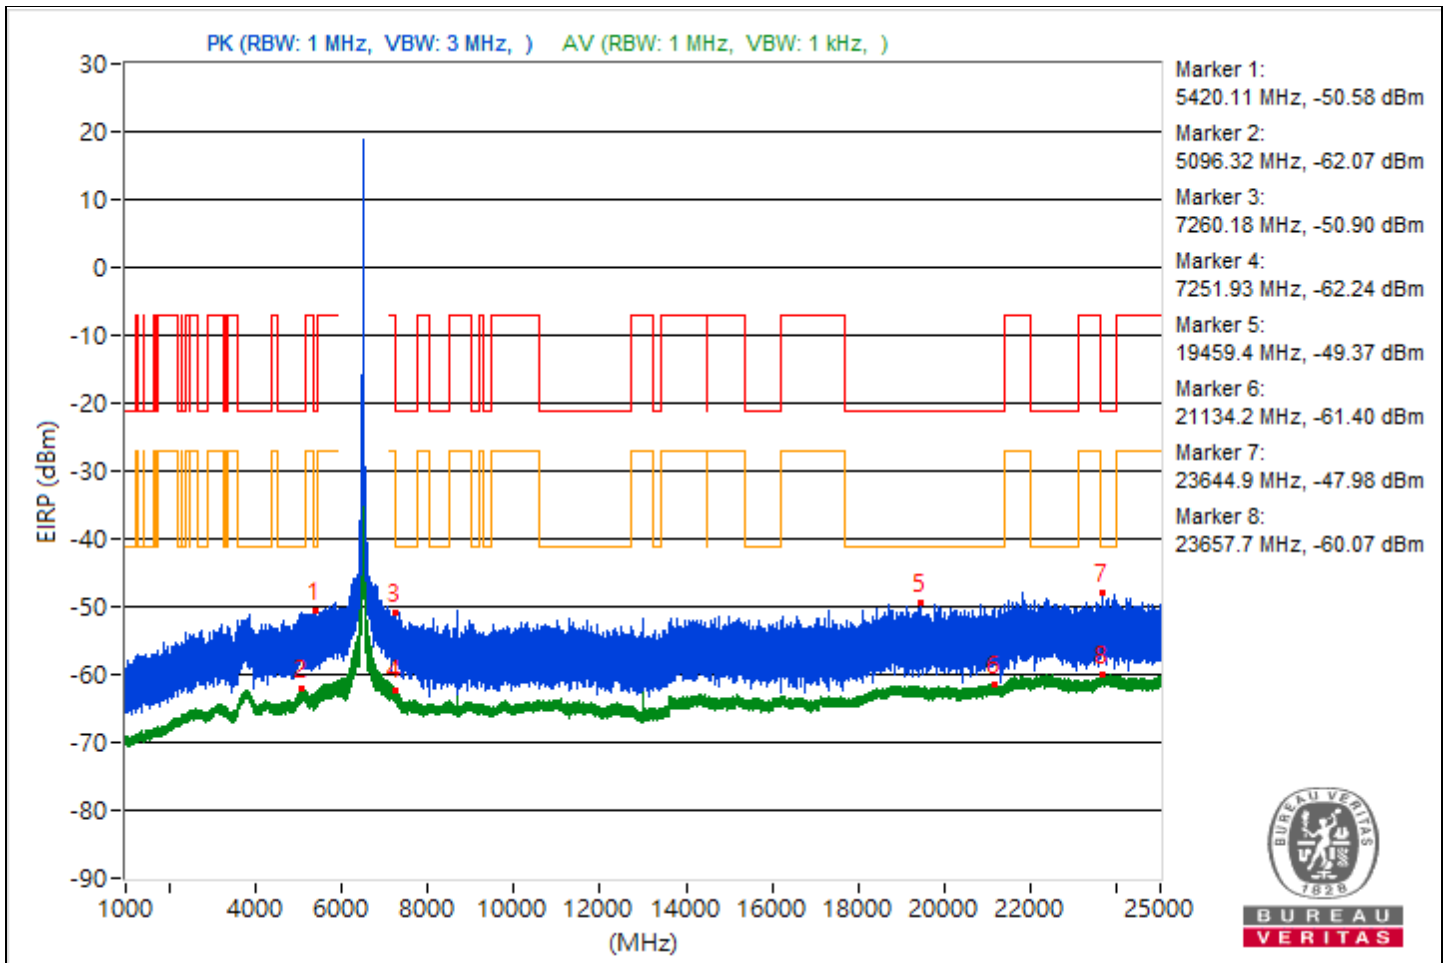

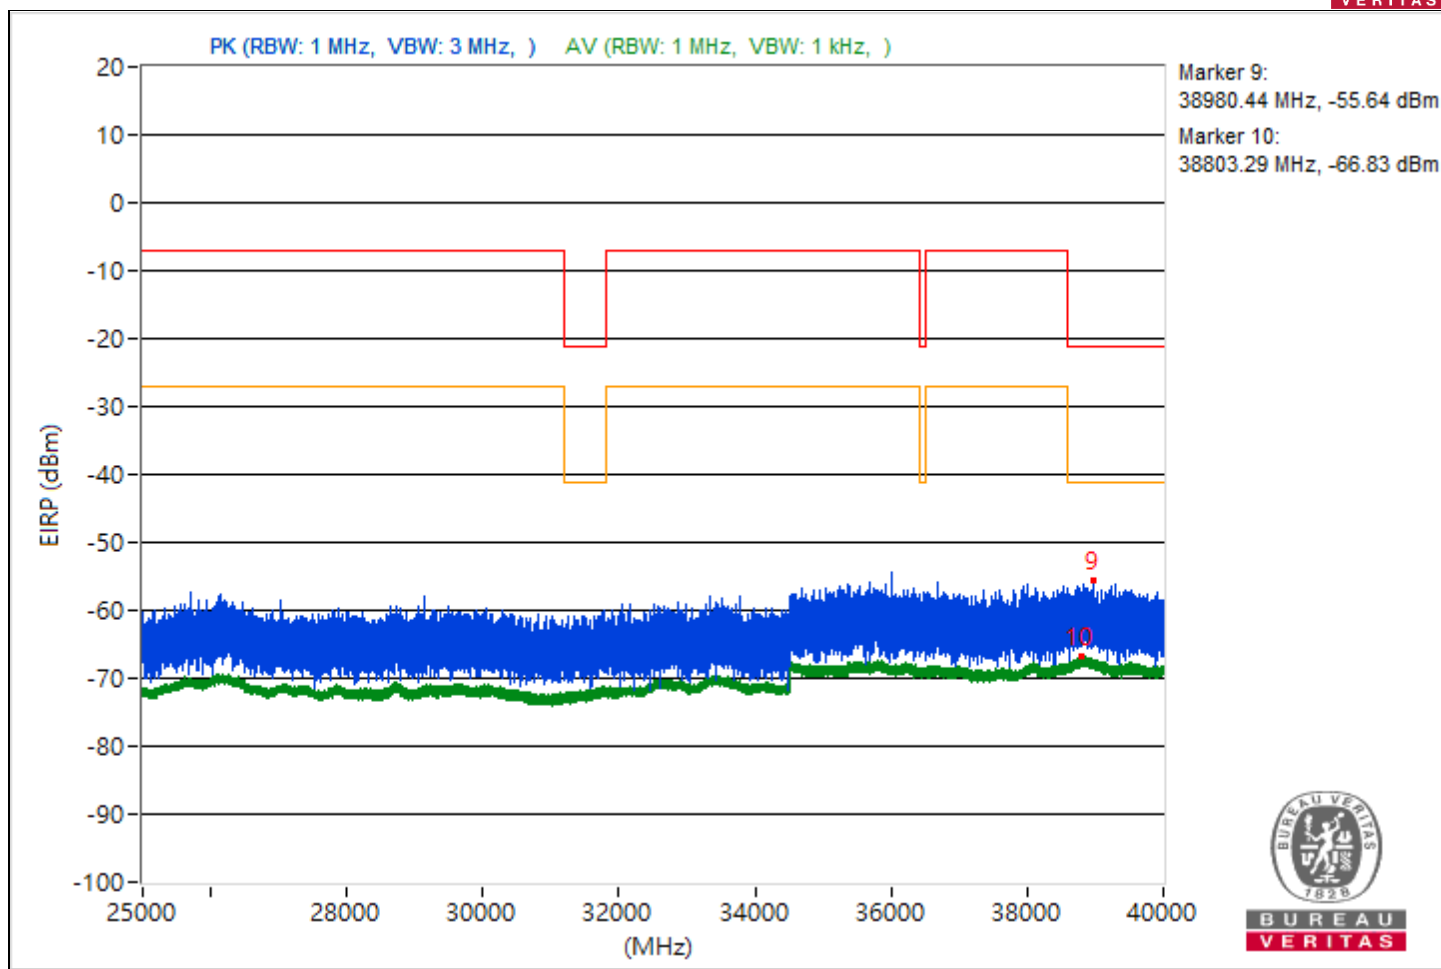





RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3761.81	44.4 PK	74	-29.6	-55.78	4.92	-50.86
2	3795.18	32.84 AV	54	-21.16	-67.34	4.92	-62.42
3	13326.58	45.03 PK	74	-28.97	-55.15	4.92	-50.23
4	13326.4	34.33 AV	54	-19.67	-65.85	4.92	-60.93
5	21103.3	45.85 PK	74	-28.15	-54.33	4.92	-49.41
6	19994.5	33.82 AV	54	-20.18	-66.36	4.92	-61.44
7	22127.7	47.16 PK	74	-26.84	-53.02	4.92	-48.1
8	23746.2	35.1 AV	54	-18.9	-65.08	4.92	-60.16
9	38881.69	39.68 PK	74	-34.32	-60.5	4.92	-55.58
10	38826.13	28.48 AV	54	-25.52	-71.7	4.92	-66.78

Note: Margin value = Emission Level - Limit value

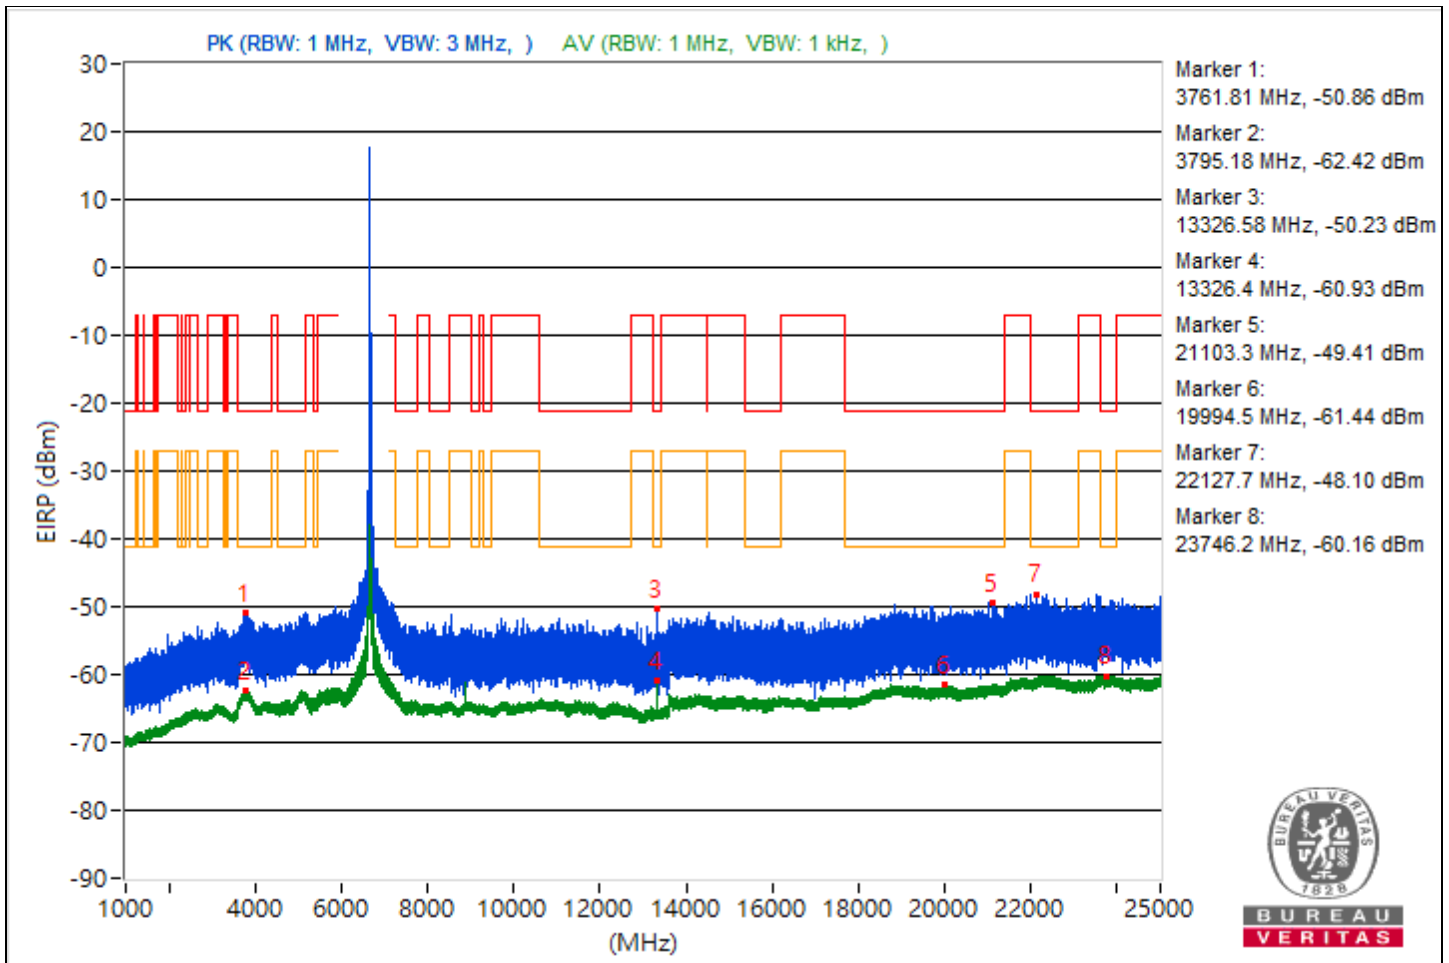

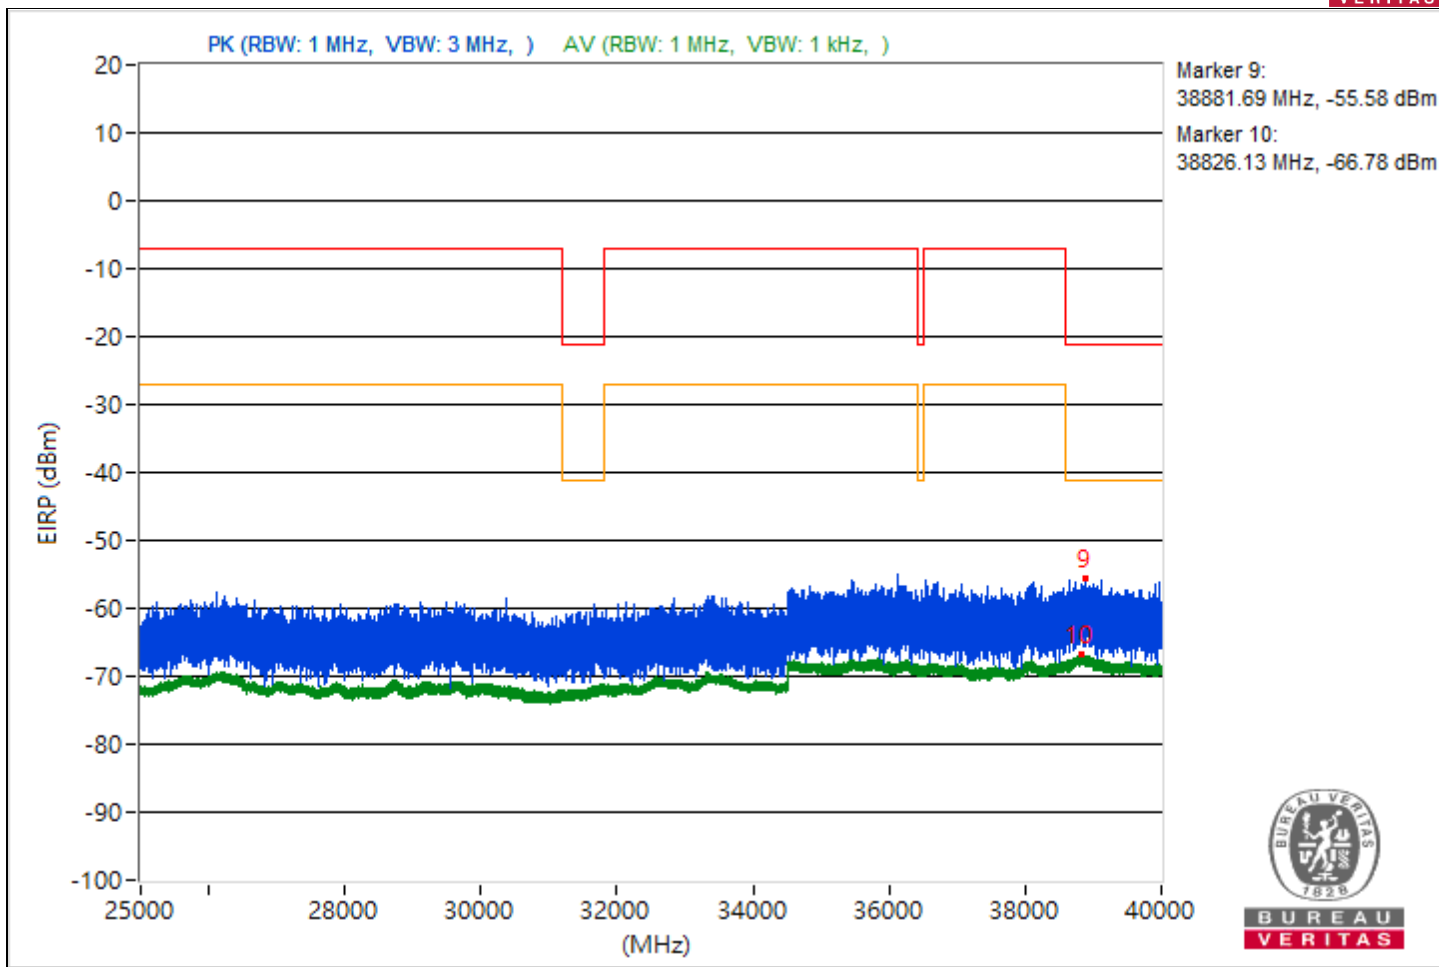





RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5086.6	45 PK	74	-29	-55.18	4.92	-50.26
2	3804.59	33.03 AV	54	-20.97	-67.15	4.92	-62.23
3	7301.4	46.19 PK	74	-27.81	-53.99	4.92	-49.07
4	7264.07	34.3 AV	54	-19.7	-65.88	4.92	-60.96
5	21070.1	46.18 PK	74	-27.82	-54	4.92	-49.08
6	21215.3	33.89 AV	54	-20.11	-66.29	4.92	-61.37
7	22525.4	47.24 PK	74	-26.76	-52.94	4.92	-48.02
8	22271.1	35.21 AV	54	-18.79	-64.97	4.92	-60.05
9	38883.11	39.52 PK	74	-34.48	-60.66	4.92	-55.74
10	38851.38	28.57 AV	54	-25.43	-71.61	4.92	-66.69

Note: Margin value = Emission Level - Limit value

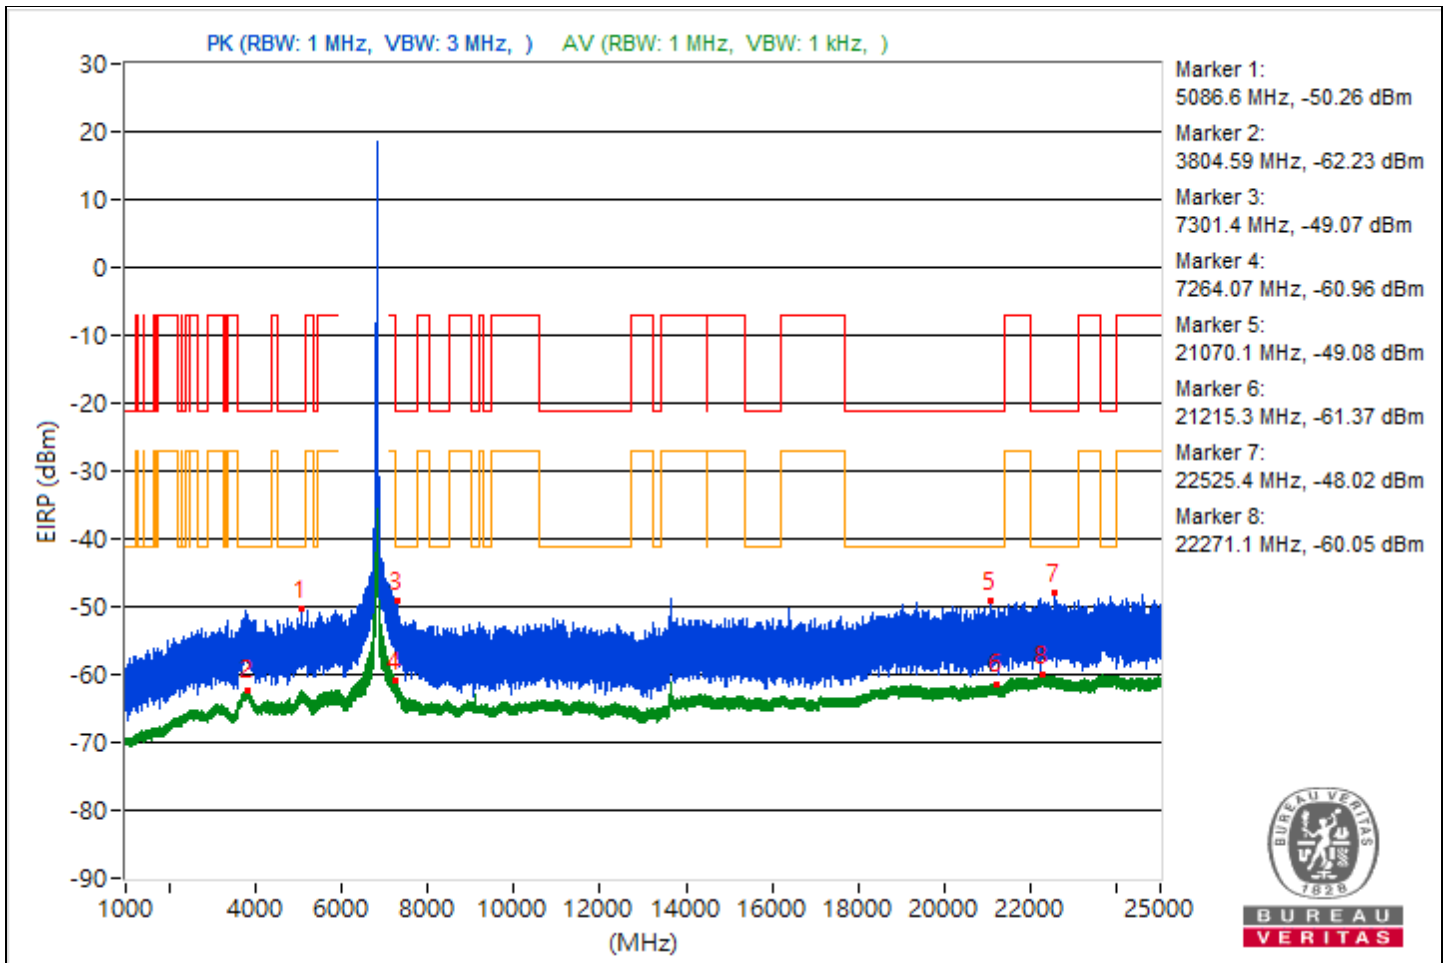

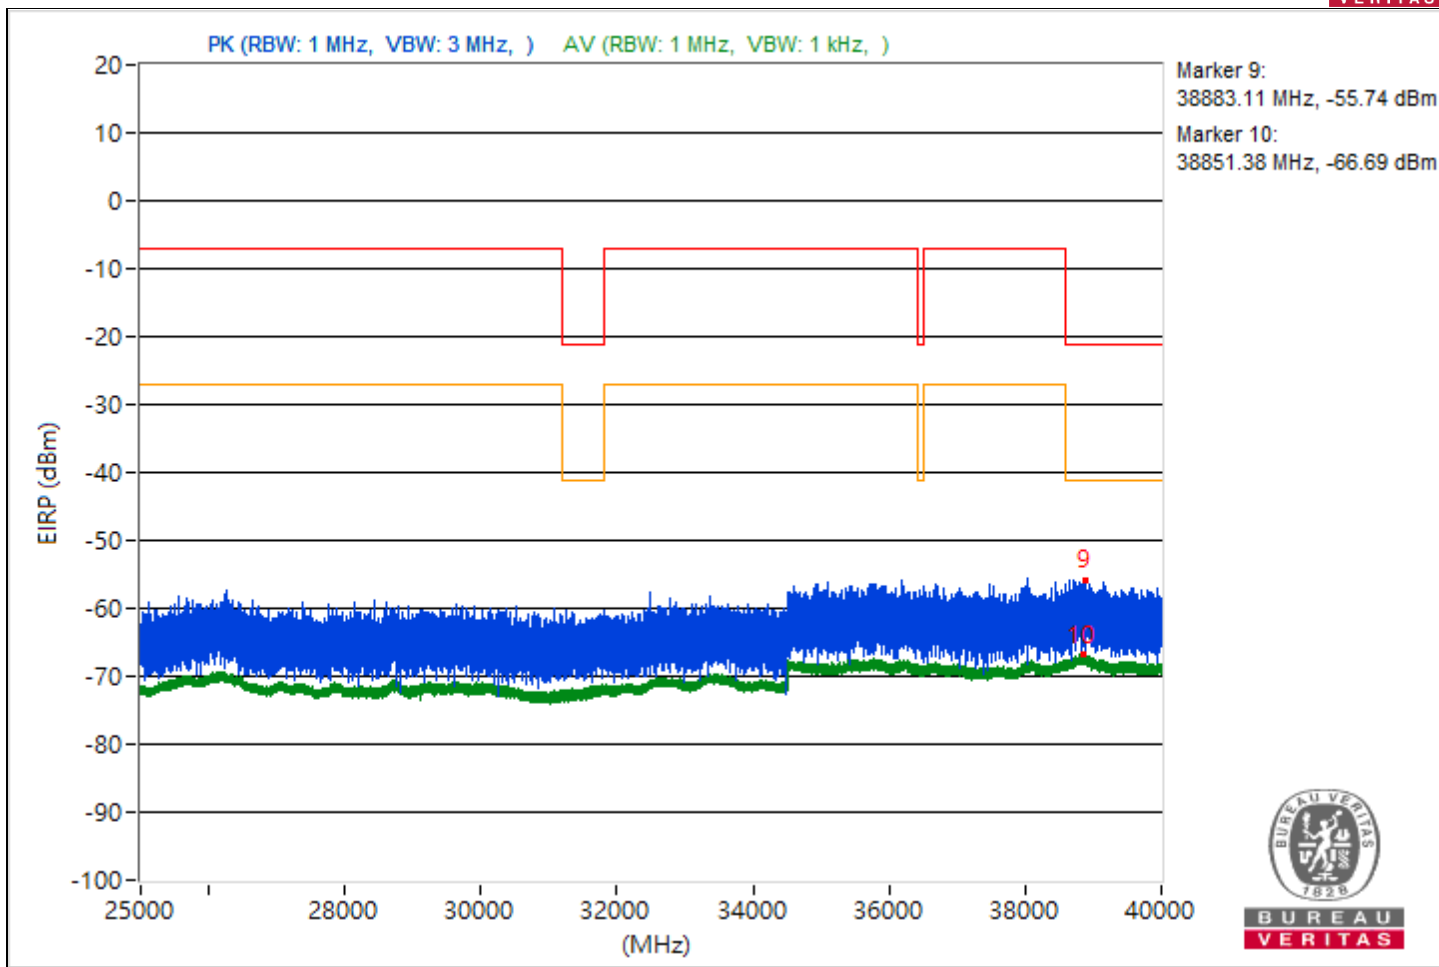





RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.8	45.22 PK	74	-28.78	-54.96	4.92	-50.04
2	3800.86	32.92 AV	54	-21.08	-67.26	4.92	-62.34
3	7286.7	46.4 PK	74	-27.6	-53.78	4.92	-48.86
4	7259.01	35.9 AV	54	-18.1	-64.28	4.92	-59.36
5	21397.5	45.48 PK	74	-28.52	-54.7	4.92	-49.78
6	20956.8	33.94 AV	54	-20.06	-66.24	4.92	-61.32
7	23614.3	47.17 PK	74	-26.83	-53.01	4.92	-48.09
8	22253	35.11 AV	54	-18.89	-65.07	4.92	-60.15
9	38929.51	39.57 PK	74	-34.43	-60.61	4.92	-55.69
10	38864.09	28.48 AV	54	-25.52	-71.7	4.92	-66.78

Note: Margin value = Emission Level - Limit value

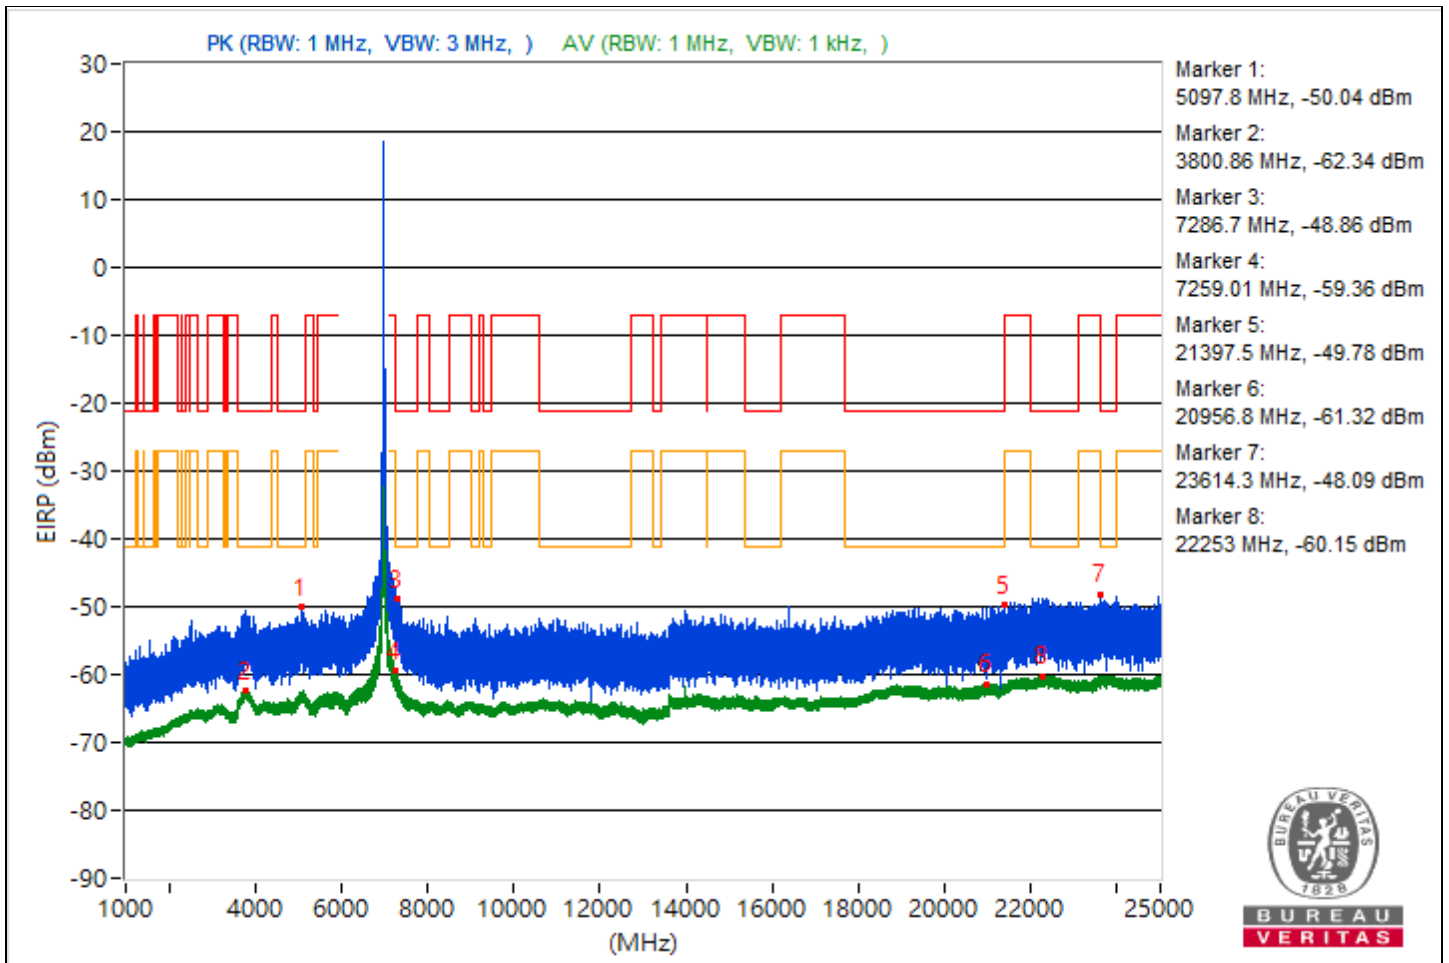

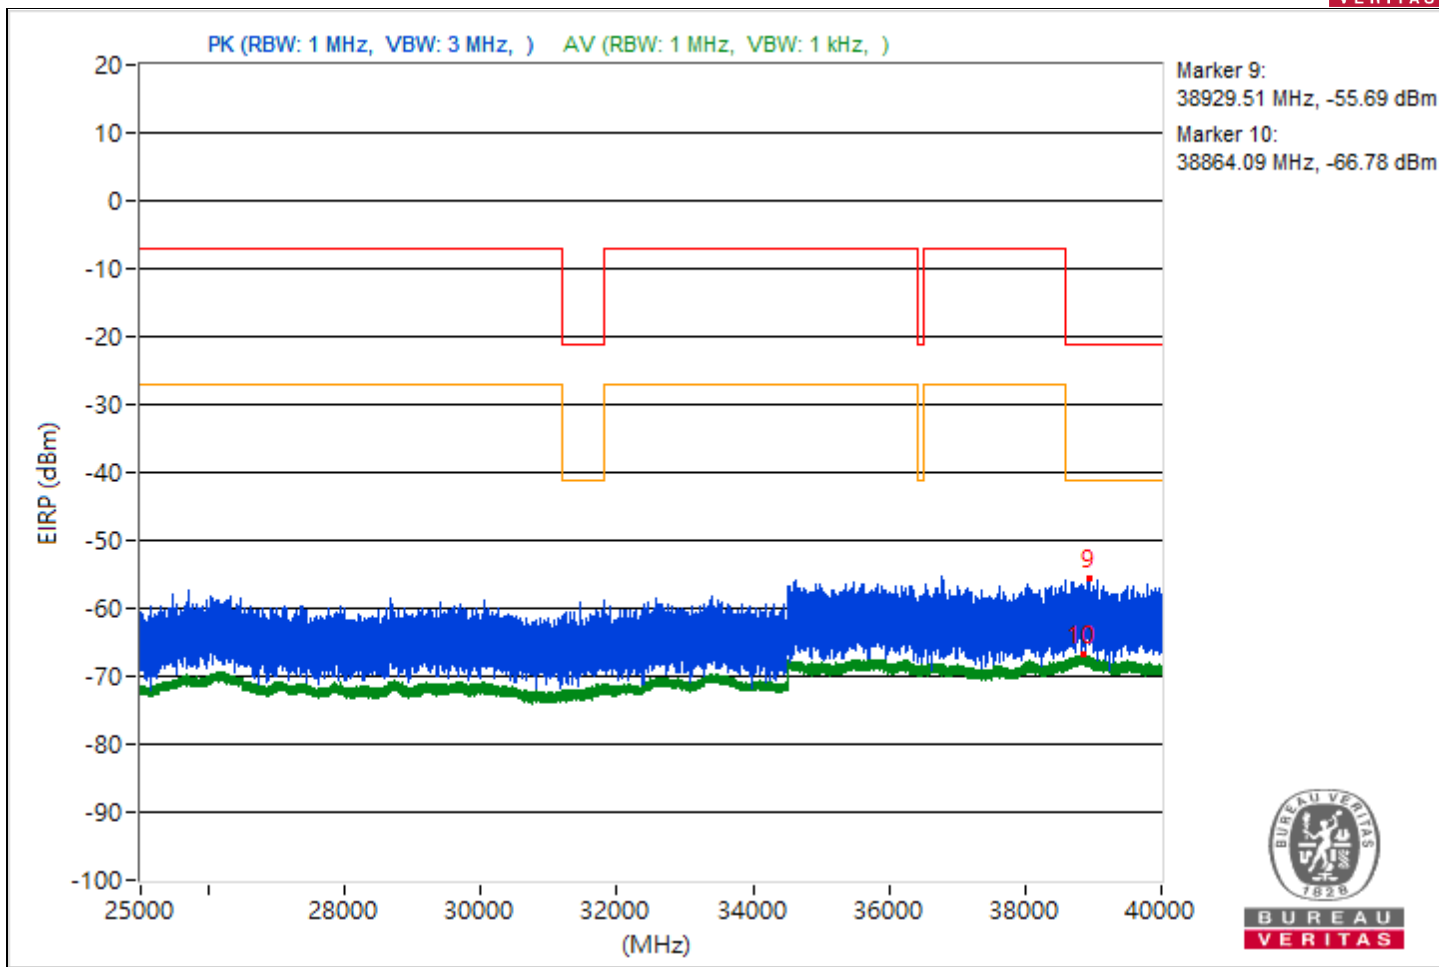





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3872.57	44.31 PK	74	-29.69	-55.87	4.92	-50.95
2	3764.07	32.86 AV	54	-21.14	-67.32	4.92	-62.4
3	7701.57	43.4 PK	74	-30.6	-56.78	4.92	-51.86
4	14486.76	32.03 AV	54	-21.97	-68.15	4.92	-63.23
5	19457.6	45.72 PK	74	-28.28	-54.46	4.92	-49.54
6	21137.2	33.82 AV	54	-20.18	-66.36	4.92	-61.44
7	22796.5	46.85 PK	74	-27.15	-53.33	4.92	-48.41
8	23647.2	35.24 AV	54	-18.76	-64.94	4.92	-60.02
9	38840.44	39.8 PK	74	-34.2	-60.38	4.92	-55.46
10	38810.31	28.8 AV	54	-25.2	-71.38	4.92	-66.46

Note: Margin value = Emission Level - Limit value

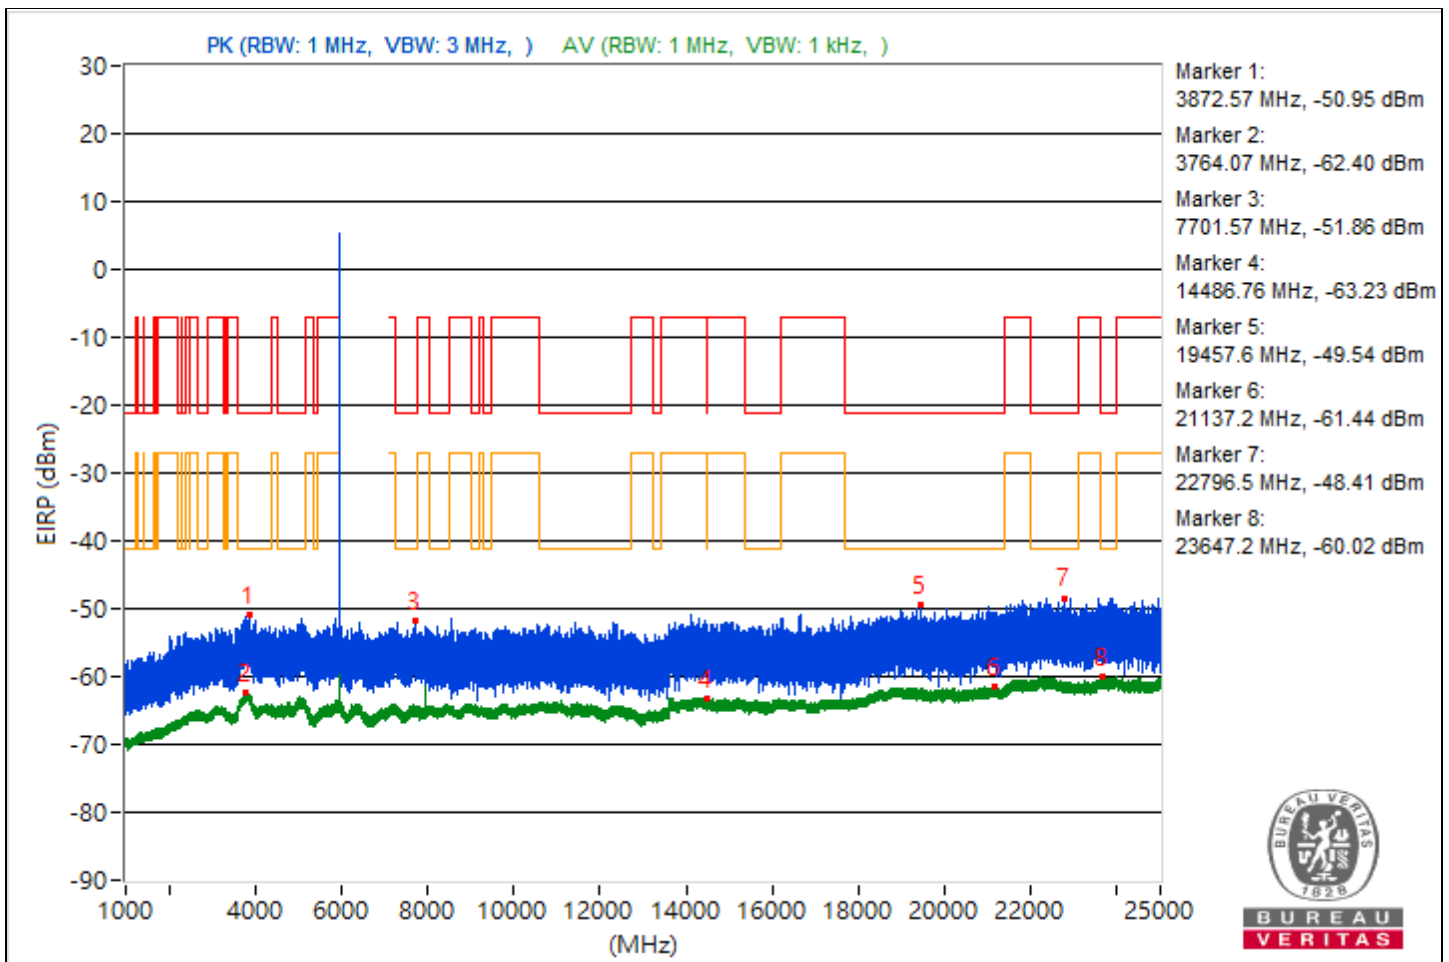

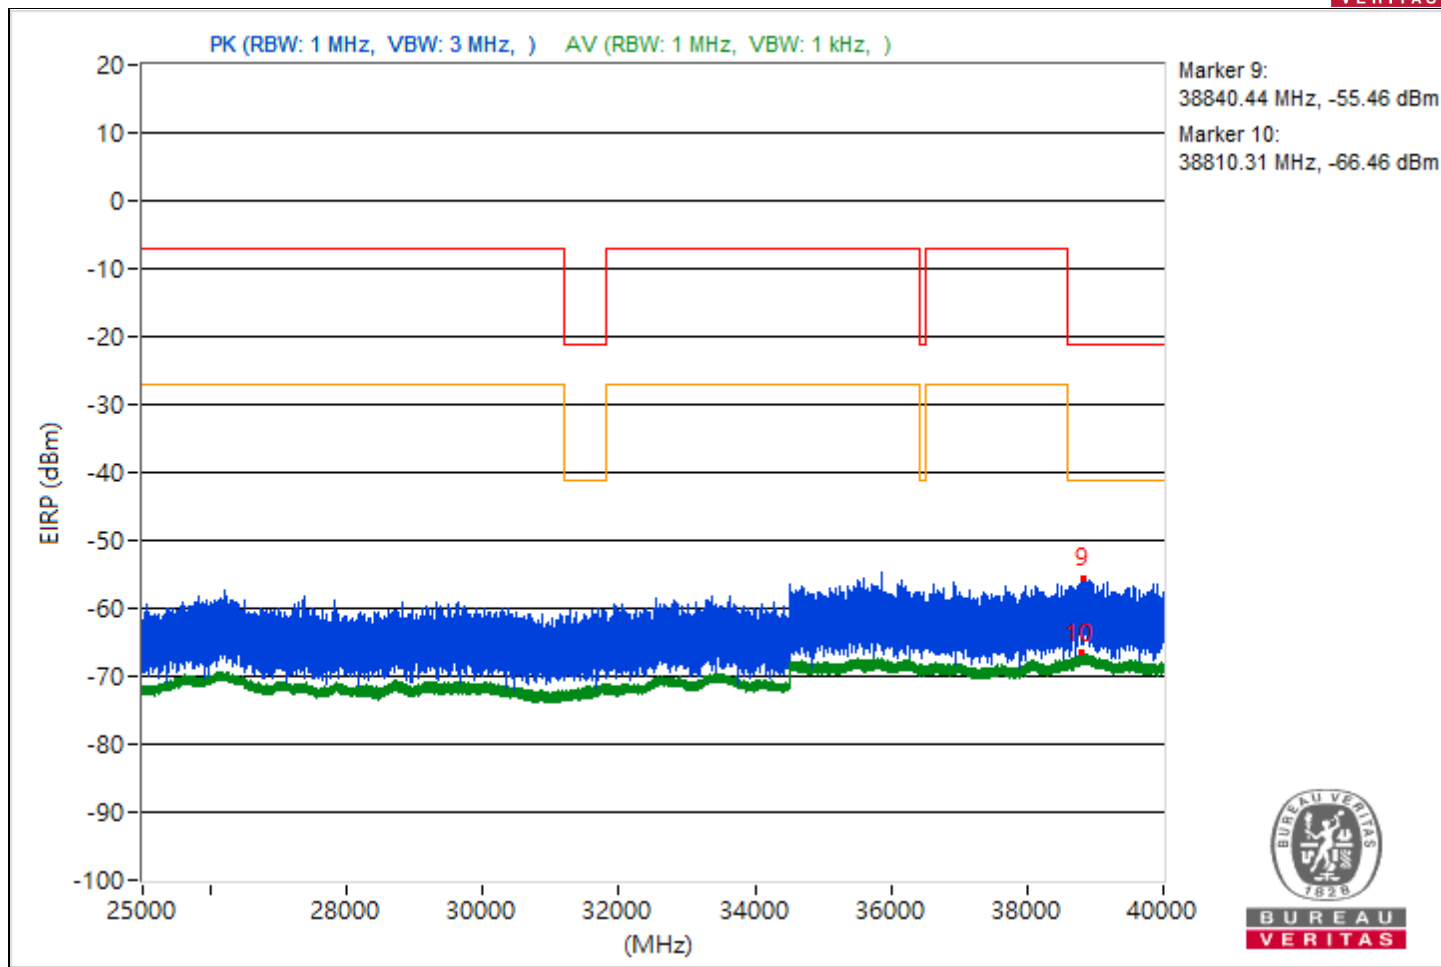





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5038.3	44.71 PK	74	-29.29	-55.47	4.92	-50.55
2	3814.23	32.83 AV	54	-21.17	-67.35	4.92	-62.43
3	15662.04	43.74 PK	74	-30.26	-56.44	4.92	-51.52
4	15620.27	31.87 AV	54	-22.13	-68.31	4.92	-63.39
5	21220.8	46.02 PK	74	-27.98	-54.16	4.92	-49.24
6	21009.8	33.8 AV	54	-20.2	-66.38	4.92	-61.46
7	23629	47.68 PK	74	-26.32	-52.5	4.92	-47.58
8	22312.6	35.21 AV	54	-18.79	-64.97	4.92	-60.05
9	39200.44	39.98 PK	74	-34.02	-60.2	4.92	-55.28
10	38800.09	28.82 AV	54	-25.18	-71.36	4.92	-66.44

Note: Margin value = Emission Level - Limit value

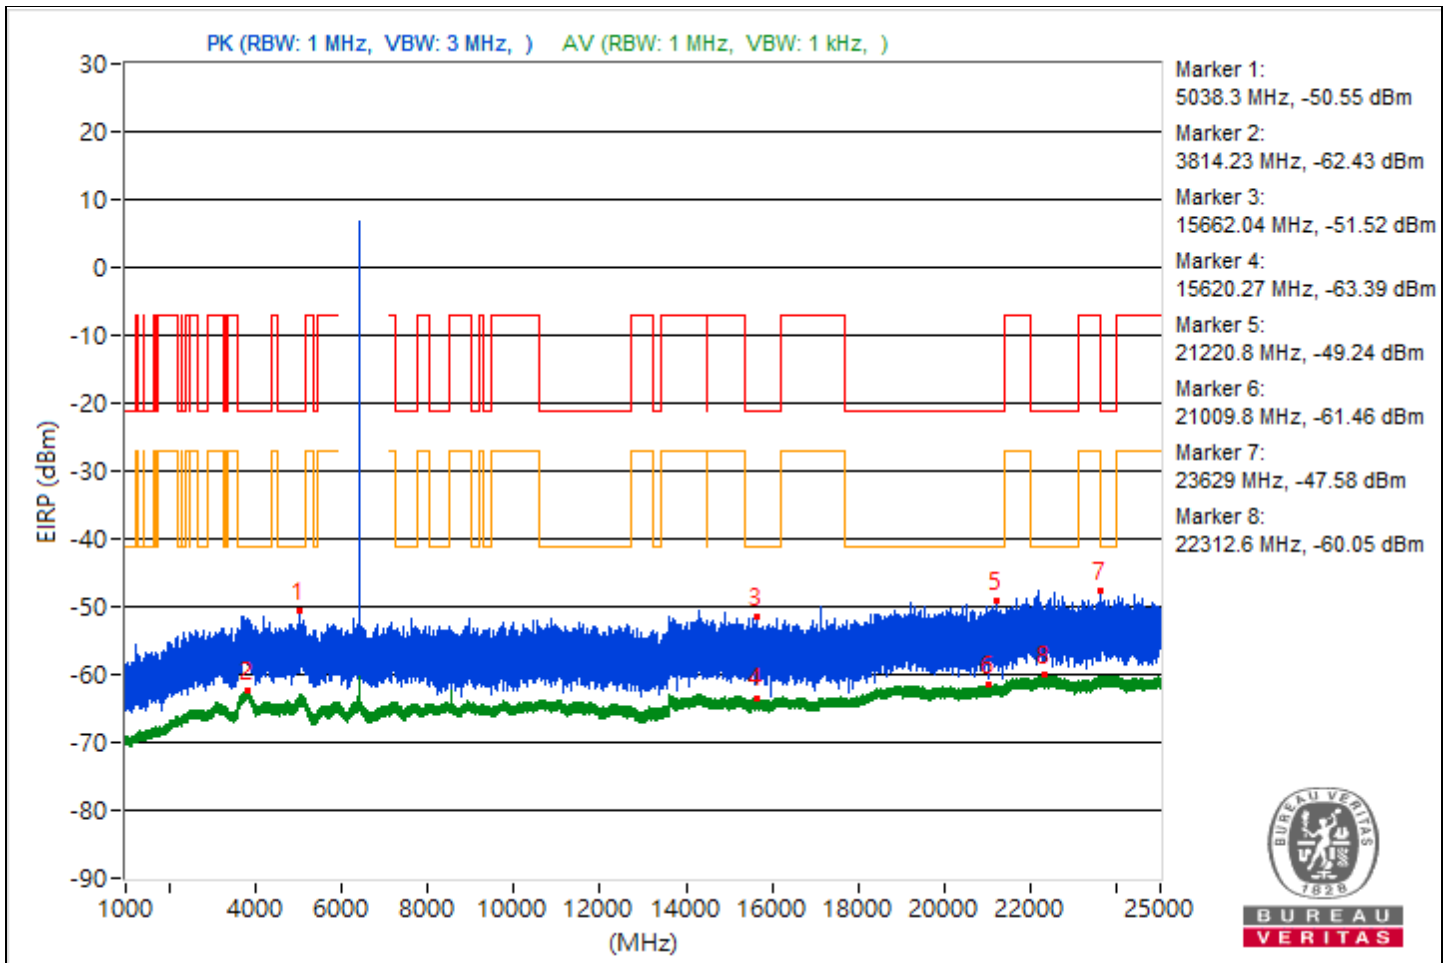

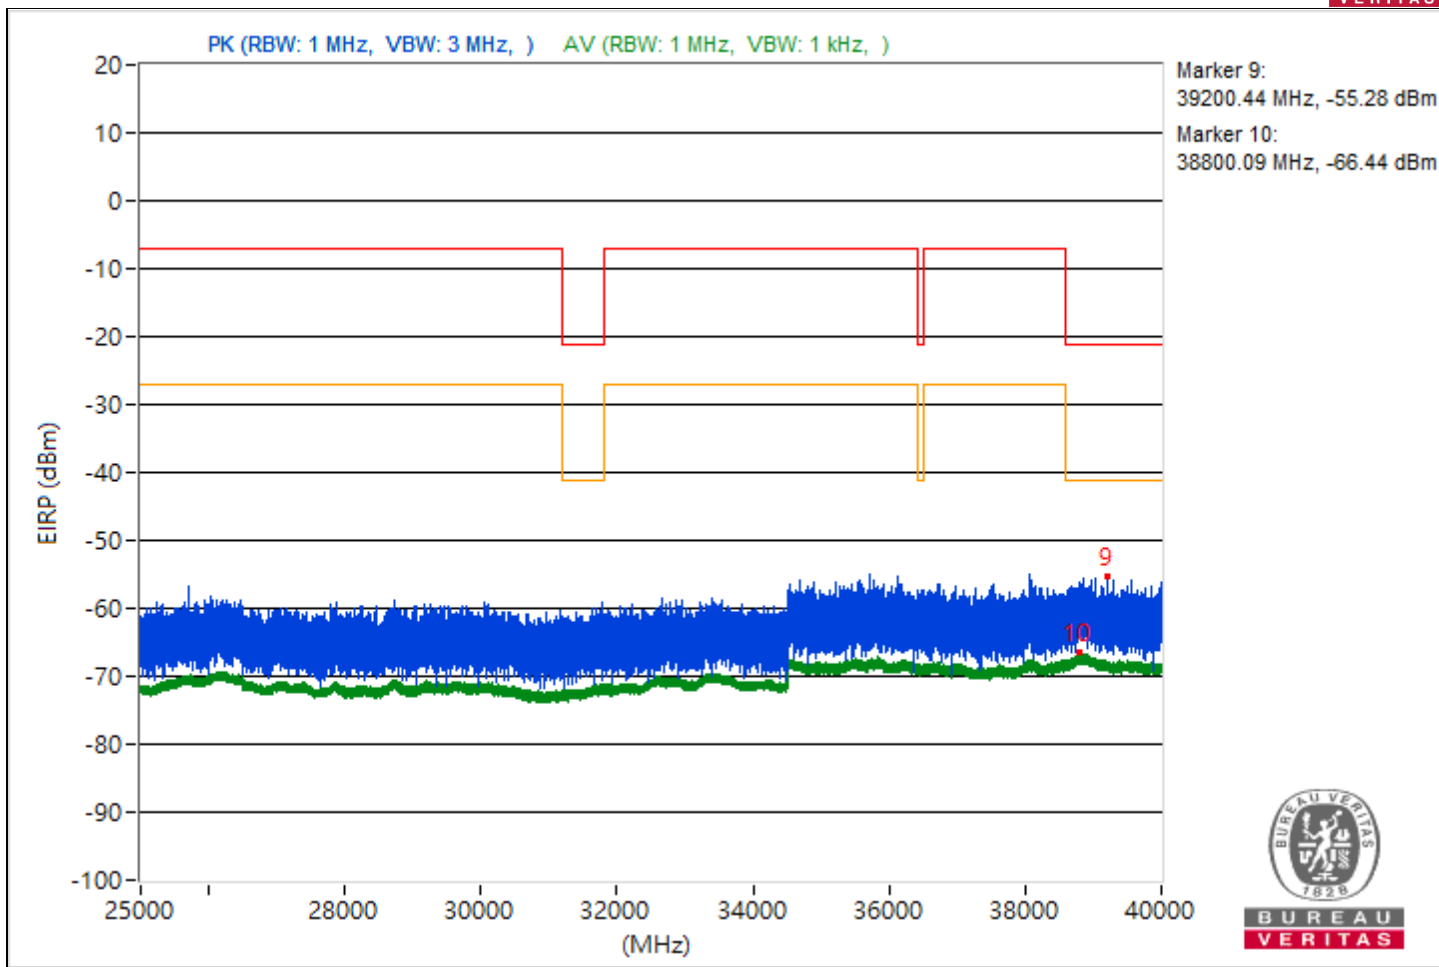





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.93	44.79 PK	74	-29.21	-55.39	4.92	-50.47
2	3789.34	32.95 AV	54	-21.05	-67.23	4.92	-62.31
3	10683.47	44.08 PK	74	-29.92	-56.1	4.92	-51.18
4	14498.49	31.91 AV	54	-22.09	-68.27	4.92	-63.35
5	21307.4	46.15 PK	74	-27.85	-54.03	4.92	-49.11
6	21102.9	33.85 AV	54	-20.15	-66.33	4.92	-61.41
7	22419.5	46.68 PK	74	-27.32	-53.5	4.92	-48.58
8	23959.3	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	39457.33	40.07 PK	74	-33.93	-60.11	4.92	-55.19
10	38856.8	28.51 AV	54	-25.49	-71.67	4.92	-66.75

Note: Margin value = Emission Level - Limit value

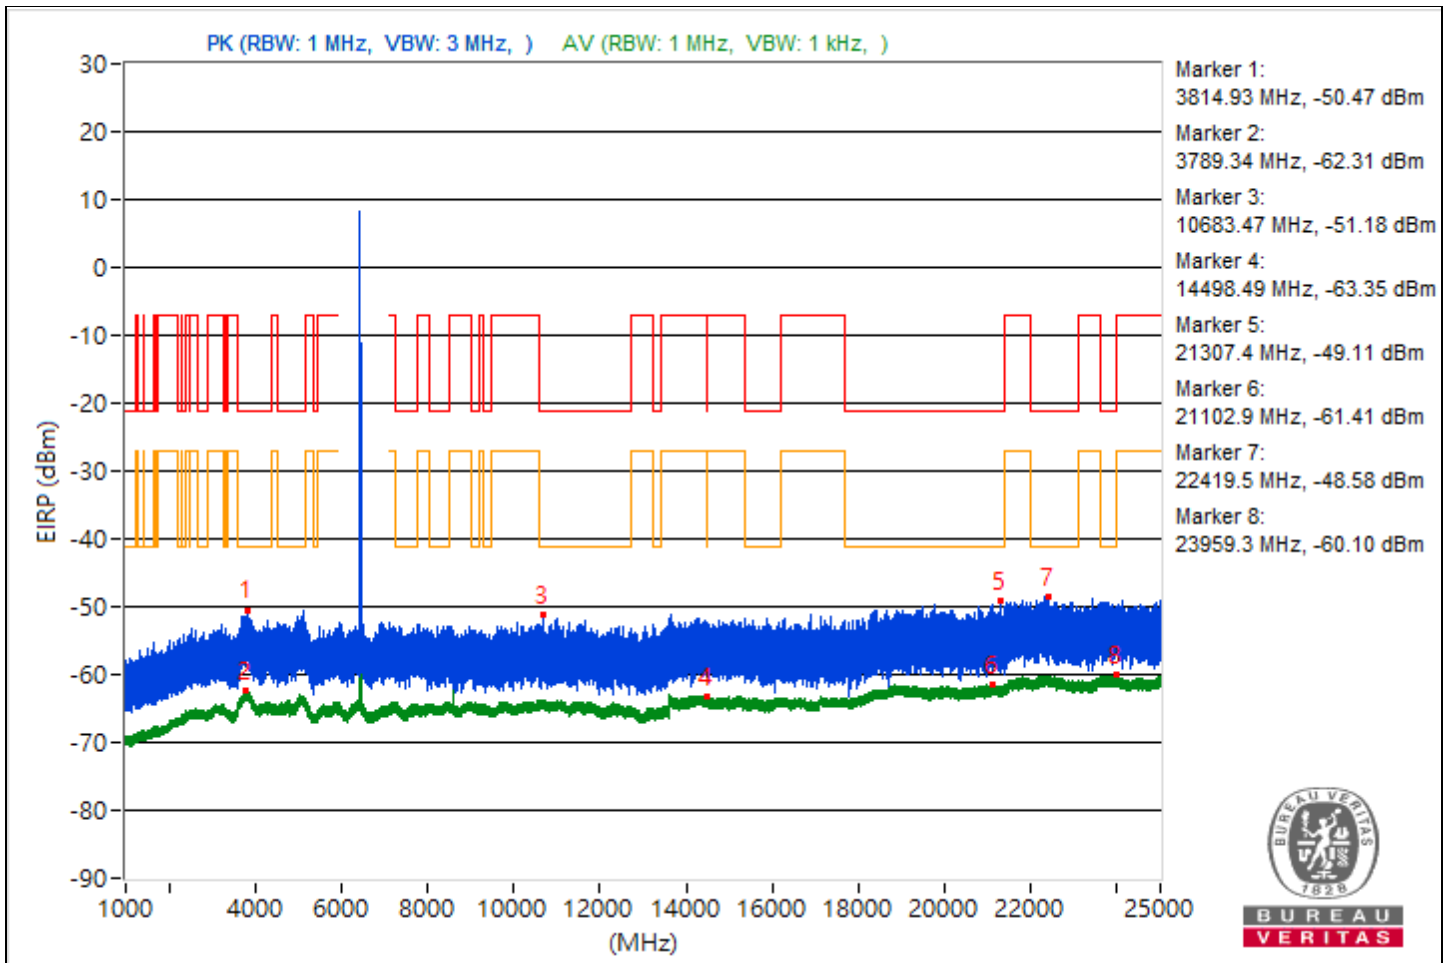

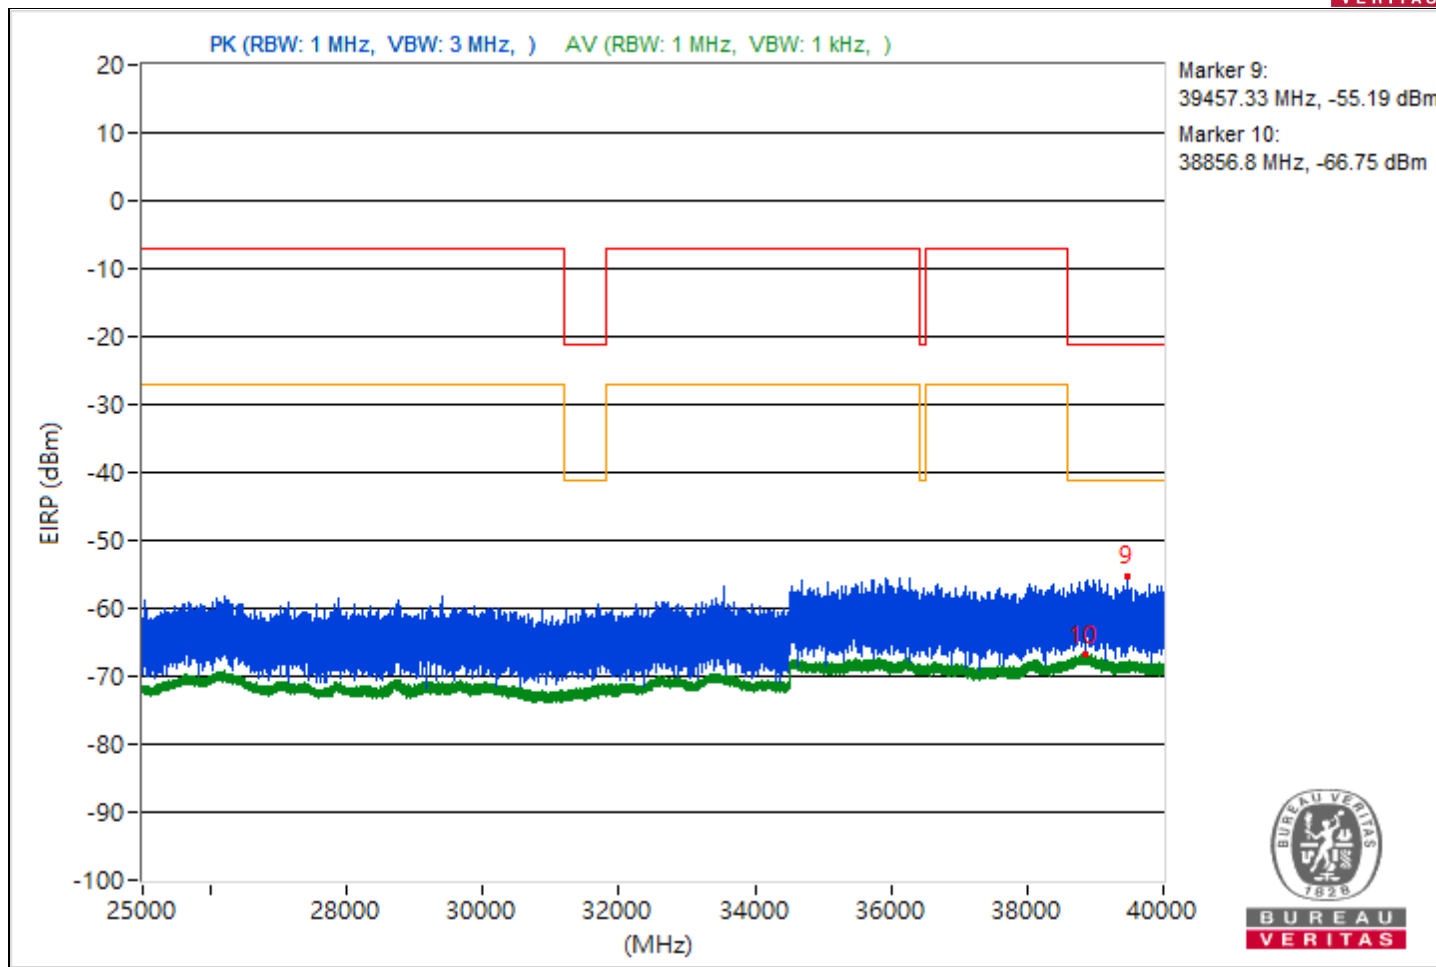





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4985.8	44.86 PK	74	-29.14	-55.32	4.92	-50.4
2	3811.82	32.98 AV	54	-21.02	-67.2	4.92	-62.28
3	7700.01	43.38 PK	74	-30.62	-56.8	4.92	-51.88
4	14482.31	31.81 AV	54	-22.19	-68.37	4.92	-63.45
5	21250.5	46.36 PK	74	-27.64	-53.82	4.92	-48.9
6	21134	33.79 AV	54	-20.21	-66.39	4.92	-61.47
7	22176	47.21 PK	74	-26.79	-52.97	4.92	-48.05
8	22272	35.14 AV	54	-18.86	-65.04	4.92	-60.12
9	38825.6	39.66 PK	74	-34.34	-60.52	4.92	-55.6
10	38832.44	28.71 AV	54	-25.29	-71.47	4.92	-66.55

Note: Margin value = Emission Level - Limit value

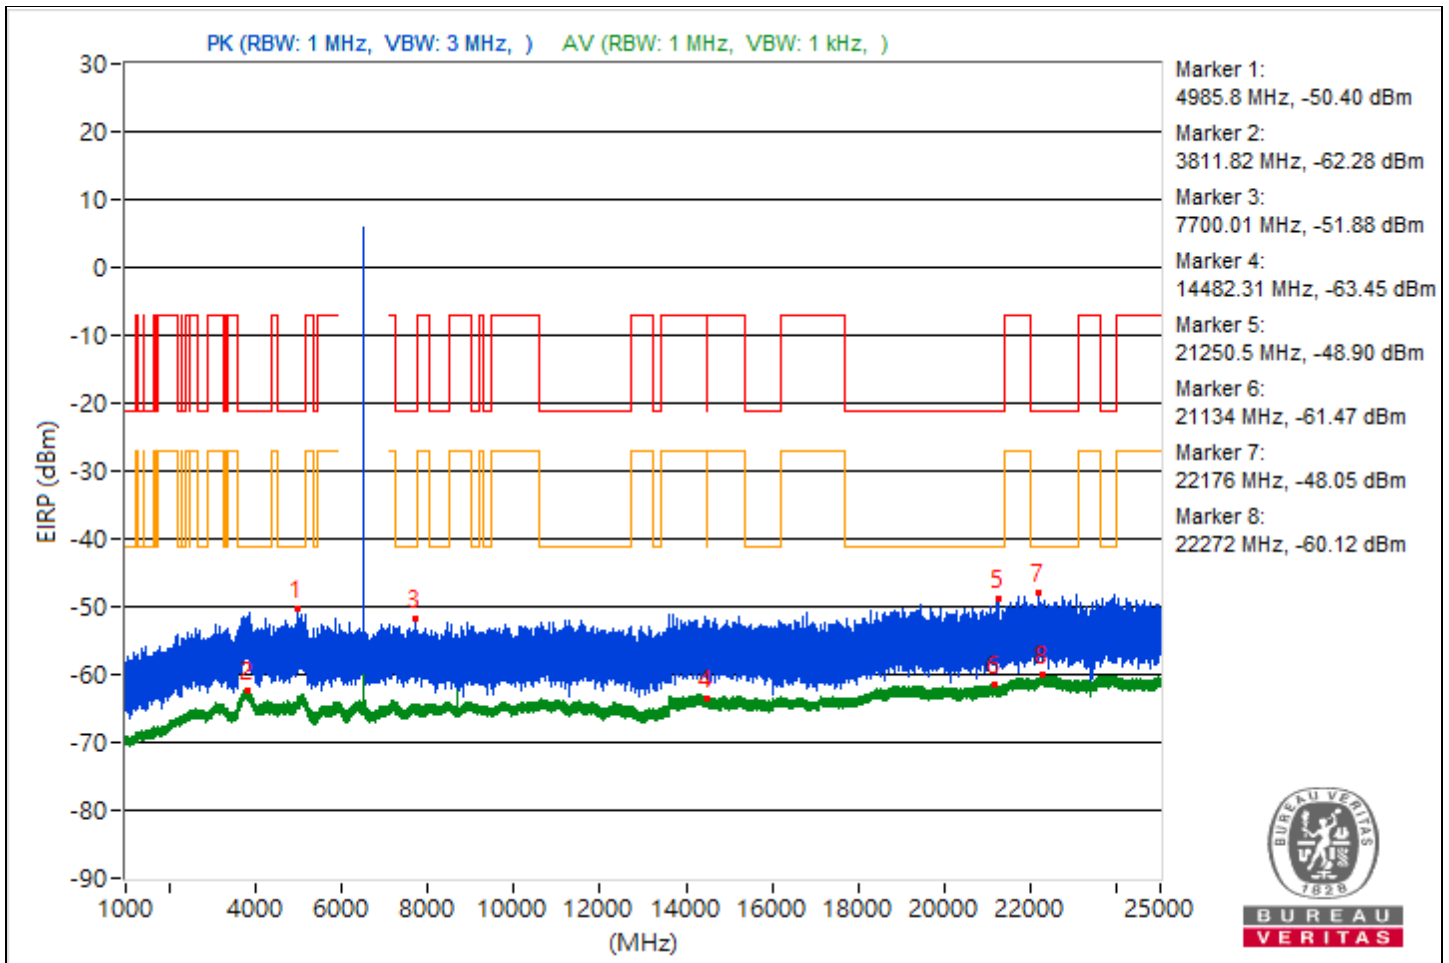

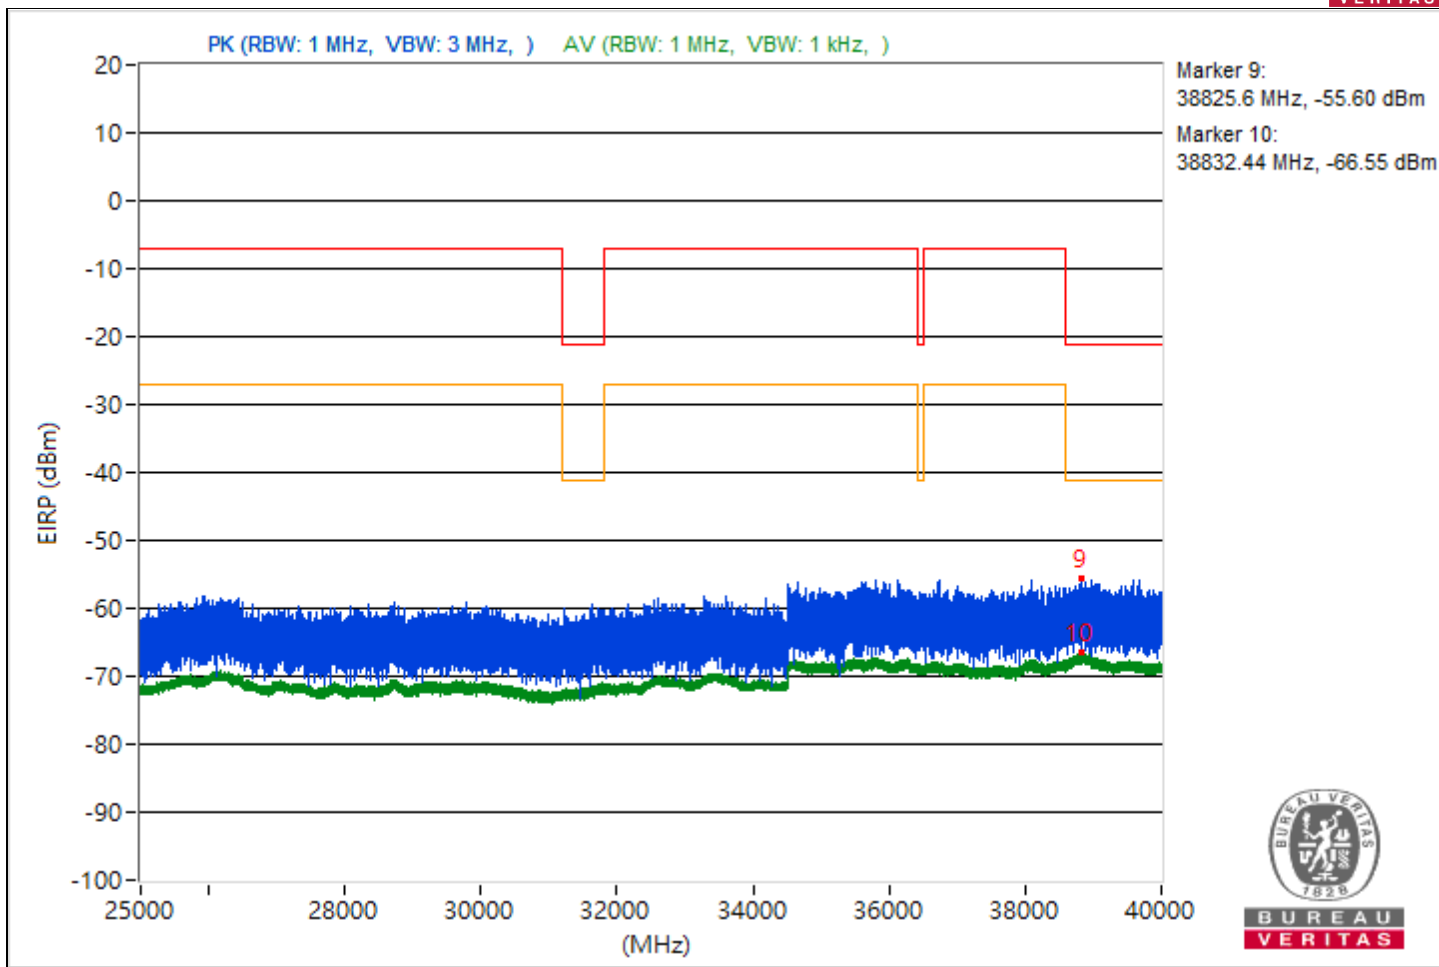





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4896.12	44.25 PK	74	-29.75	-55.93	4.92	-51.01
2	3772.62	32.89 AV	54	-21.11	-67.29	4.92	-62.37
3	11246.22	44.25 PK	74	-29.75	-55.93	4.92	-51.01
4	14479.82	31.99 AV	54	-22.01	-68.19	4.92	-63.27
5	21112	45.28 PK	74	-28.72	-54.9	4.92	-49.98
6	21218.1	33.96 AV	54	-20.04	-66.22	4.92	-61.3
7	23771.2	47.45 PK	74	-26.55	-52.73	4.92	-47.81
8	23975.5	35.11 AV	54	-18.89	-65.07	4.92	-60.15
9	38744.62	39.95 PK	74	-34.05	-60.23	4.92	-55.31
10	38828.09	28.58 AV	54	-25.42	-71.6	4.92	-66.68

Note: Margin value = Emission Level - Limit value

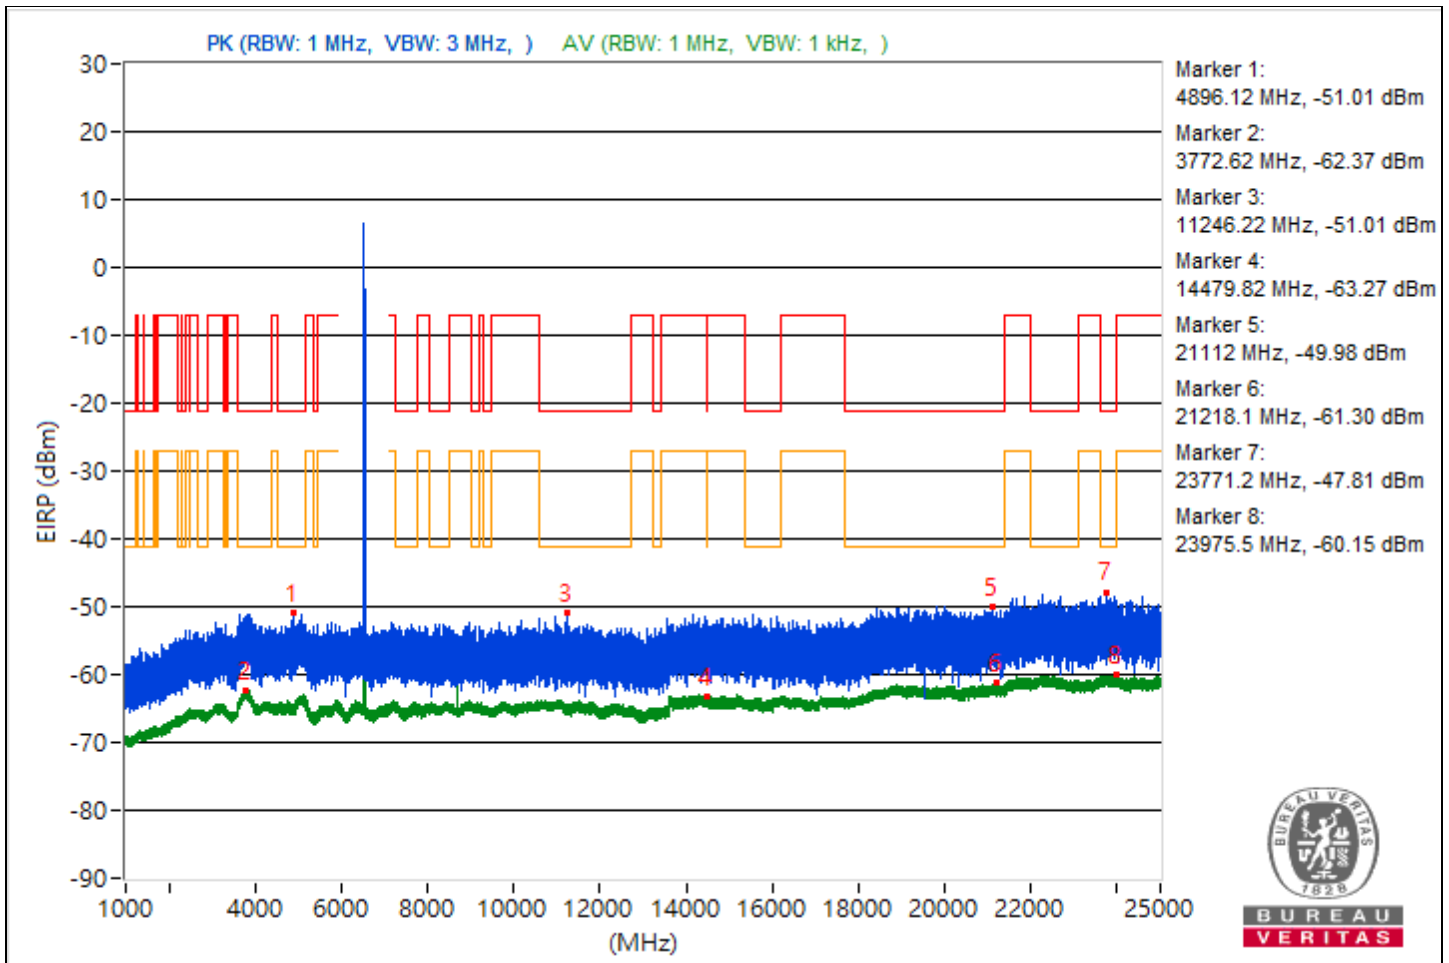

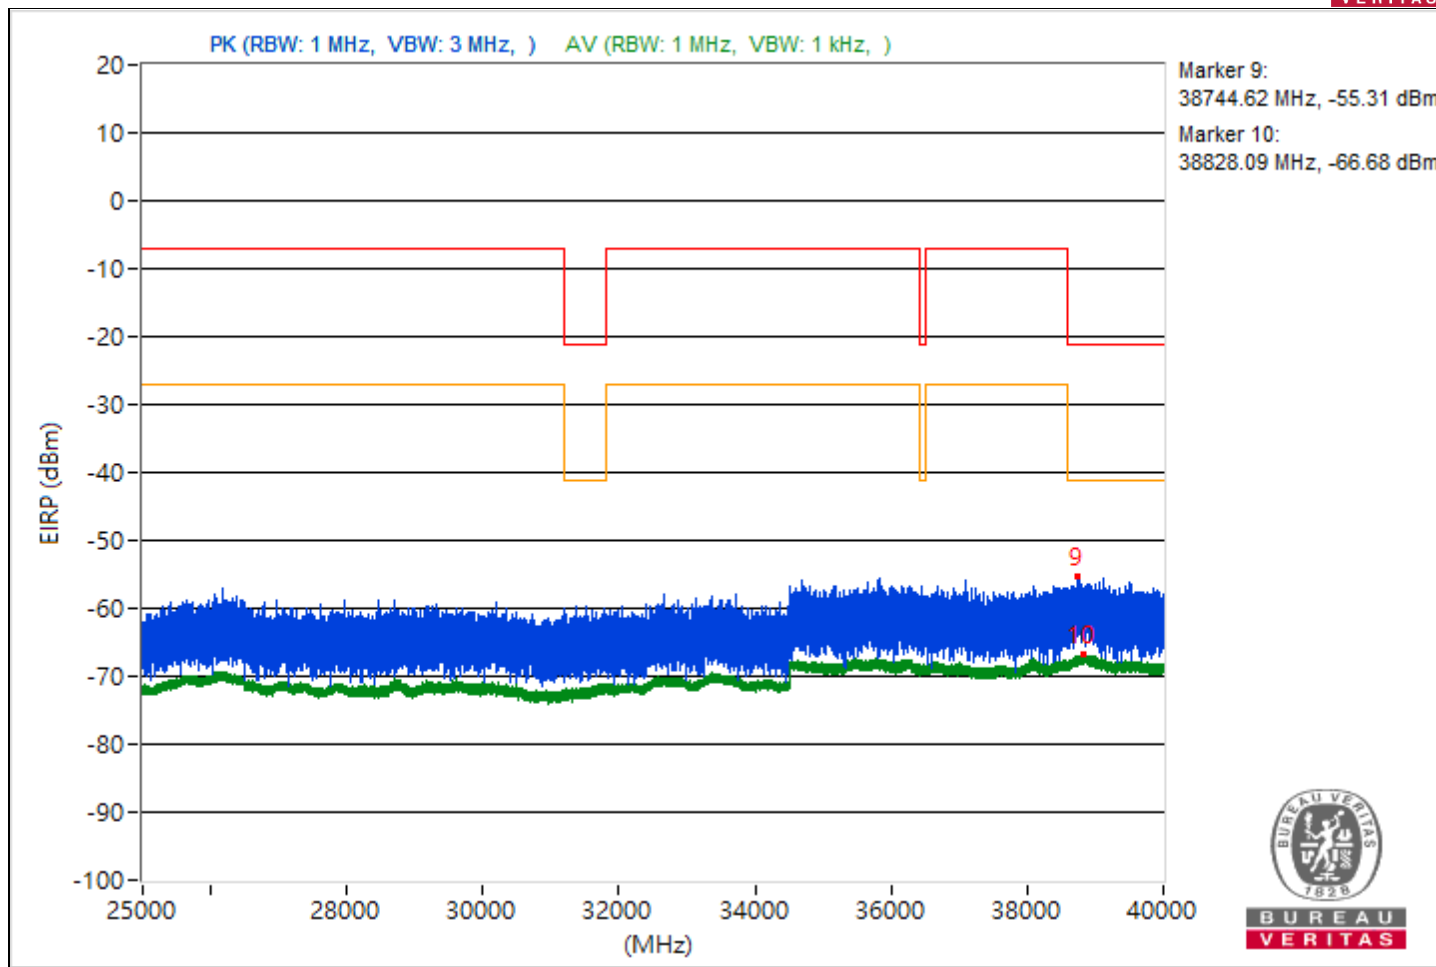





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3695.16	44.94 PK	74	-29.06	-55.24	4.92	-50.32
2	3787.63	33.05 AV	54	-20.95	-67.13	4.92	-62.21
3	15557.51	43.94 PK	74	-30.06	-56.24	4.92	-51.32
4	15680.53	31.87 AV	54	-22.13	-68.31	4.92	-63.39
5	21089.4	46.06 PK	74	-27.94	-54.12	4.92	-49.2
6	21174.8	33.94 AV	54	-20.06	-66.24	4.92	-61.32
7	23954.5	46.81 PK	74	-27.19	-53.37	4.92	-48.45
8	22246.7	35.21 AV	54	-18.79	-64.97	4.92	-60.05
9	38874.76	40.25 PK	74	-33.75	-59.93	4.92	-55.01
10	38855.29	28.57 AV	54	-25.43	-71.61	4.92	-66.69

Note: Margin value = Emission Level - Limit value

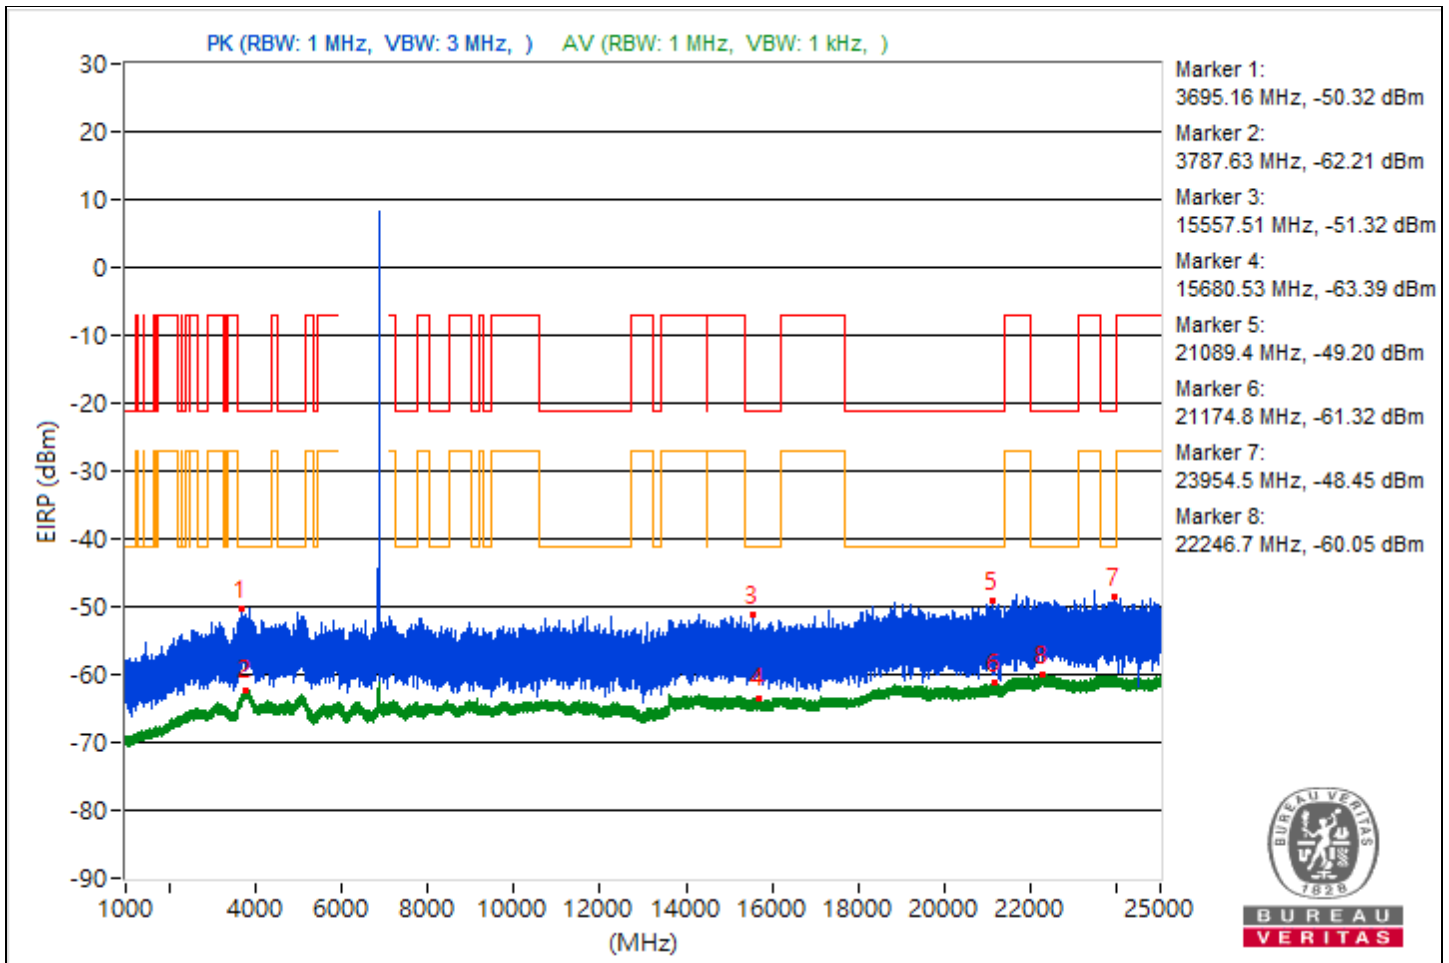

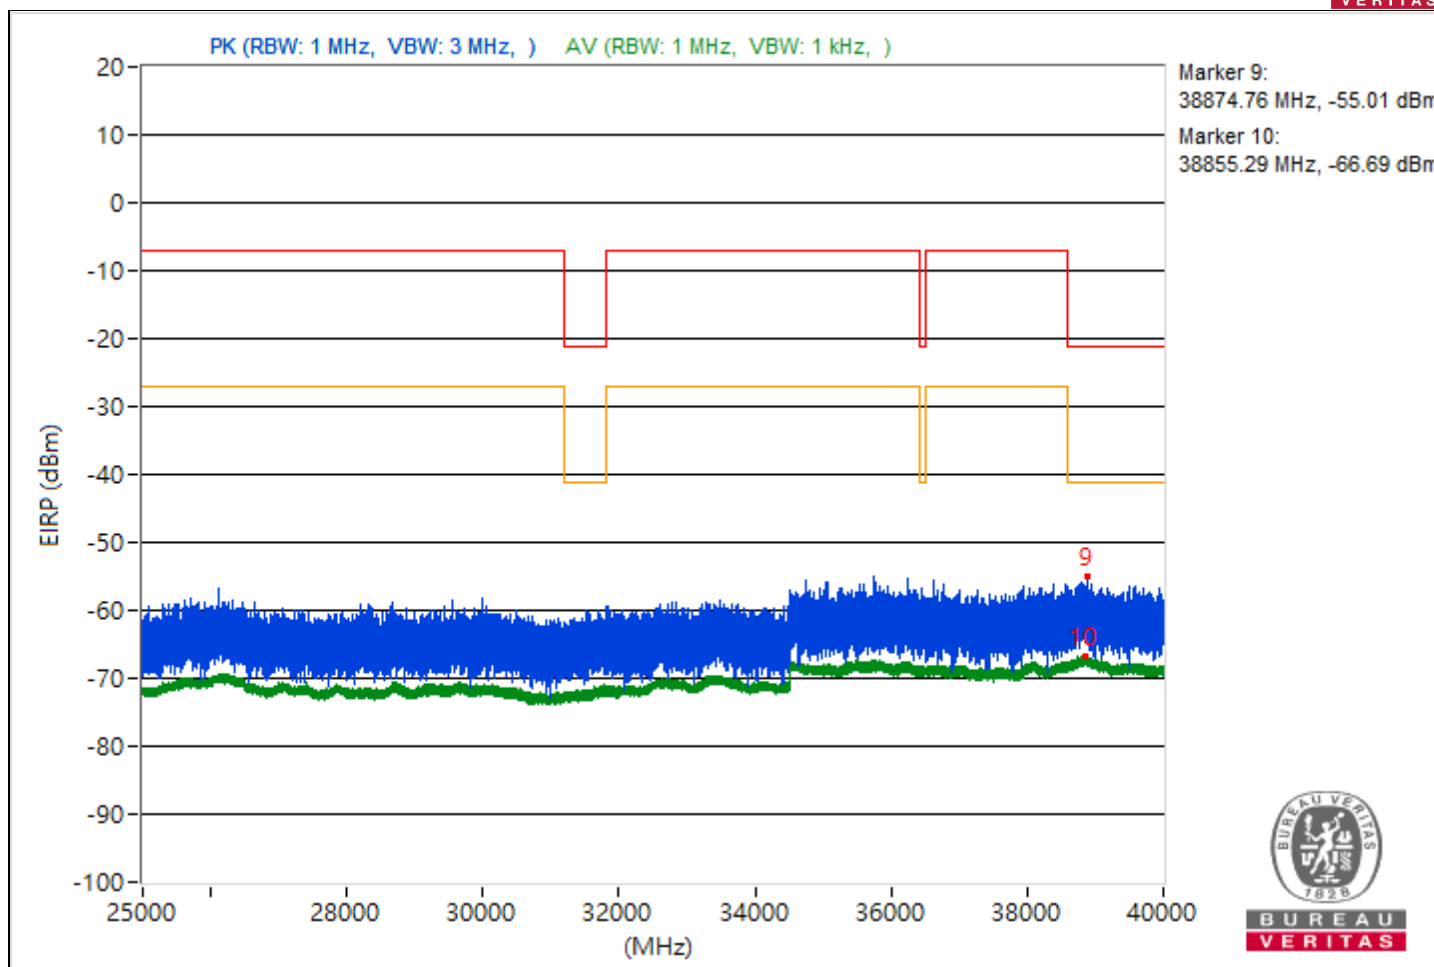





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5101.92	44.44 PK	74	-29.56	-55.74	4.92	-50.82
2	3814	32.96 AV	54	-21.04	-67.22	4.92	-62.3
3	11568.09	43.52 PK	74	-30.48	-56.66	4.92	-51.74
4	14487.82	31.89 AV	54	-22.11	-68.29	4.92	-63.37
5	20178	45.95 PK	74	-28.05	-54.23	4.92	-49.31
6	21191.9	33.79 AV	54	-20.21	-66.39	4.92	-61.47
7	22377.2	46.61 PK	74	-27.39	-53.57	4.92	-48.65
8	23681.7	35.29 AV	54	-18.71	-64.89	4.92	-59.97
9	38783.64	40.04 PK	74	-33.96	-60.14	4.92	-55.22
10	38865.6	28.6 AV	54	-25.4	-71.58	4.92	-66.66

Note: Margin value = Emission Level - Limit value

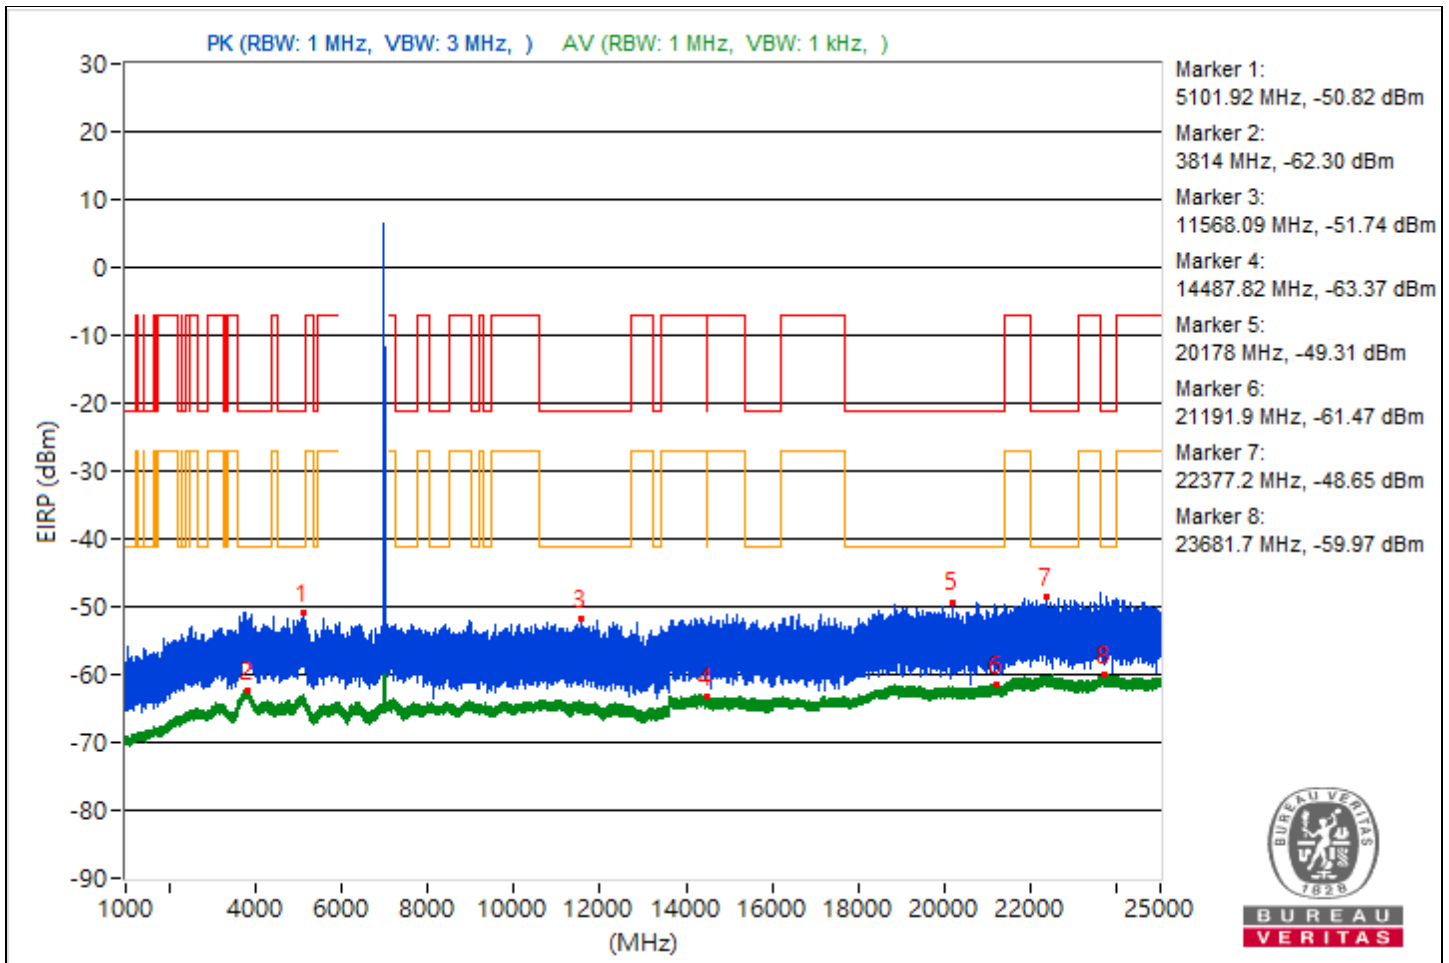

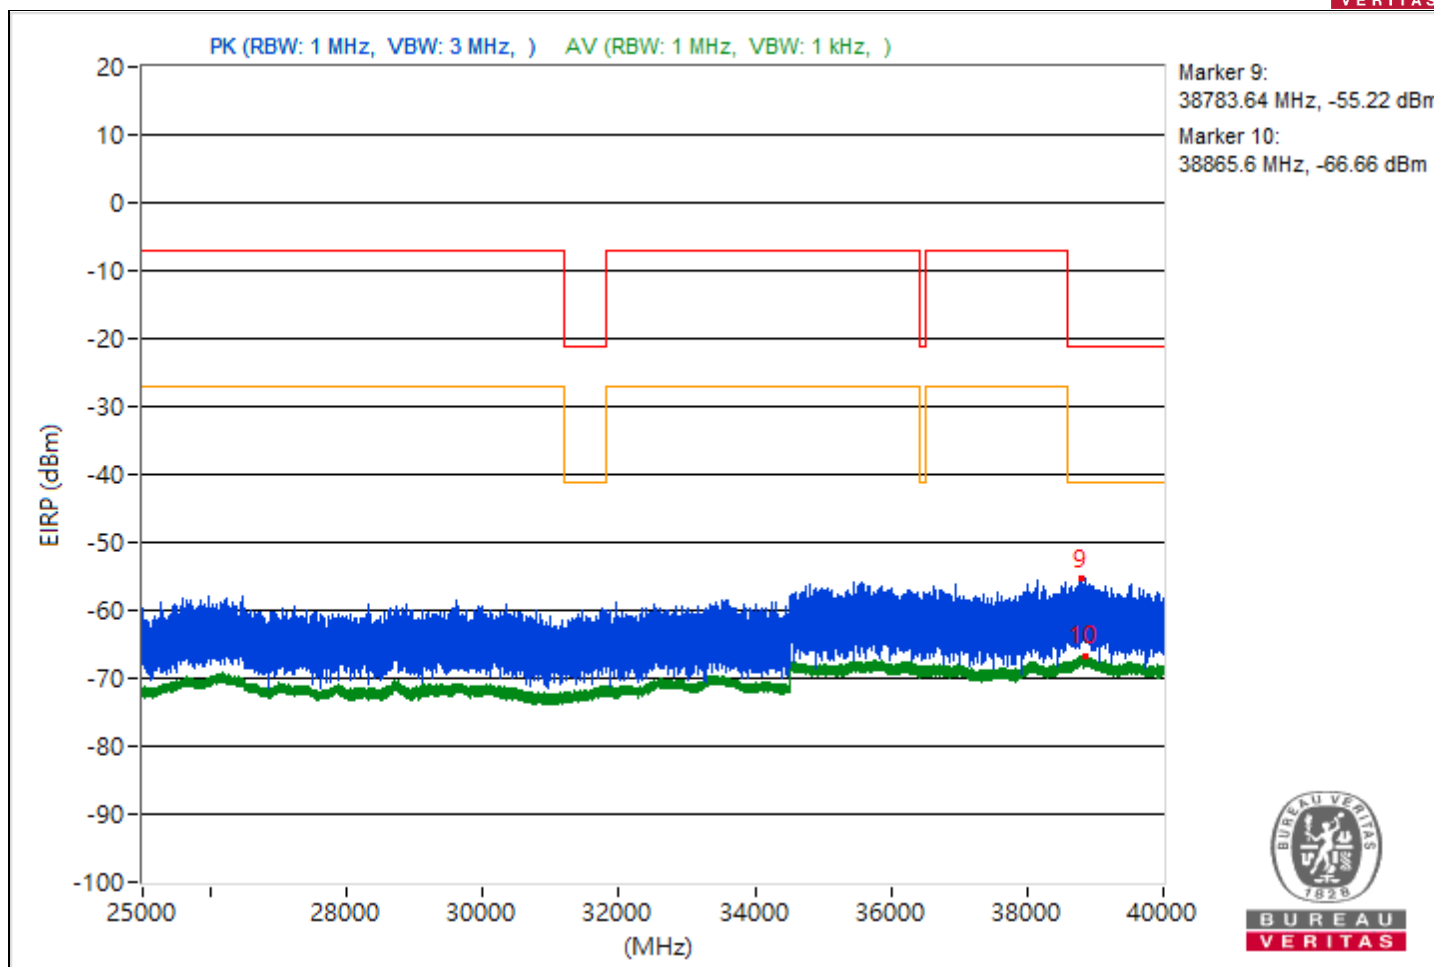





RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3721.52	44.52 PK	74	-29.48	-55.66	4.92	-50.74
2	3771.84	32.87 AV	54	-21.13	-67.31	4.92	-62.39
3	10842.04	43.4 PK	74	-30.6	-56.78	4.92	-51.86
4	14479.47	31.73 AV	54	-22.27	-68.45	4.92	-63.53
5	20704.3	45.57 PK	74	-28.43	-54.61	4.92	-49.69
6	21137.7	33.83 AV	54	-20.17	-66.35	4.92	-61.43
7	22510.6	47.71 PK	74	-26.29	-52.47	4.92	-47.55
8	23771	35.25 AV	54	-18.75	-64.93	4.92	-60.01
9	38707.29	39.94 PK	74	-34.06	-60.24	4.92	-55.32
10	38825.87	28.62 AV	54	-25.38	-71.56	4.92	-66.64

Note: Margin value = Emission Level - Limit value

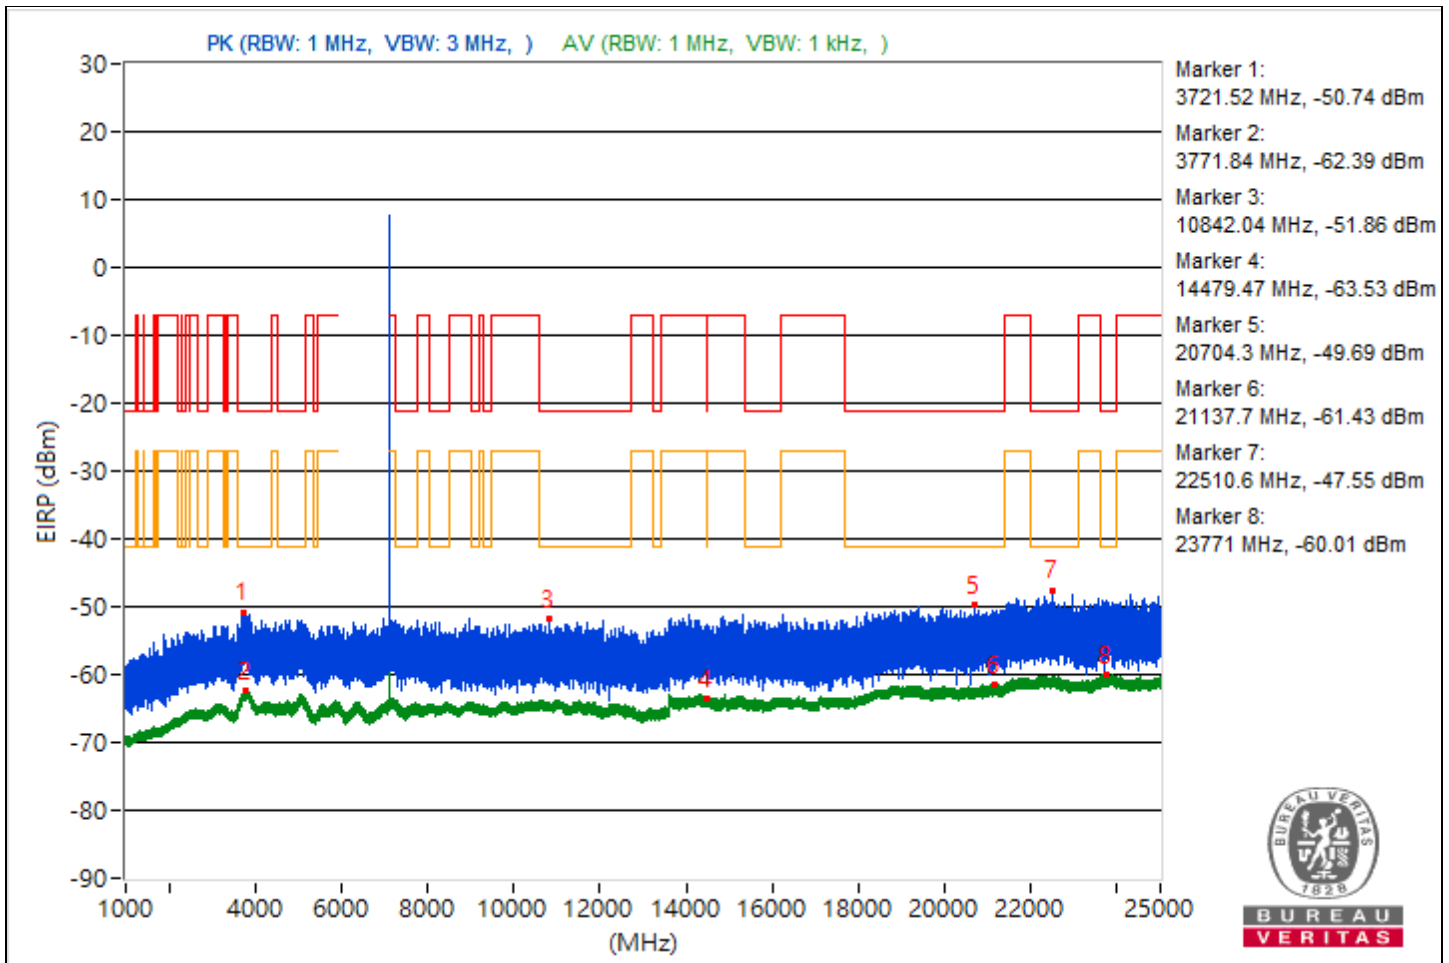

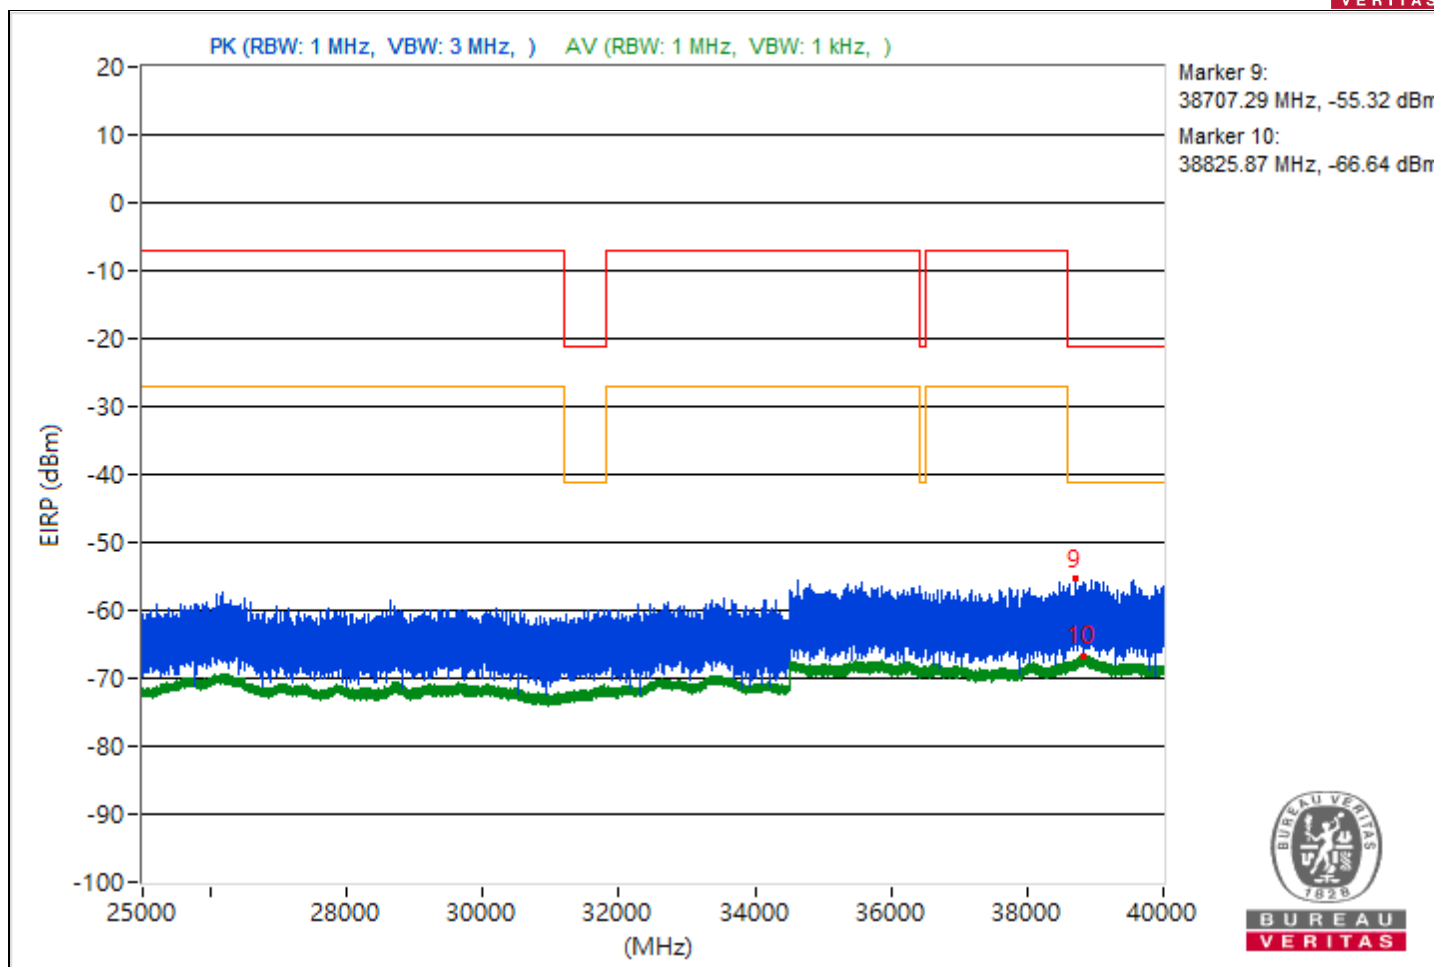





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3896.99	44.66 PK	74	-29.34	-55.52	4.92	-50.6
2	3797.36	32.9 AV	54	-21.1	-67.28	4.92	-62.36
3	7639.27	43.73 PK	74	-30.27	-56.45	4.92	-51.53
4	14470.13	31.93 AV	54	-22.07	-68.25	4.92	-63.33
5	21399.5	47.55 PK	74	-26.45	-52.63	4.92	-47.71
6	21163.8	33.92 AV	54	-20.08	-66.26	4.92	-61.34
7	22655.1	46.76 PK	74	-27.24	-53.42	4.92	-48.5
8	23908.8	35.2 AV	54	-18.8	-64.98	4.92	-60.06
9	38608.36	40.76 PK	74	-33.24	-59.42	4.92	-54.5
10	38831.02	28.6 AV	54	-25.4	-71.58	4.92	-66.66

Note: Margin value = Emission Level - Limit value

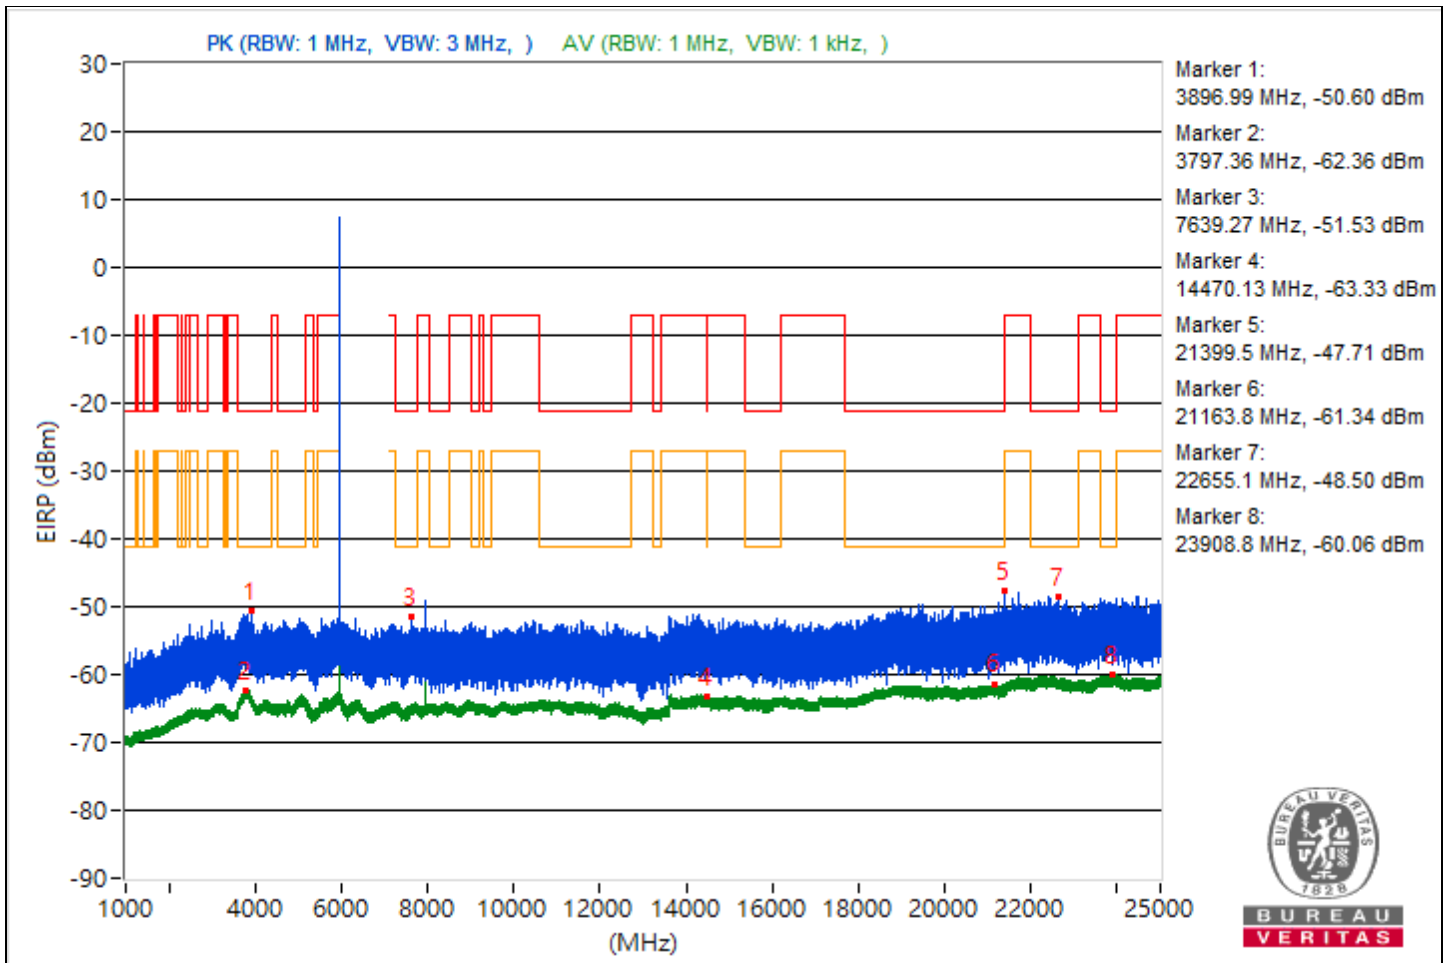

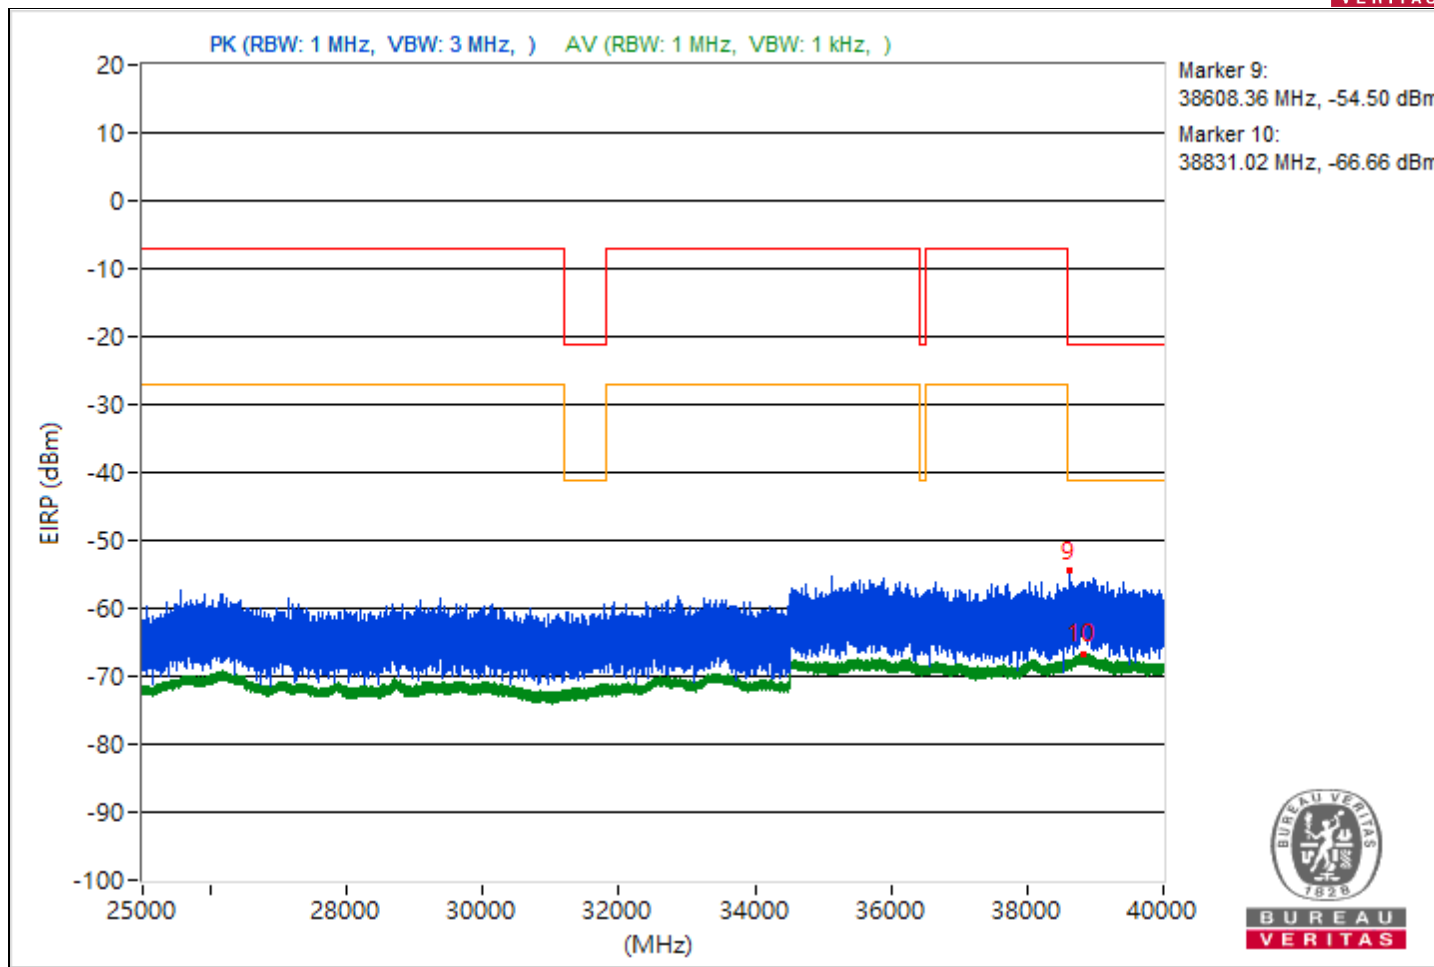





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3877.16	44.74 PK	74	-29.26	-55.44	4.92	-50.52
2	3809.1	32.79 AV	54	-21.21	-67.39	4.92	-62.47
3	12401.42	43.87 PK	74	-30.13	-56.31	4.92	-51.39
4	14486.4	31.8 AV	54	-22.2	-68.38	4.92	-63.46
5	19193.3	45.09 PK	74	-28.91	-55.09	4.92	-50.17
6	21154.9	34.03 AV	54	-19.97	-66.15	4.92	-61.23
7	23617.5	47.49 PK	74	-26.51	-52.69	4.92	-47.77
8	23659.3	35.19 AV	54	-18.81	-64.99	4.92	-60.07
9	38804.36	39.98 PK	74	-34.02	-60.2	4.92	-55.28
10	38800.53	28.62 AV	54	-25.38	-71.56	4.92	-66.64

Note: Margin value = Emission Level - Limit value

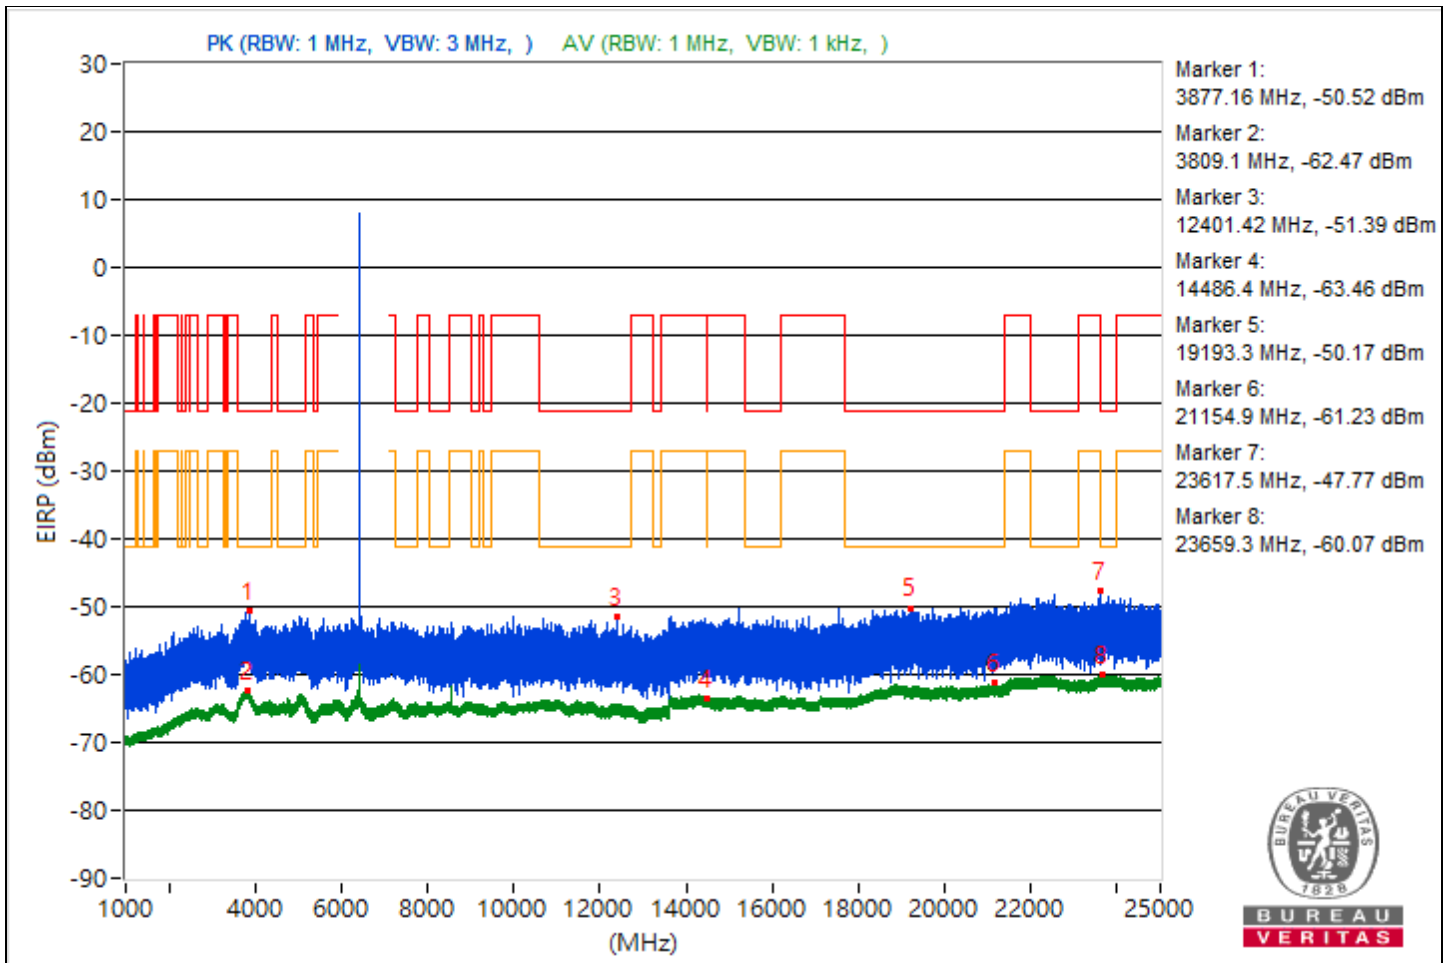

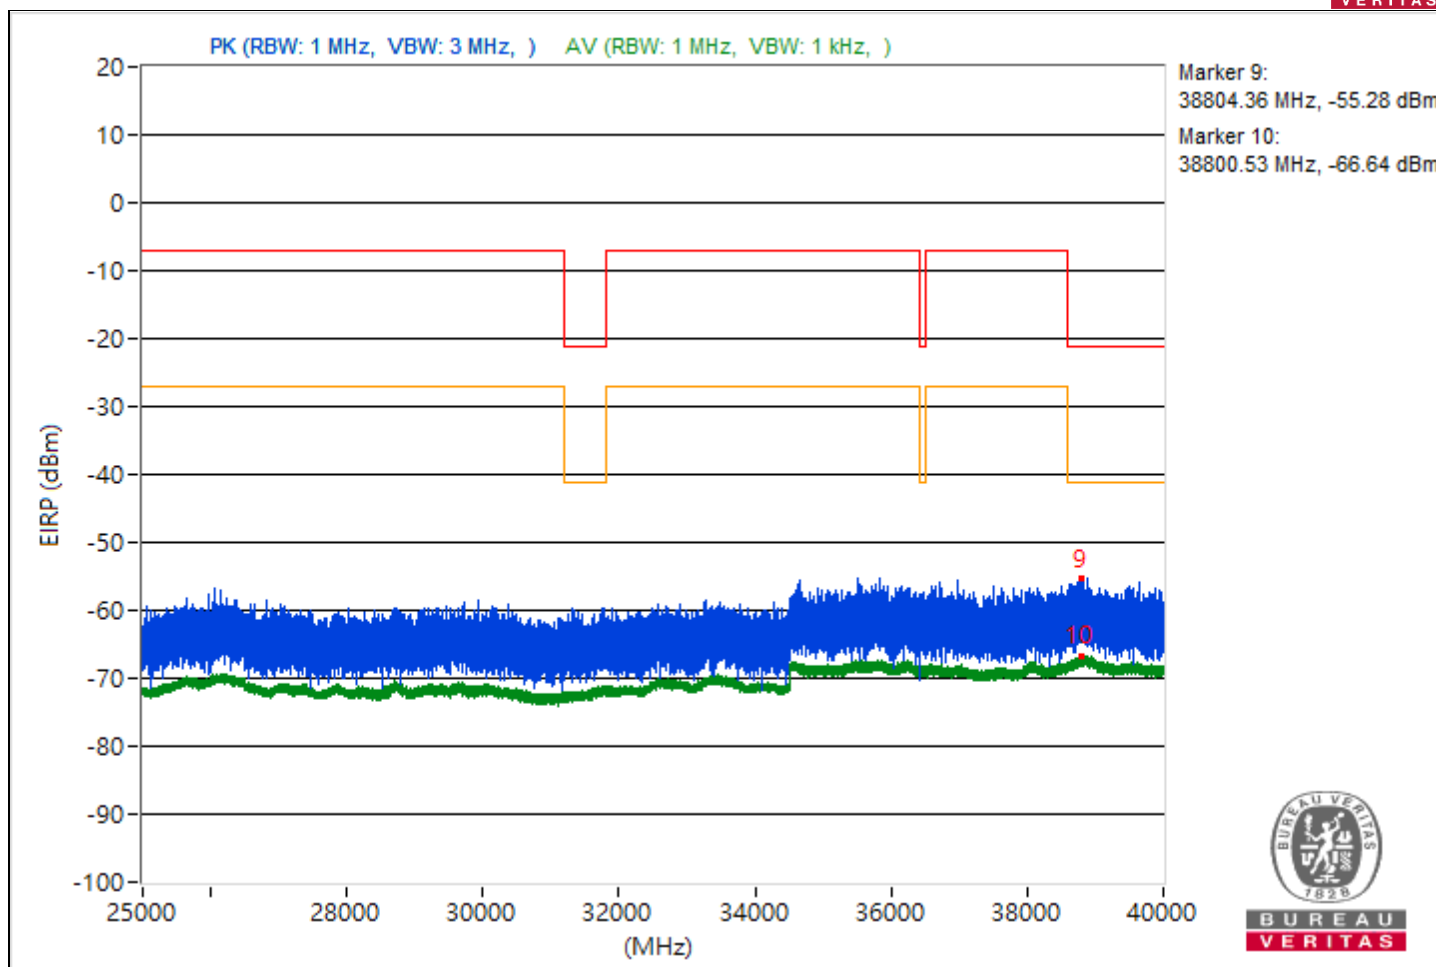





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.03	44.66 PK	74	-29.34	-55.52	4.92	-50.6
2	3810.73	32.98 AV	54	-21.02	-67.2	4.92	-62.28
3	11849.87	44.09 PK	74	-29.91	-56.09	4.92	-51.17
4	14498.31	32.1 AV	54	-21.9	-68.08	4.92	-63.16
5	20889.9	45.87 PK	74	-28.13	-54.31	4.92	-49.39
6	21061.7	33.78 AV	54	-20.22	-66.4	4.92	-61.48
7	22203.6	47.84 PK	74	-26.16	-52.34	4.92	-47.42
8	22309.5	35.13 AV	54	-18.87	-65.05	4.92	-60.13
9	38688.18	40.74 PK	74	-33.26	-59.44	4.92	-54.52
10	38803.73	28.64 AV	54	-25.36	-71.54	4.92	-66.62

Note: Margin value = Emission Level - Limit value

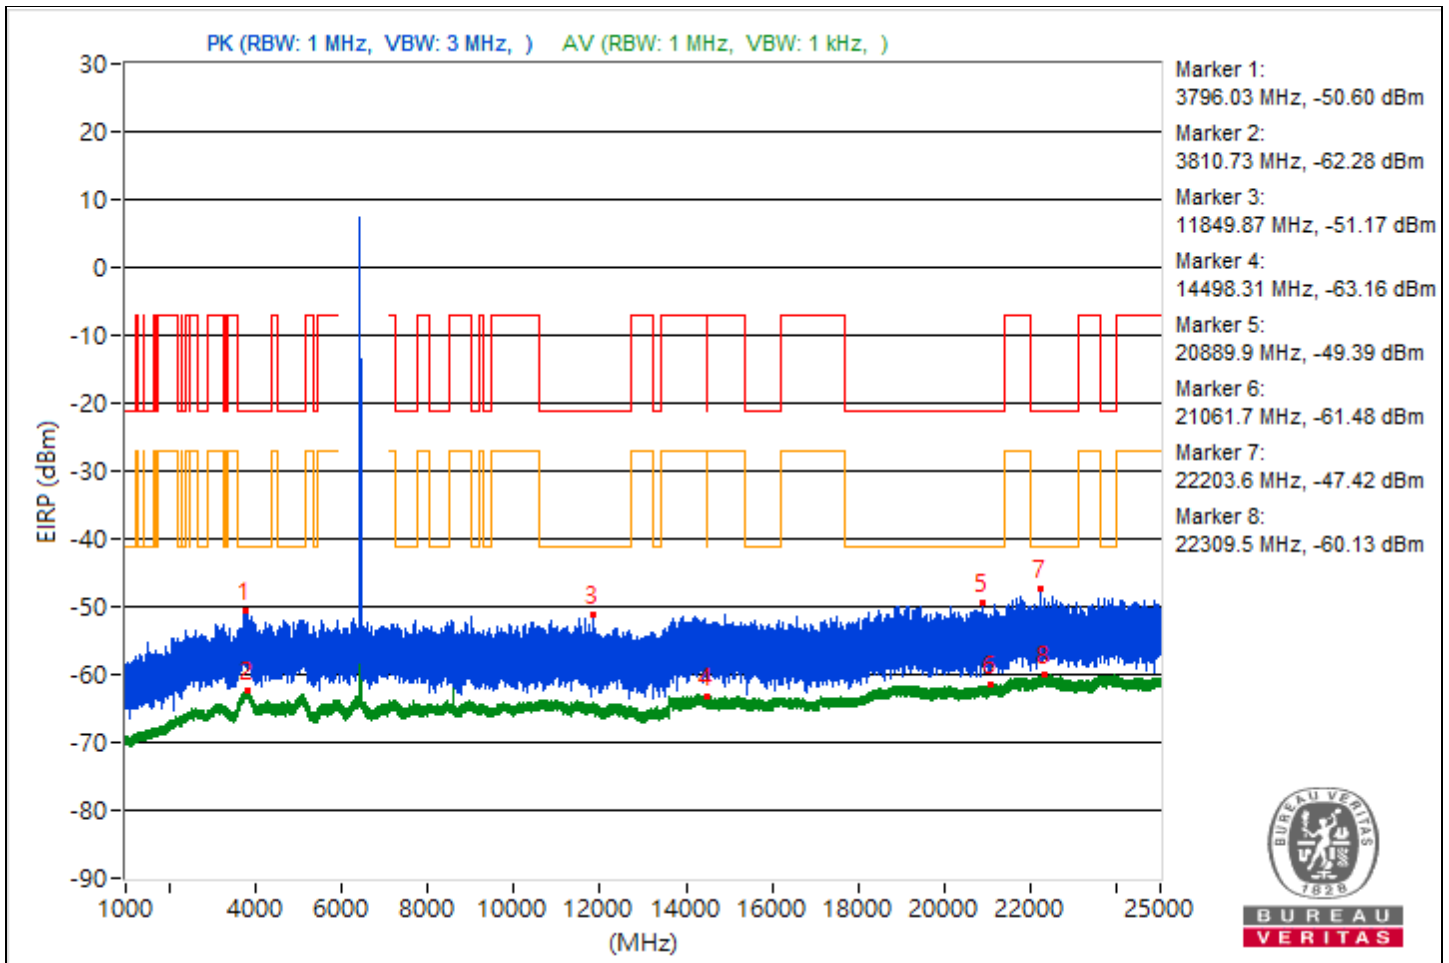

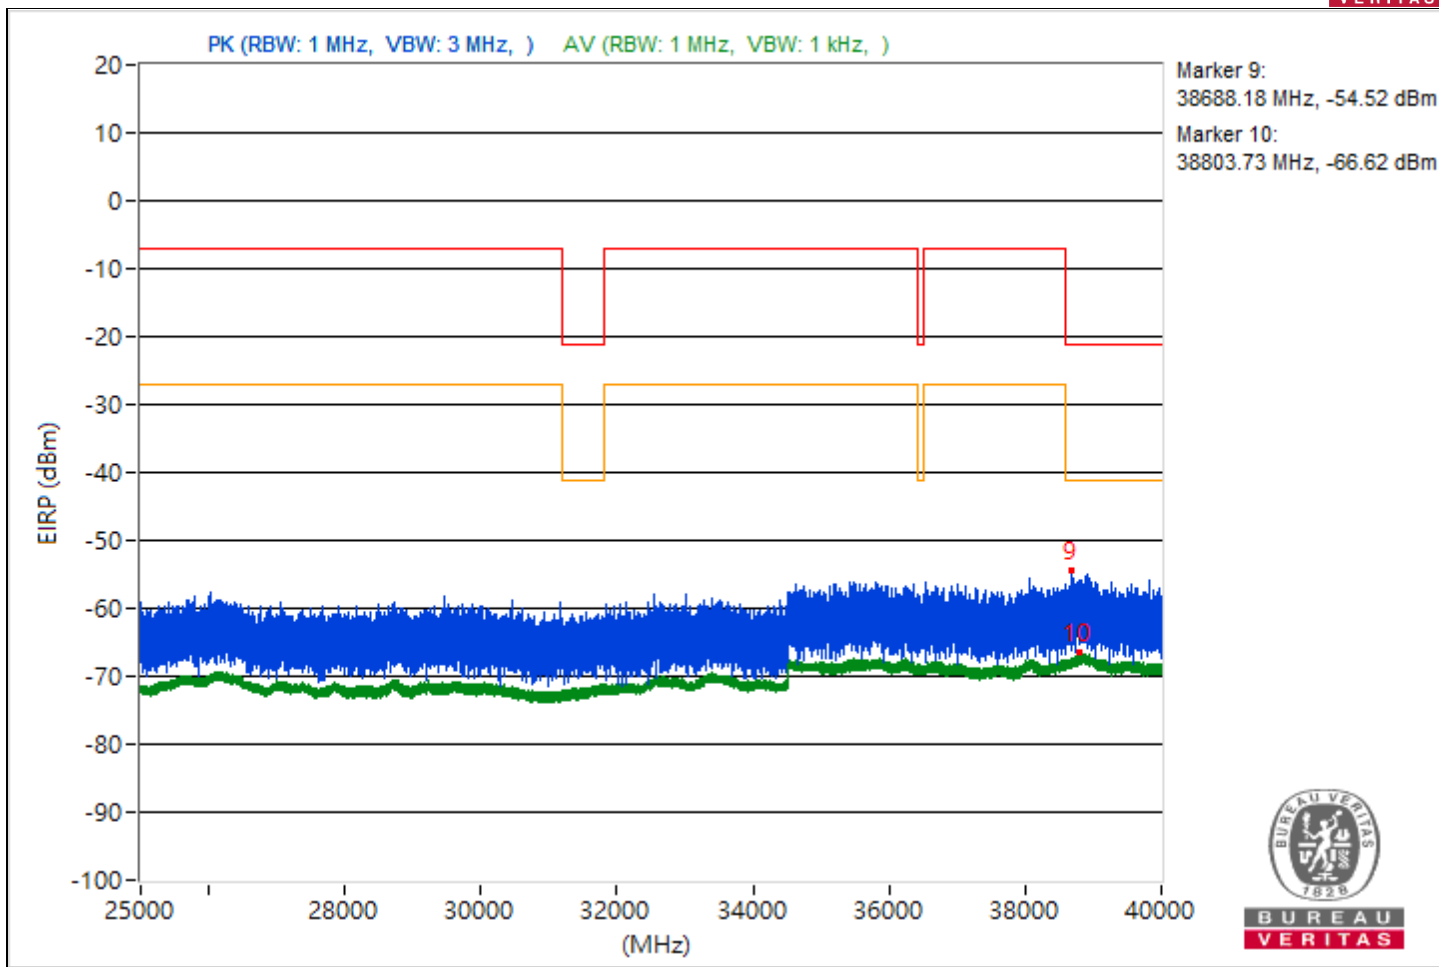





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.52	44.7 PK	74	-29.3	-55.48	4.92	-50.56
2	3789.11	33.02 AV	54	-20.98	-67.16	4.92	-62.24
3	10633.24	43.78 PK	74	-30.22	-56.4	4.92	-51.48
4	14489.07	31.96 AV	54	-22.04	-68.22	4.92	-63.3
5	20034.9	45.56 PK	74	-28.44	-54.62	4.92	-49.7
6	21096.9	33.8 AV	54	-20.2	-66.38	4.92	-61.46
7	22745	47.04 PK	74	-26.96	-53.14	4.92	-48.22
8	22238.8	35.23 AV	54	-18.77	-64.95	4.92	-60.03
9	38626.49	39.71 PK	74	-34.29	-60.47	4.92	-55.55
10	38790.84	28.62 AV	54	-25.38	-71.56	4.92	-66.64

Note: Margin value = Emission Level - Limit value

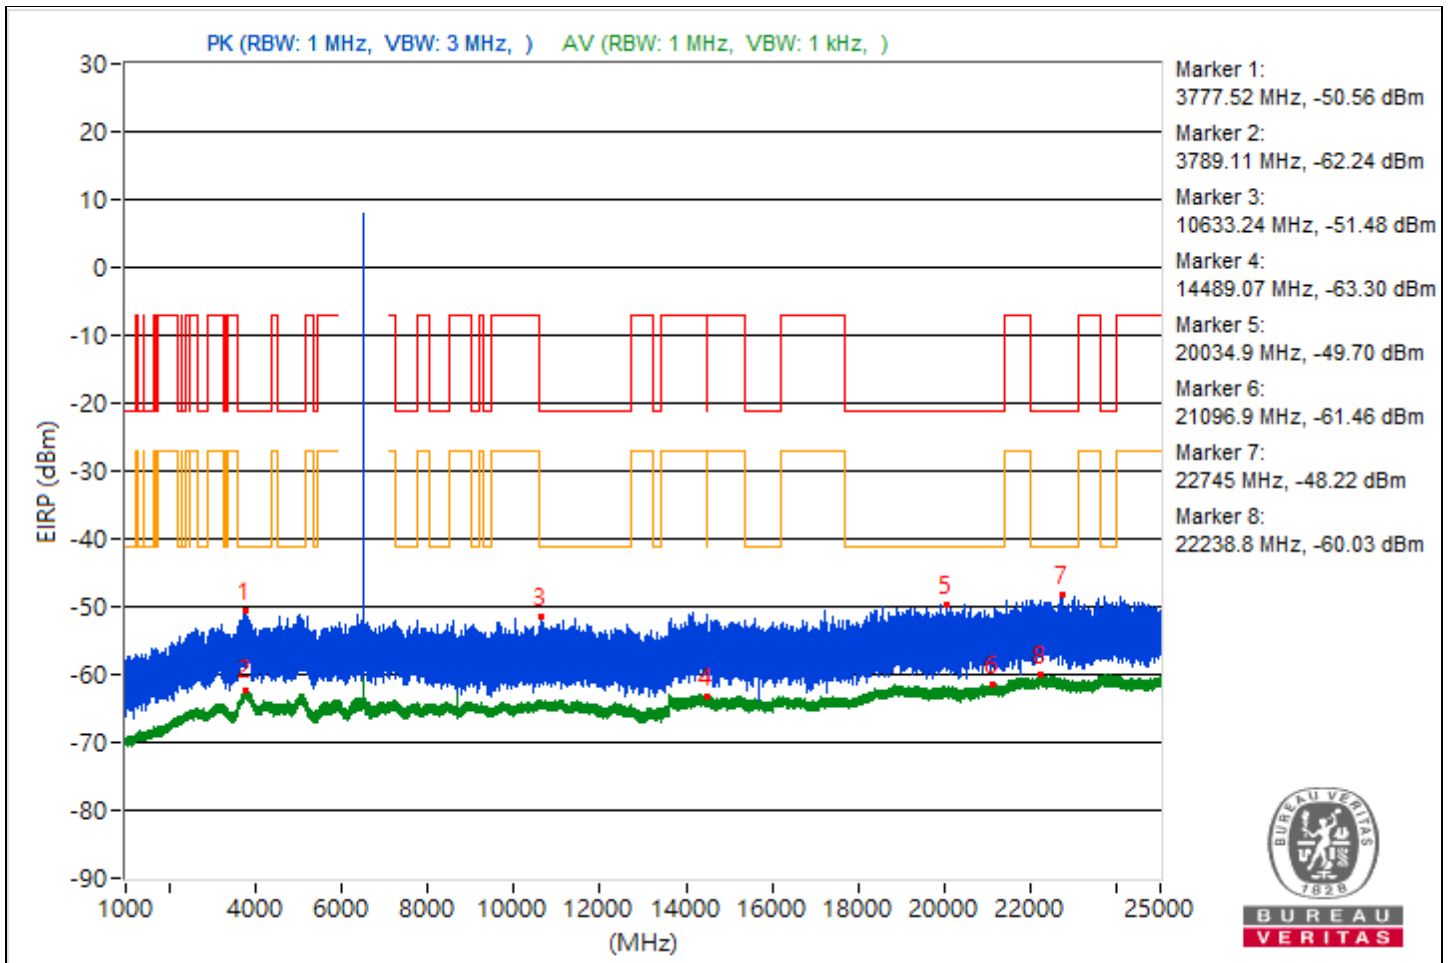

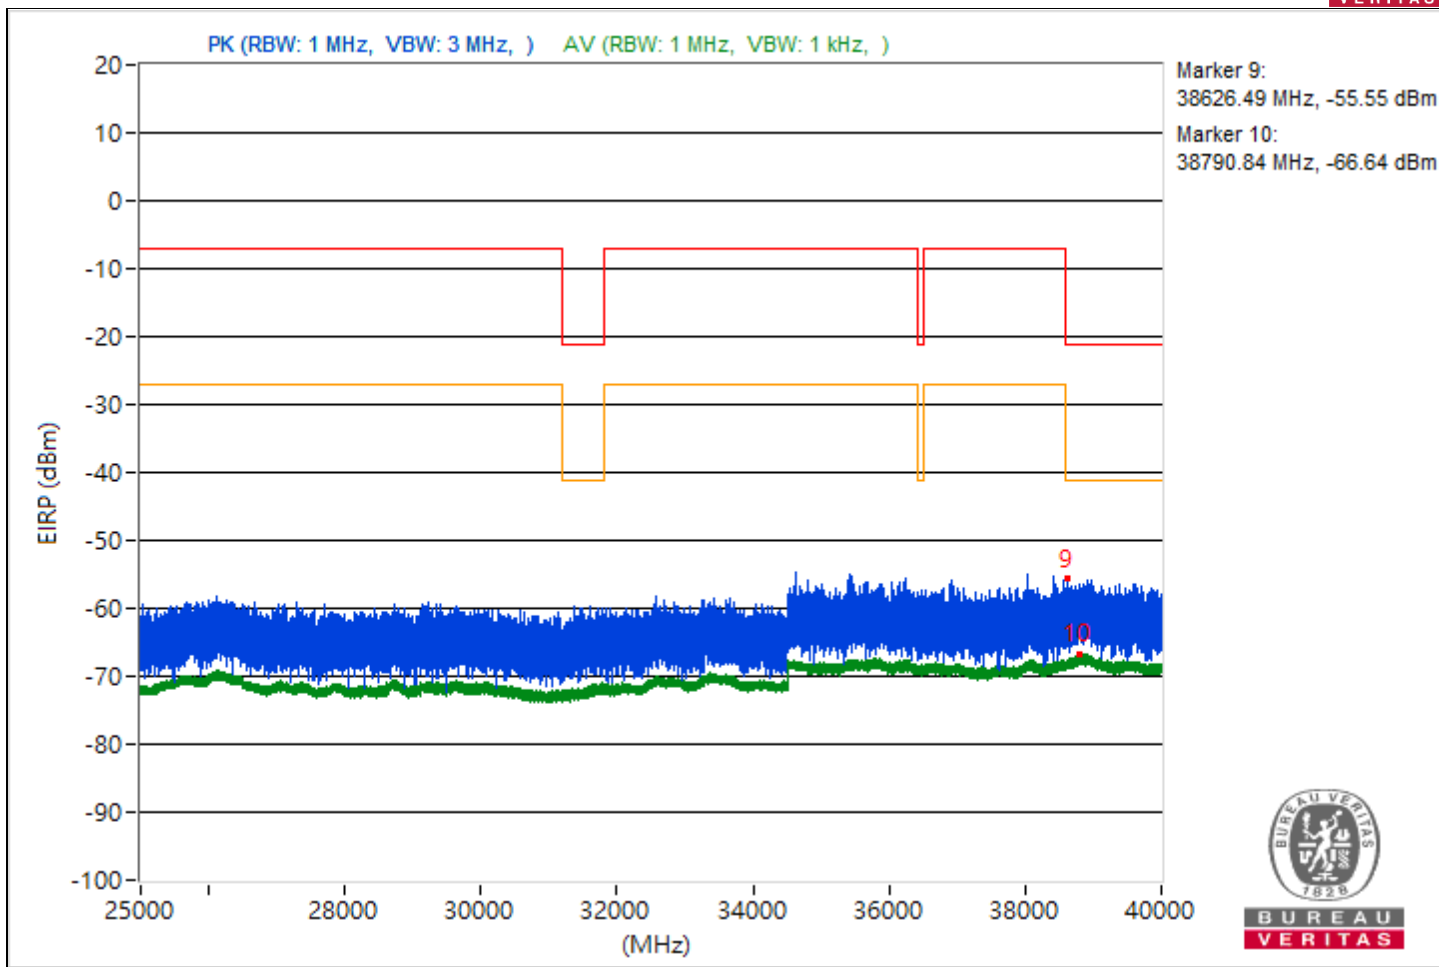





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3702.16	44.68 PK	74	-29.32	-55.5	4.92	-50.58
2	3773.71	33.15 AV	54	-20.85	-67.03	4.92	-62.11
3	11459.2	43.86 PK	74	-30.14	-56.32	4.92	-51.4
4	14497.78	31.84 AV	54	-22.16	-68.34	4.92	-63.42
5	21398.5	46.09 PK	74	-27.91	-54.09	4.92	-49.17
6	21135.3	33.89 AV	54	-20.11	-66.29	4.92	-61.37
7	22713.3	47.11 PK	74	-26.89	-53.07	4.92	-48.15
8	23819.4	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38806.49	40.28 PK	74	-33.72	-59.9	4.92	-54.98
10	38809.69	28.6 AV	54	-25.4	-71.58	4.92	-66.66

Note: Margin value = Emission Level - Limit value

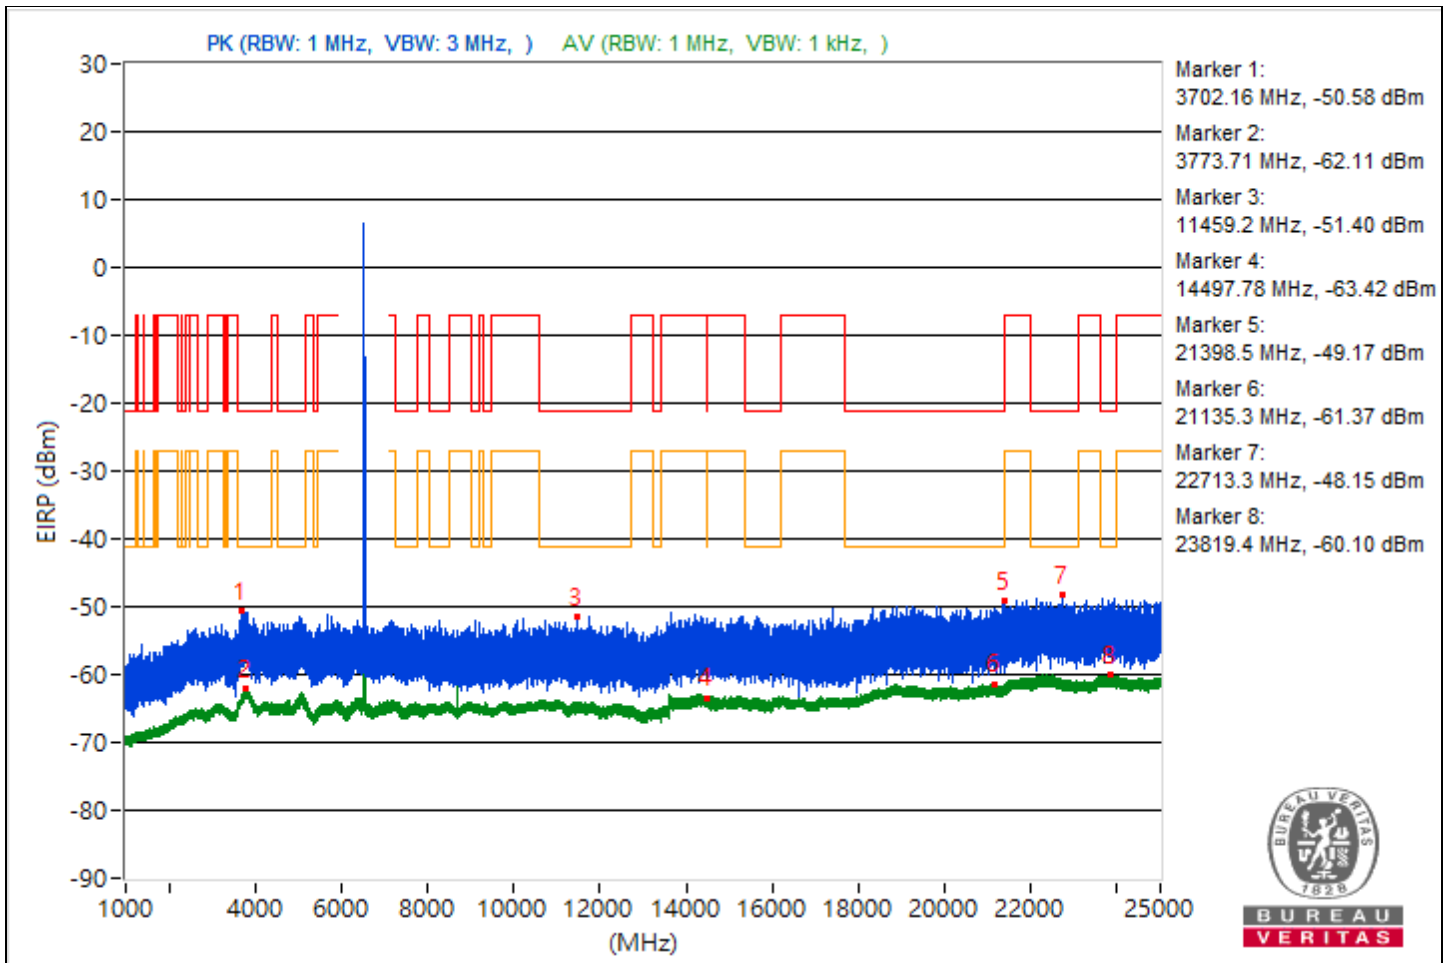

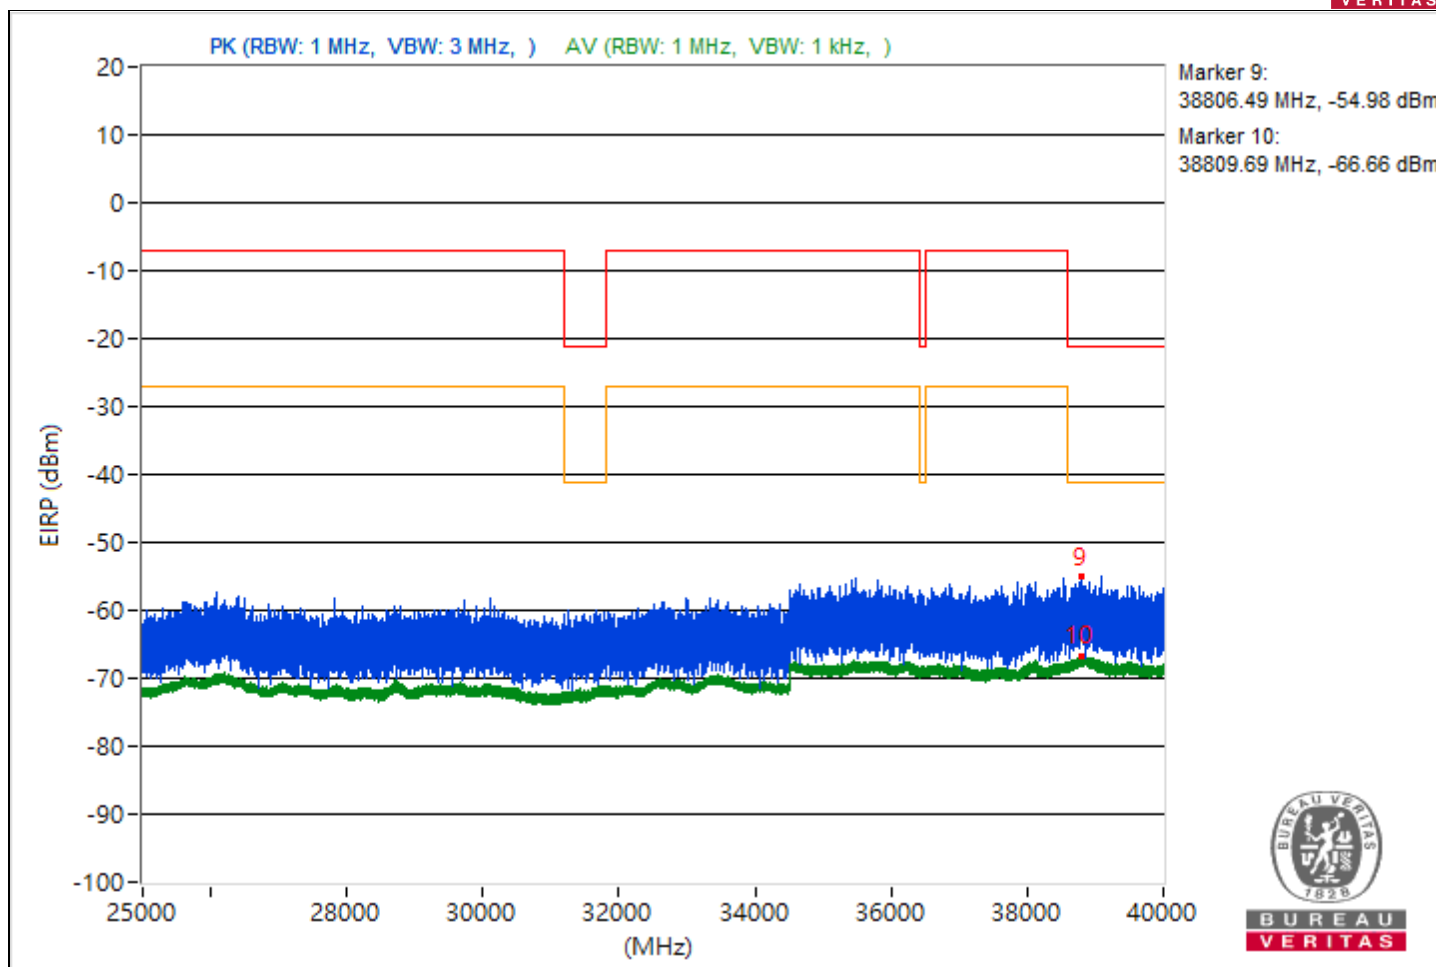





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3765.16	44.75 PK	74	-29.25	-55.43	4.92	-50.51
2	3825.82	32.82 AV	54	-21.18	-67.36	4.92	-62.44
3	10674.84	43.61 PK	74	-30.39	-56.57	4.92	-51.65
4	9166.49	31.96 AV	54	-22.04	-68.22	4.92	-63.3
5	18852.2	47.13 PK	74	-26.87	-53.05	4.92	-48.13
6	21189.2	33.83 AV	54	-20.17	-66.35	4.92	-61.43
7	22664.5	47.59 PK	74	-26.41	-52.59	4.92	-47.67
8	22503.5	35.09 AV	54	-18.91	-65.09	4.92	-60.17
9	38898.93	40.21 PK	74	-33.79	-59.97	4.92	-55.05
10	38836.18	28.57 AV	54	-25.43	-71.61	4.92	-66.69

Note: Margin value = Emission Level - Limit value

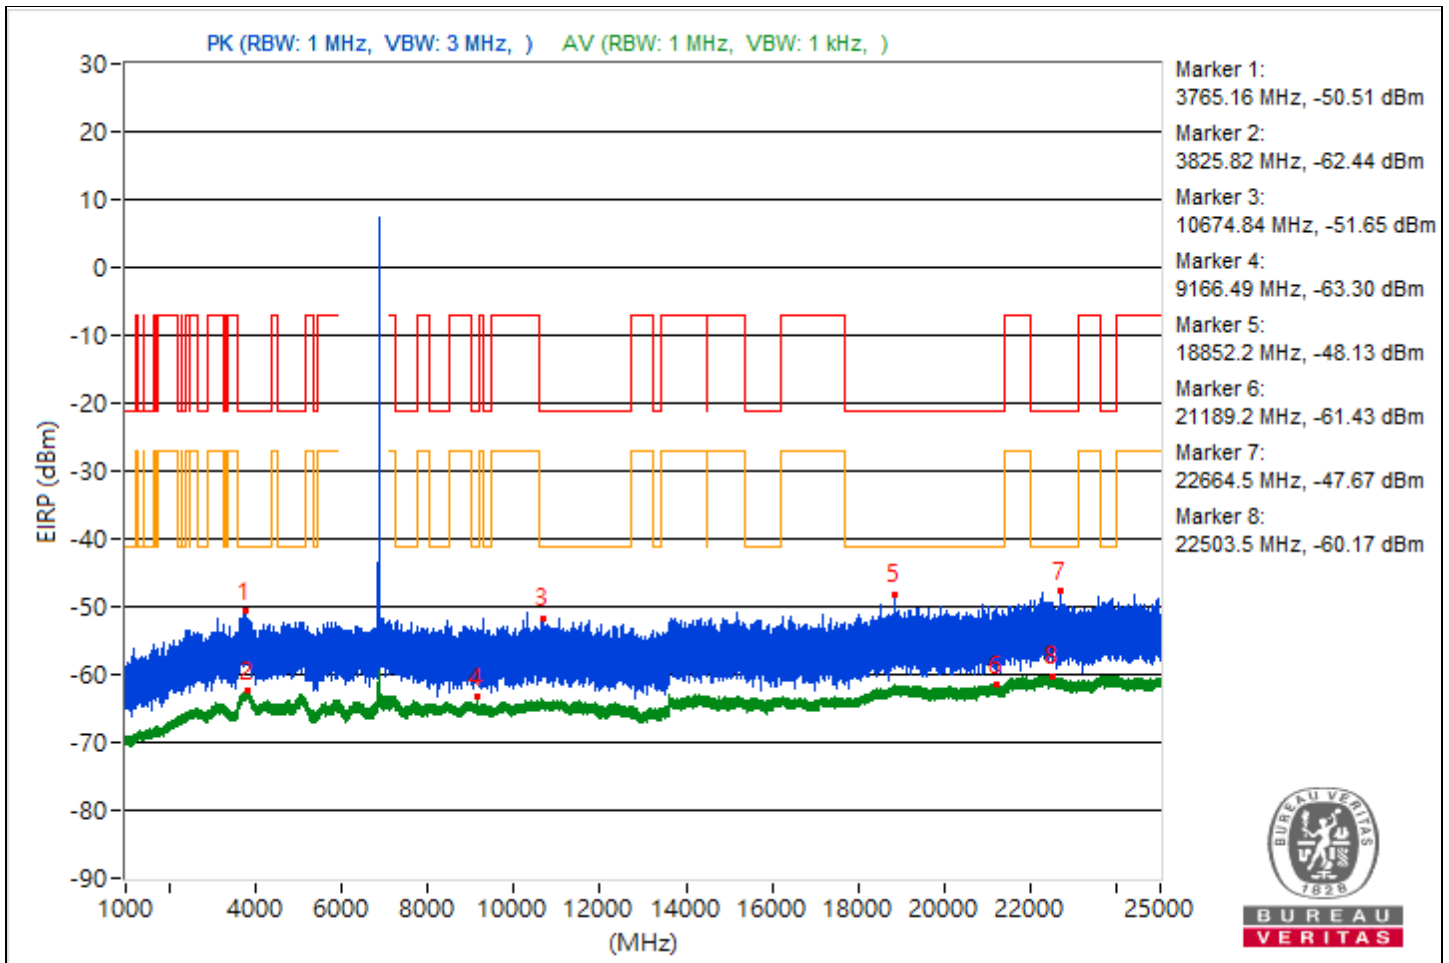

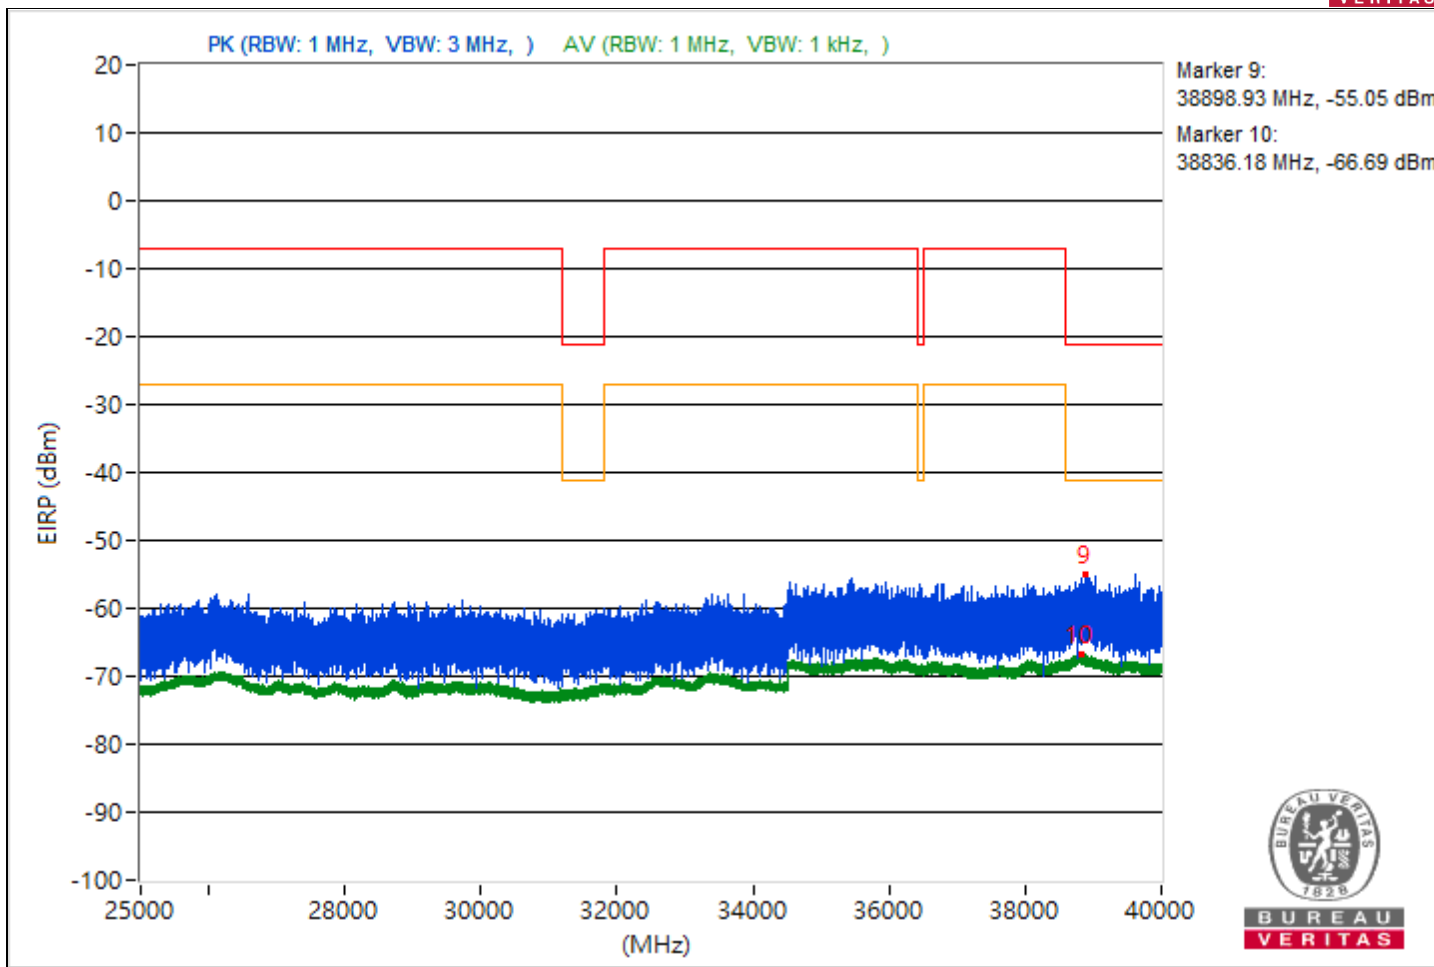





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.37	44.88 PK	74	-29.12	-55.3	4.92	-50.38
2	3790.51	33.05 AV	54	-20.95	-67.13	4.92	-62.21
3	8407.38	44.26 PK	74	-29.74	-55.92	4.92	-51
4	7261.42	32.01 AV	54	-21.99	-68.17	4.92	-63.25
5	21195.8	45.95 PK	74	-28.05	-54.23	4.92	-49.31
6	21396.9	33.91 AV	54	-20.09	-66.27	4.92	-61.35
7	22344.7	47.68 PK	74	-26.32	-52.5	4.92	-47.58
8	23872.9	35.19 AV	54	-18.81	-64.99	4.92	-60.07
9	38794.22	39.94 PK	74	-34.06	-60.24	4.92	-55.32
10	38794.04	28.59 AV	54	-25.41	-71.59	4.92	-66.67

Note: Margin value = Emission Level - Limit value

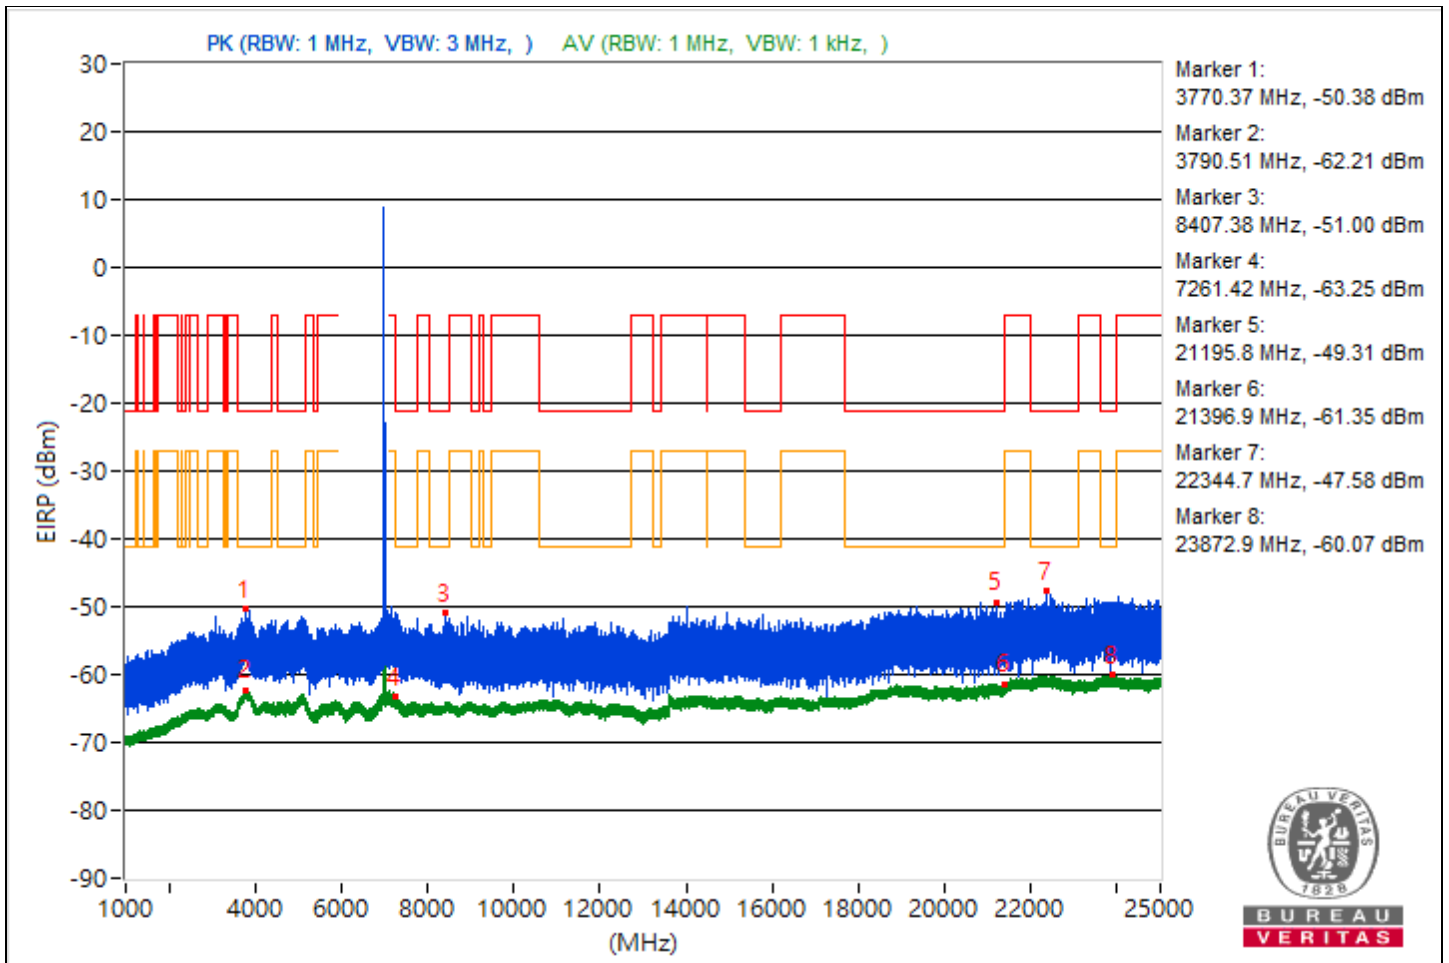

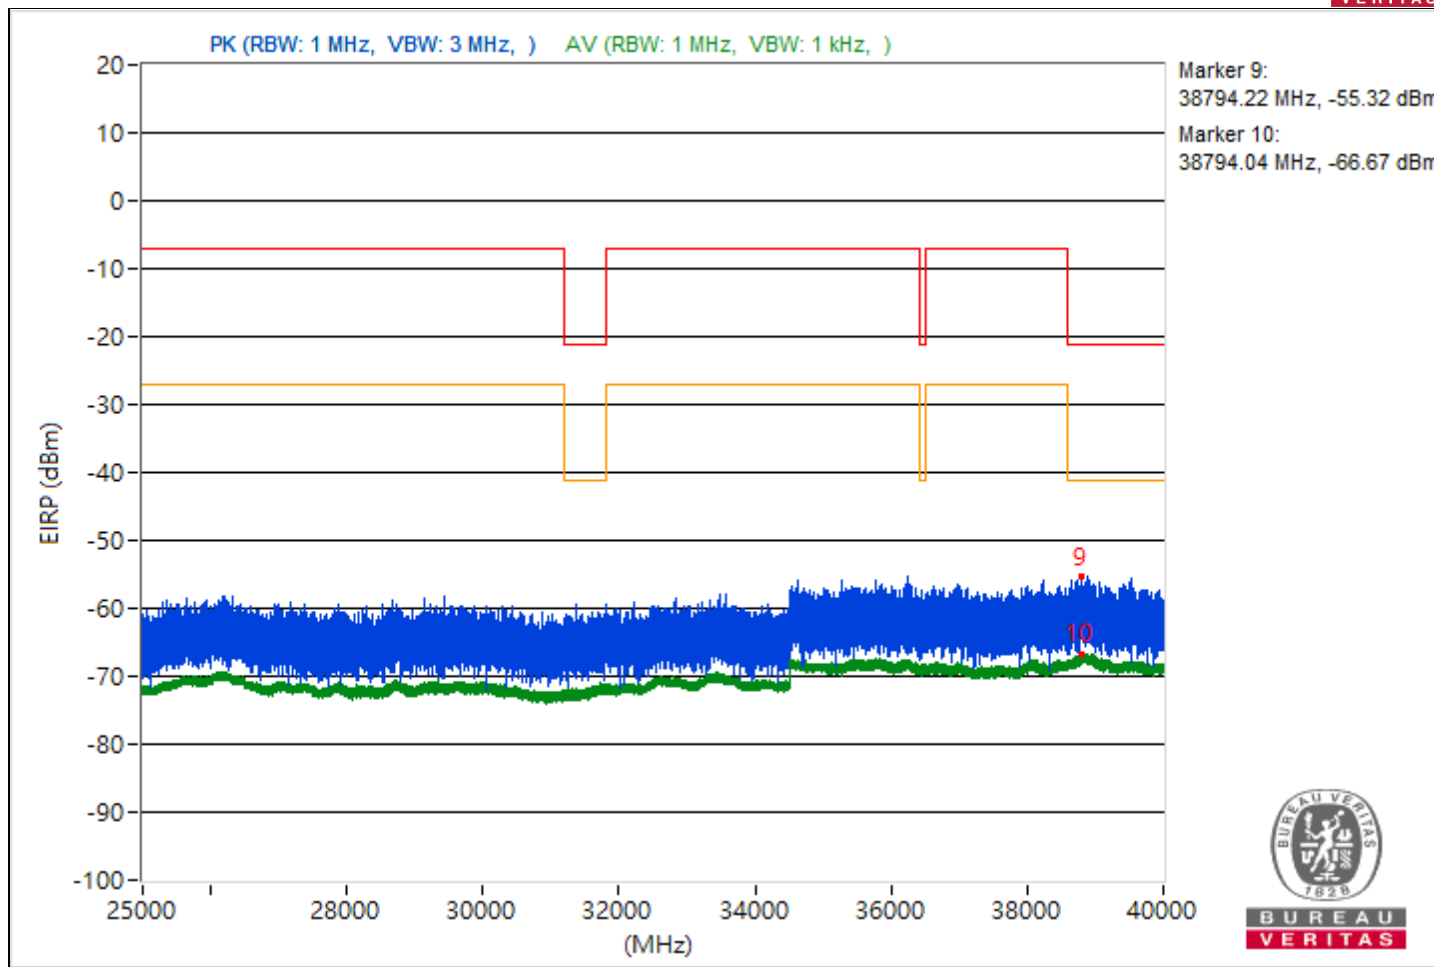





RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.2	45.31 PK	74	-28.69	-54.87	4.92	-49.95
2	3810.66	32.94 AV	54	-21.06	-67.24	4.92	-62.32
3	7262.2	43.5 PK	74	-30.5	-56.68	4.92	-51.76
4	7255.74	32.34 AV	54	-21.66	-67.84	4.92	-62.92
5	19876.1	45.71 PK	74	-28.29	-54.47	4.92	-49.55
6	21101.7	33.88 AV	54	-20.12	-66.3	4.92	-61.38
7	22617.6	47.95 PK	74	-26.05	-52.23	4.92	-47.31
8	23906.4	35.17 AV	54	-18.83	-65.01	4.92	-60.09
9	38935.82	39.67 PK	74	-34.33	-60.51	4.92	-55.59
10	38879.02	28.65 AV	54	-25.35	-71.53	4.92	-66.61

Note: Margin value = Emission Level - Limit value

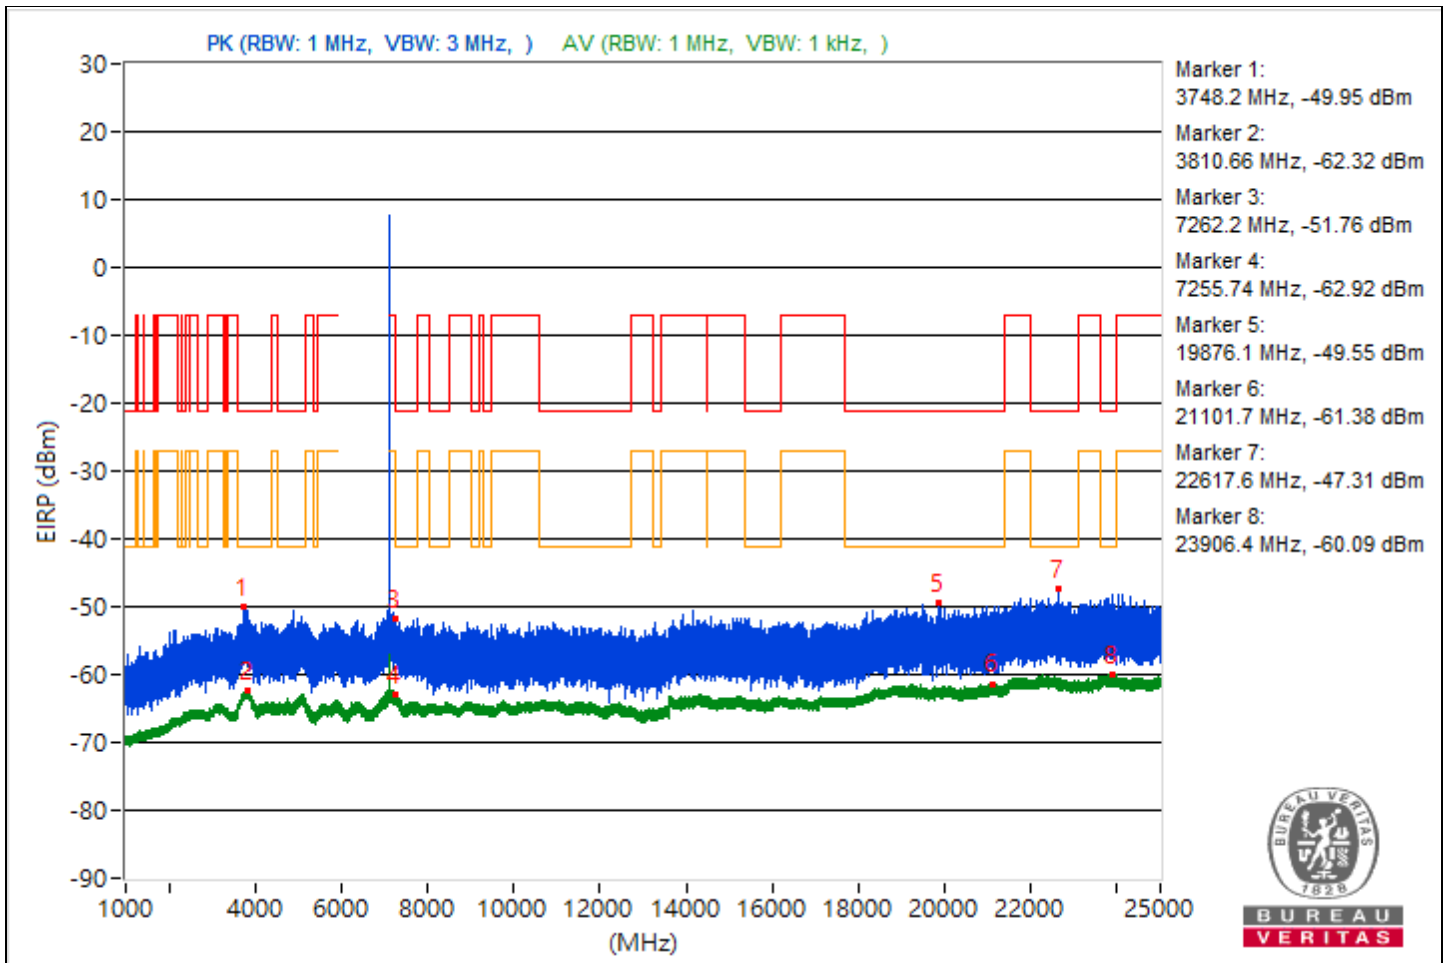

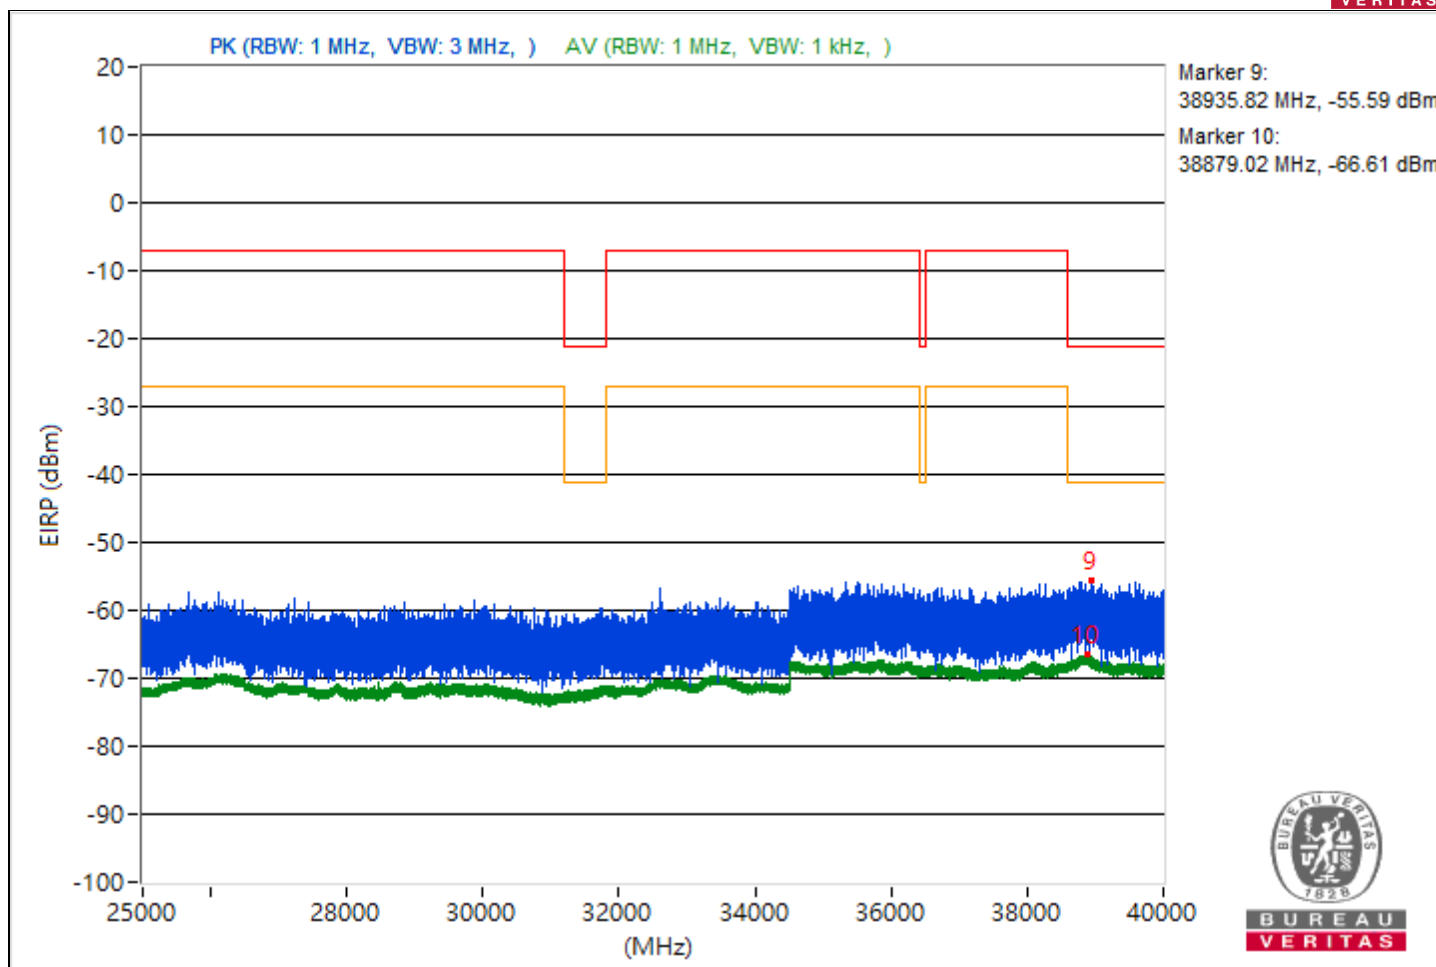





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3795.02	45.3 PK	74	-28.7	-54.88	4.92	-49.96
2	3804.67	32.93 AV	54	-21.07	-67.25	4.92	-62.33
3	11051.56	43.69 PK	74	-30.31	-56.49	4.92	-51.57
4	14497.07	31.9 AV	54	-22.1	-68.28	4.92	-63.36
5	18870.2	46.43 PK	74	-27.57	-53.75	4.92	-48.83
6	18890.6	33.83 AV	54	-20.17	-66.35	4.92	-61.43
7	23055.9	47.62 PK	74	-26.38	-52.56	4.92	-47.64
8	23642.8	35.17 AV	54	-18.83	-65.01	4.92	-60.09
9	39907.82	39.77 PK	74	-34.23	-60.41	4.92	-55.49
10	38825.33	28.66 AV	54	-25.34	-71.52	4.92	-66.6

Note: Margin value = Emission Level - Limit value

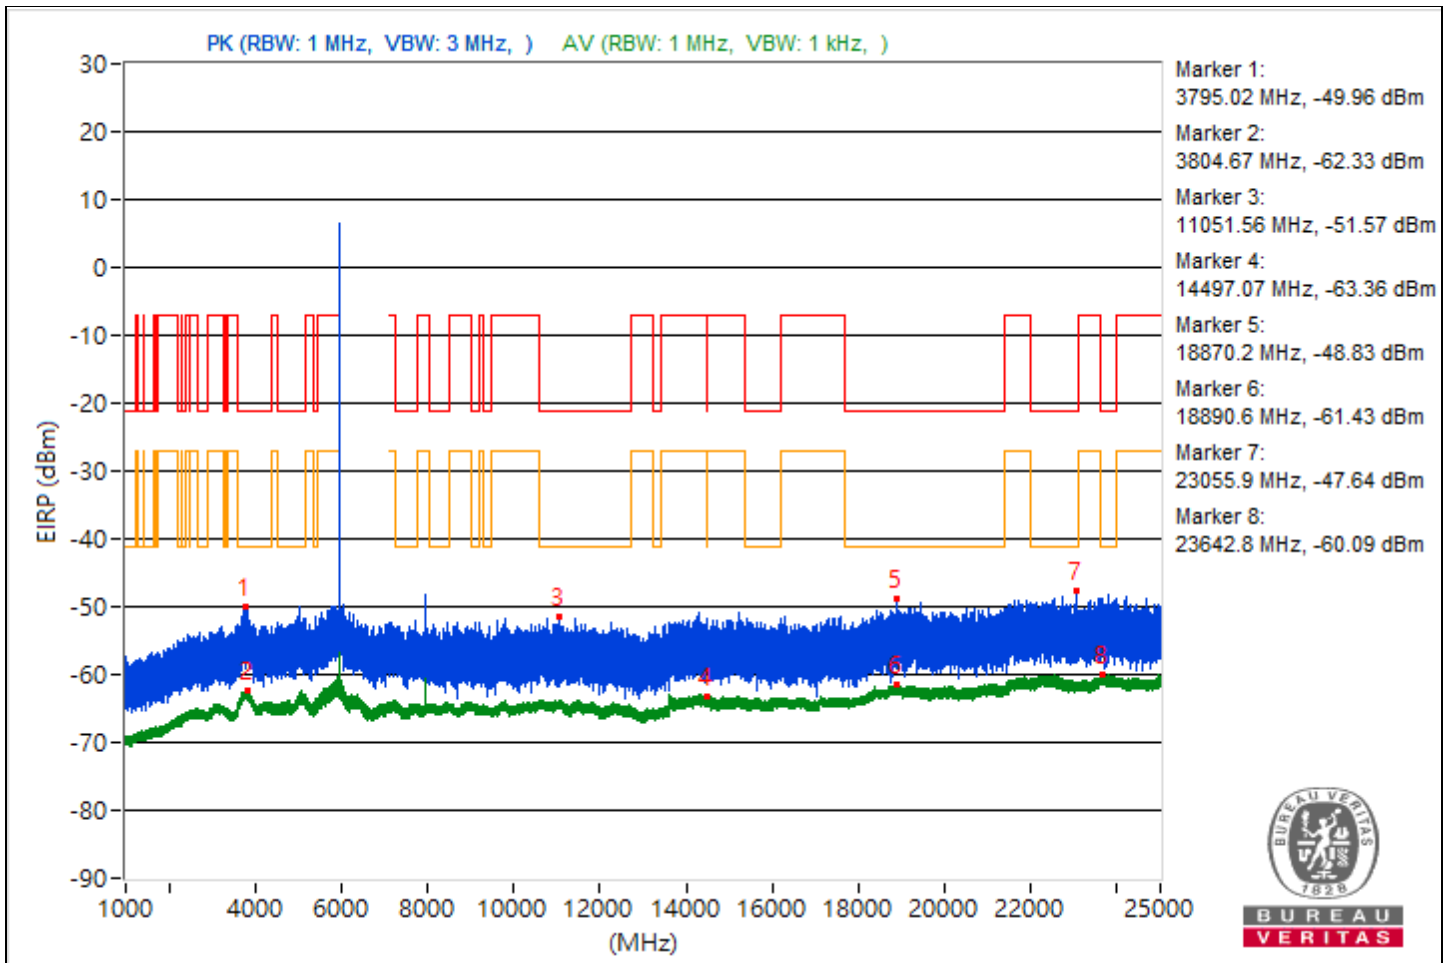

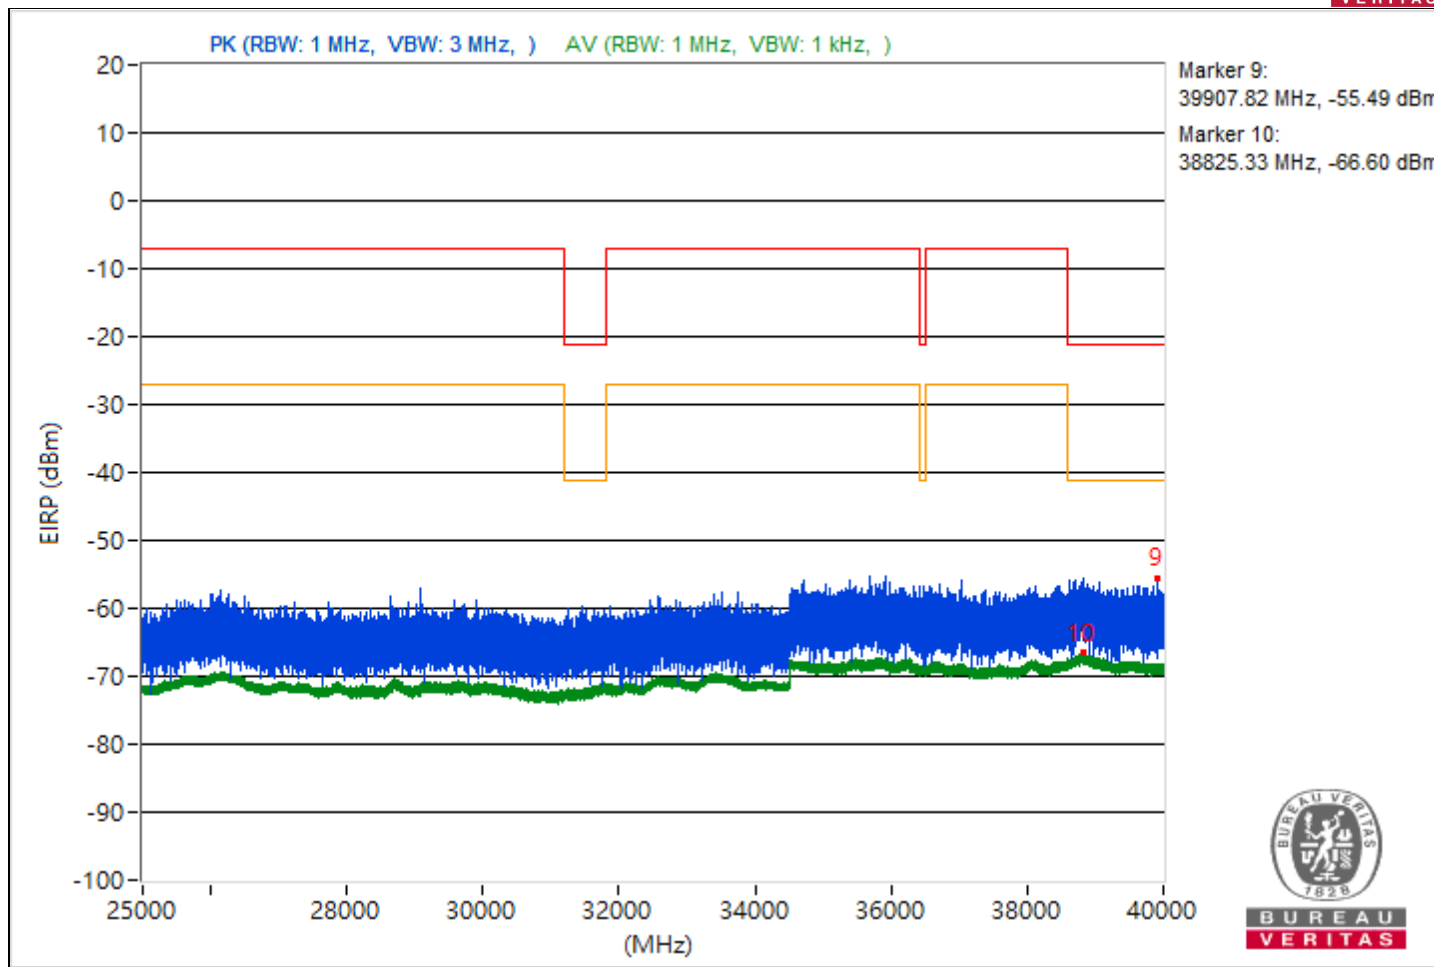





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3800.23	45.07 PK	74	-28.93	-55.11	4.92	-50.19
2	3812.06	32.9 AV	54	-21.1	-67.28	4.92	-62.36
3	15632.44	43.9 PK	74	-30.1	-56.28	4.92	-51.36
4	14494.93	31.83 AV	54	-22.17	-68.35	4.92	-63.43
5	19082.9	46.66 PK	74	-27.34	-53.52	4.92	-48.6
6	21112.5	33.91 AV	54	-20.09	-66.27	4.92	-61.35
7	22593.4	47.47 PK	74	-26.53	-52.71	4.92	-47.79
8	22277.3	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38789.6	39.9 PK	74	-34.1	-60.28	4.92	-55.36
10	38832.44	28.65 AV	54	-25.35	-71.53	4.92	-66.61

Note: Margin value = Emission Level - Limit value

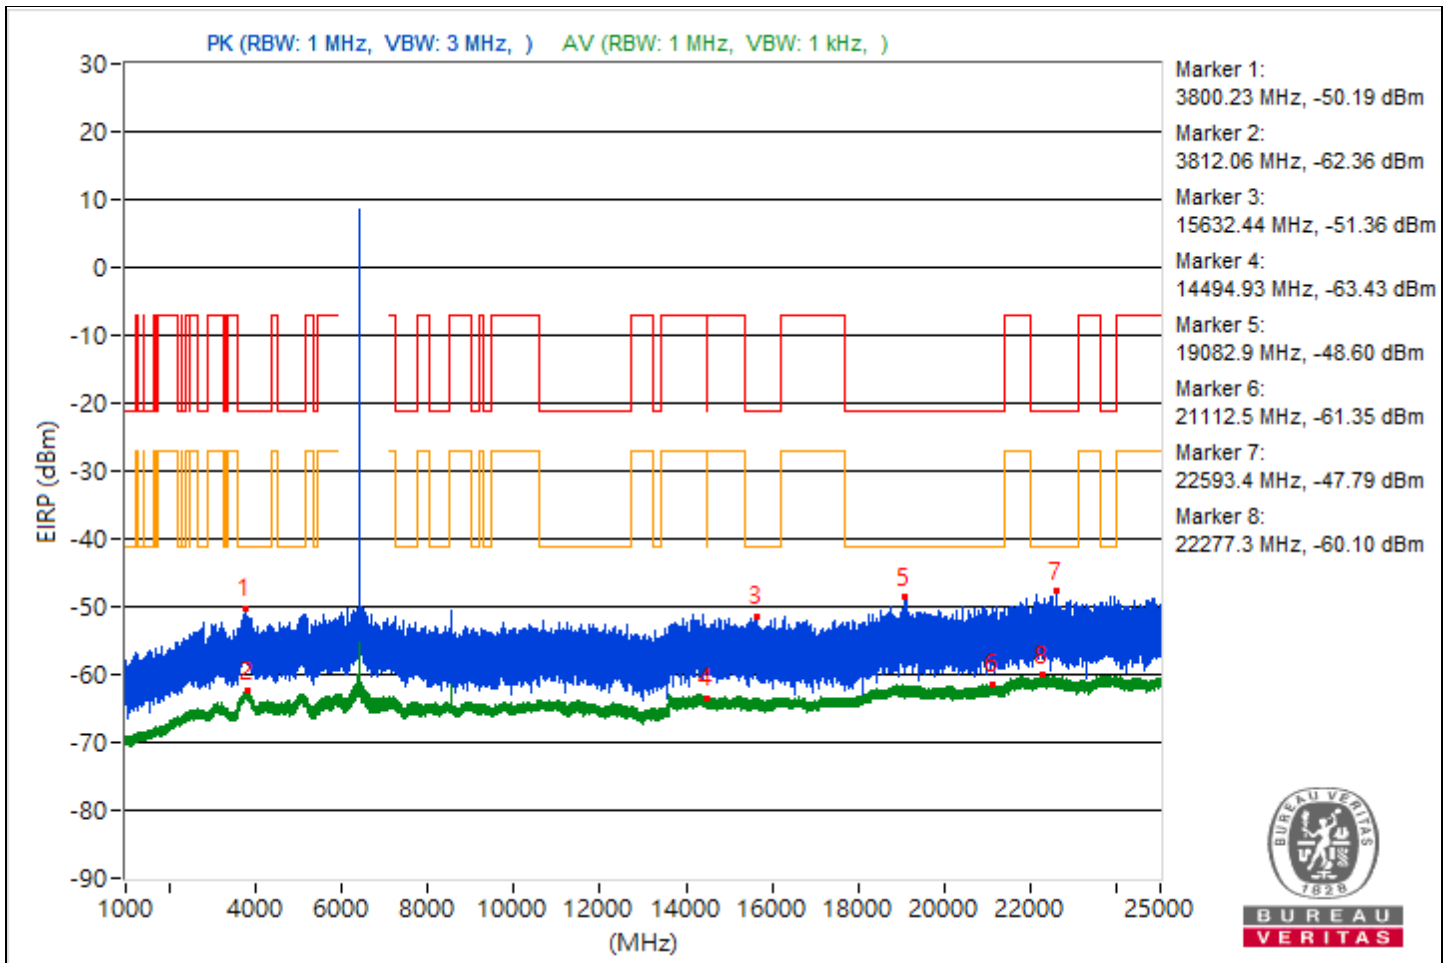

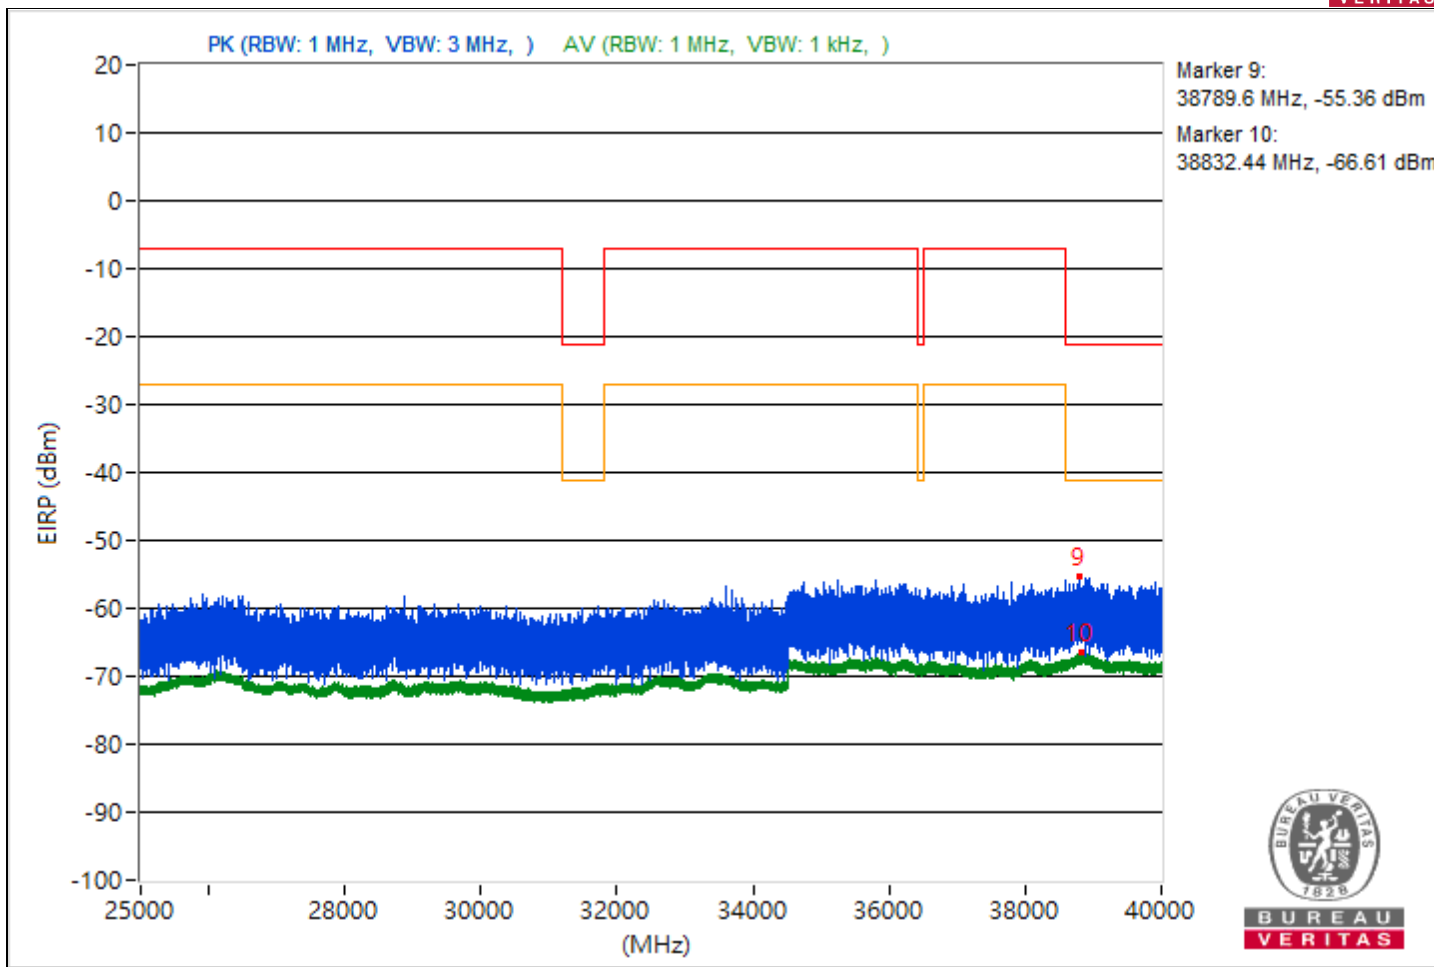





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.54	46.17 PK	74	-27.83	-54.01	4.92	-49.09
2	3817.19	32.93 AV	54	-21.07	-67.25	4.92	-62.33
3	11394.04	43.09 PK	74	-30.91	-57.09	4.92	-52.17
4	14498.13	31.97 AV	54	-22.03	-68.21	4.92	-63.29
5	20631.1	45.34 PK	74	-28.66	-54.84	4.92	-49.92
6	21160.3	33.84 AV	54	-20.16	-66.34	4.92	-61.42
7	23779.2	46.88 PK	74	-27.12	-53.3	4.92	-48.38
8	23979.9	35.31 AV	54	-18.69	-64.87	4.92	-59.95
9	38812.36	40.74 PK	74	-33.26	-59.44	4.92	-54.52
10	38873.78	28.61 AV	54	-25.39	-71.57	4.92	-66.65

Note: Margin value = Emission Level - Limit value

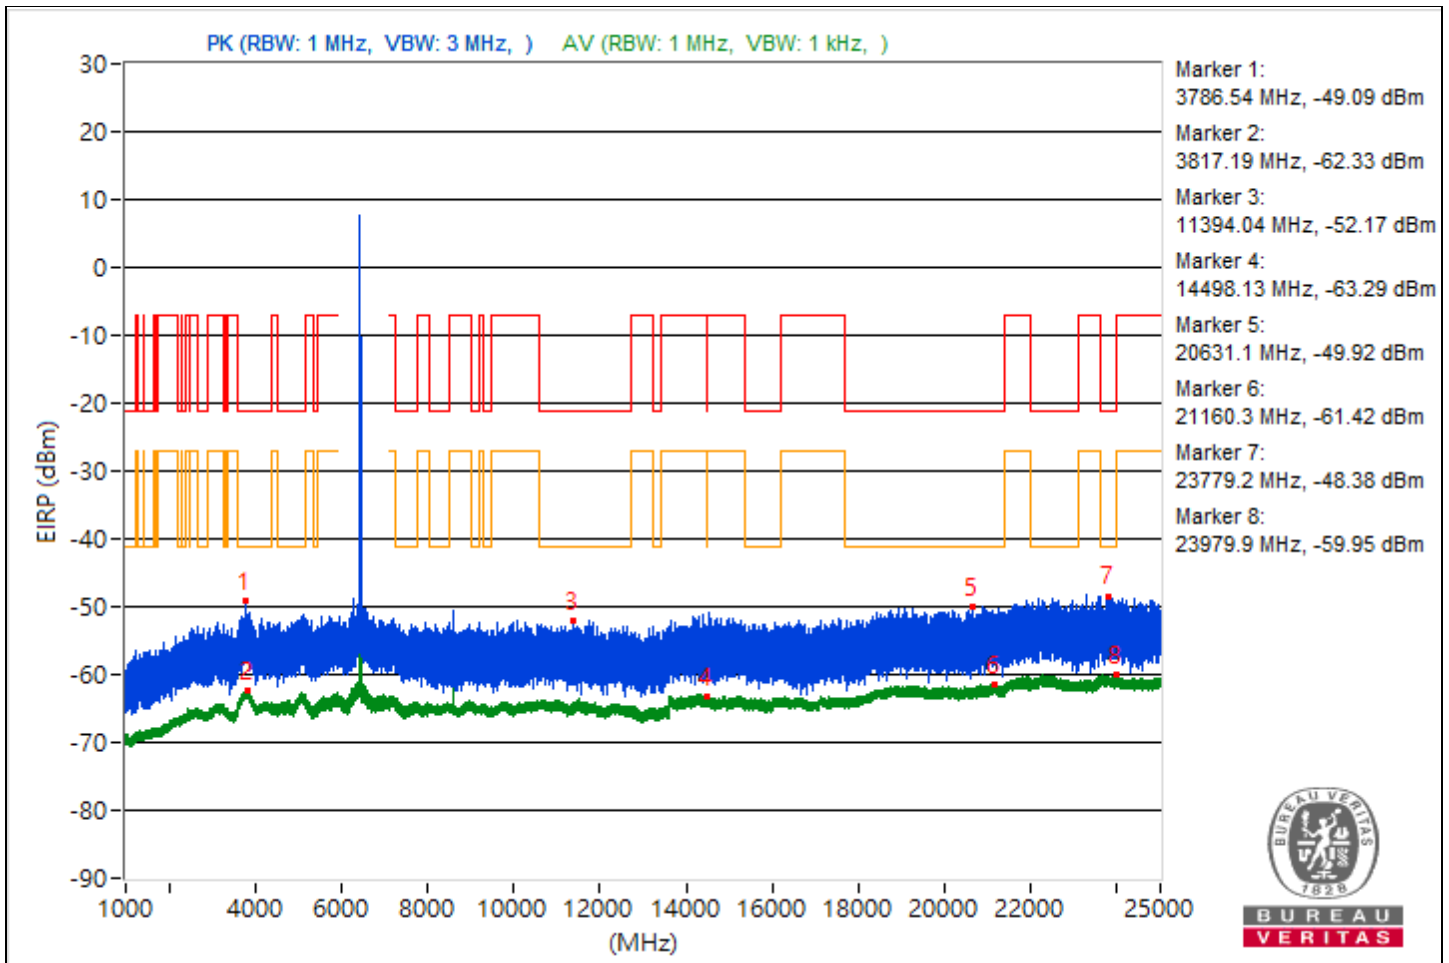

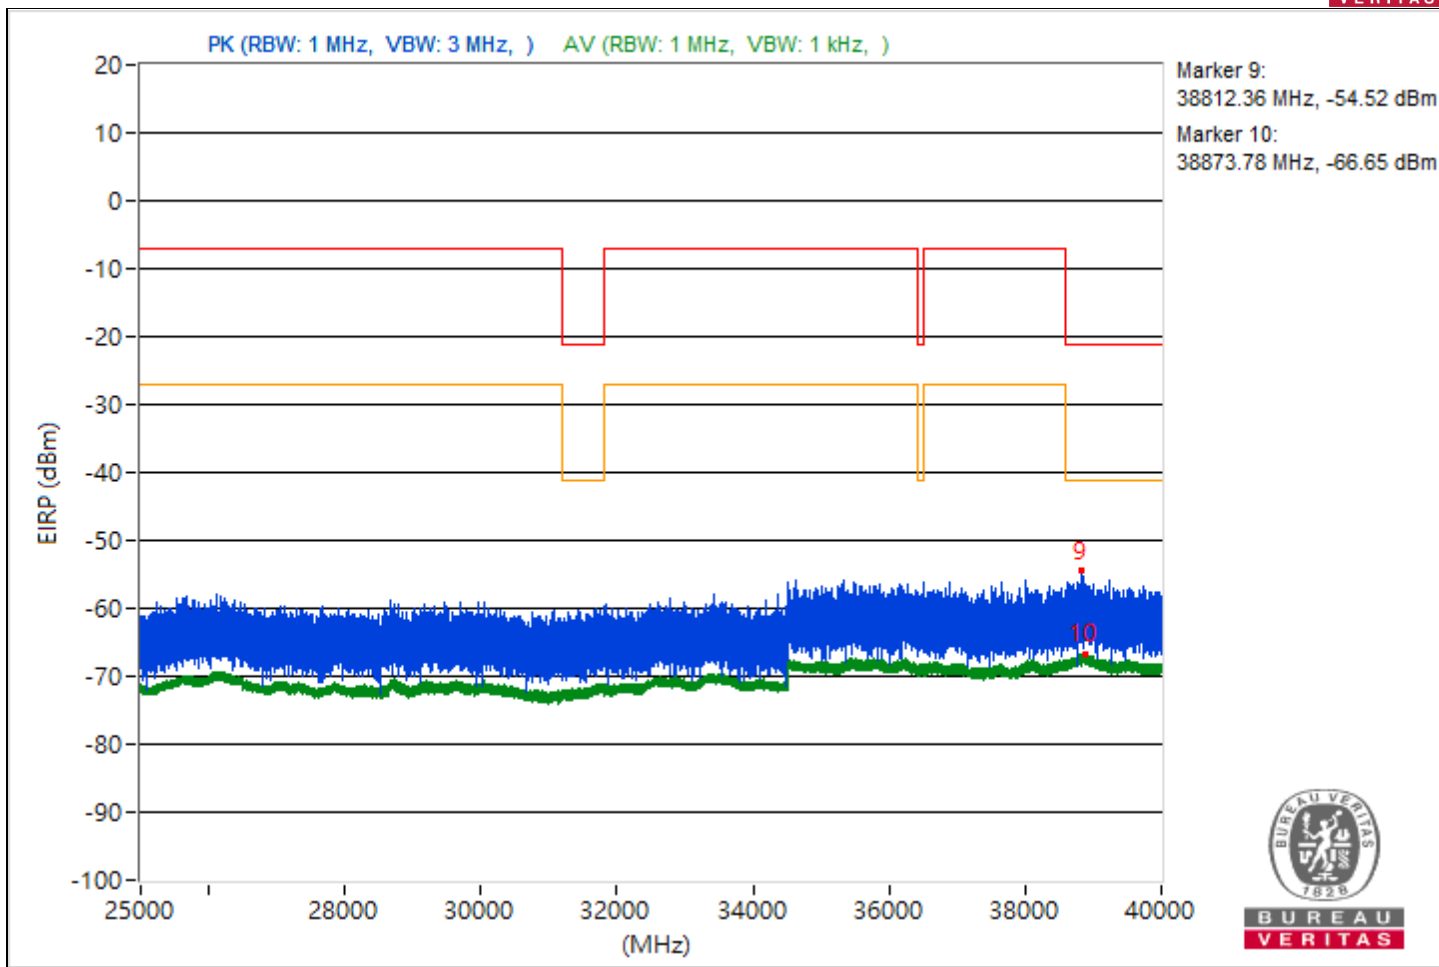





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.43	44.9 PK	74	-29.1	-55.28	4.92	-50.36
2	3793.08	33.02 AV	54	-20.98	-67.16	4.92	-62.24
3	7336.32	43.72 PK	74	-30.28	-56.46	4.92	-51.54
4	14493.6	31.82 AV	54	-22.18	-68.36	4.92	-63.44
5	19384.5	45.46 PK	74	-28.54	-54.72	4.92	-49.8
6	21167.4	33.79 AV	54	-20.21	-66.39	4.92	-61.47
7	22357.9	47.68 PK	74	-26.32	-52.5	4.92	-47.58
8	23709.5	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38910.67	41.02 PK	74	-32.98	-59.16	4.92	-54.24
10	38839.11	28.64 AV	54	-25.36	-71.54	4.92	-66.62

Note: Margin value = Emission Level - Limit value

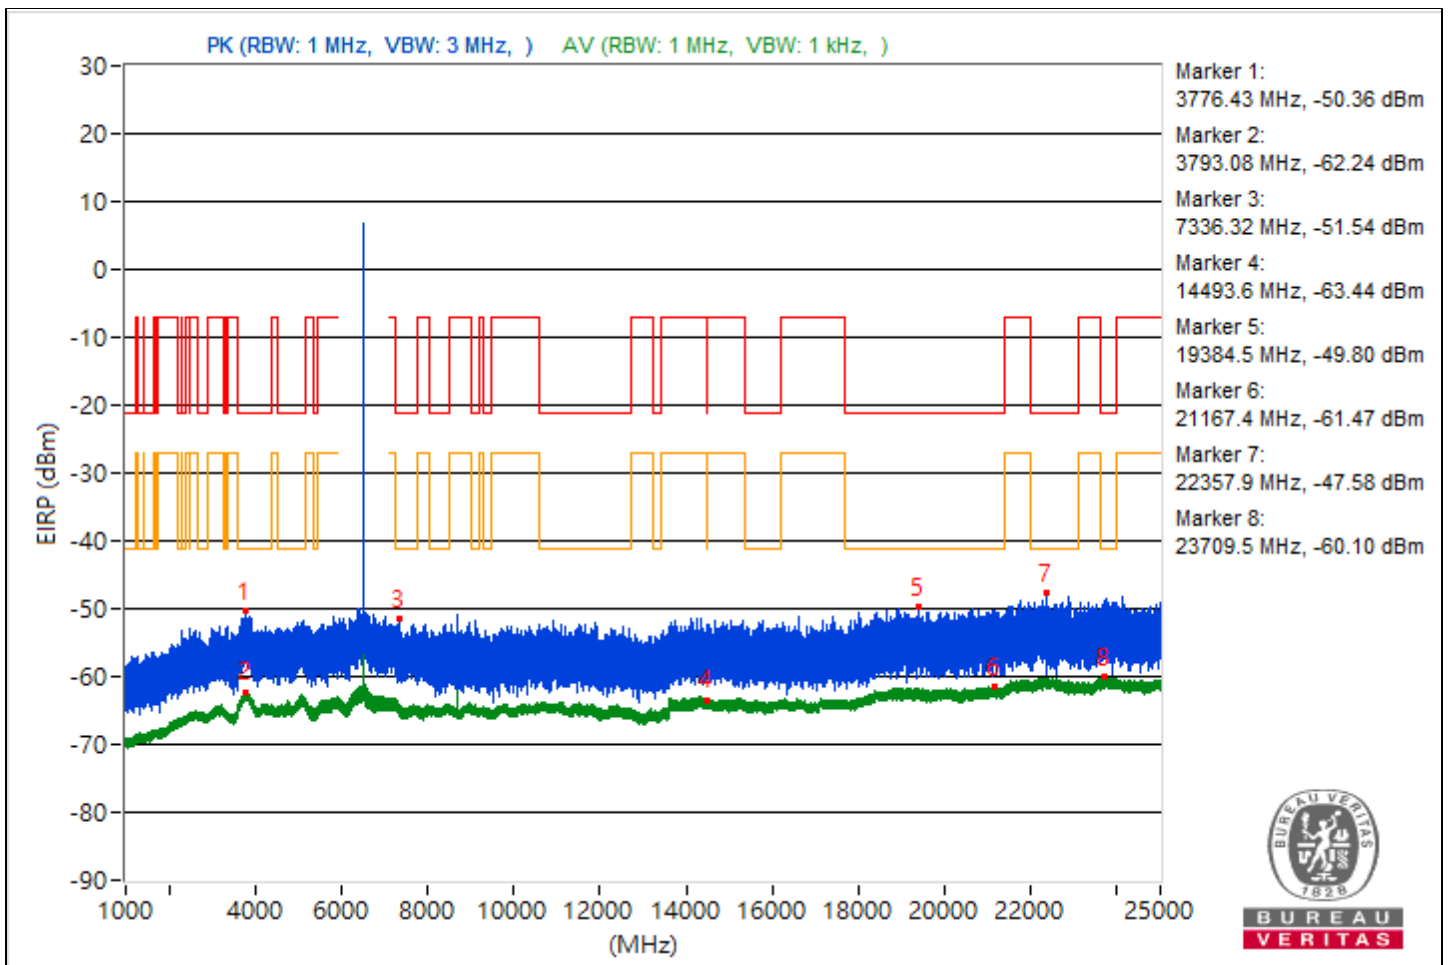

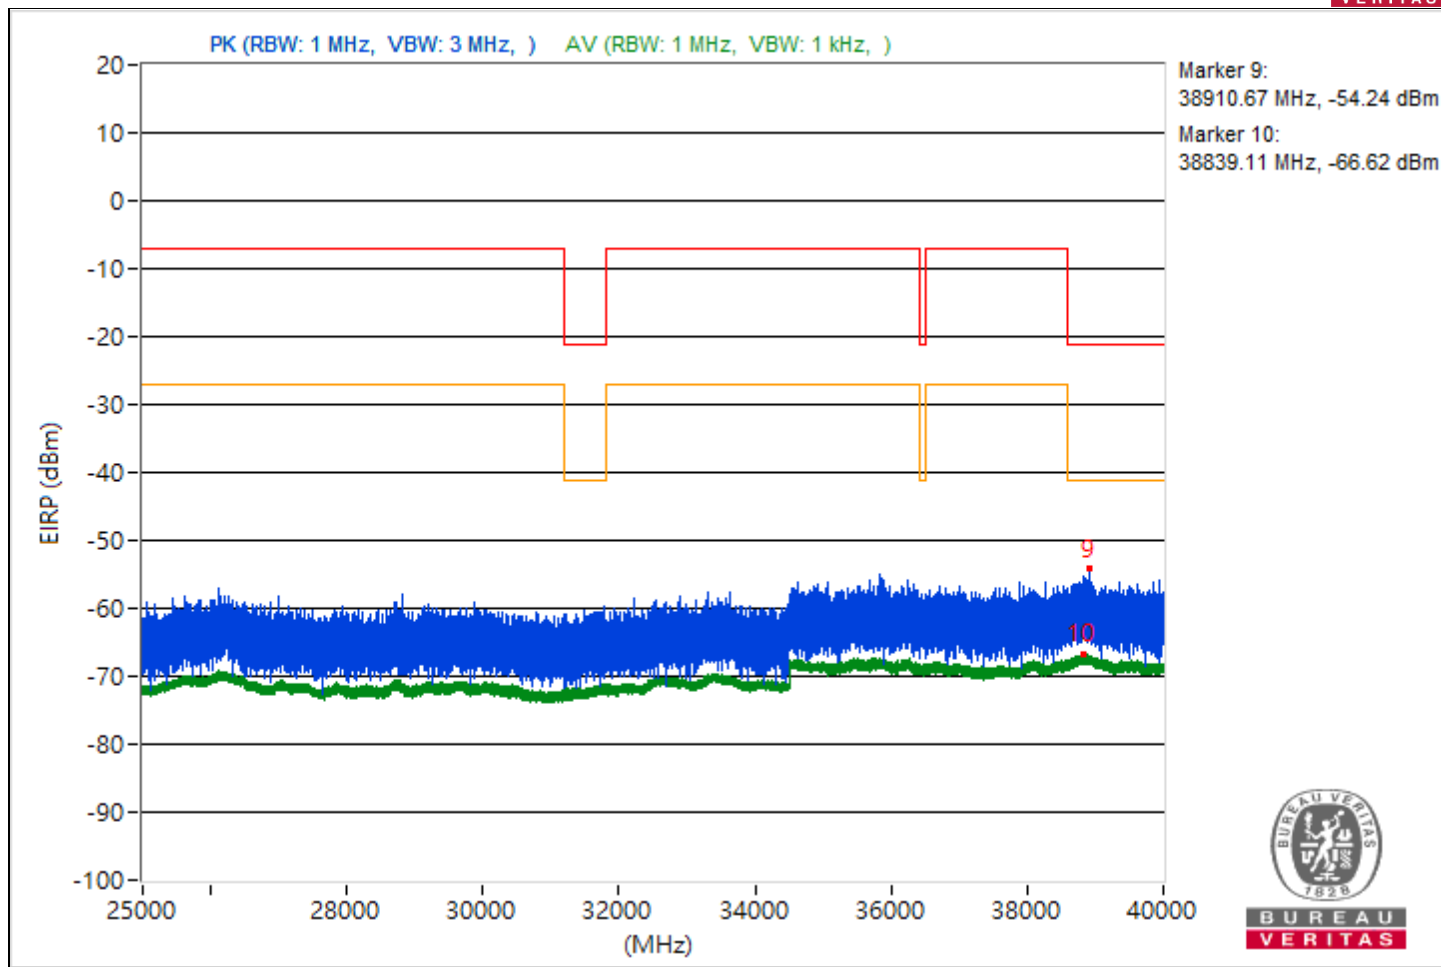





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5010.53	44.59 PK	74	-29.41	-55.59	4.92	-50.67
2	3776.12	32.87 AV	54	-21.13	-67.31	4.92	-62.39
3	9315.29	43.79 PK	74	-30.21	-56.39	4.92	-51.47
4	7257.14	31.86 AV	54	-22.14	-68.32	4.92	-63.4
5	21200.2	45.62 PK	74	-28.38	-54.56	4.92	-49.64
6	20857.8	33.86 AV	54	-20.14	-66.32	4.92	-61.4
7	23981.1	48.02 PK	74	-25.98	-52.16	4.92	-47.24
8	23876.8	35.1 AV	54	-18.9	-65.08	4.92	-60.16
9	38773.78	40.84 PK	74	-33.16	-59.34	4.92	-54.42
10	38839.91	28.54 AV	54	-25.46	-71.64	4.92	-66.72

Note: Margin value = Emission Level - Limit value

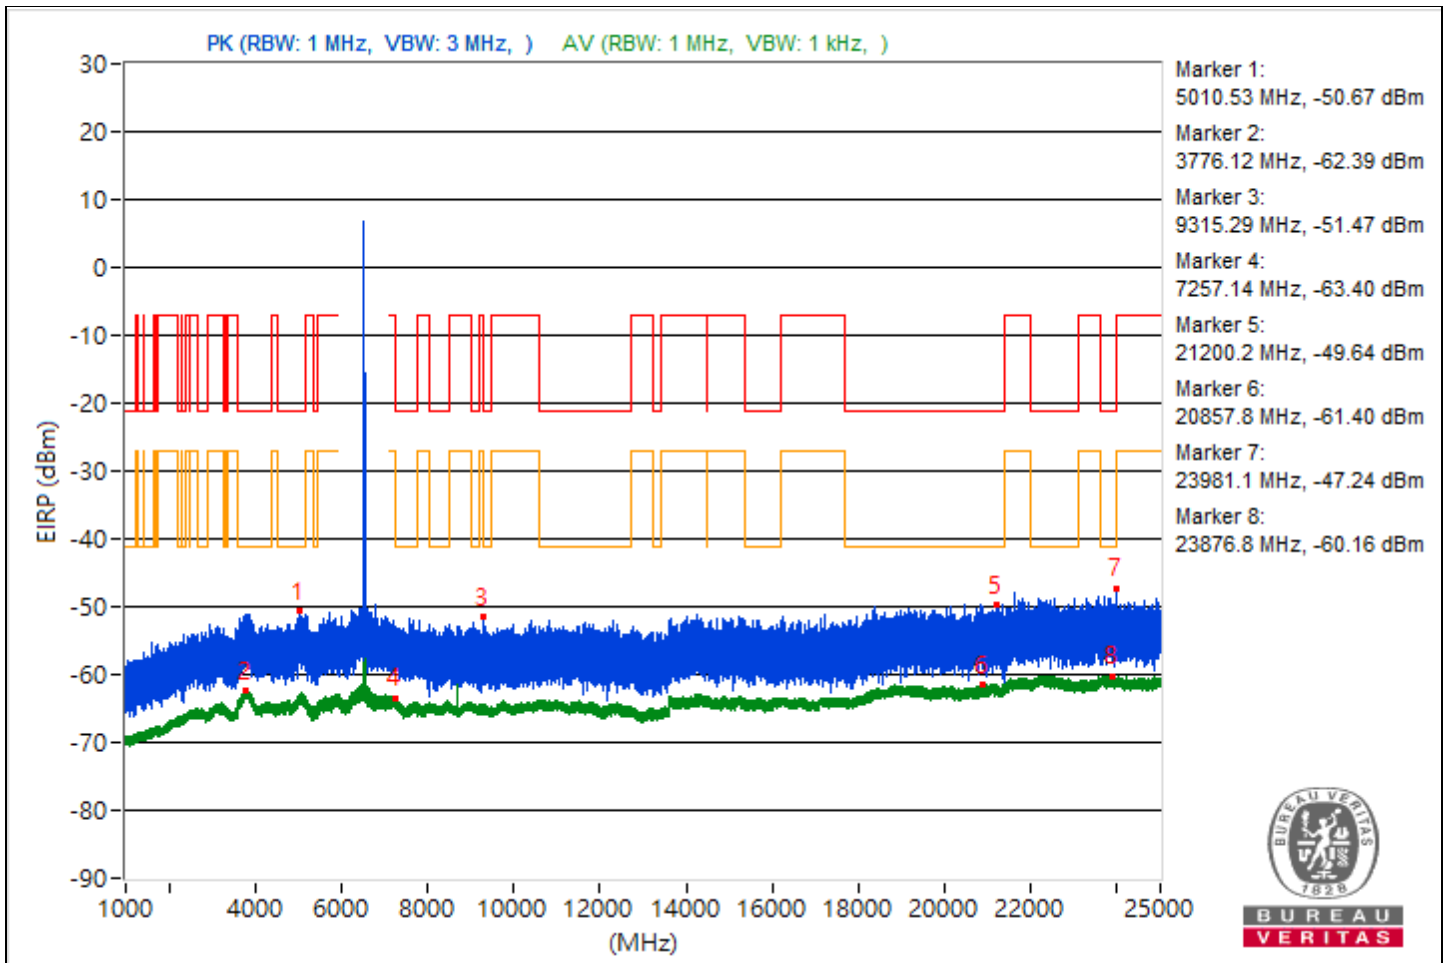

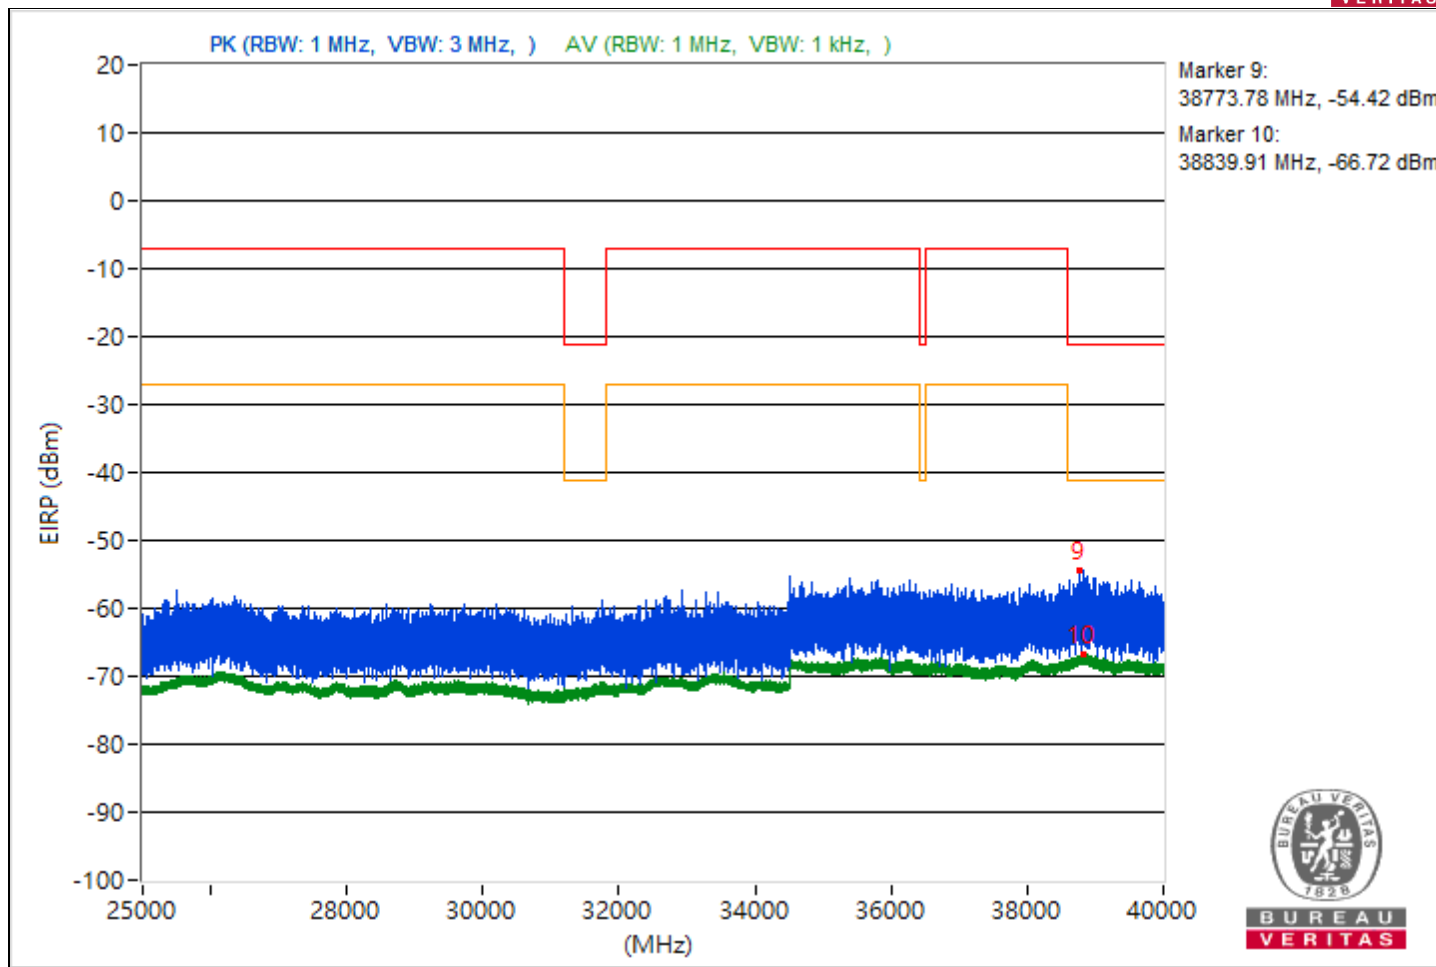





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.56	44.65 PK	74	-29.35	-55.53	4.92	-50.61
2	3787.09	32.97 AV	54	-21.03	-67.21	4.92	-62.29
3	15623.29	44.71 PK	74	-29.29	-55.47	4.92	-50.55
4	7250.46	32.5 AV	54	-21.5	-67.68	4.92	-62.76
5	19959.9	46.12 PK	74	-27.88	-54.06	4.92	-49.14
6	21136.3	33.91 AV	54	-20.09	-66.27	4.92	-61.35
7	22353	46.65 PK	74	-27.35	-53.53	4.92	-48.61
8	23697.9	35.21 AV	54	-18.79	-64.97	4.92	-60.05
9	38830.84	39.92 PK	74	-34.08	-60.26	4.92	-55.34
10	38862.22	28.82 AV	54	-25.18	-71.36	4.92	-66.44

Note: Margin value = Emission Level - Limit value

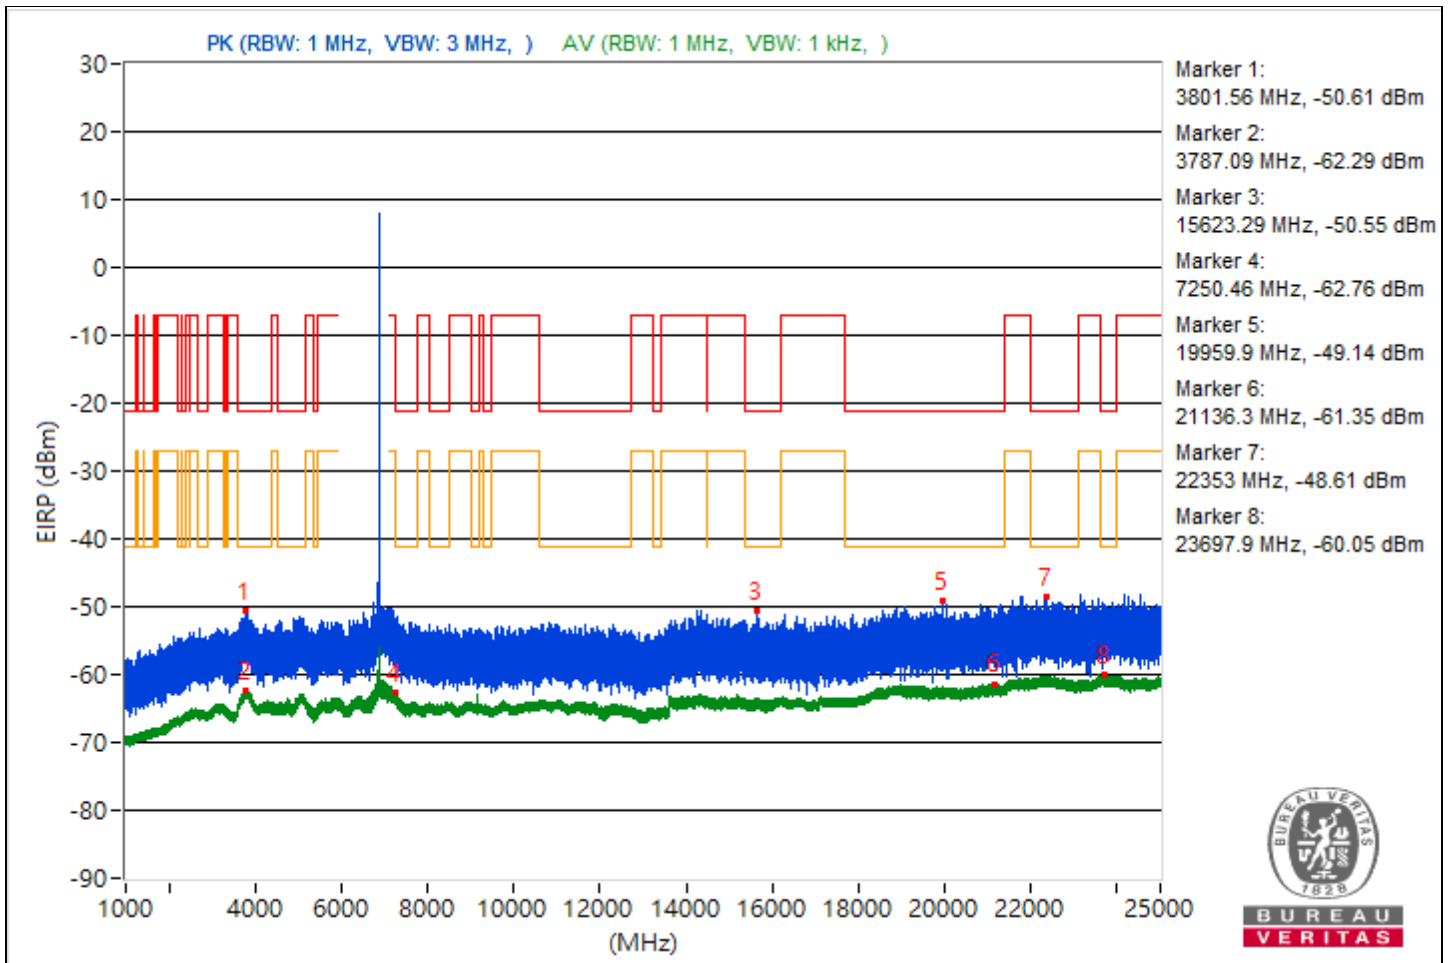

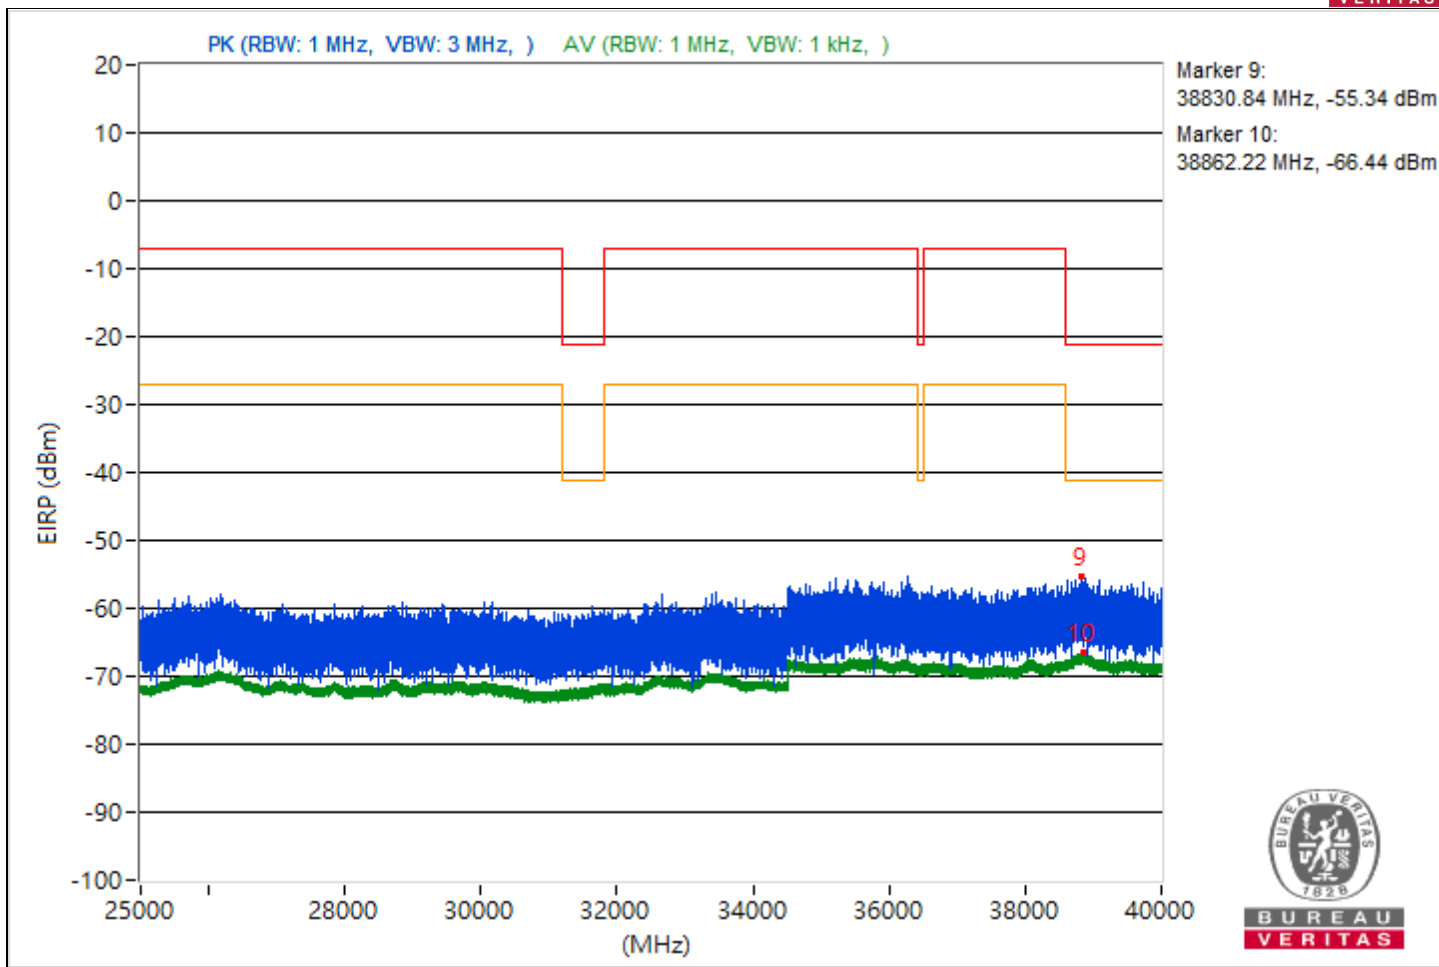





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3853.28	44.69 PK	74	-29.31	-55.49	4.92	-50.57
2	3833.21	32.87 AV	54	-21.13	-67.31	4.92	-62.39
3	7293.16	44.92 PK	74	-29.08	-55.26	4.92	-50.34
4	7257.38	33.71 AV	54	-20.29	-66.47	4.92	-61.55
5	18814.6	45.83 PK	74	-28.17	-54.35	4.92	-49.43
6	21162	33.84 AV	54	-20.16	-66.34	4.92	-61.42
7	23964.3	47.04 PK	74	-26.96	-53.14	4.92	-48.22
8	23750.5	35.13 AV	54	-18.87	-65.05	4.92	-60.13
9	38675.82	39.53 PK	74	-34.47	-60.65	4.92	-55.73
10	38839.02	28.67 AV	54	-25.33	-71.51	4.92	-66.59

Note: Margin value = Emission Level - Limit value

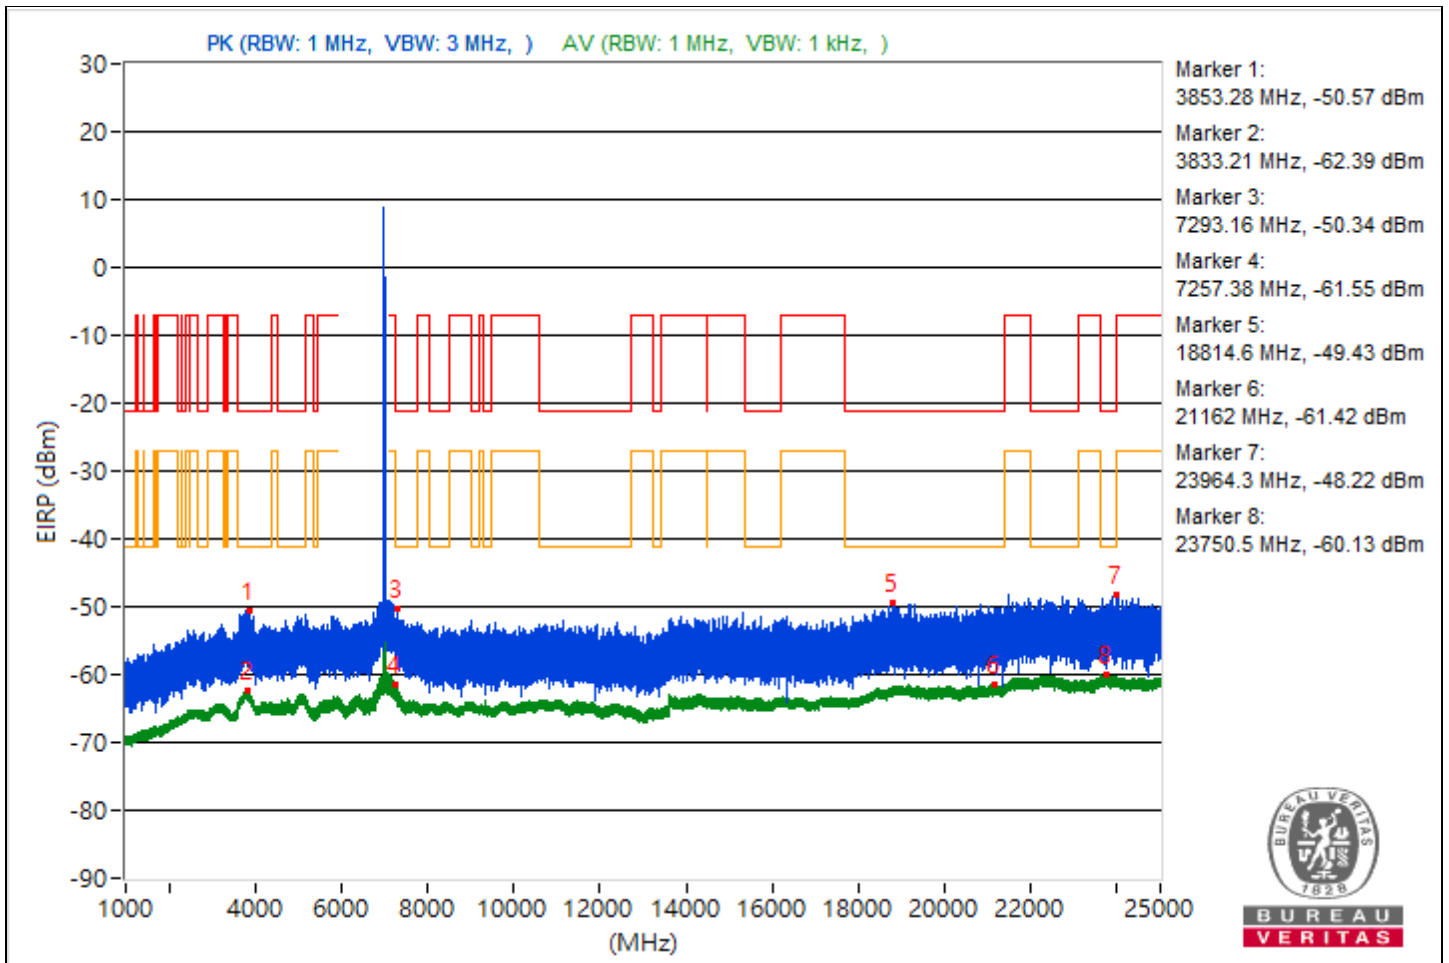

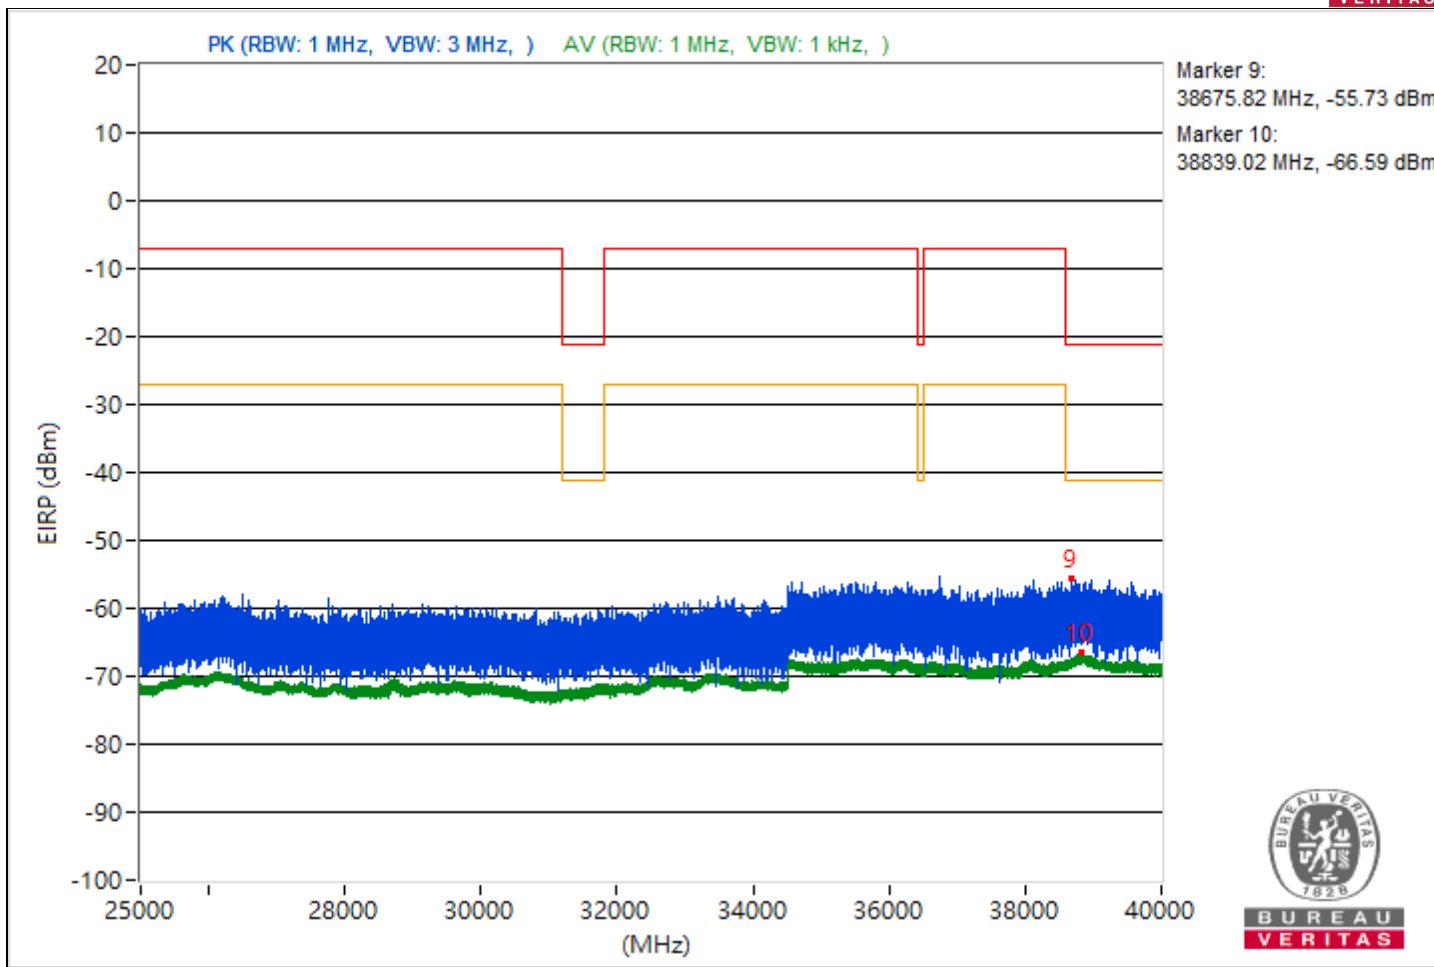





RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.3	44.15 PK	74	-29.85	-56.03	4.92	-51.11
2	3816.49	32.97 AV	54	-21.03	-67.21	4.92	-62.29
3	7259.71	46.42 PK	74	-27.58	-53.76	4.92	-48.84
4	7258.39	34.58 AV	54	-19.42	-65.6	4.92	-60.68
5	19169.2	45.52 PK	74	-28.48	-54.66	4.92	-49.74
6	21234.6	33.94 AV	54	-20.06	-66.24	4.92	-61.32
7	22270.6	47.51 PK	74	-26.49	-52.67	4.92	-47.75
8	23863.7	35.1 AV	54	-18.9	-65.08	4.92	-60.16
9	38665.42	39.62 PK	74	-34.38	-60.56	4.92	-55.64
10	38864.53	28.67 AV	54	-25.33	-71.51	4.92	-66.59

Note: Margin value = Emission Level - Limit value

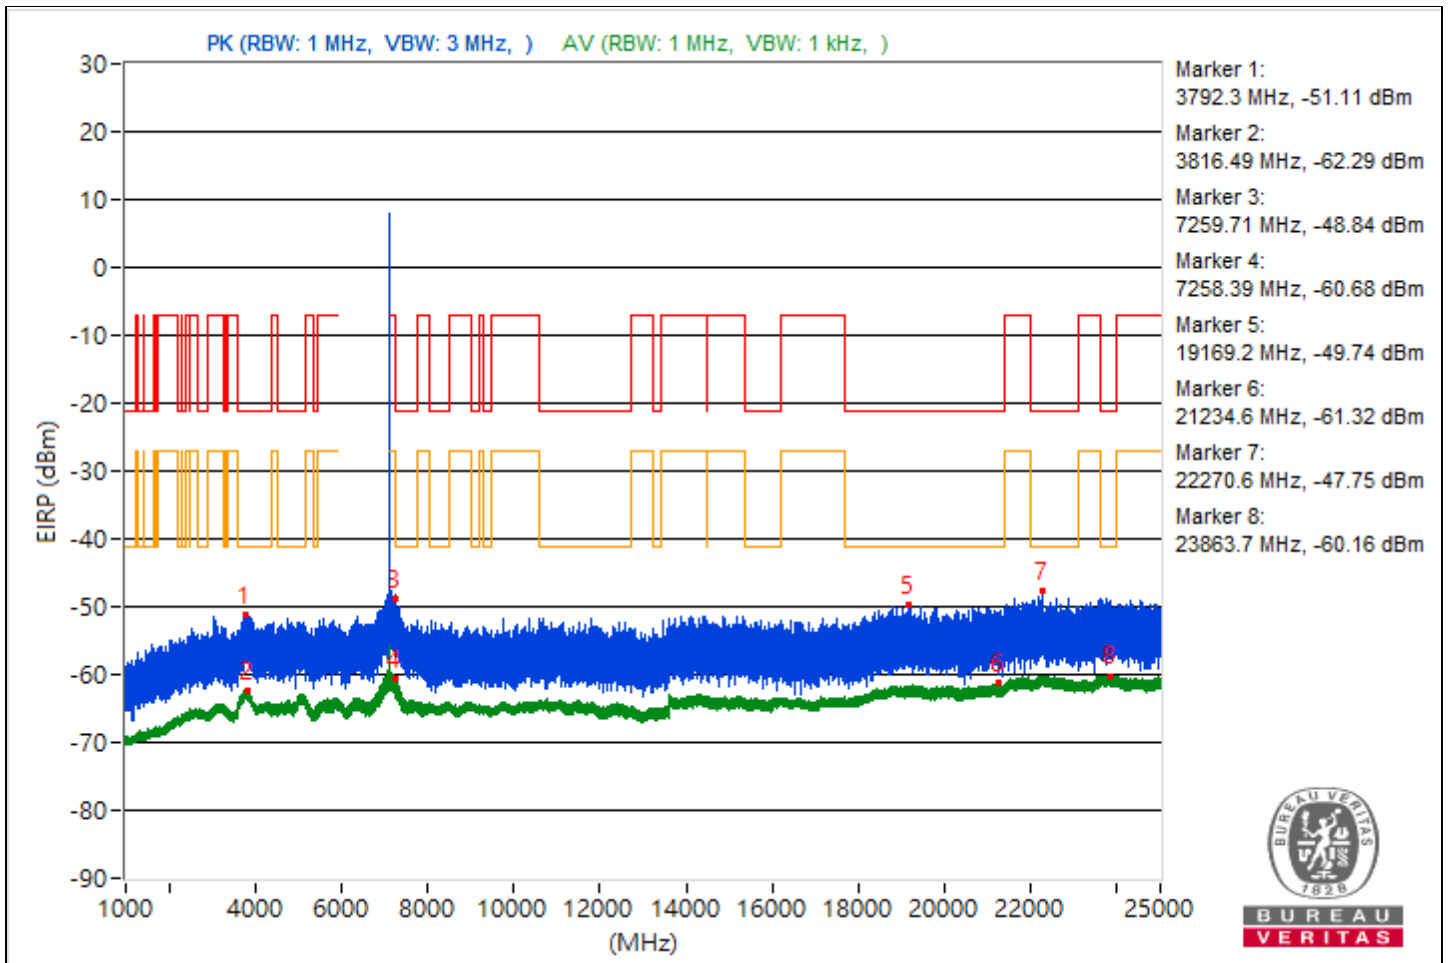

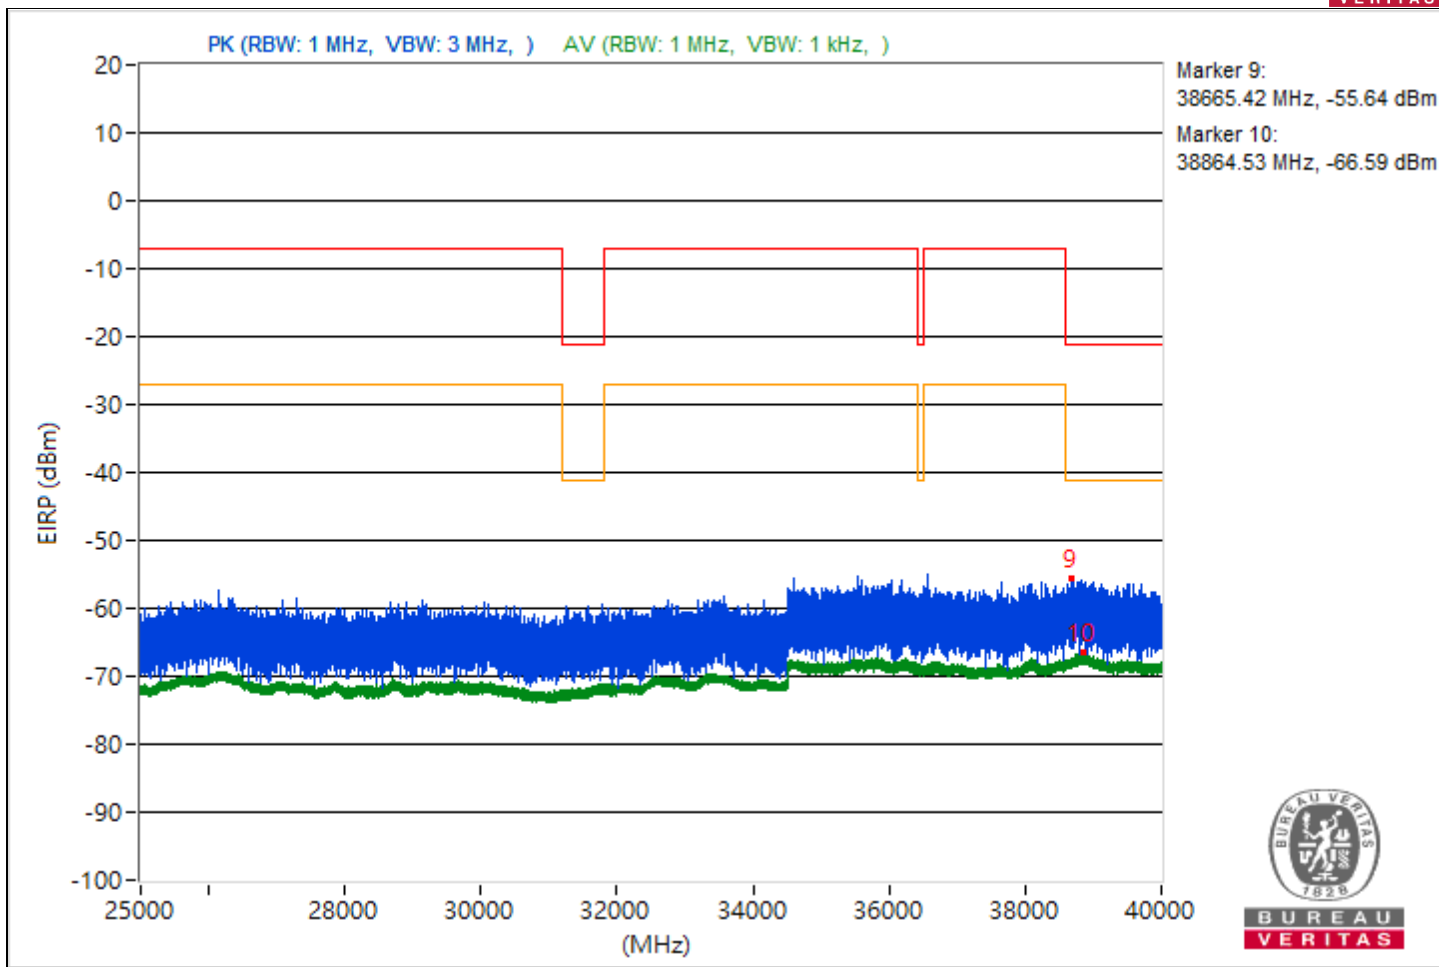





RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3819.91	45.23 PK	74	-28.77	-54.95	4.92	-50.03
2	3809.96	33.08 AV	54	-20.92	-67.1	4.92	-62.18
3	15670.31	44.76 PK	74	-29.24	-55.42	4.92	-50.5
4	14498.93	32.27 AV	54	-21.73	-67.91	4.92	-62.99
5	21130	45.71 PK	74	-28.29	-54.47	4.92	-49.55
6	21165.6	33.83 AV	54	-20.17	-66.35	4.92	-61.43
7	23790.3	46.51 PK	74	-27.49	-53.67	4.92	-48.75
8	22218.8	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38955.29	40.69 AV	74	-33.31	-59.49	4.92	-54.57
10	38808.18	28.66 PK	54	-25.34	-71.52	4.92	-66.6

Note: Margin value = Emission Level - Limit value

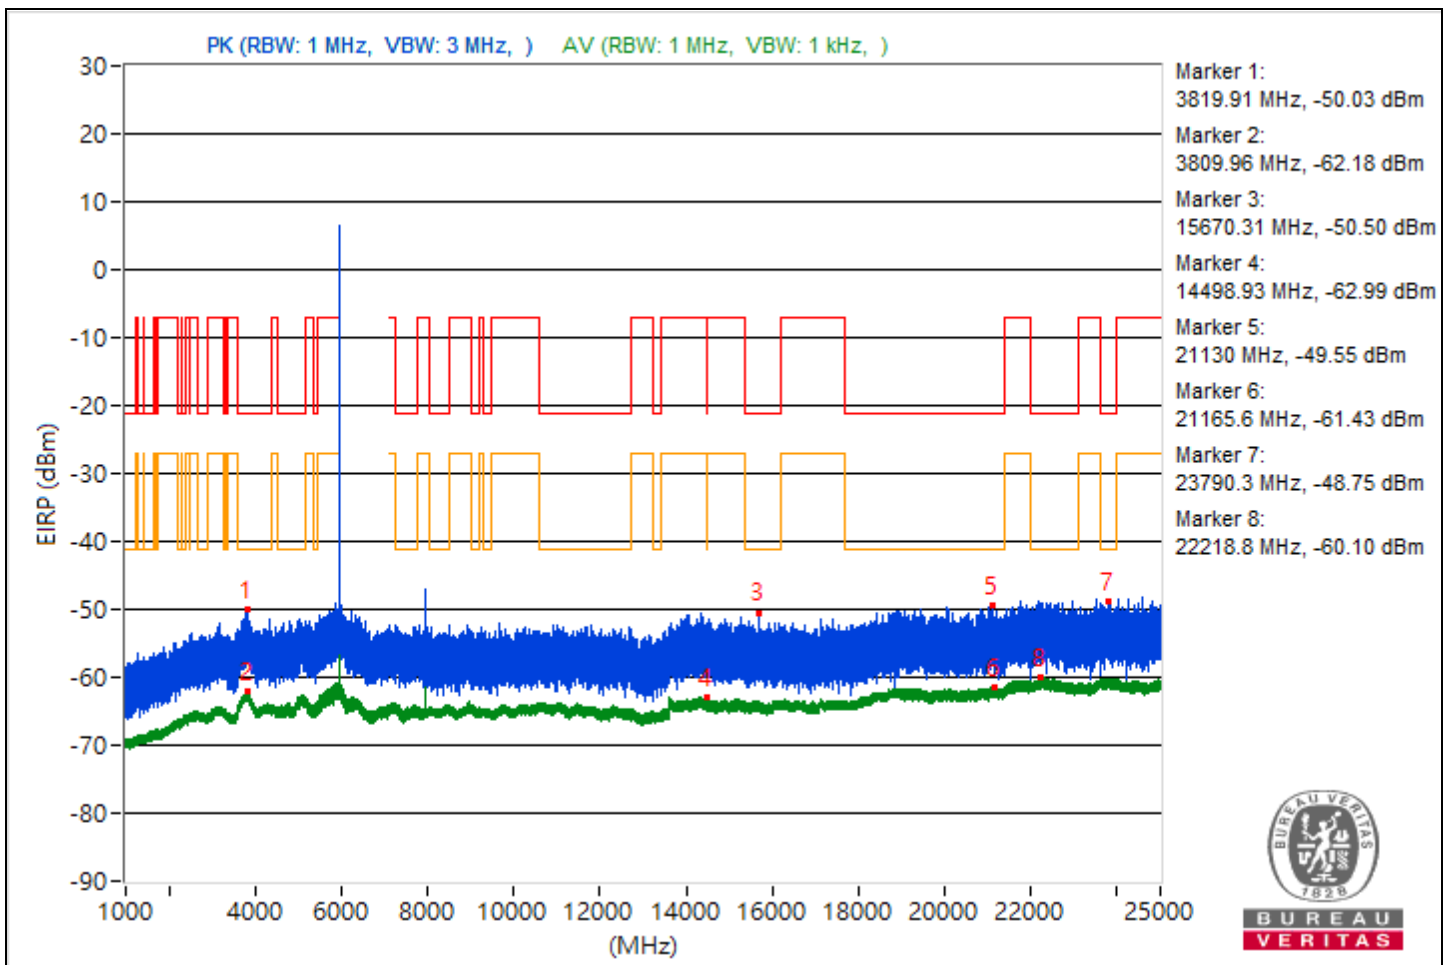


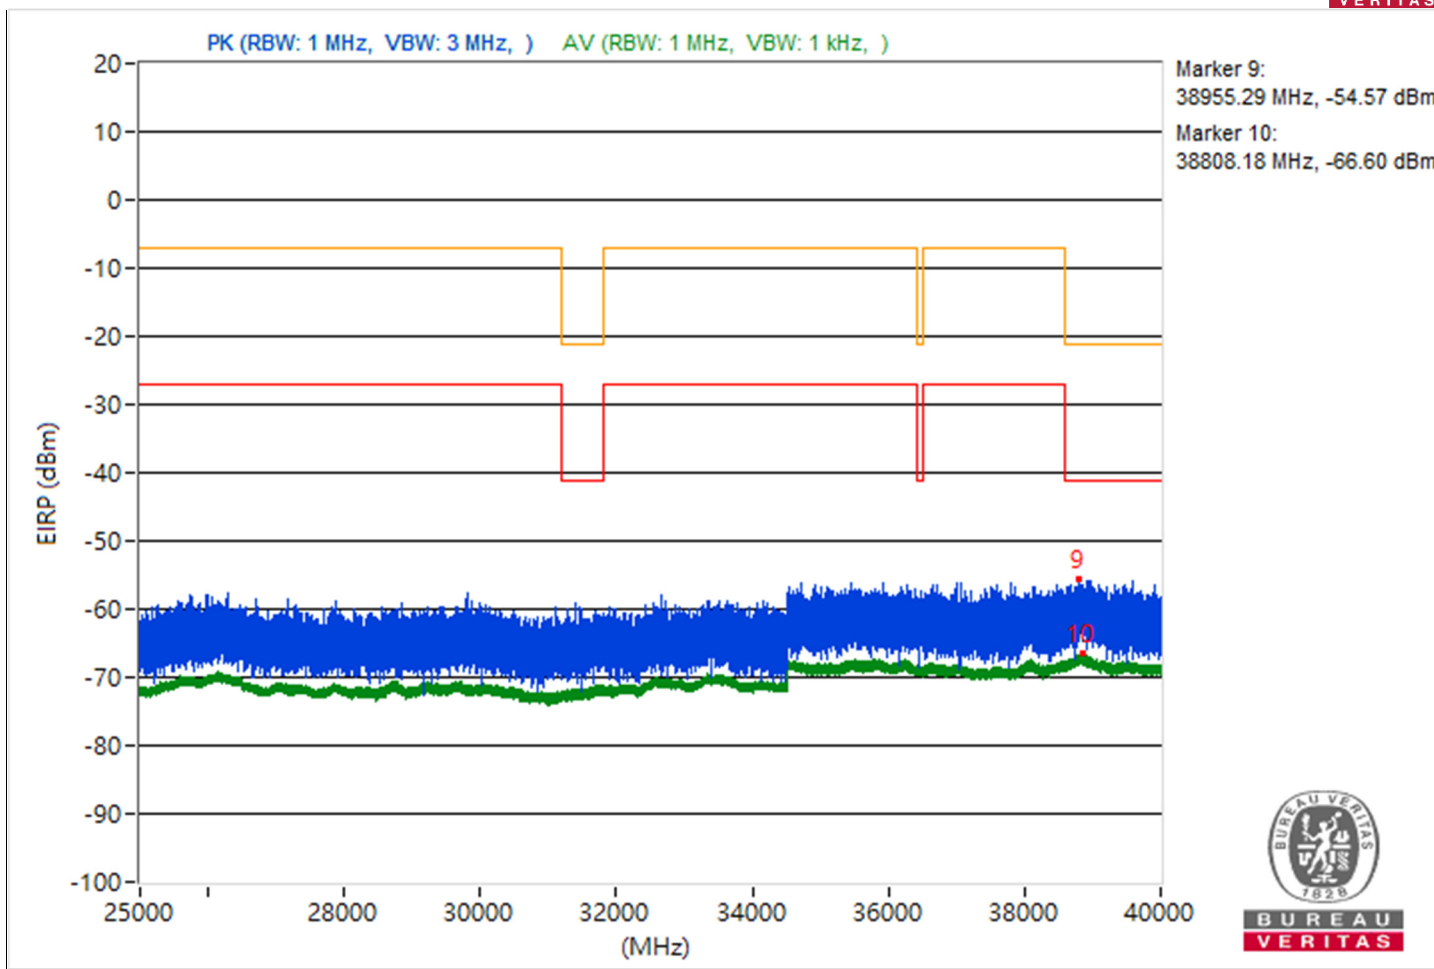


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5097.02	44.3 PK	74	-29.7	-55.88	4.92	-50.96
2	3790.59	32.95 AV	54	-21.05	-67.23	4.92	-62.31
3	7294.56	43.51 PK	74	-30.49	-56.67	4.92	-51.75
4	14499.47	31.94 AV	54	-22.06	-68.24	4.92	-63.32
5	19936.1	46.14 PK	74	-27.86	-54.04	4.92	-49.12
6	21256.2	33.72 AV	54	-20.28	-66.46	4.92	-61.54
7	22143.7	46.95 PK	74	-27.05	-53.23	4.92	-48.31
8	23875.3	35.15 AV	54	-18.85	-65.03	4.92	-60.11
9	38903.82	39.84 PK	74	-34.16	-60.34	4.92	-55.42
10	38845.24	28.64 AV	54	-25.36	-71.54	4.92	-66.62

Note: Margin value = Emission Level - Limit value

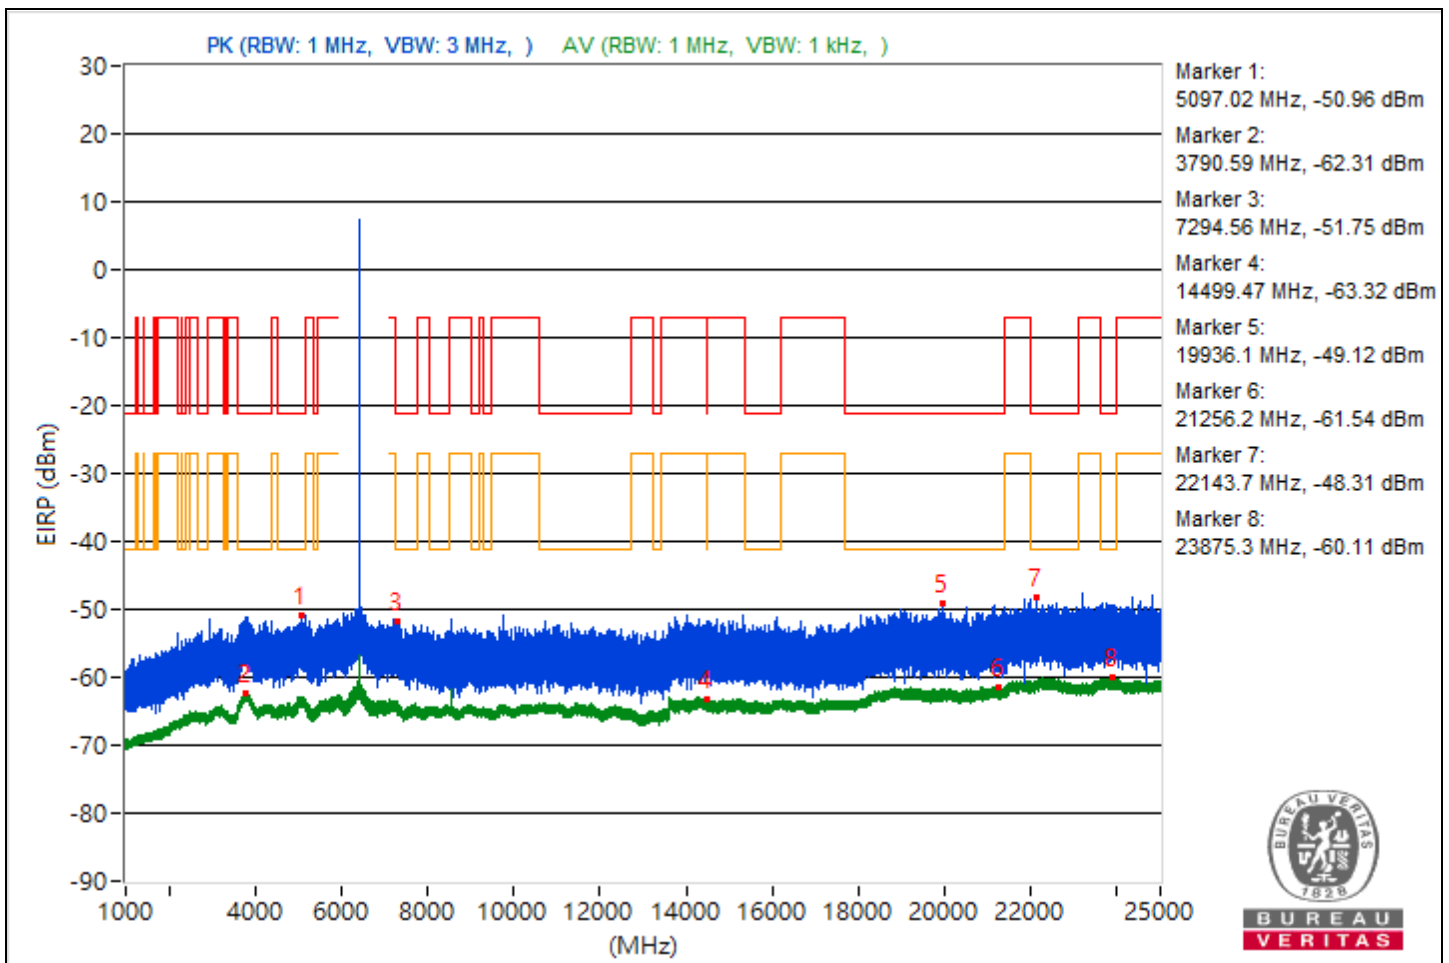


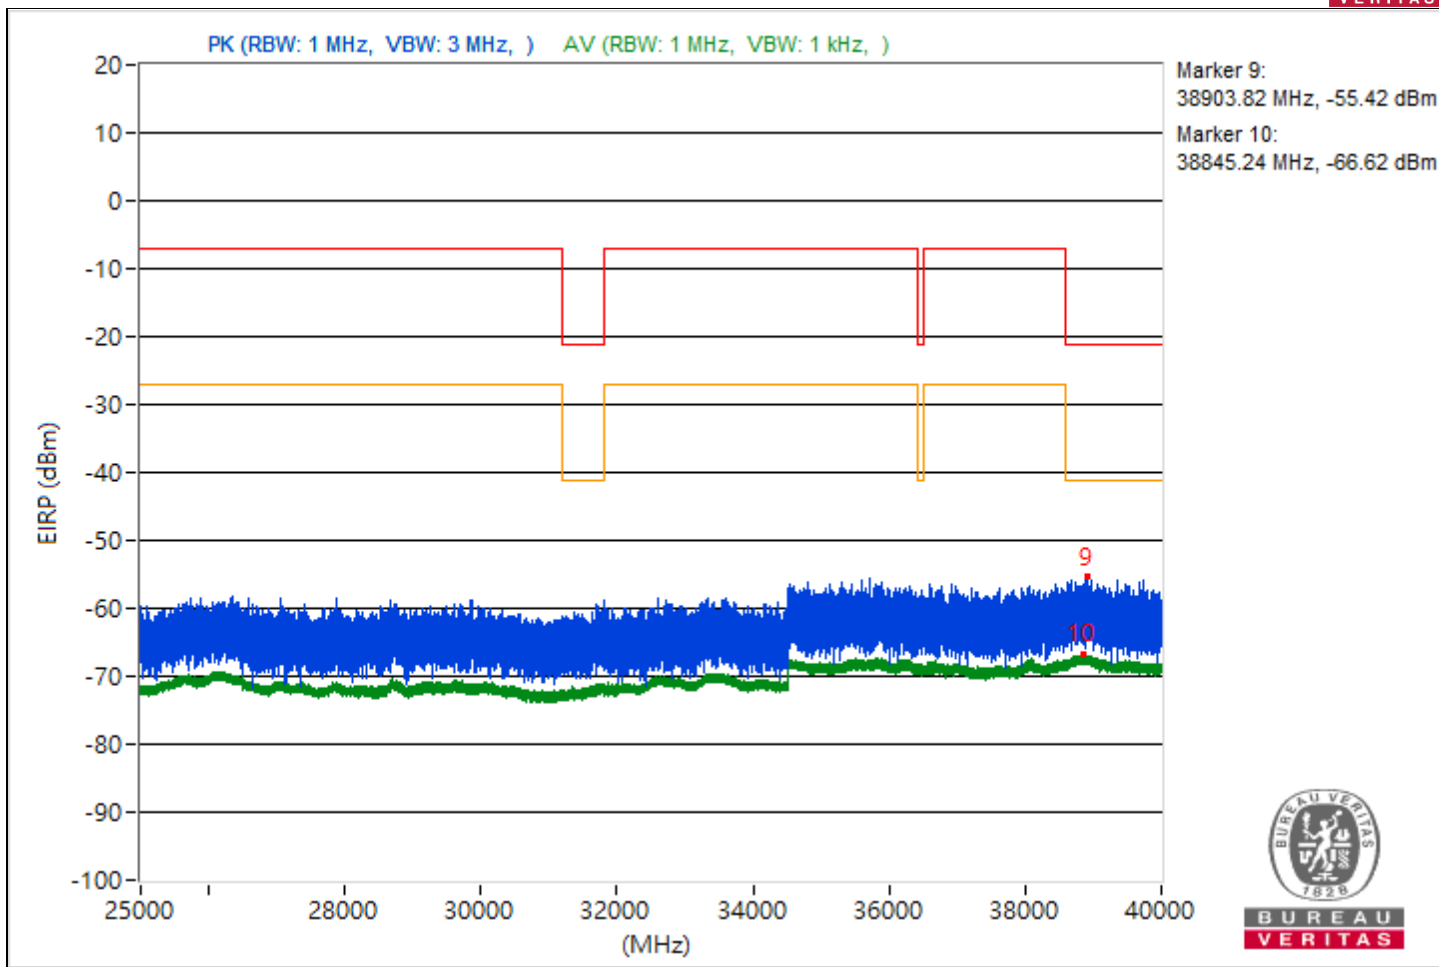


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5082.71	45.96 PK	74	-28.04	-54.22	4.92	-49.3
2	3788.88	32.89 AV	54	-21.11	-67.29	4.92	-62.37
3	11497.51	44.29 PK	74	-29.71	-55.89	4.92	-50.97
4	14492	31.89 AV	54	-22.11	-68.29	4.92	-63.37
5	19347.7	46.49 PK	74	-27.51	-53.69	4.92	-48.77
6	21192.4	33.85 AV	54	-20.15	-66.33	4.92	-61.41
7	22500.7	47.54 PK	74	-26.46	-52.64	4.92	-47.72
8	23891.7	35.2 AV	54	-18.8	-64.98	4.92	-60.06
9	38793.07	39.67 PK	74	-34.33	-60.51	4.92	-55.59
10	38850.76	28.72 AV	54	-25.28	-71.46	4.92	-66.54

Note: Margin value = Emission Level - Limit value

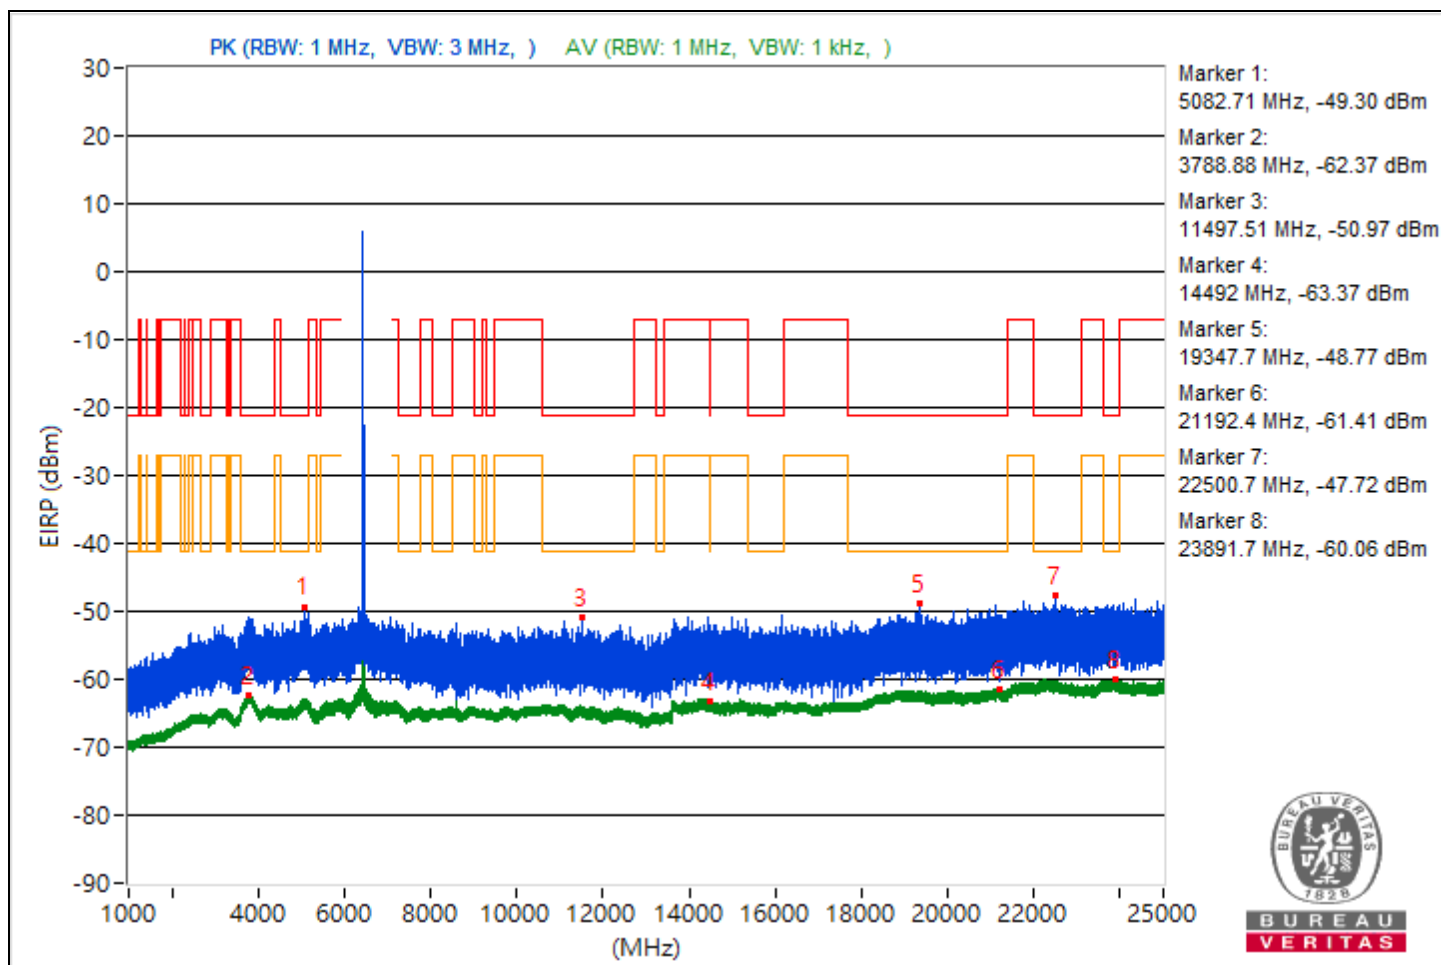


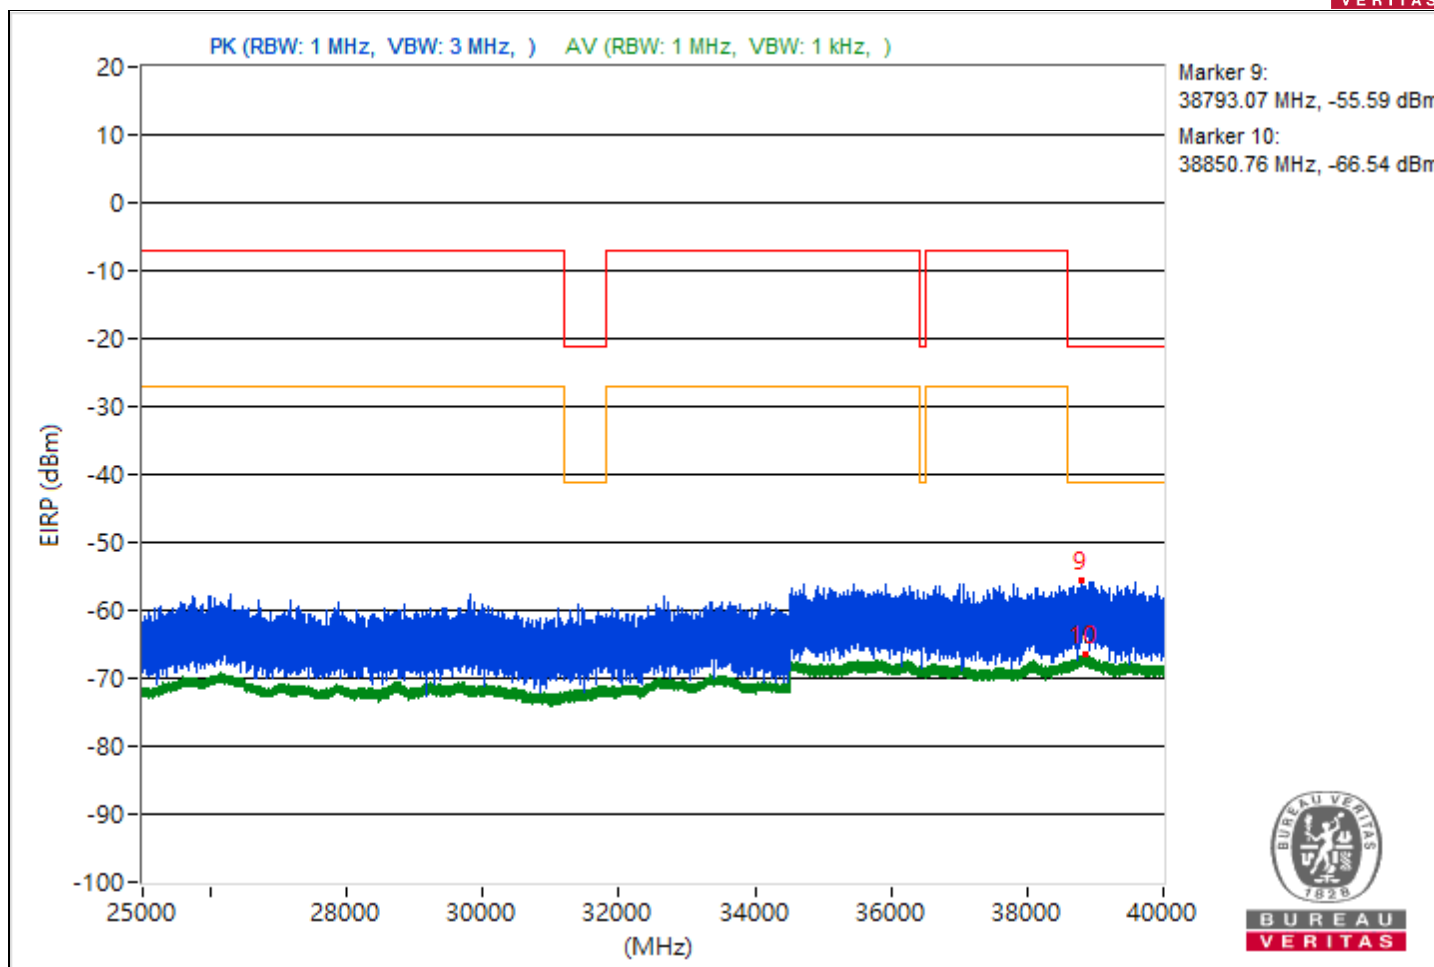


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3760.57	44.11 PK	74	-29.89	-56.07	4.92	-51.15
2	3803.97	33 AV	54	-21	-67.18	4.92	-62.26
3	10634.84	44.14 PK	74	-29.86	-56.04	4.92	-51.12
4	14480.09	32.01 AV	54	-21.99	-68.17	4.92	-63.25
5	18727.1	46.04 PK	74	-27.96	-54.14	4.92	-49.22
6	21399.6	33.87 AV	54	-20.13	-66.31	4.92	-61.39
7	22161.9	46.62 PK	74	-27.38	-53.56	4.92	-48.64
8	23823.5	35.16 AV	54	-18.84	-65.02	4.92	-60.1
9	38812.98	40.97 PK	74	-33.03	-59.21	4.92	-54.29
10	38847.64	28.73 AV	54	-25.27	-71.45	4.92	-66.53

Note: Margin value = Emission Level - Limit value

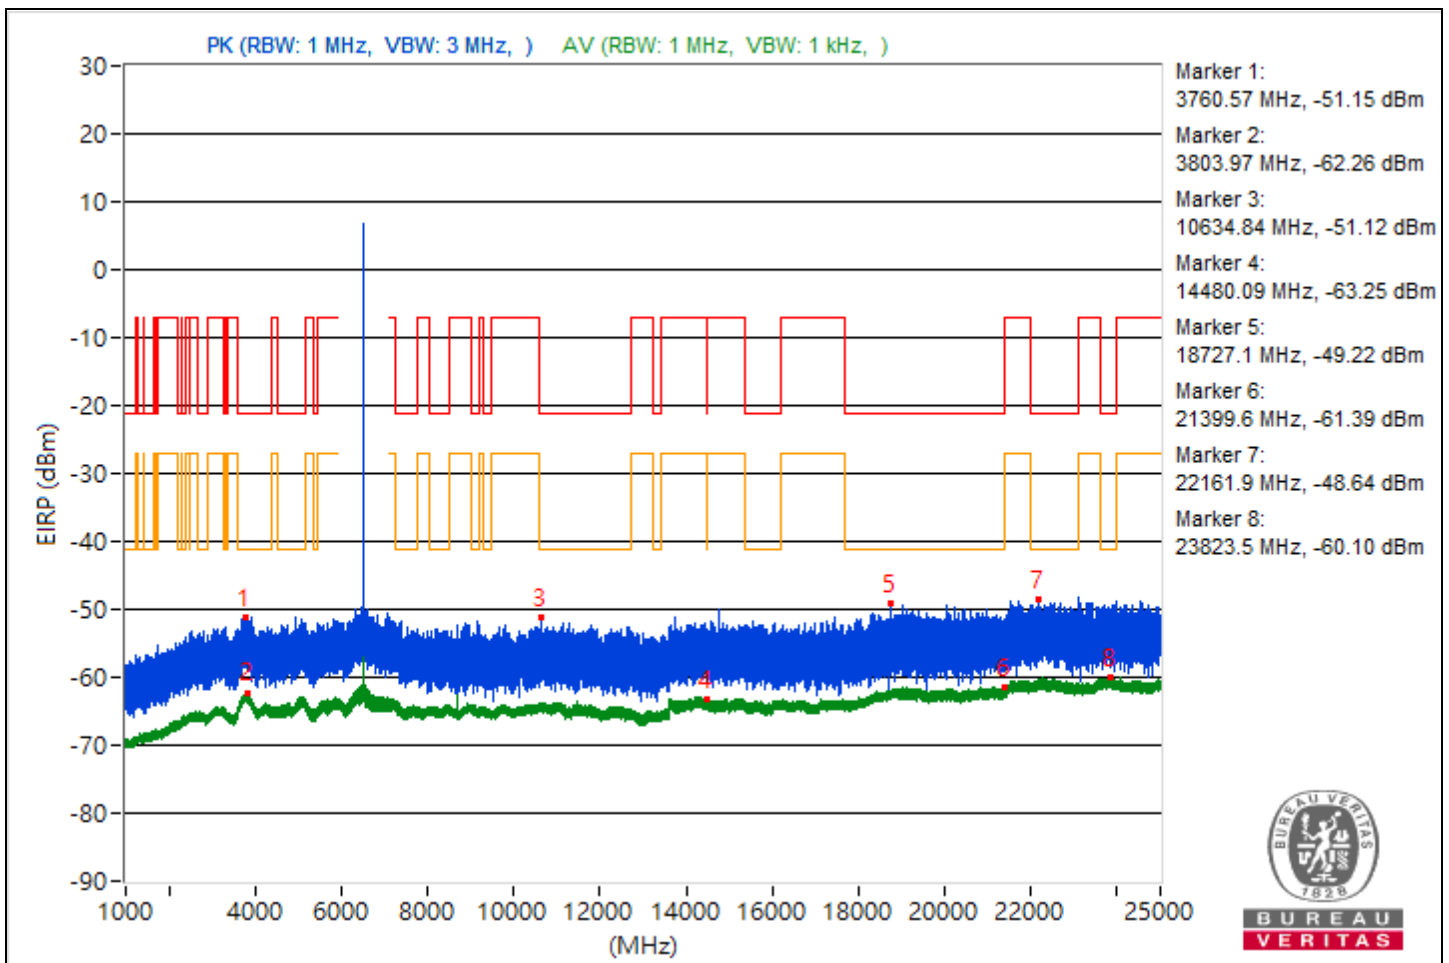


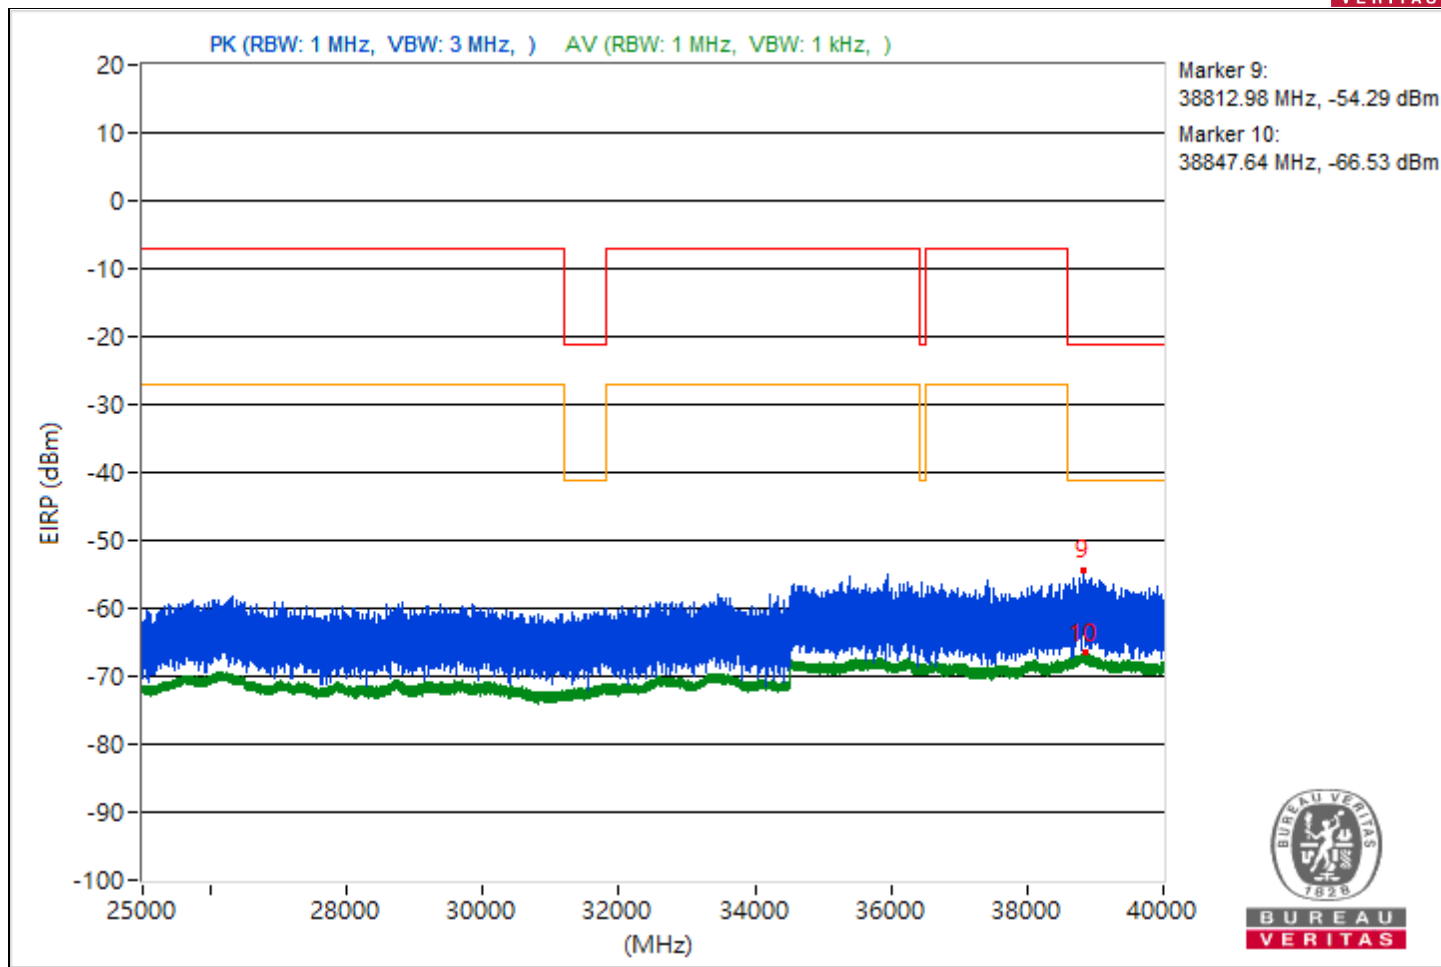


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.74	45.55 PK	74	-28.45	-54.63	4.92	-49.71
2	3808.56	32.94 AV	54	-21.06	-67.24	4.92	-62.32
3	15752.71	44.67 PK	74	-29.33	-55.51	4.92	-50.59
4	7253.33	31.94 AV	54	-22.06	-68.24	4.92	-63.32
5	18829.8	45.32 PK	74	-28.68	-54.86	4.92	-49.94
6	21131.4	33.87 AV	54	-20.13	-66.31	4.92	-61.39
7	22415.1	46.44 PK	74	-27.56	-53.74	4.92	-48.82
8	23794.8	35.2 AV	54	-18.8	-64.98	4.92	-60.06
9	38866.76	40.21 PK	74	-33.79	-59.97	4.92	-55.05
10	38824.27	28.53 AV	54	-25.47	-71.65	4.92	-66.73

Note: Margin value = Emission Level - Limit value

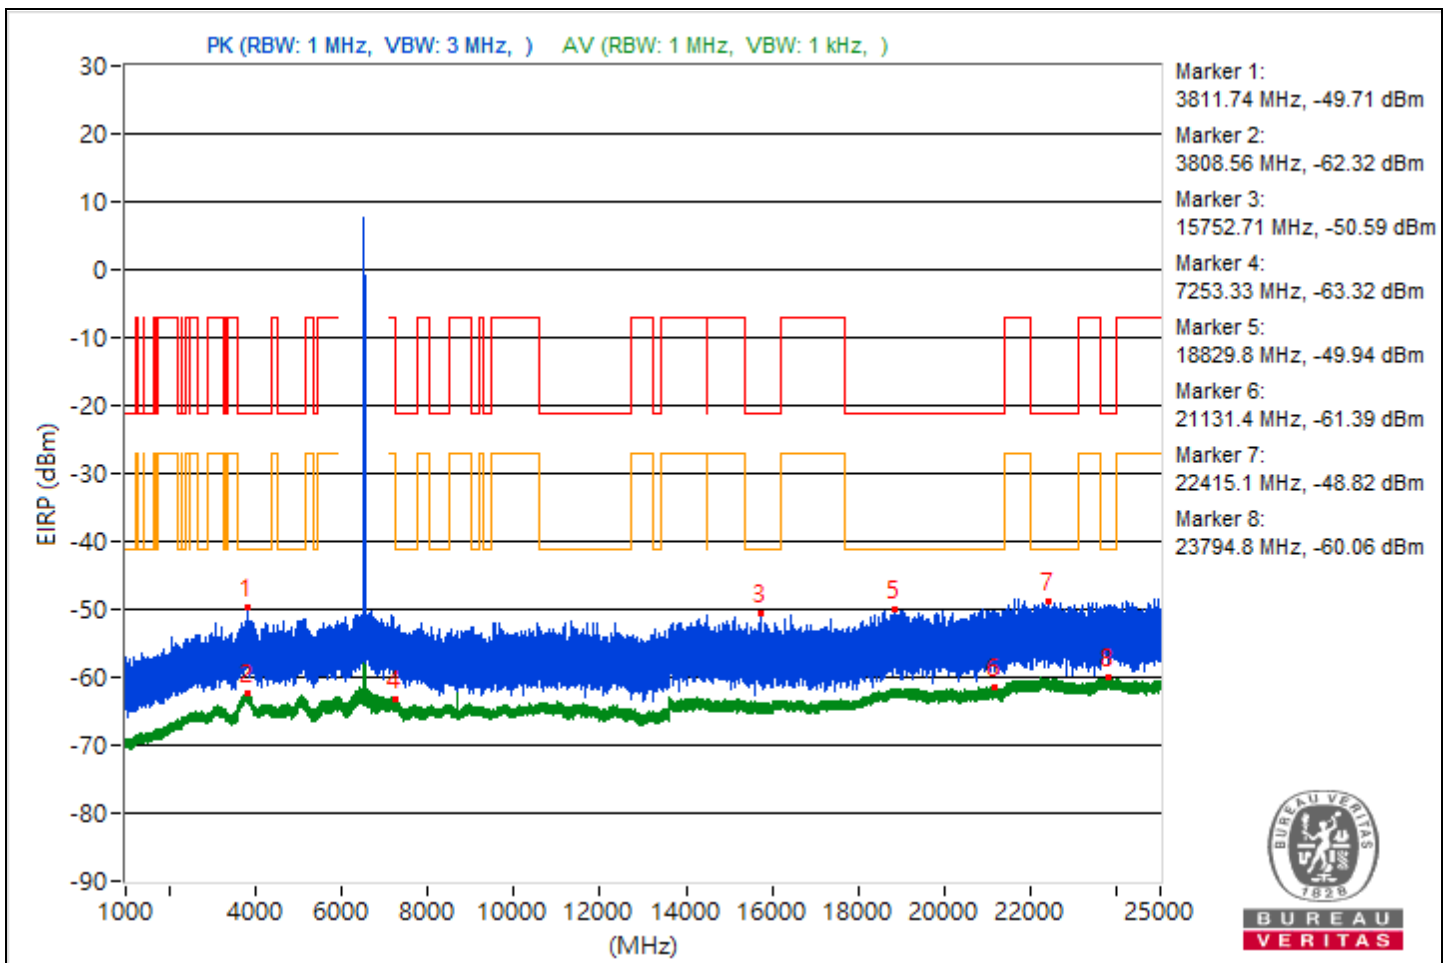


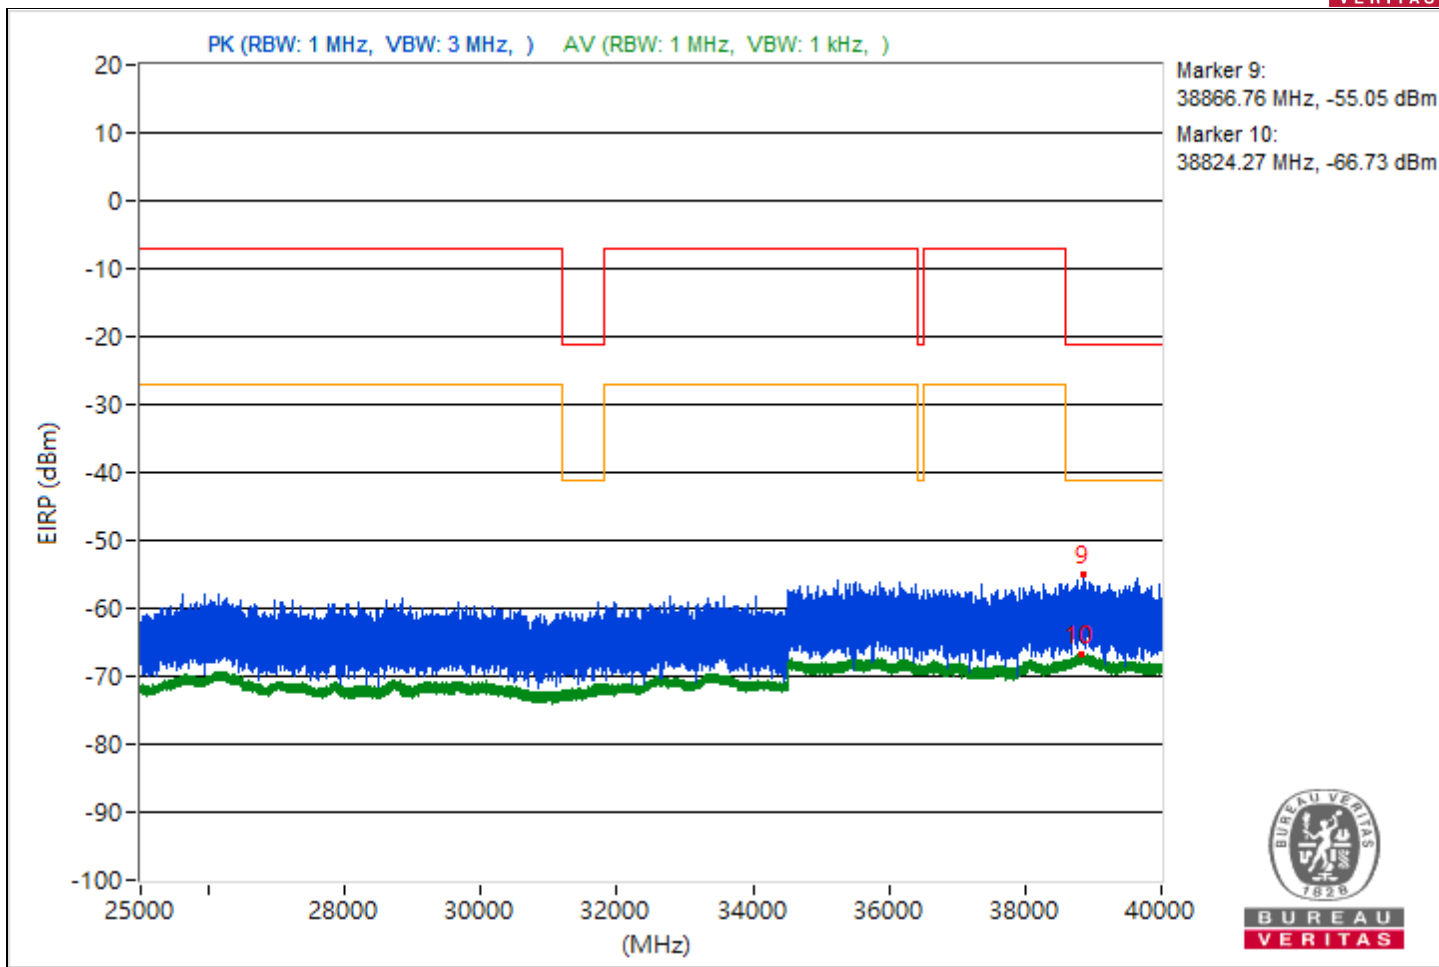


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.39	44.46 PK	74	-29.54	-55.72	4.92	-50.8
2	3764.84	32.89 AV	54	-21.11	-67.29	4.92	-62.37
3	11891.38	43.52 PK	74	-30.48	-56.66	4.92	-51.74
4	7263.44	32.65 AV	54	-21.35	-67.53	4.92	-62.61
5	19441.5	45.74 PK	74	-28.26	-54.44	4.92	-49.52
6	21148.8	33.89 AV	54	-20.11	-66.29	4.92	-61.37
7	23655.7	48.06 PK	74	-25.94	-52.12	4.92	-47.2
8	22369.7	35.34 AV	54	-18.66	-64.84	4.92	-59.92
9	38868.89	39.34 PK	74	-34.66	-60.84	4.92	-55.92
10	38841.78	28.49 AV	54	-25.51	-71.69	4.92	-66.77

Note: Margin value = Emission Level - Limit value

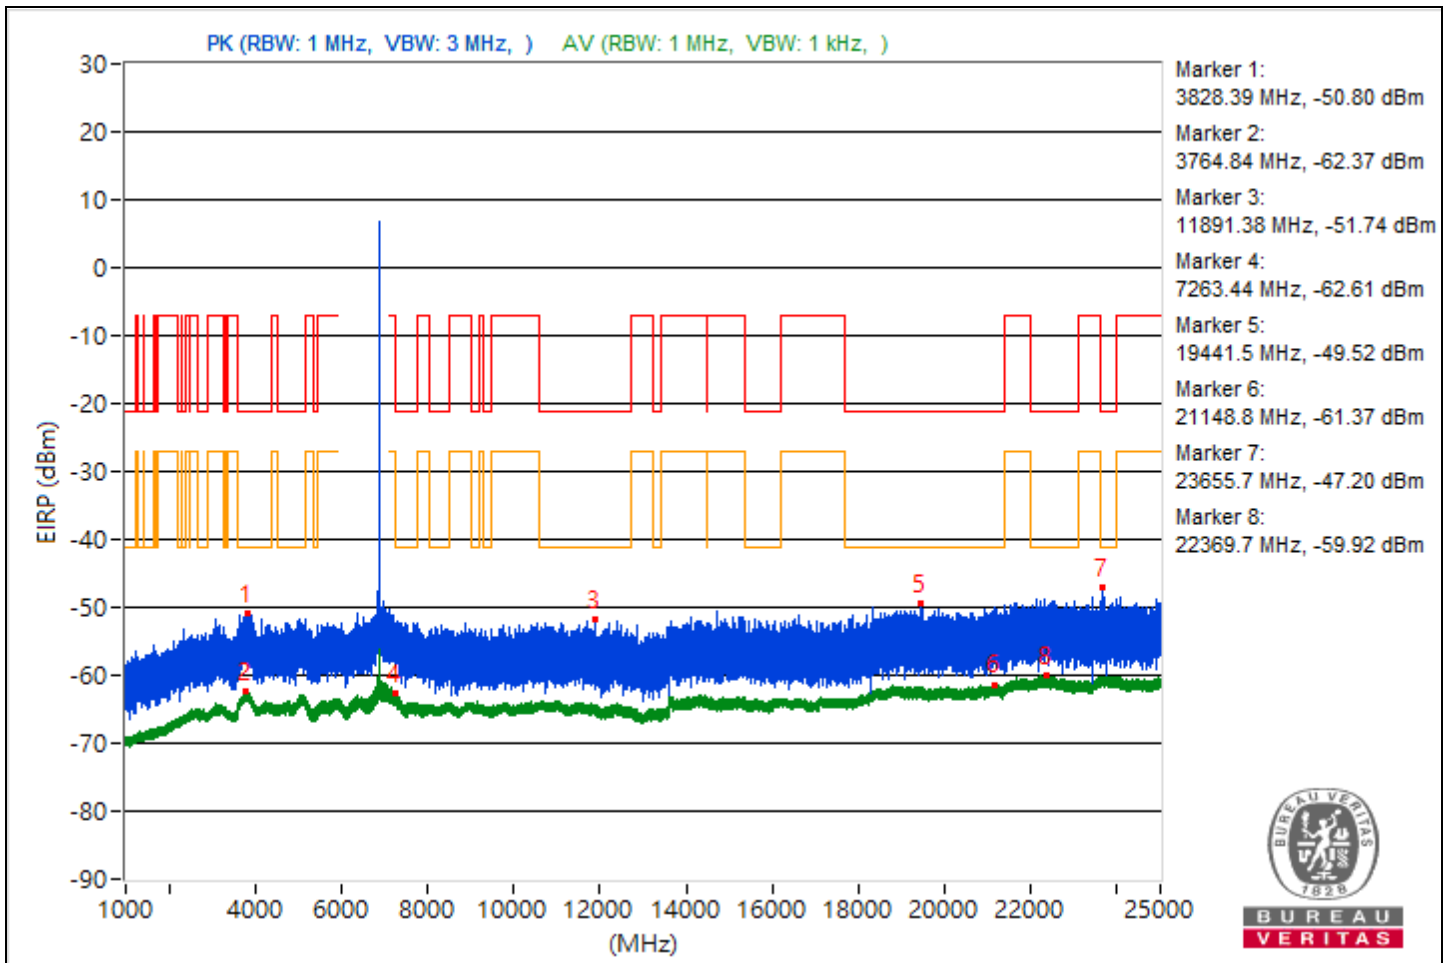


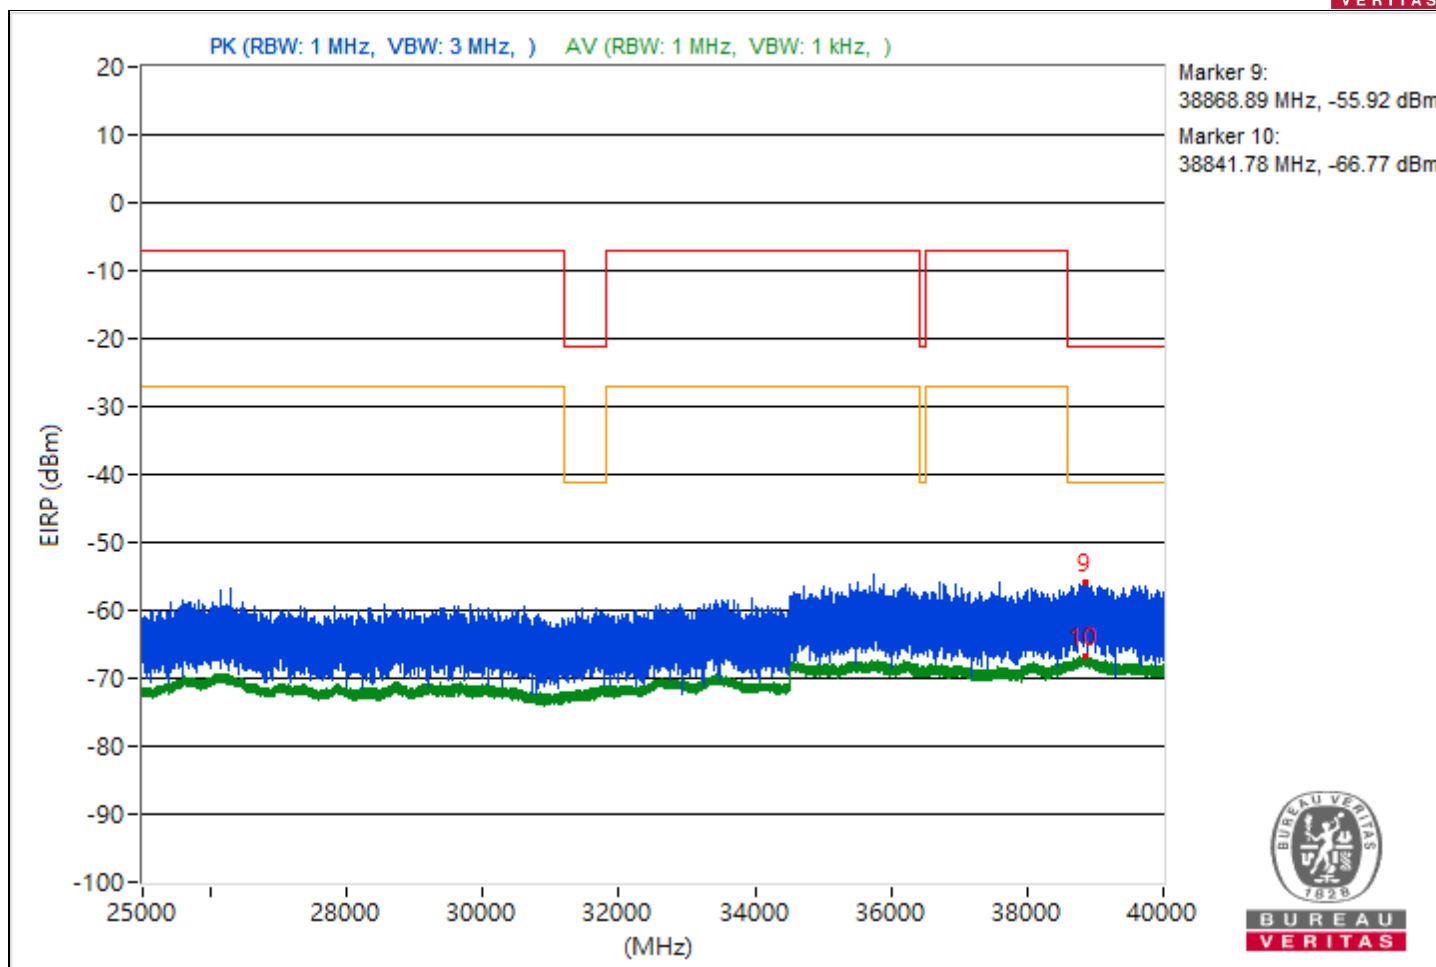


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.94	44.37 PK	74	-29.63	-55.81	4.92	-50.89
2	3820.46	33.08 AV	54	-20.92	-67.1	4.92	-62.18
3	7260.8	45.13 PK	74	-28.87	-55.05	4.92	-50.13
4	7272.23	33.69 AV	54	-20.31	-66.49	4.92	-61.57
5	19335.5	45.95 PK	74	-28.05	-54.23	4.92	-49.31
6	21139.5	34.01 AV	54	-19.99	-66.17	4.92	-61.25
7	23088.1	46.63 PK	74	-27.37	-53.55	4.92	-48.63
8	22297	35.15 AV	54	-18.85	-65.03	4.92	-60.11
9	39609.16	41.35 PK	74	-32.65	-58.83	4.92	-53.91
10	38864.44	28.48 AV	54	-25.52	-71.7	4.92	-66.78

Note: Margin value = Emission Level - Limit value

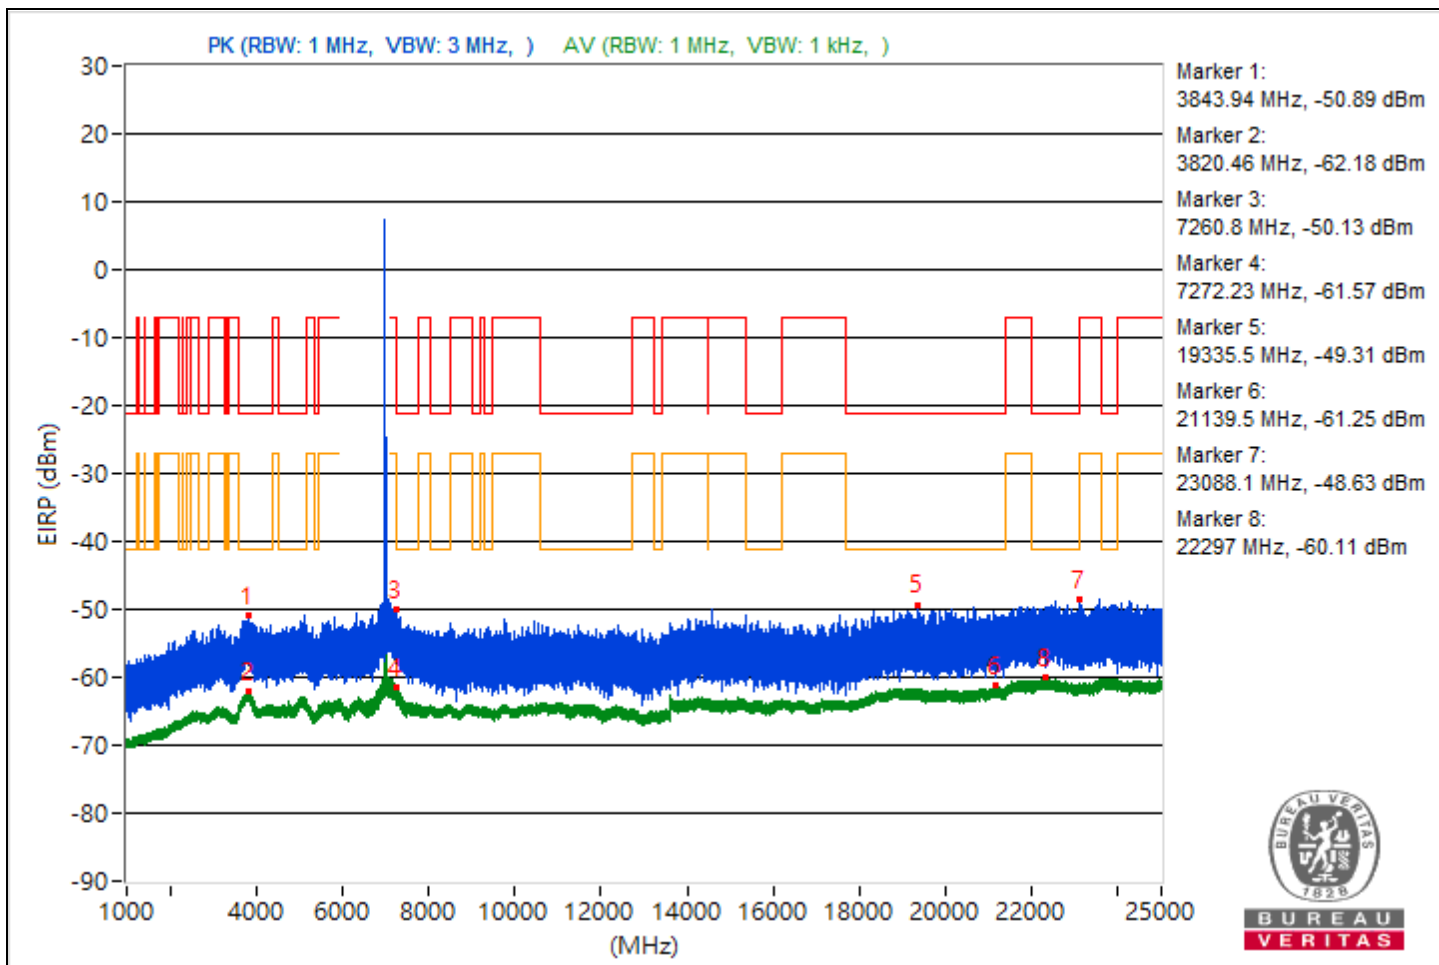


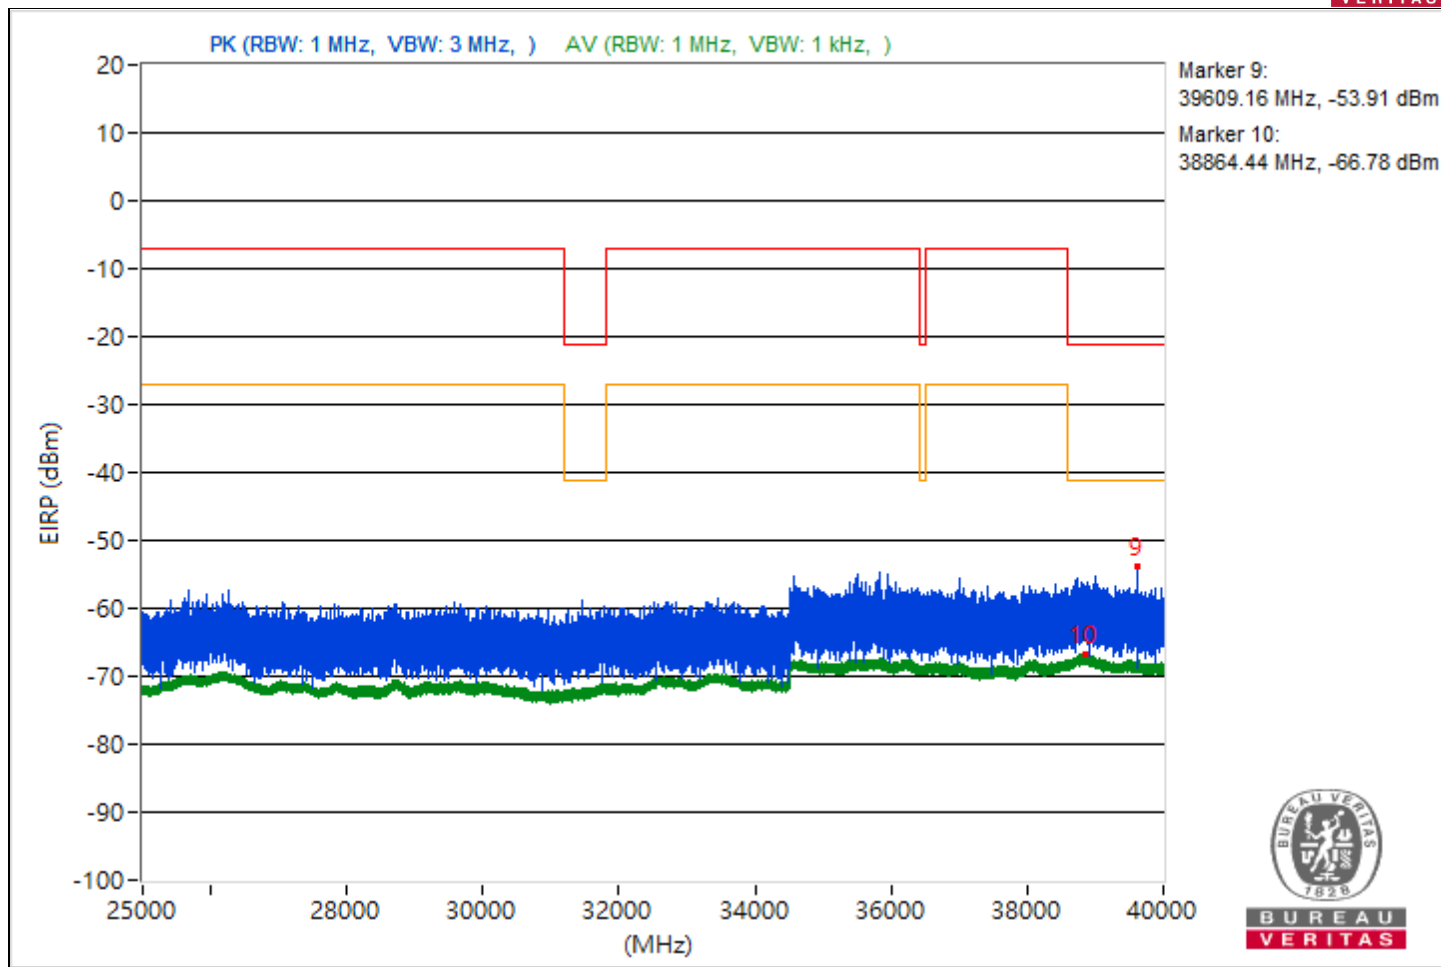


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3836.09	44.96 PK	74	-29.04	-55.22	4.92	-50.3
2	3798.76	33.06 AV	54	-20.94	-67.12	4.92	-62.2
3	7258.7	46.77 PK	74	-27.23	-53.41	4.92	-48.49
4	7281.26	34.34 AV	54	-19.66	-65.84	4.92	-60.92
5	19403.4	46.5 PK	74	-27.5	-53.68	4.92	-48.76
6	21101.9	33.87 AV	54	-20.13	-66.31	4.92	-61.39
7	22374.8	47.42 PK	74	-26.58	-52.76	4.92	-47.84
8	22356.6	35.2 AV	54	-18.8	-64.98	4.92	-60.06
9	39465.69	39.51 PK	74	-34.49	-60.67	4.92	-55.75
10	38816.62	28.6 AV	54	-25.4	-71.58	4.92	-66.66

Note: Margin value = Emission Level - Limit value

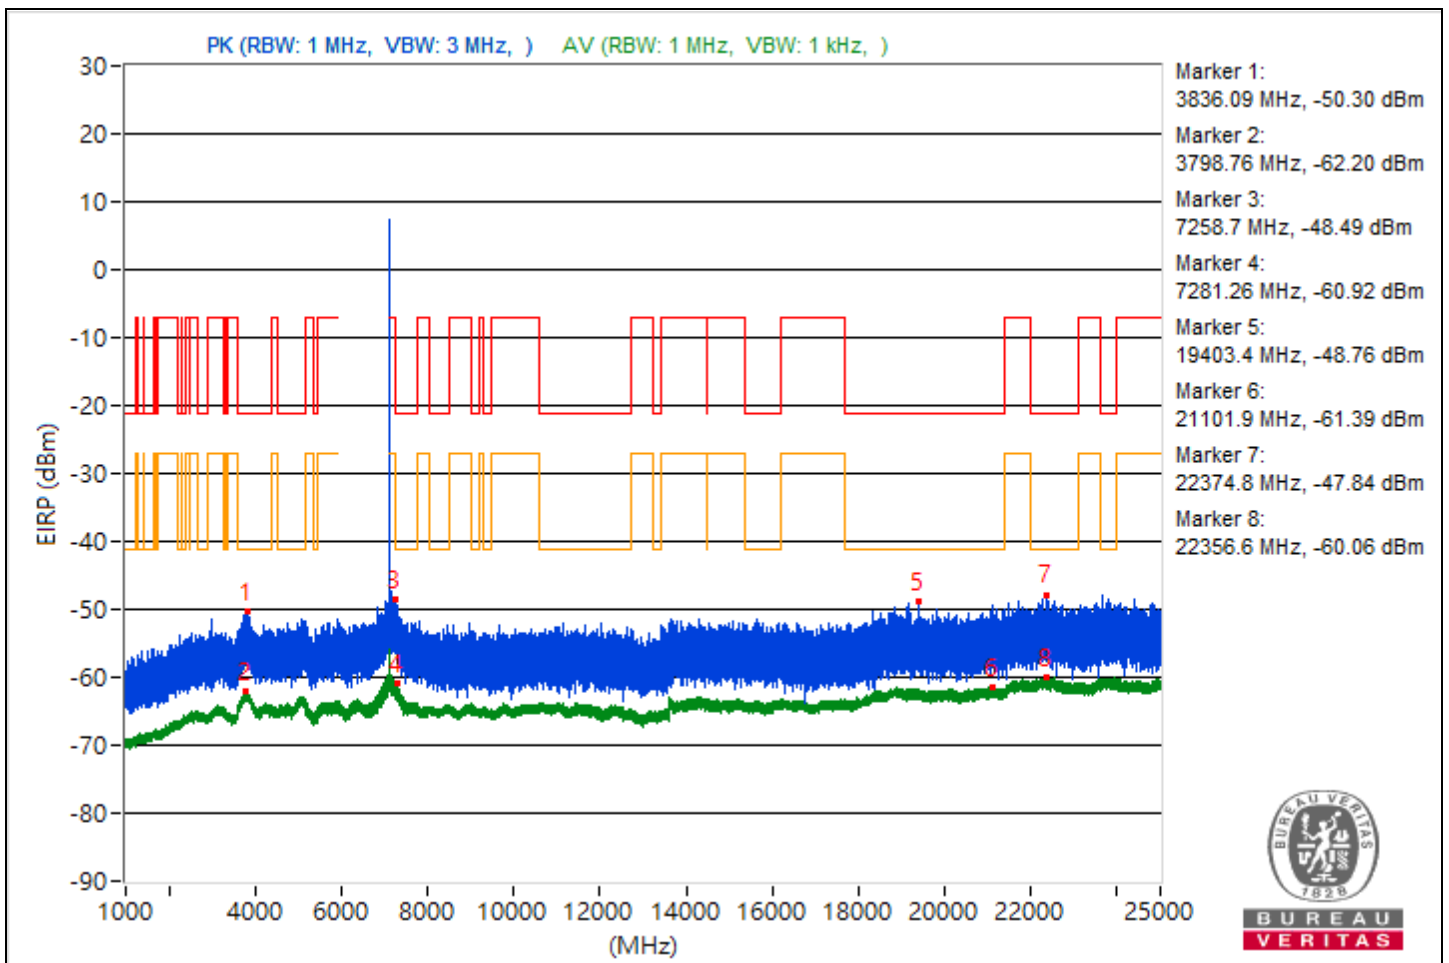


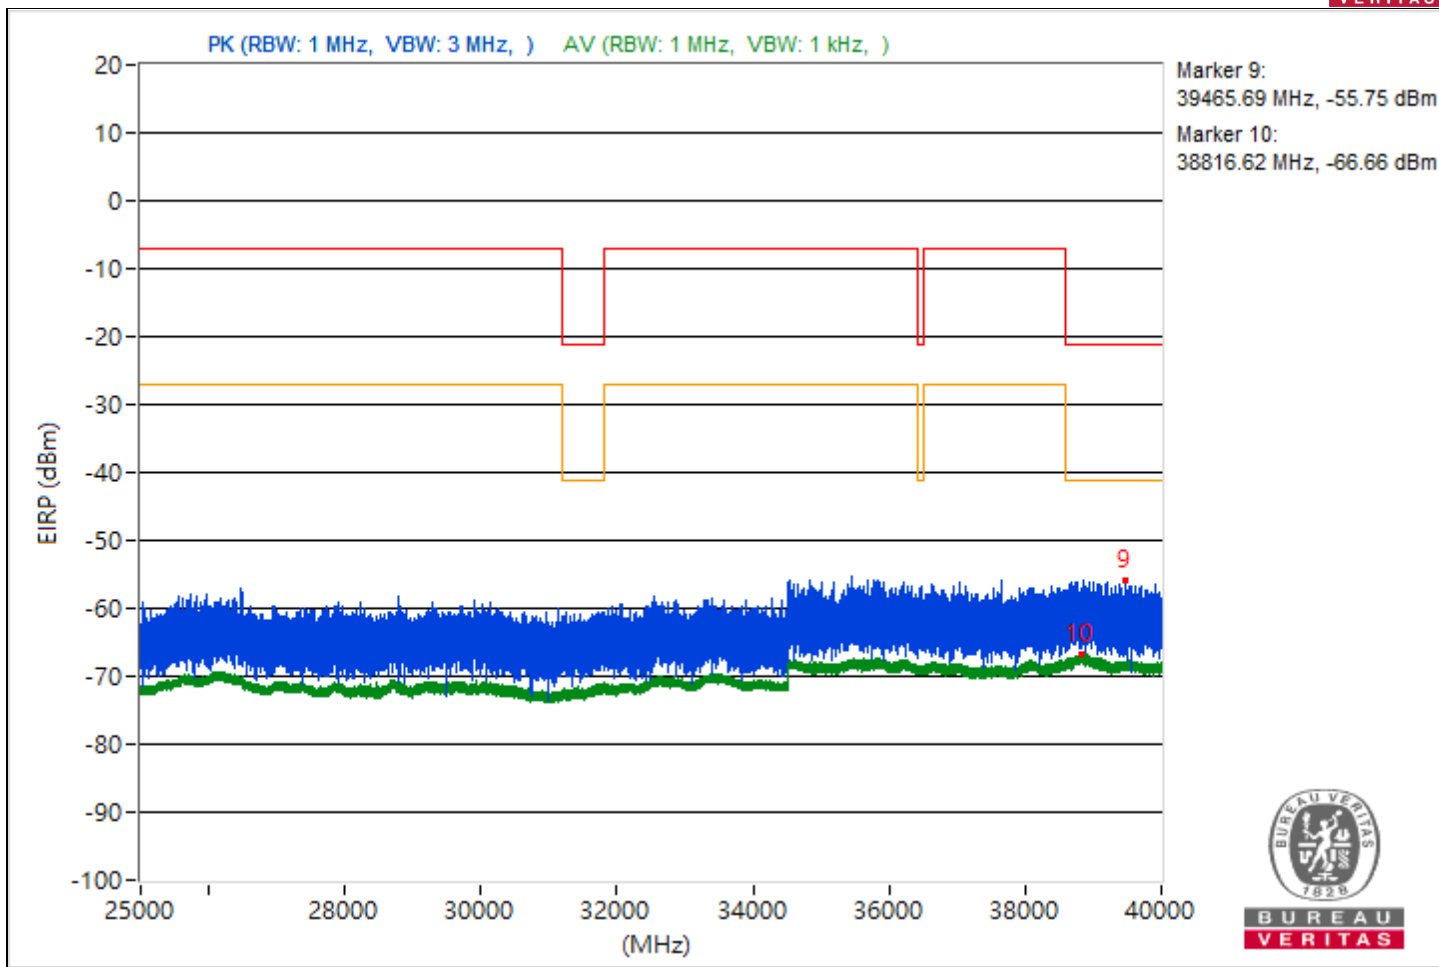


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	4973.98	44.27 PK	74	-29.73	-55.91	4.92	-50.99
2	3839.59	33.09 AV	54	-20.91	-67.09	4.92	-62.17
3	15455.64	44.4 PK	74	-29.6	-55.78	4.92	-50.86
4	14487.91	32.32 AV	54	-21.68	-67.86	4.92	-62.94
5	21356.8	45.98 PK	74	-28.02	-54.2	4.92	-49.28
6	21167	33.94 AV	54	-20.06	-66.24	4.92	-61.32
7	23808.2	46.83 PK	74	-27.17	-53.35	4.92	-48.43
8	22221	35.11 AV	54	-18.89	-65.07	4.92	-60.15
9	38856.09	39.81 PK	74	-34.19	-60.37	4.92	-55.45
10	38835.64	28.7 AV	54	-25.3	-71.48	4.92	-66.56

Note: Margin value = Emission Level - Limit value

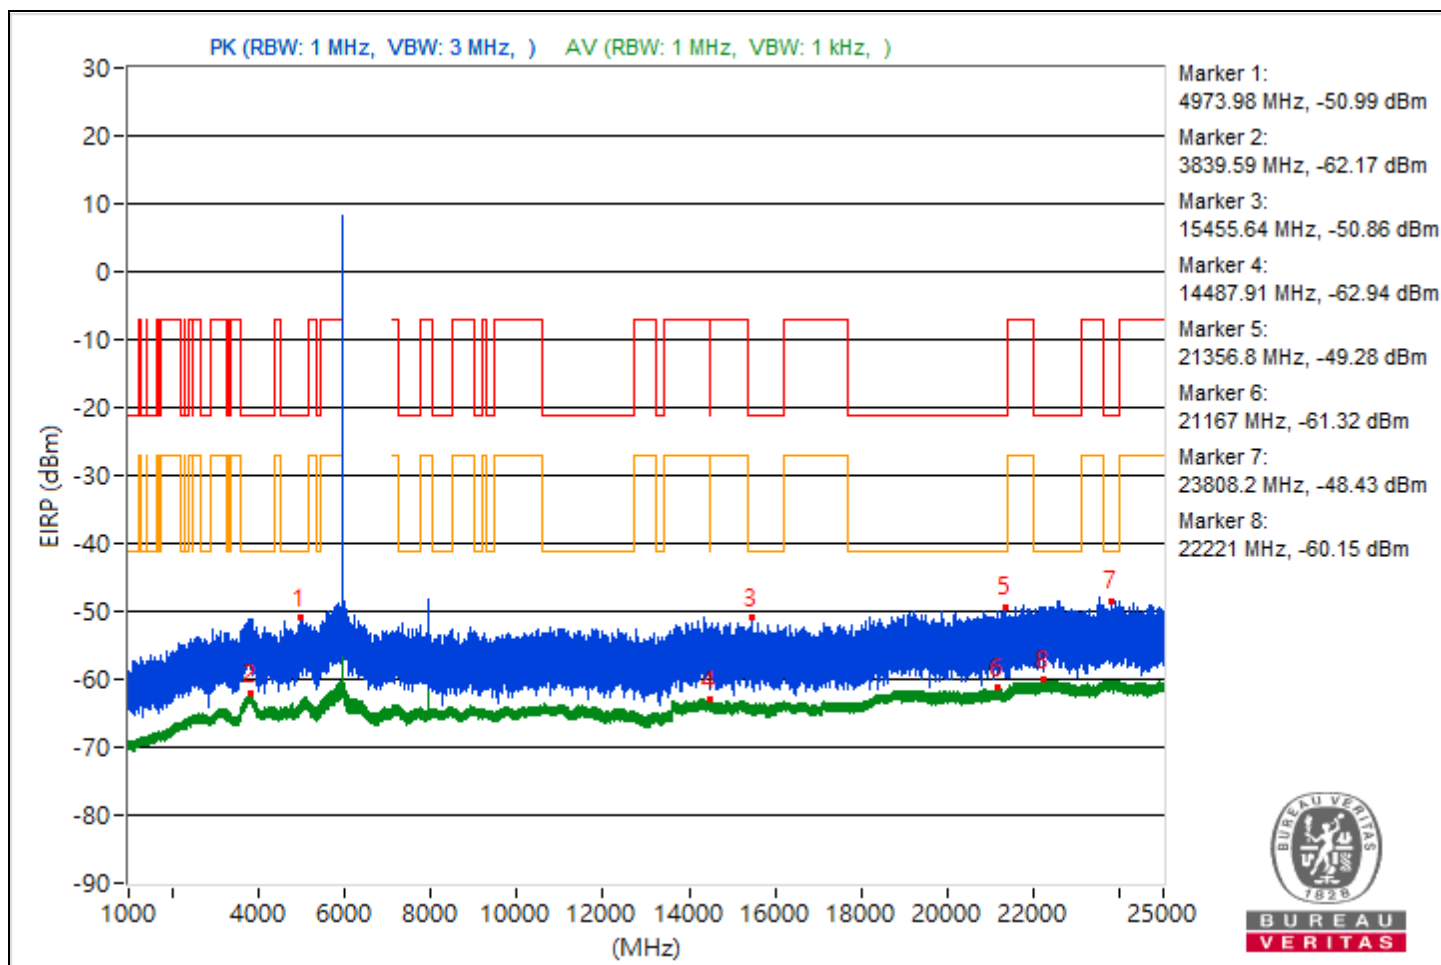


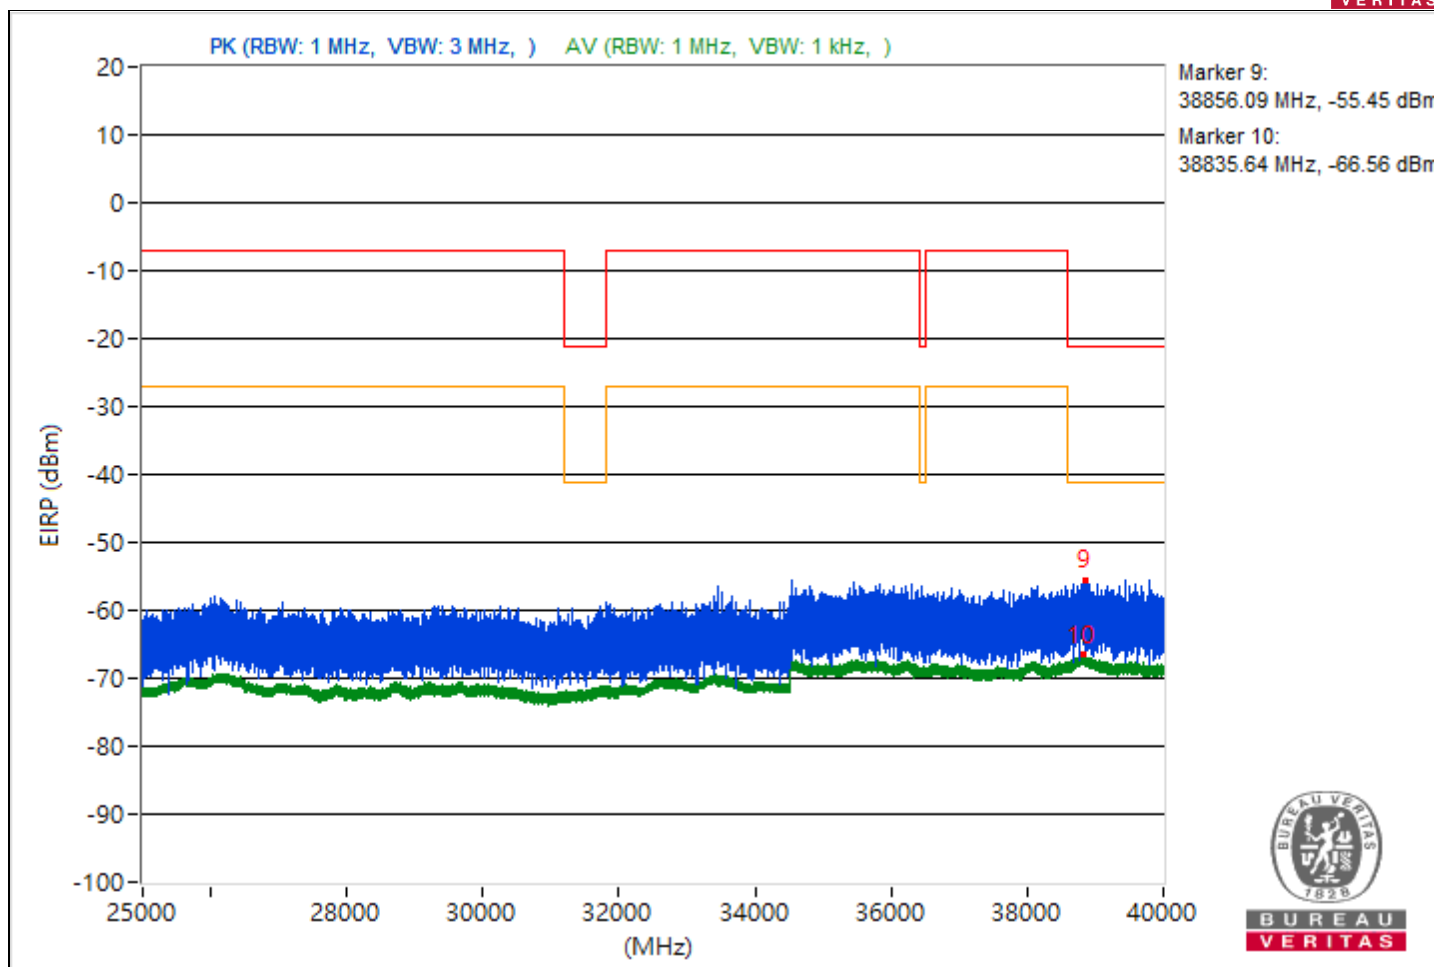


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	5051.76	44.18 PK	74	-29.82	-56	4.92	-51.08
2	3832.28	32.86 AV	54	-21.14	-67.32	4.92	-62.4
3	11158.84	44.41 PK	74	-29.59	-55.77	4.92	-50.85
4	14489.78	31.83 AV	54	-22.17	-68.35	4.92	-63.43
5	20818.5	45.76 PK	74	-28.24	-54.42	4.92	-49.5
6	21081.2	33.89 AV	54	-20.11	-66.29	4.92	-61.37
7	23831.9	46.6 PK	74	-27.4	-53.58	4.92	-48.66
8	22237.4	35.14 AV	54	-18.86	-65.04	4.92	-60.12
9	38814.93	40.41 PK	74	-33.59	-59.77	4.92	-54.85
10	38869.78	28.62 AV	54	-25.38	-71.56	4.92	-66.64

Note: Margin value = Emission Level - Limit value

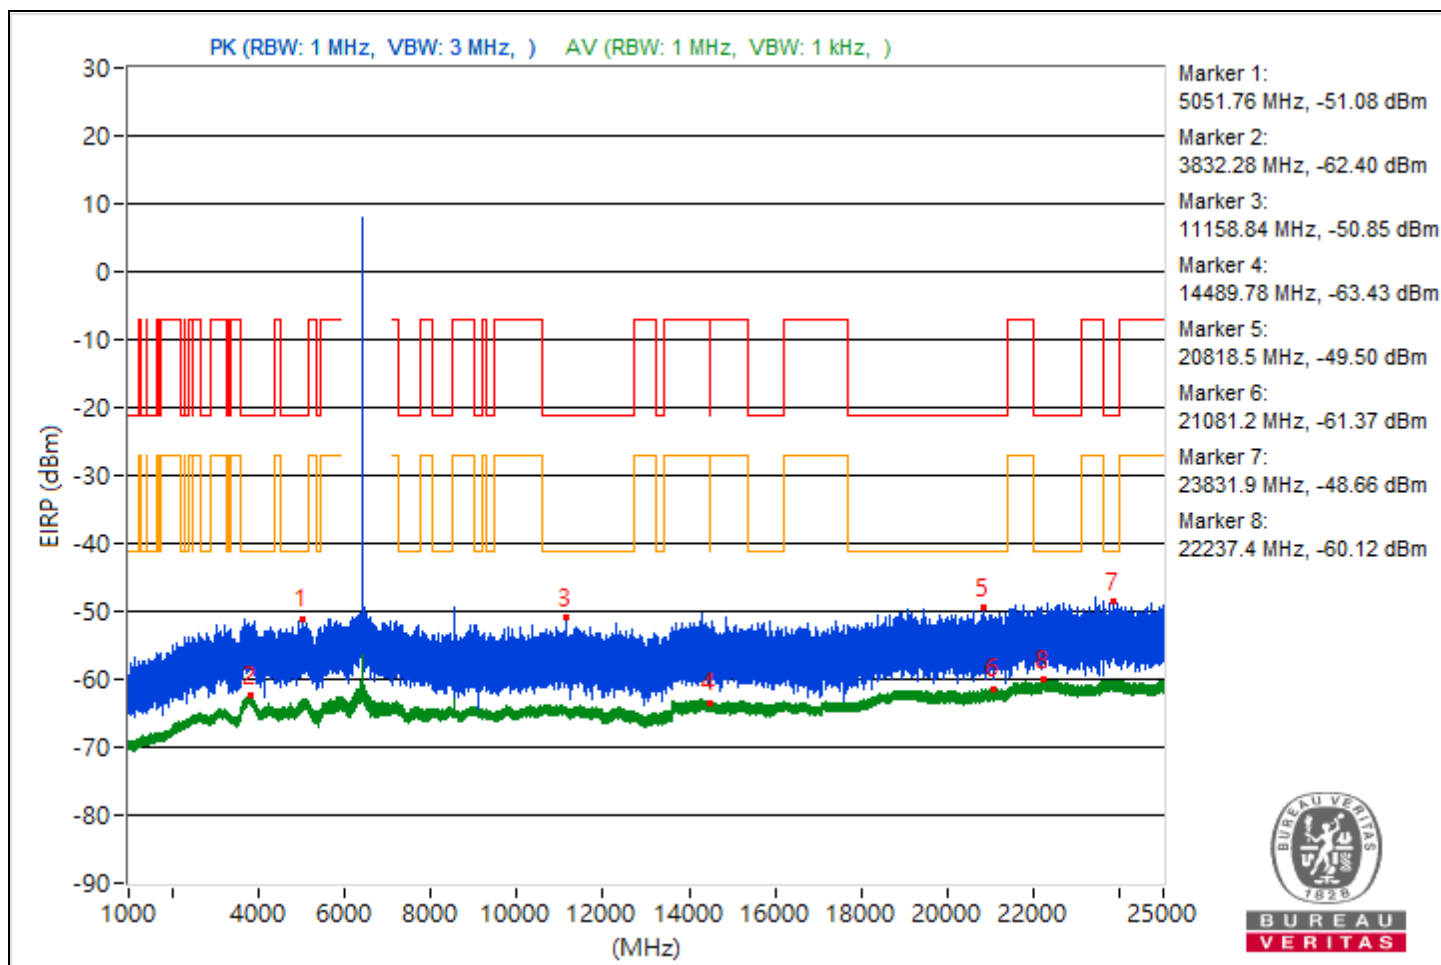


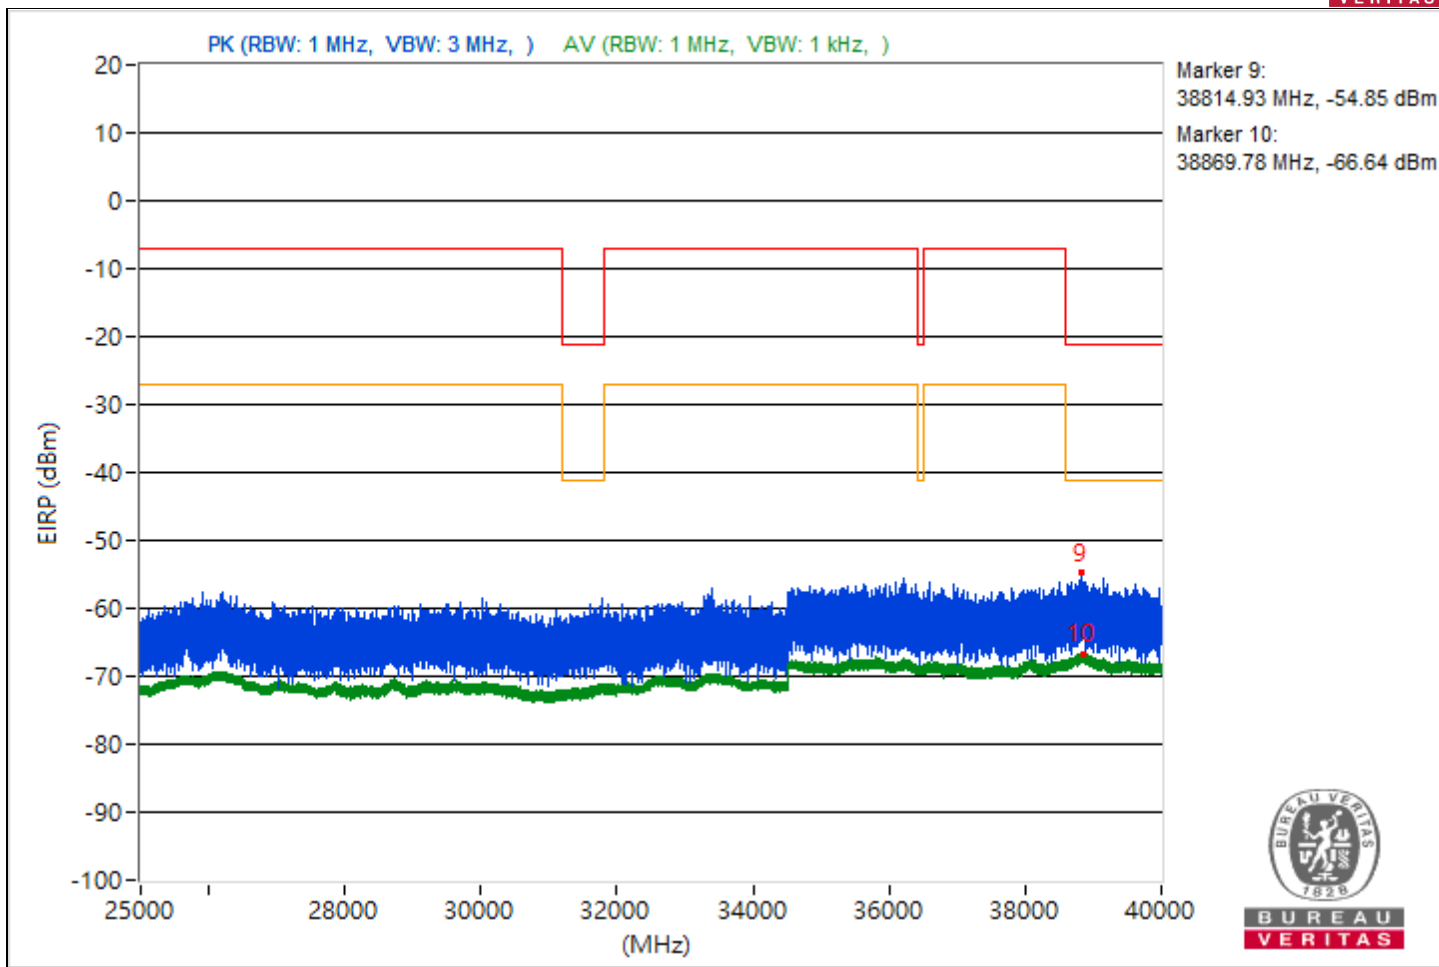


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.81	44.26 PK	74	-29.74	-55.92	4.92	-51
2	3822.24	32.87 AV	54	-21.13	-67.31	4.92	-62.39
3	14490.4	43.8 PK	74	-30.2	-56.38	4.92	-51.46
4	14475.47	31.82 AV	54	-22.18	-68.36	4.92	-63.44
5	18965.7	45.76 PK	74	-28.24	-54.42	4.92	-49.5
6	21170.5	33.77 AV	54	-20.23	-66.41	4.92	-61.49
7	23725.3	46.92 PK	74	-27.08	-53.26	4.92	-48.34
8	23940.6	35.19 AV	54	-18.81	-64.99	4.92	-60.07
9	38620.18	40.51 PK	74	-33.49	-59.67	4.92	-54.75
10	38851.82	28.62 AV	54	-25.38	-71.56	4.92	-66.64

Note: Margin value = Emission Level - Limit value

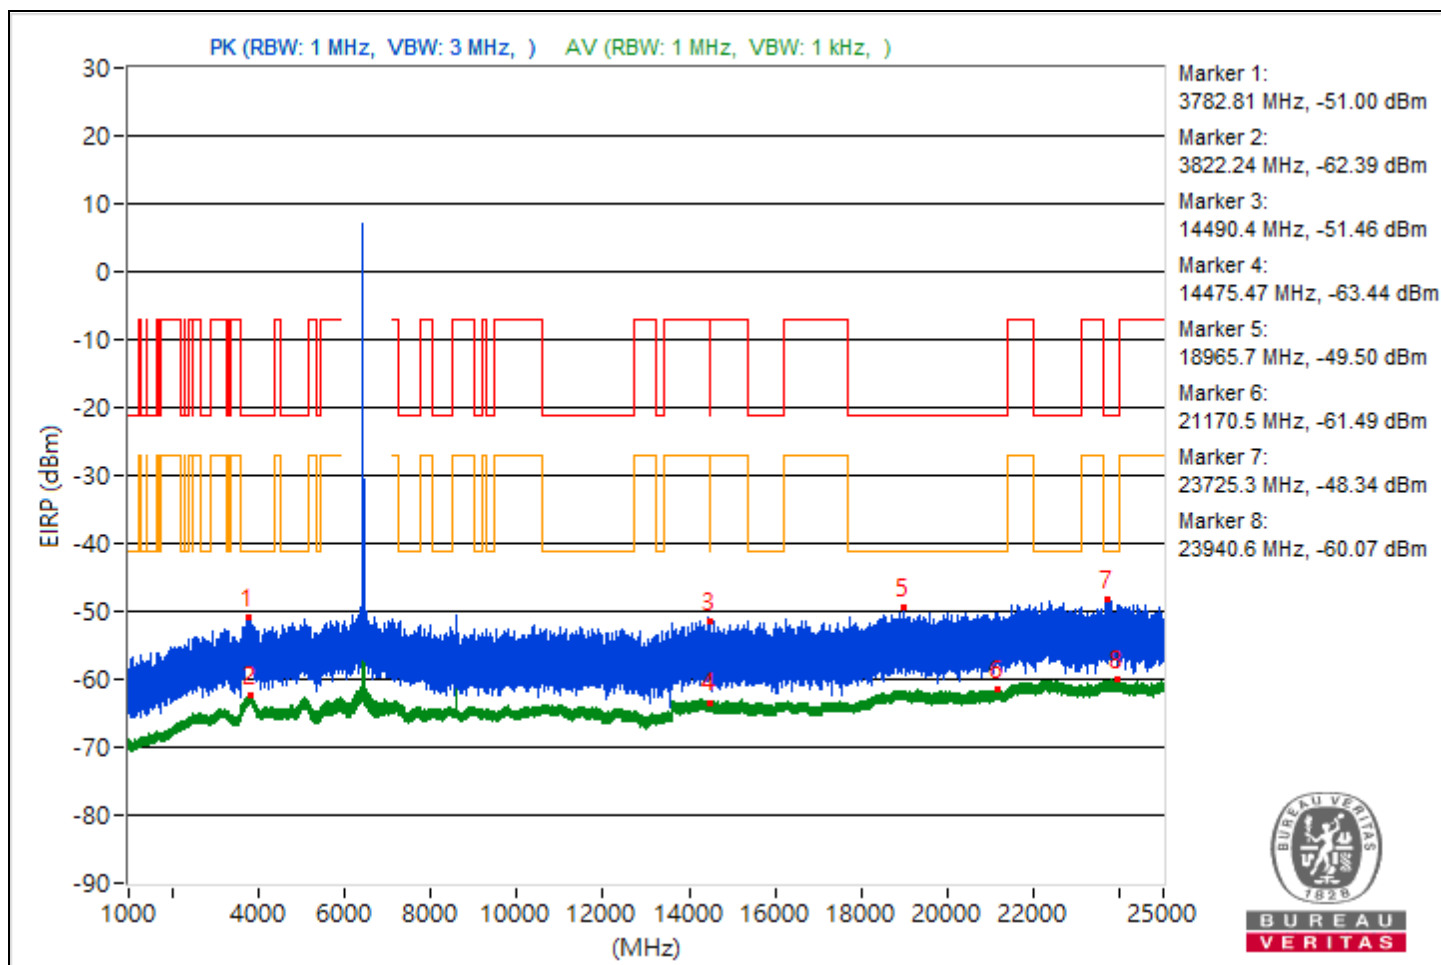


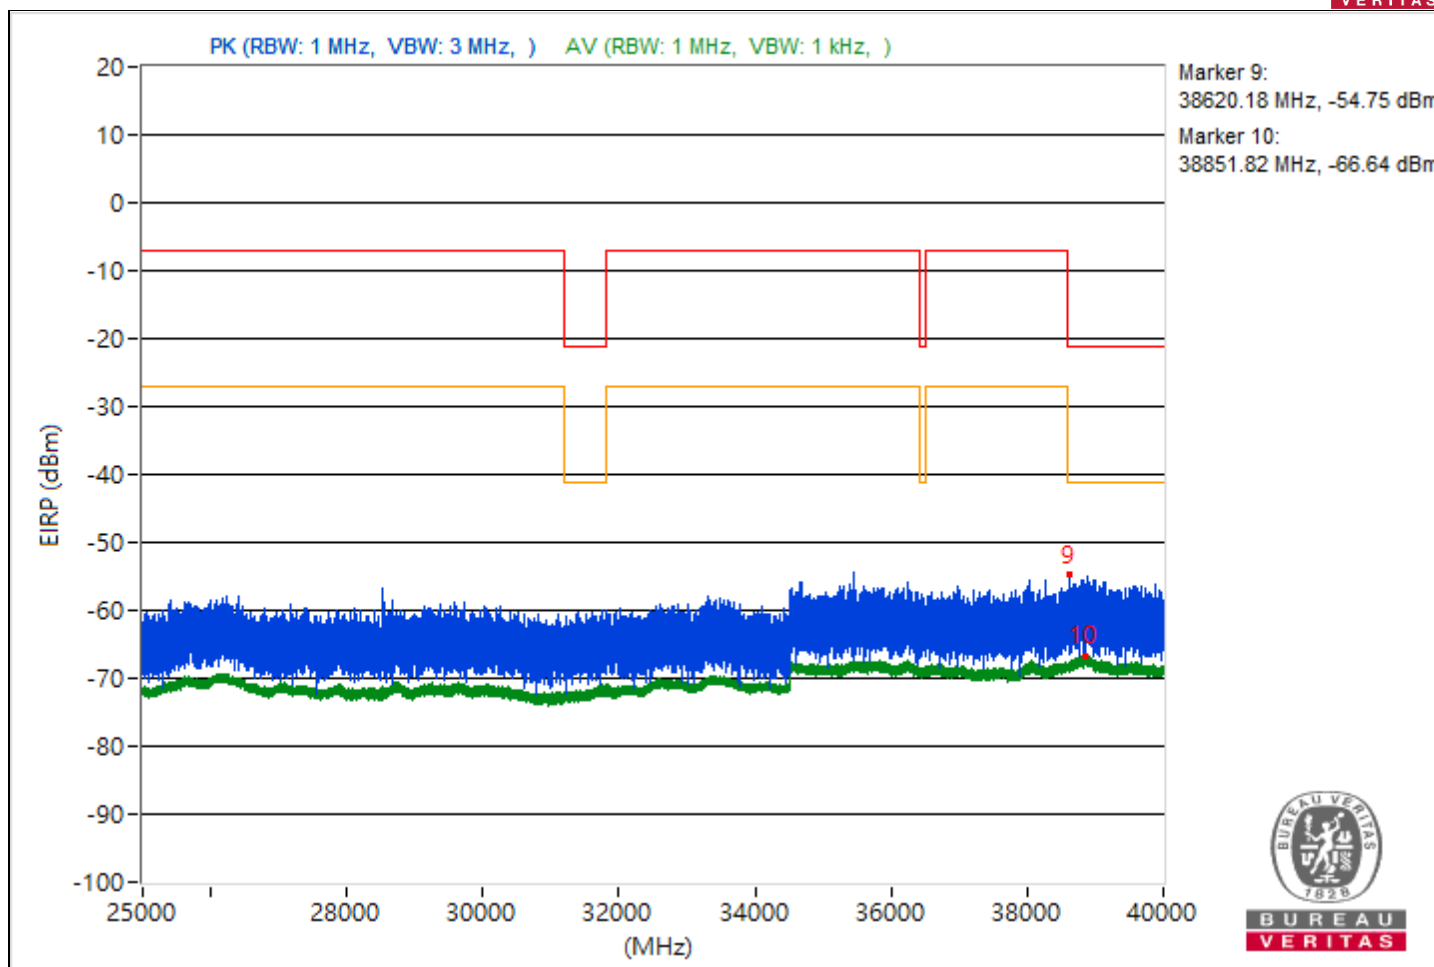


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3750.22	44.9 PK	74	-29.1	-55.28	4.92	-50.36
2	3817.5	32.91 AV	54	-21.09	-67.27	4.92	-62.35
3	9377.42	43.65 PK	74	-30.35	-56.53	4.92	-51.61
4	14496.71	31.91 AV	54	-22.09	-68.27	4.92	-63.35
5	18416.1	46.42 PK	74	-27.58	-53.76	4.92	-48.84
6	21138.1	33.81 AV	54	-20.19	-66.37	4.92	-61.45
7	23675.2	47.1 PK	74	-26.9	-53.08	4.92	-48.16
8	23683.6	35.14 AV	54	-18.86	-65.04	4.92	-60.12
9	39642.31	39.93 PK	74	-34.07	-60.25	4.92	-55.33
10	38800.44	28.66 AV	54	-25.34	-71.52	4.92	-66.6

Note: Margin value = Emission Level - Limit value

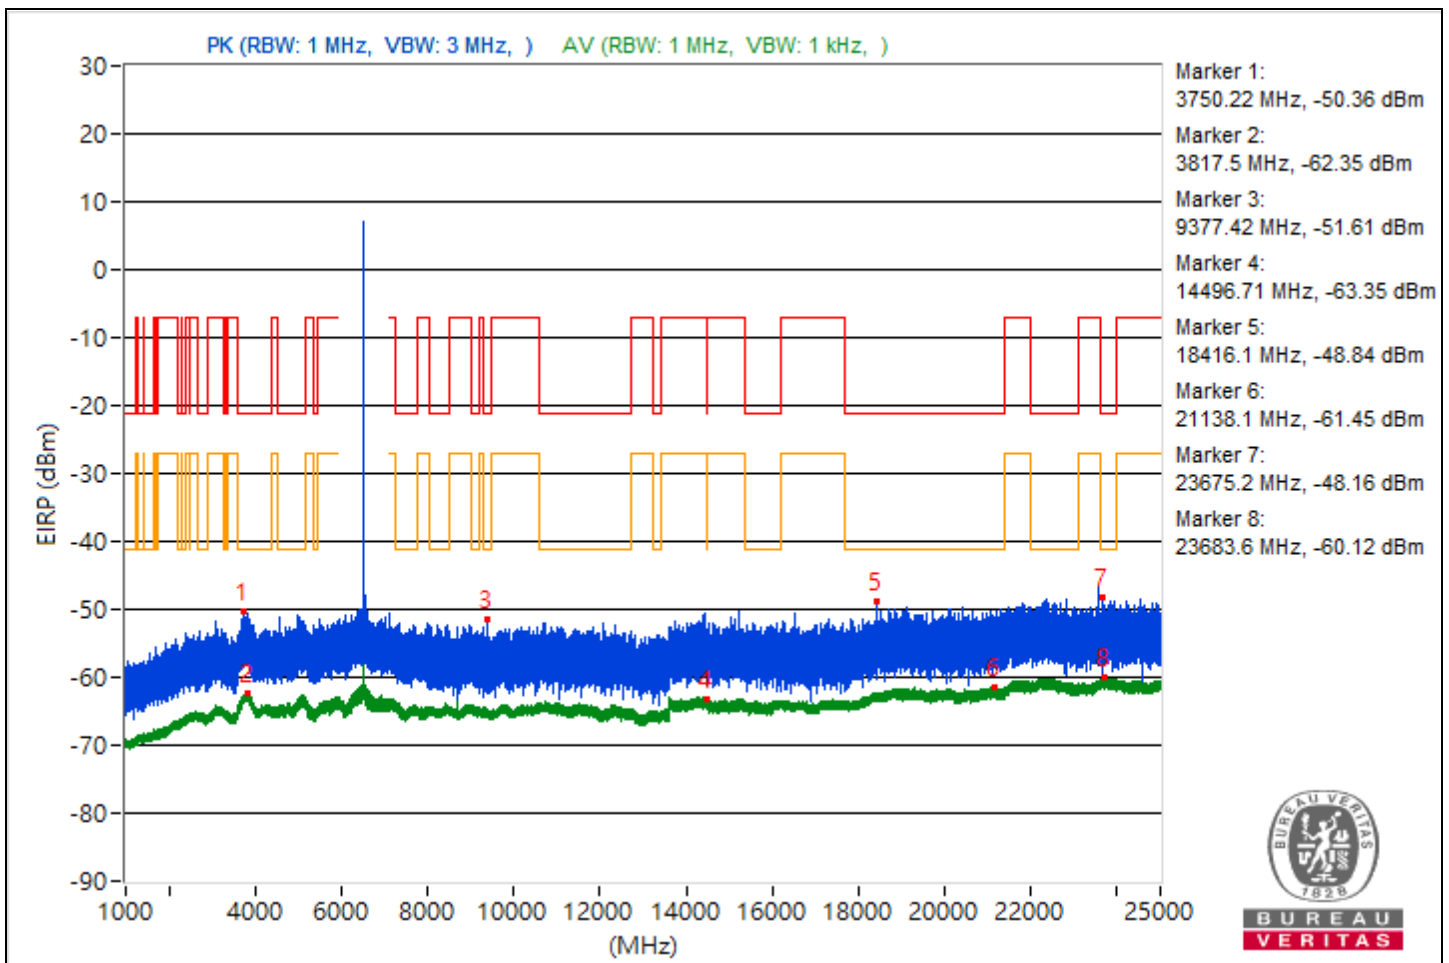

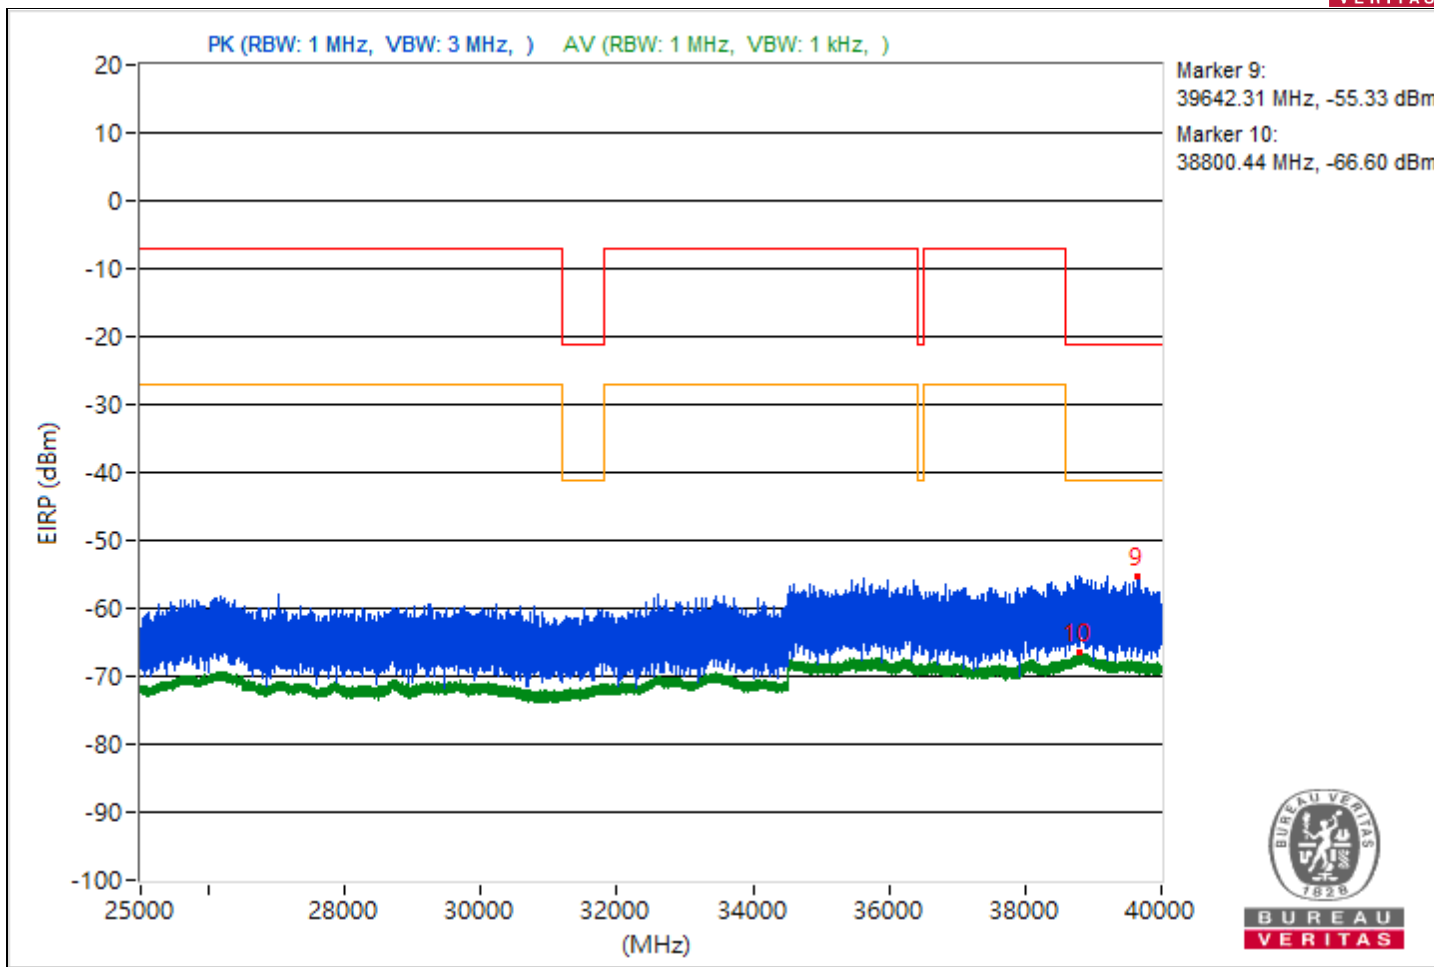

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Environmental Conditions	25°C, 60% RH
Tested By	John Peng		

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3839.12	44.4 PK	74	-29.6	-55.78	4.92	-50.86
2	3774.41	32.94 AV	54	-21.06	-67.24	4.92	-62.32
3	10977.69	43.66 PK	74	-30.34	-56.52	4.92	-51.6
4	7284.06	31.86 AV	54	-22.14	-68.32	4.92	-63.4
5	19187.4	45.8 PK	74	-28.2	-54.38	4.92	-49.46
6	21071.1	33.83 AV	54	-20.17	-66.35	4.92	-61.43
7	22392.8	47.4 PK	74	-26.6	-52.78	4.92	-47.86
8	22296.7	35.31 AV	54	-18.69	-64.87	4.92	-59.95
9	39081.69	39.84 PK	74	-34.16	-60.34	4.92	-55.42
10	38869.24	28.53 AV	54	-25.47	-71.65	4.92	-66.73

Note: Margin value = Emission Level - Limit value

