










Maximum Conducted Output Power




Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	7.16	2.14	9.3	24	Pass
NVNT	a	5200	Ant1	6.19	2.14	8.33	24	Pass
NVNT	a	5240	Ant1	5.28	2.14	7.42	24	Pass
NVNT	a	5260	Ant1	5.61	2.14	7.75	24	Pass
NVNT	a	5300	Ant1	5.09	2.14	7.23	24	Pass
NVNT	a	5320	Ant1	4.85	2.14	6.99	24	Pass
NVNT	a	5500	Ant1	3.77	2.14	5.91	24	Pass
NVNT	a	5580	Ant1	4.19	2.14	6.33	24	Pass
NVNT	a	5700	Ant1	4.4	2.14	6.54	24	Pass
NVNT	a	5745	Ant1	4.72	2.14	6.86	30	Pass
NVNT	a	5785	Ant1	4.33	2.14	6.47	30	Pass
NVNT	a	5825	Ant1	3.96	2.14	6.1	30	Pass
NVNT	n20	5180	Ant1	7.45	2.14	9.59	24	Pass
NVNT	n20	5200	Ant1	6.52	2.14	8.66	24	Pass
NVNT	n20	5240	Ant1	5.85	2.14	7.99	24	Pass
NVNT	n20	5260	Ant1	5.72	2.14	7.86	24	Pass
NVNT	n20	5300	Ant1	5.2	2.14	7.34	24	Pass
NVNT	n20	5320	Ant1	4.7	2.14	6.84	24	Pass
NVNT	n20	5500	Ant1	3	2.14	5.14	24	Pass
NVNT	n20	5580	Ant1	3.77	2.14	5.91	24	Pass
NVNT	n20	5700	Ant1	4.57	2.14	6.71	24	Pass
NVNT	n20	5745	Ant1	4.99	2.14	7.13	30	Pass
NVNT	n20	5785	Ant1	4.49	2.14	6.63	30	Pass
NVNT	n20	5825	Ant1	4.62	2.14	6.76	30	Pass
NVNT	n40	5190	Ant1	5.62	2.65	8.27	24	Pass
NVNT	n40	5230	Ant1	4.71	2.65	7.36	24	Pass
NVNT	n40	5270	Ant1	4.37	2.65	7.02	24	Pass
NVNT	n40	5310	Ant1	3.65	2.65	6.3	24	Pass
NVNT	n40	5510	Ant1	2.62	2.65	5.27	24	Pass
NVNT	n40	5550	Ant1	2.85	2.65	5.5	24	Pass
NVNT	n40	5670	Ant1	4.32	2.65	6.97	24	Pass
NVNT	n40	5755	Ant1	4.49	2.66	7.15	30	Pass
NVNT	n40	5795	Ant1	3.97	2.65	6.62	30	Pass
NVNT	ac20	5180	Ant1	6.49	1.83	8.32	24	Pass
NVNT	ac20	5200	Ant1	5.92	1.83	7.75	24	Pass
NVNT	ac20	5240	Ant1	5.3	1.83	7.13	24	Pass
NVNT	ac20	5260	Ant1	5.38	1.83	7.21	24	Pass
NVNT	ac20	5300	Ant1	4.73	1.83	6.56	24	Pass
NVNT	ac20	5320	Ant1	4.46	1.83	6.29	24	Pass
NVNT	ac20	5500	Ant1	3.44	1.83	5.27	24	Pass
NVNT	ac20	5580	Ant1	3.9	1.83	5.73	24	Pass
NVNT	ac20	5700	Ant1	5.22	1.83	7.05	24	Pass
NVNT	ac20	5745	Ant1	4.95	1.83	6.78	30	Pass
NVNT	ac20	5785	Ant1	4.64	1.83	6.47	30	Pass
NVNT	ac20	5825	Ant1	4.45	1.83	6.28	30	Pass
NVNT	ac40	5190	Ant1	6.45	2.63	9.08	24	Pass
NVNT	ac40	5230	Ant1	5.67	2.63	8.3	24	Pass
NVNT	ac40	5270	Ant1	5.14	2.63	7.77	24	Pass
NVNT	ac40	5310	Ant1	4.47	2.63	7.1	24	Pass
NVNT	ac40	5510	Ant1	3.22	2.63	5.85	24	Pass
NVNT	ac40	5550	Ant1	2.97	2.63	5.6	24	Pass









NVNT	ac40	5670	Ant1	4.41	2.63	7.04	24	Pass
NVNT	ac40	5755	Ant1	4.66	2.63	7.29	30	Pass
NVNT	ac40	5795	Ant1	4.31	2.63	6.94	30	Pass
NVNT	ac80	5210	Ant1	5.59	3.69	9.28	24	Pass
NVNT	ac80	5290	Ant1	5.44	3.69	9.13	24	Pass
NVNT	ac80	5530	Ant1	4.29	3.69	7.98	24	Pass
NVNT	ac80	5610	Ant1	3.93	3.69	7.62	24	Pass
NVNT	ac80	5775	Ant1	3.35	3.69	7.04	30	Pass



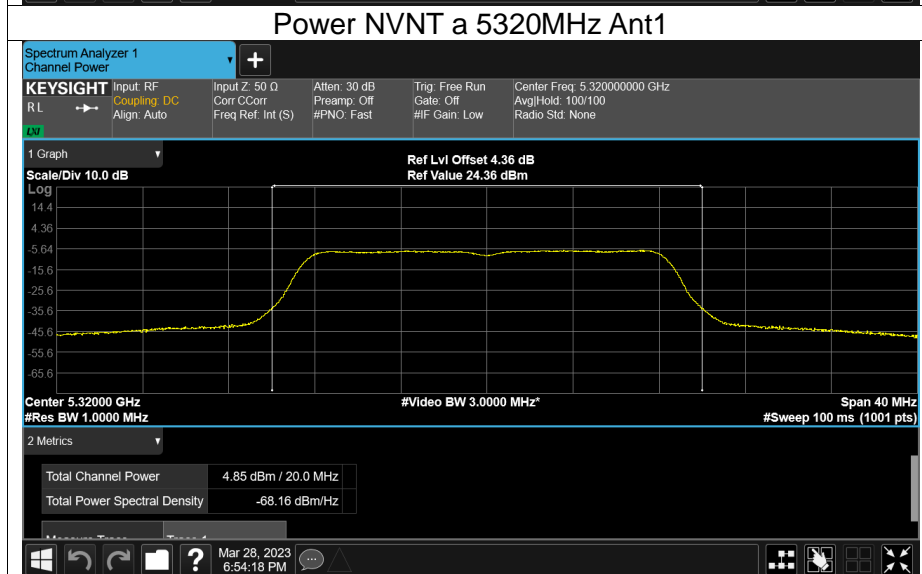
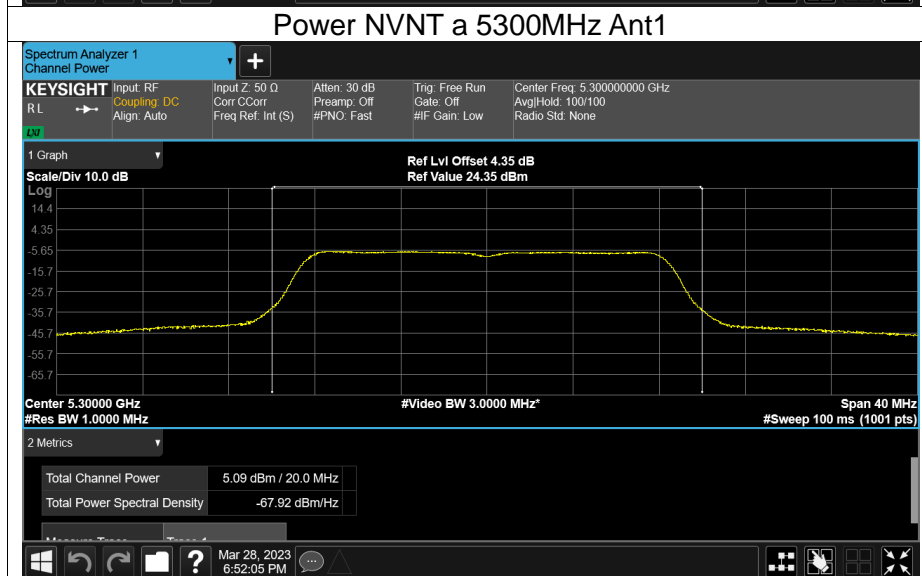
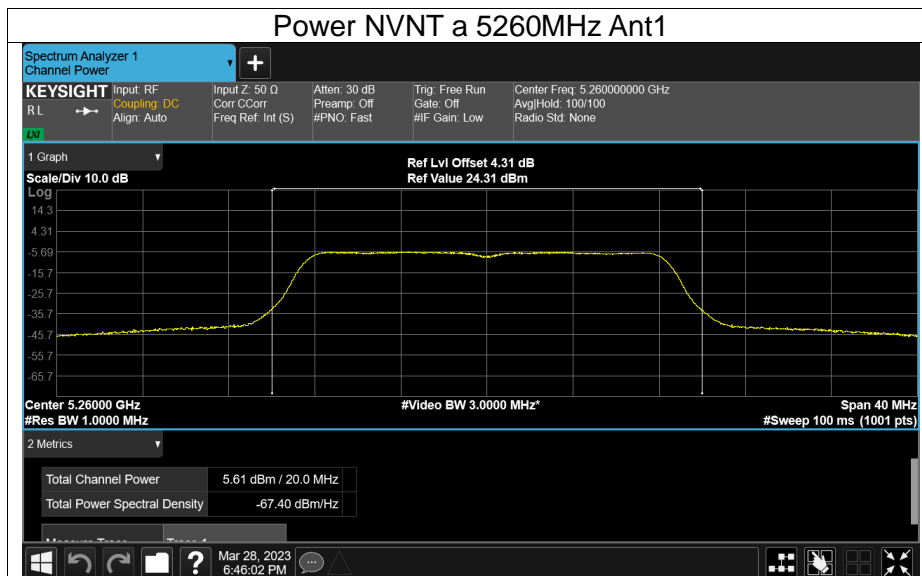


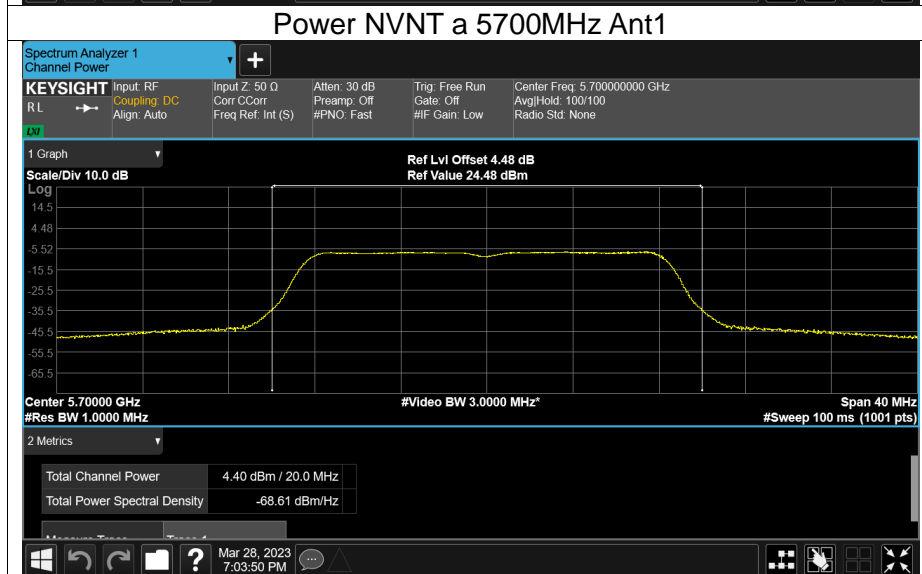
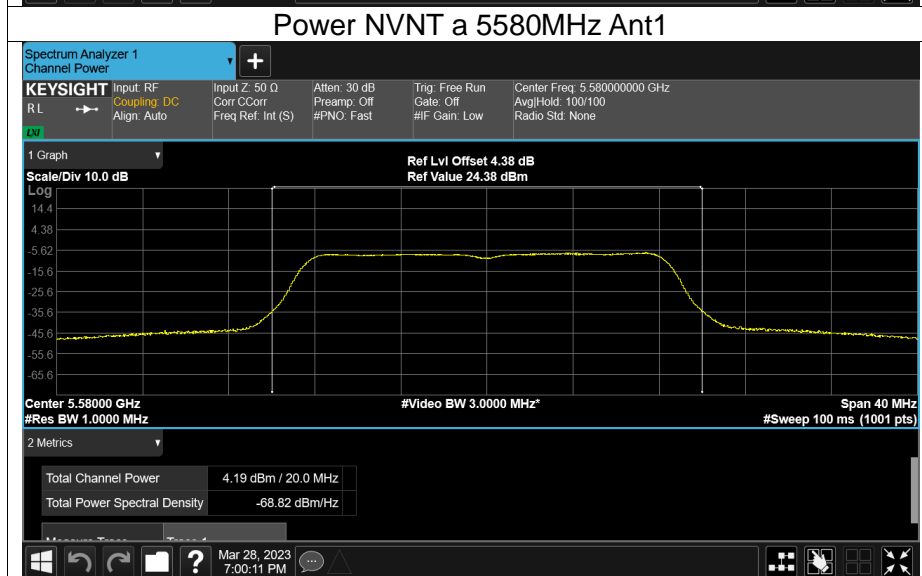
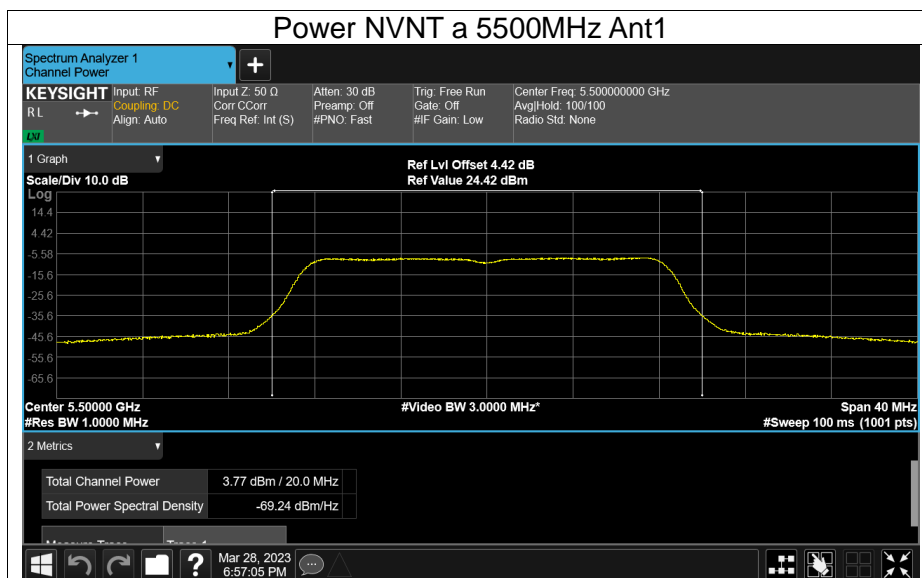


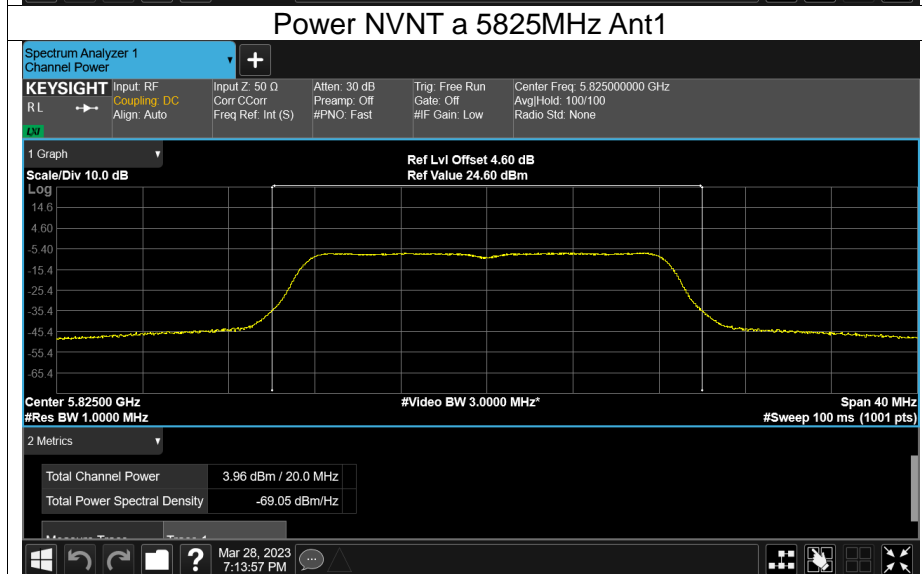
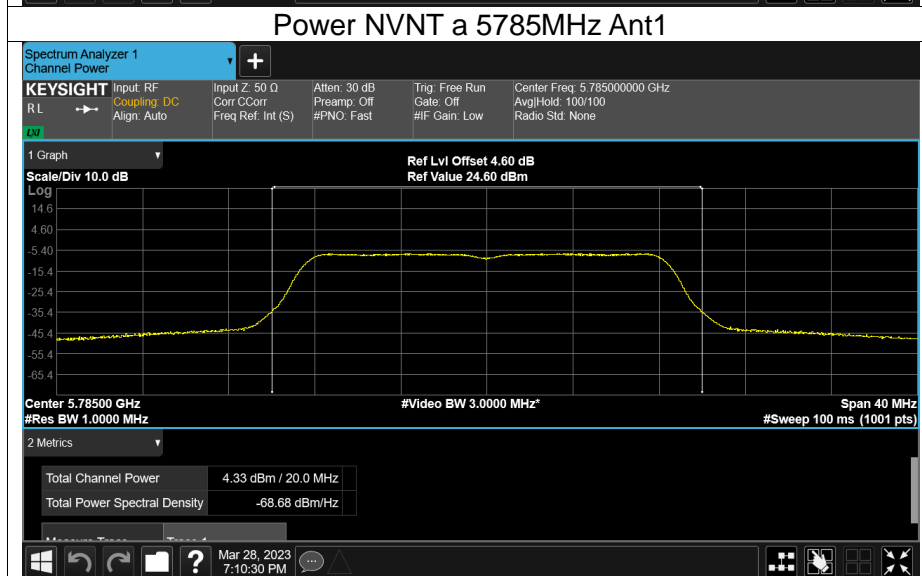
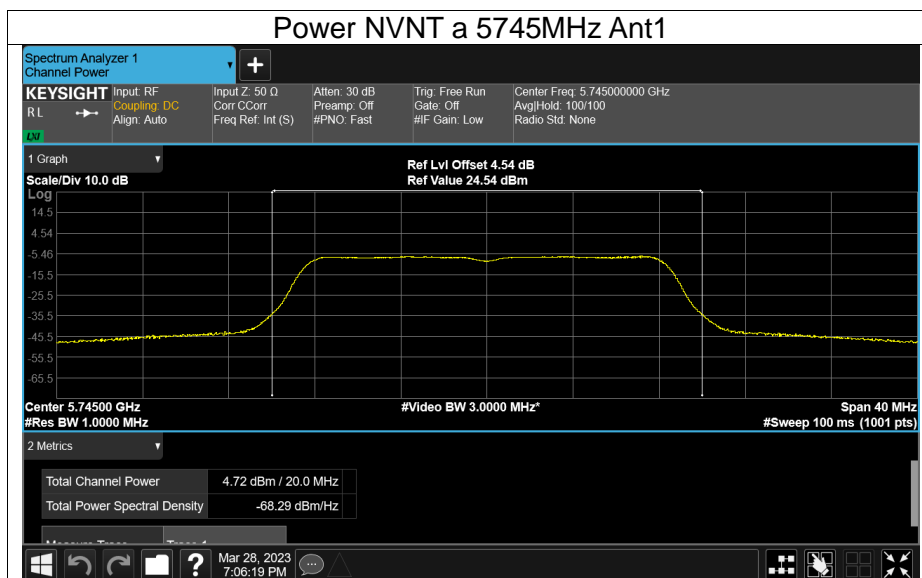


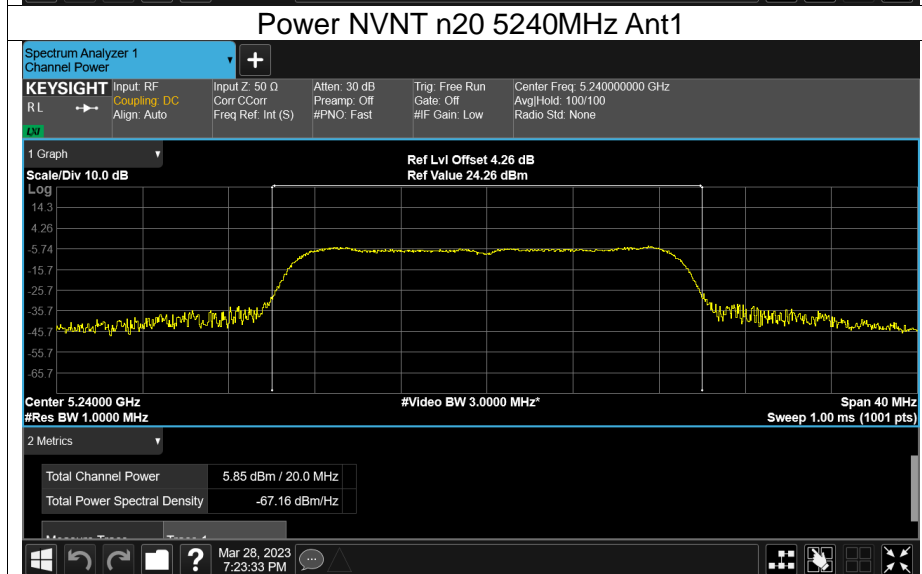
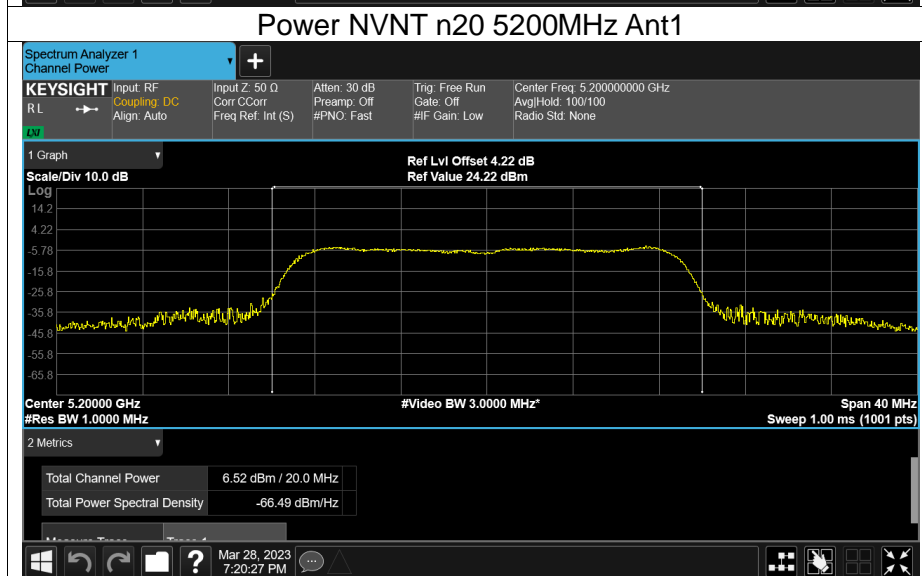
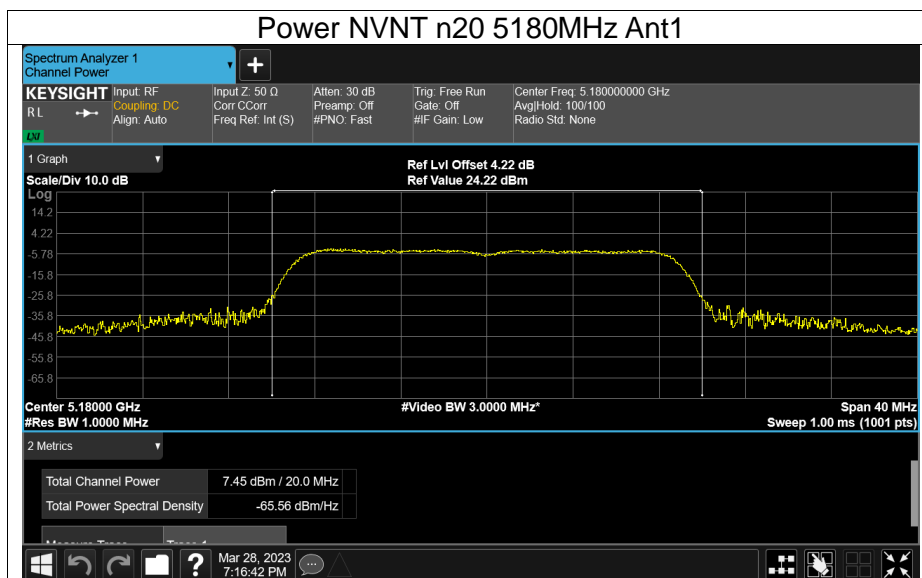







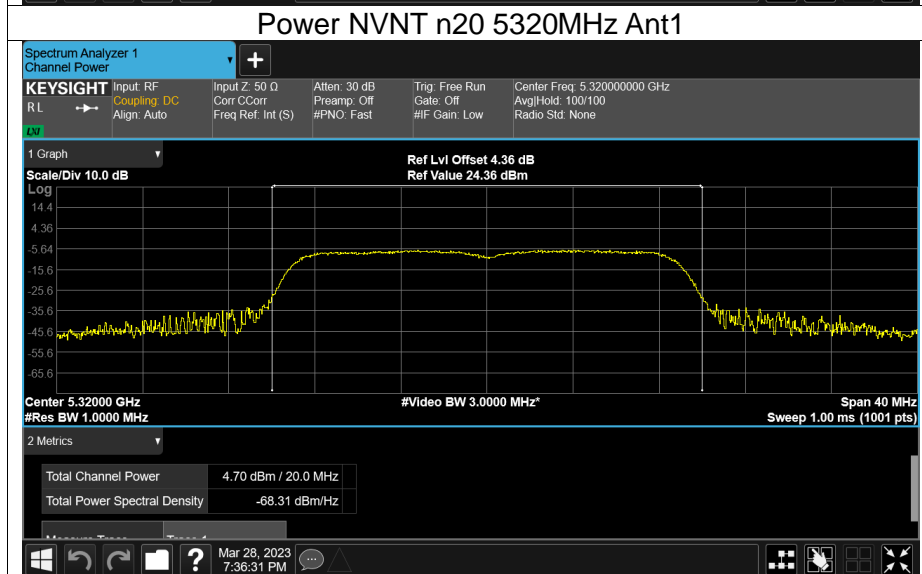
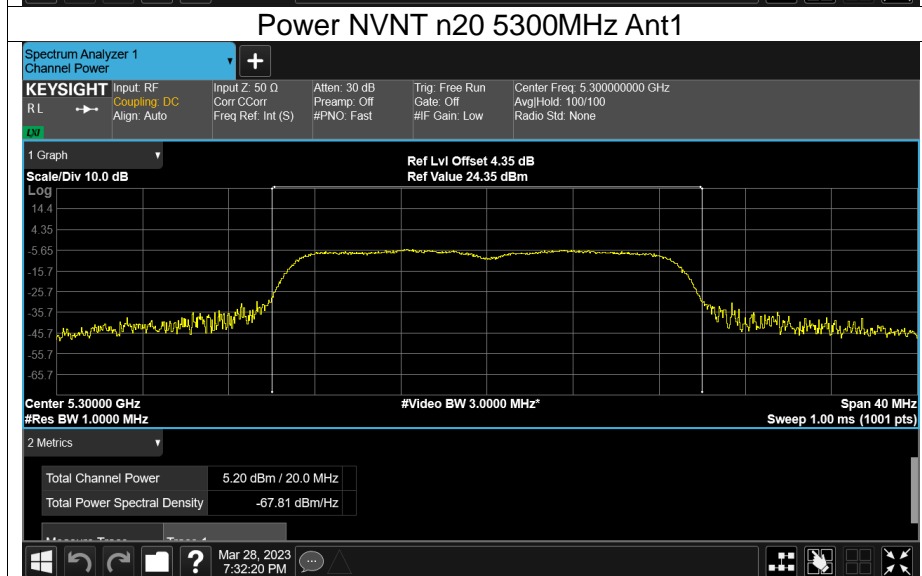
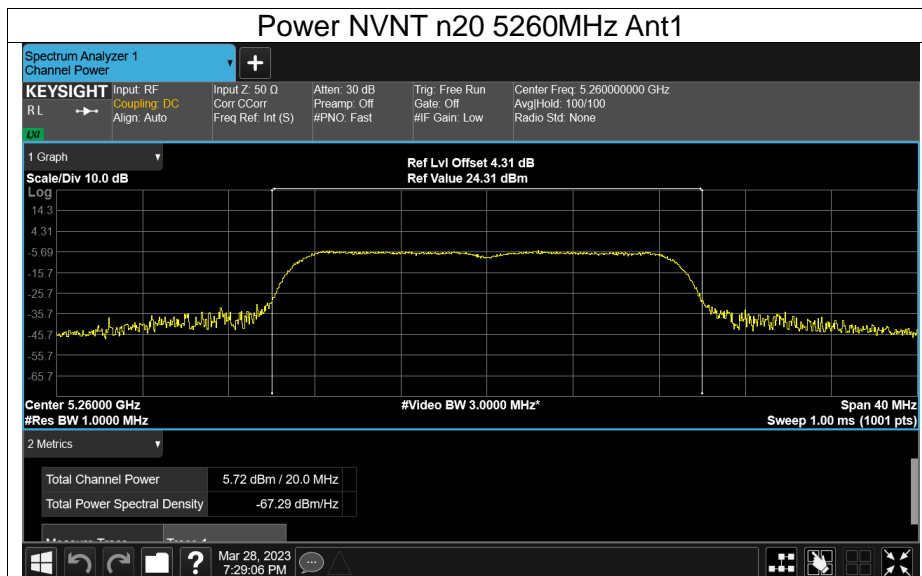


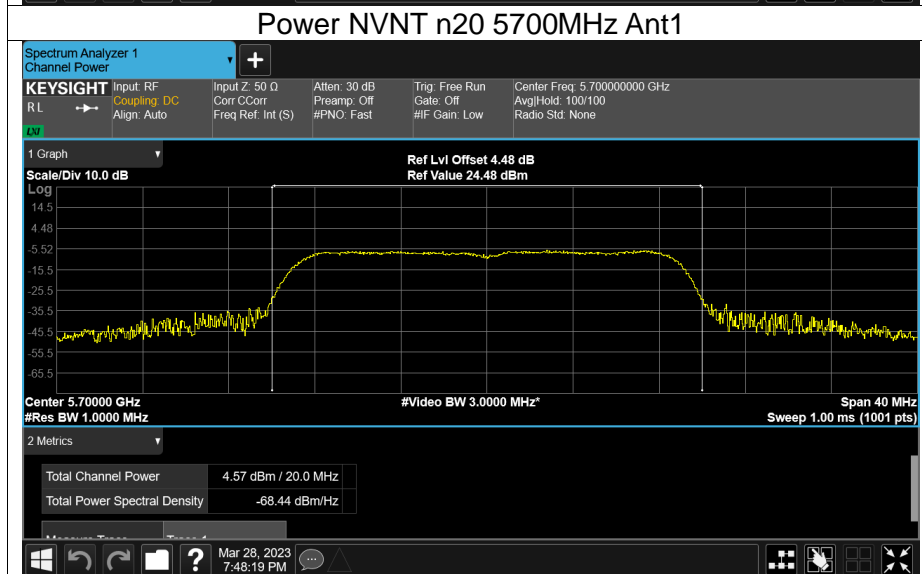
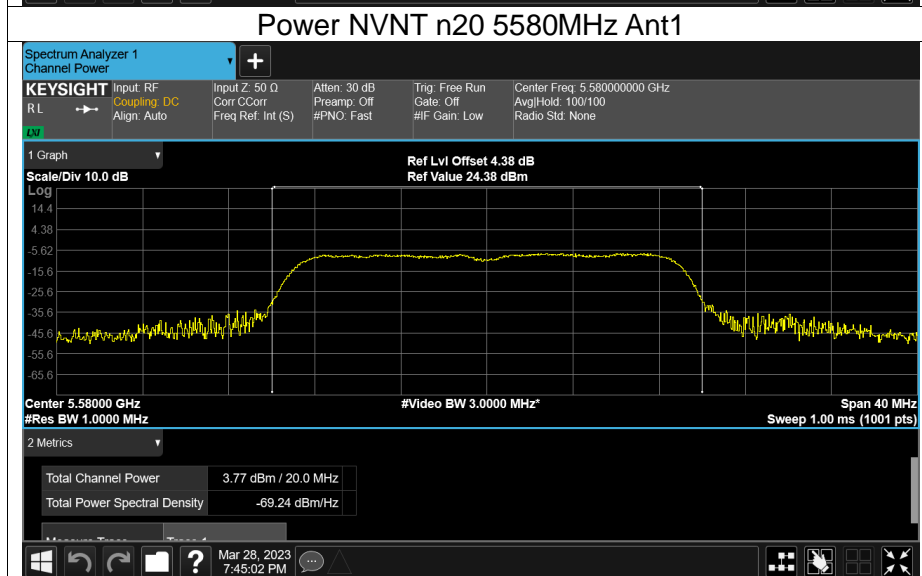
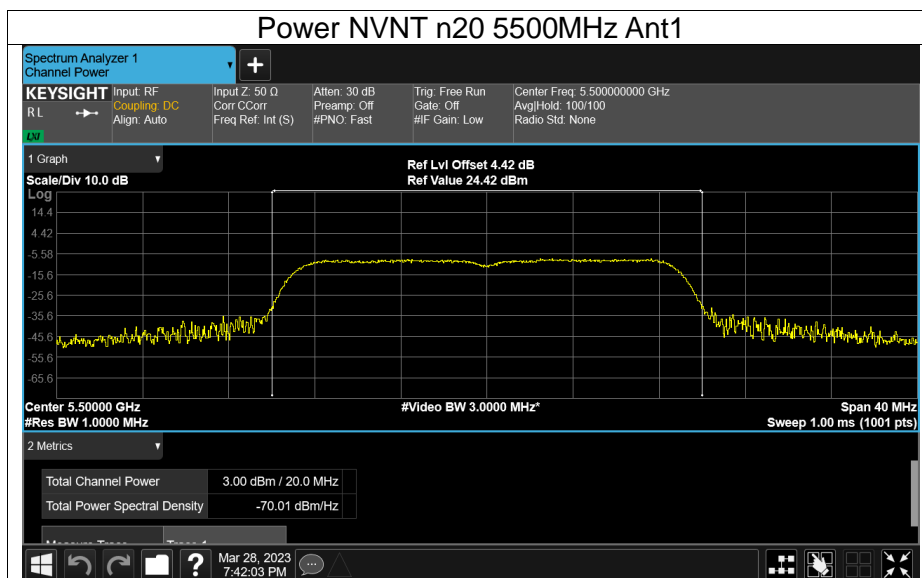


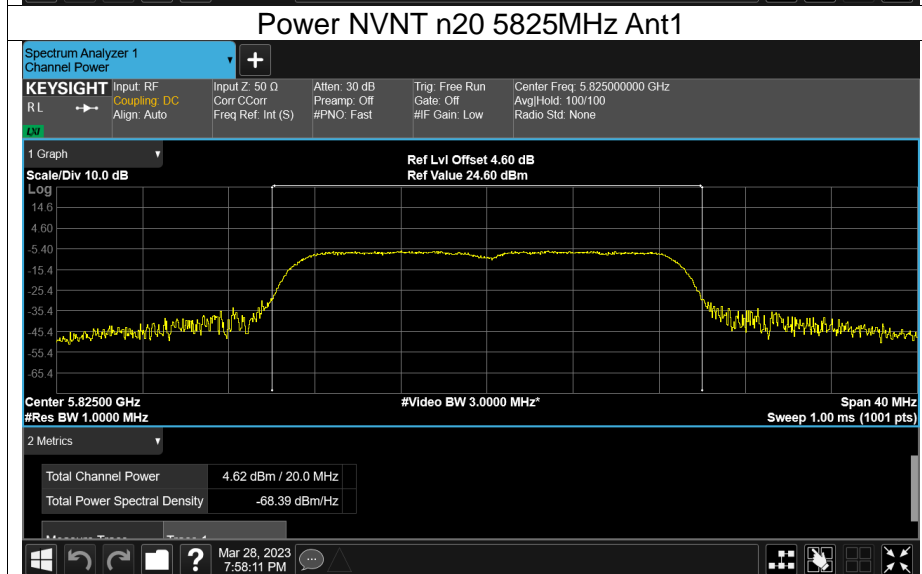
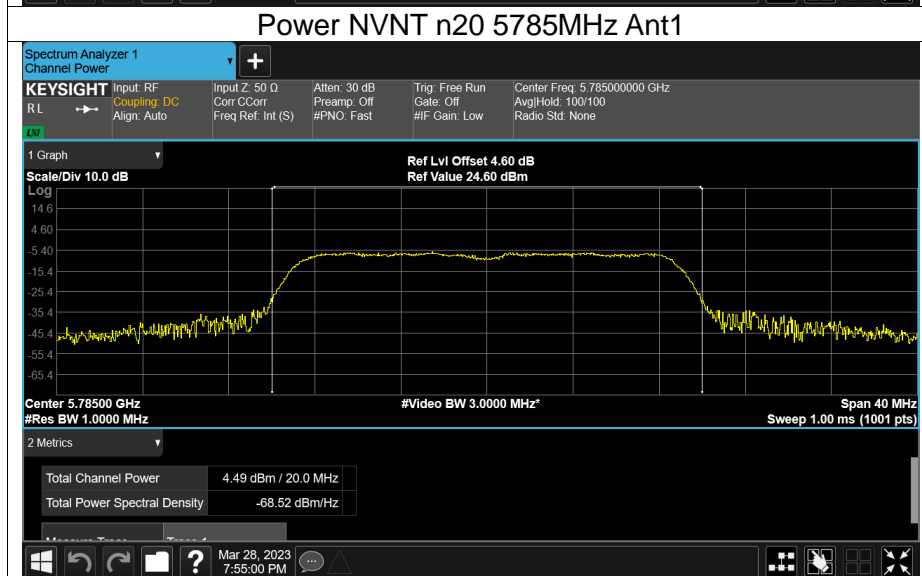
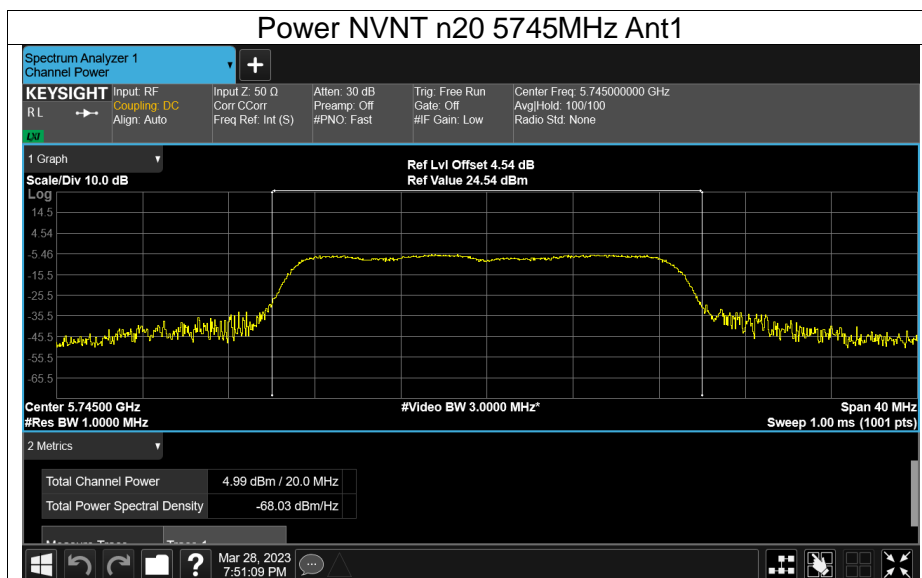


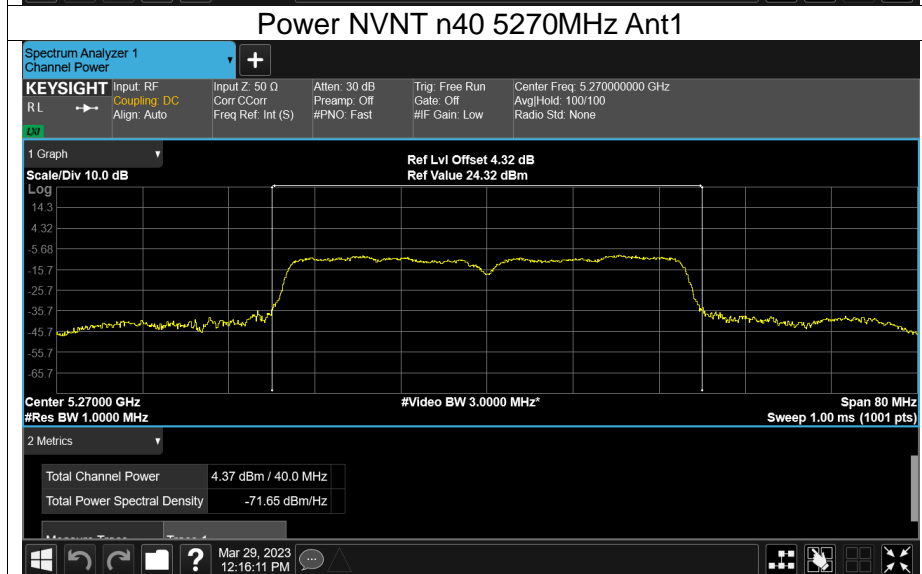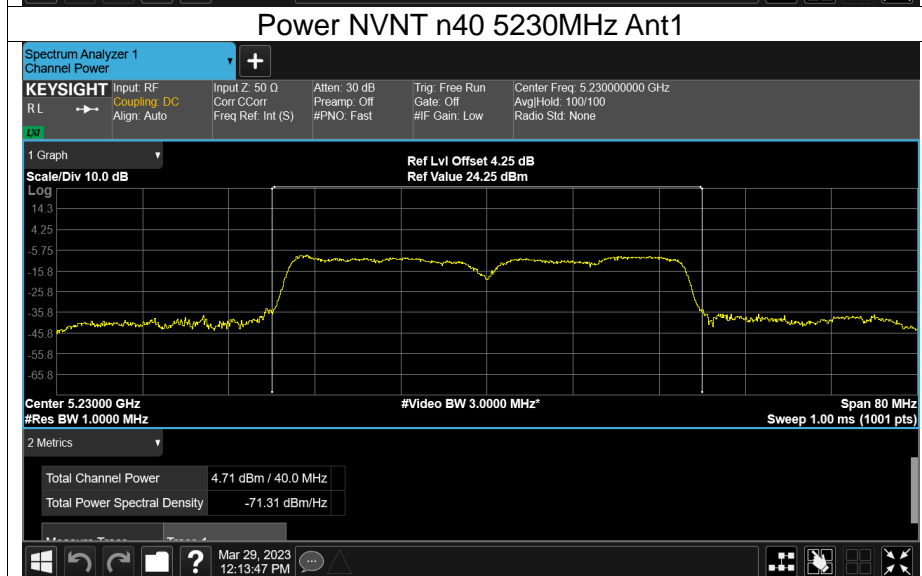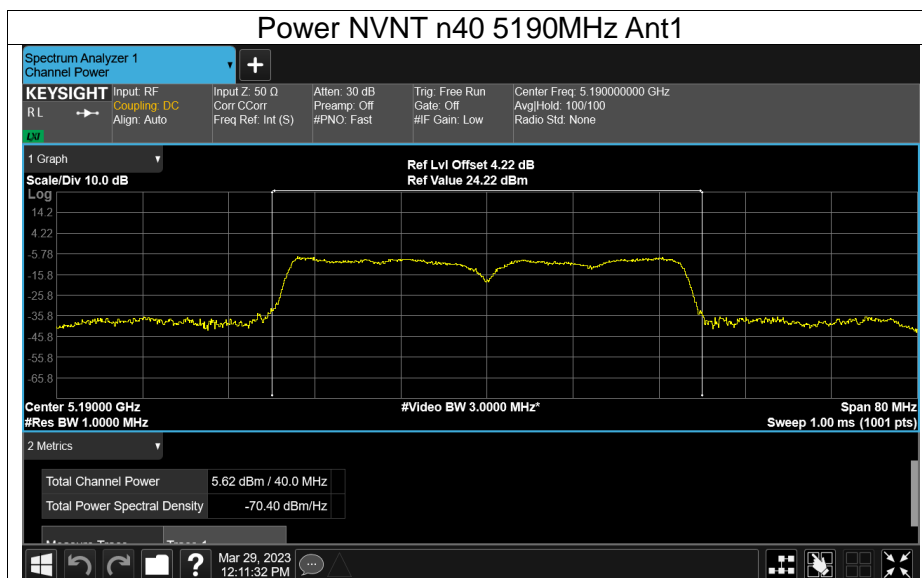

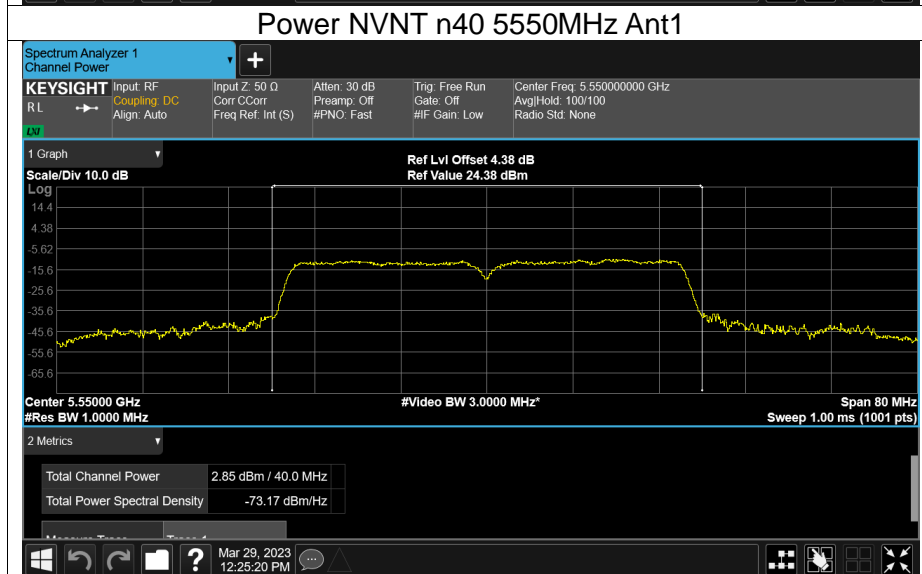
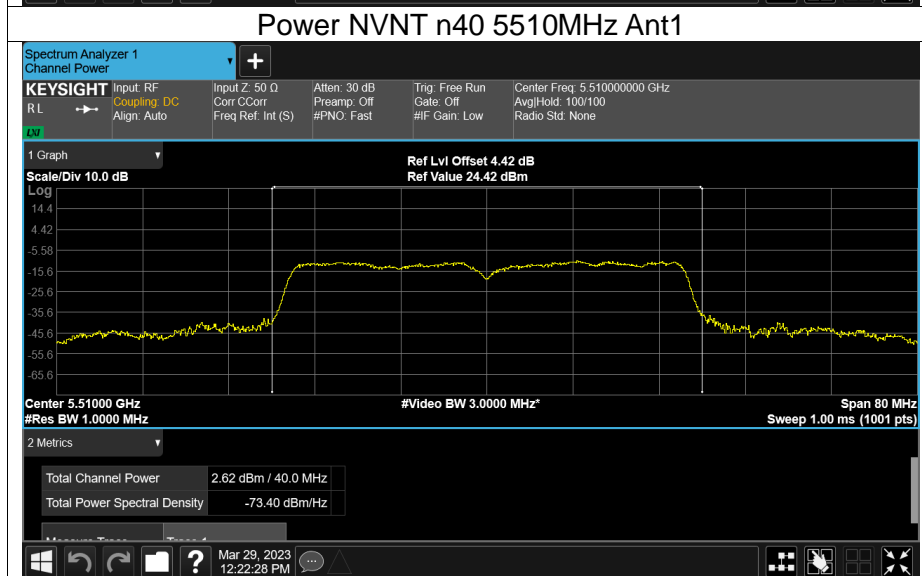
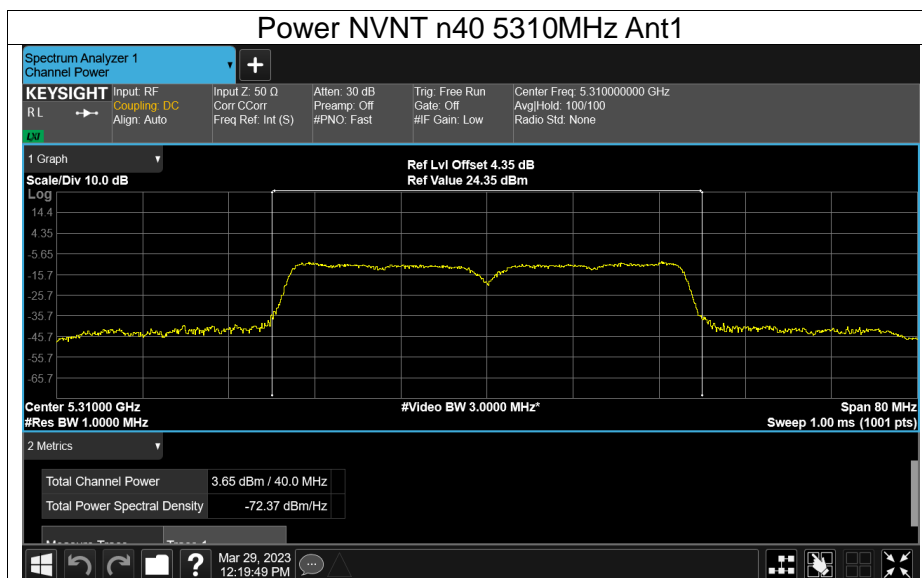


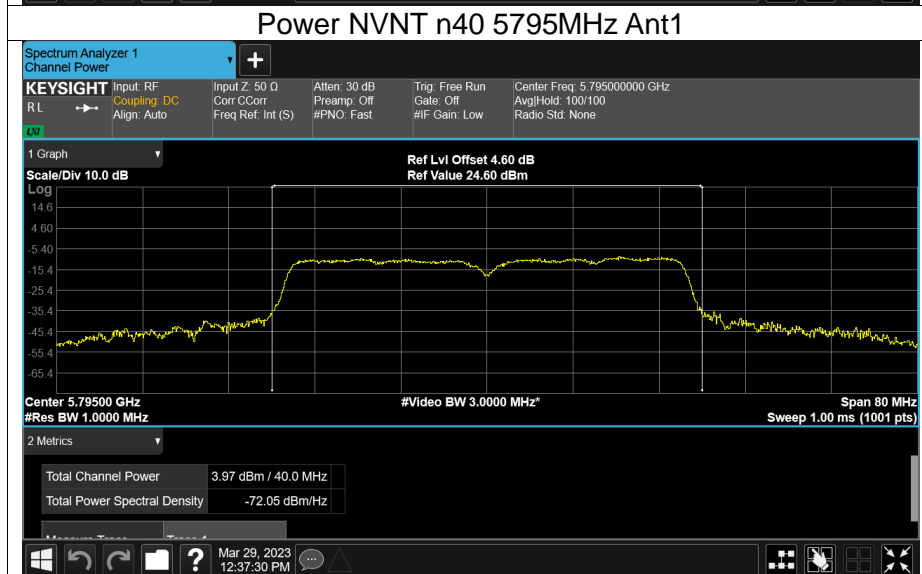
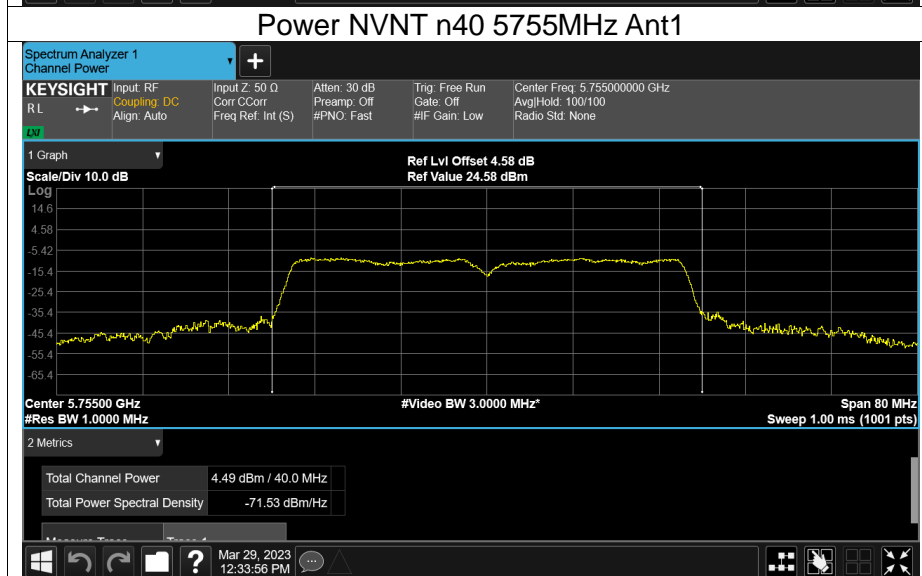
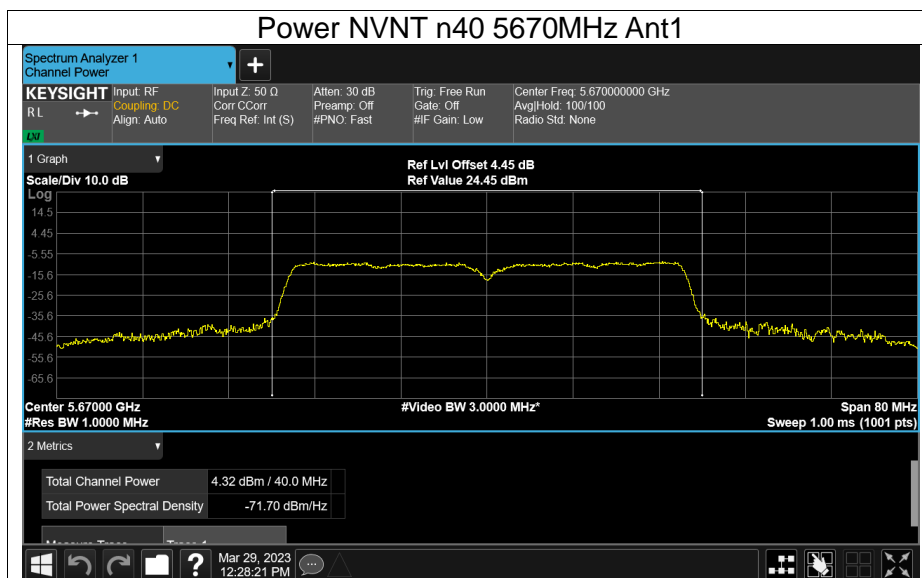


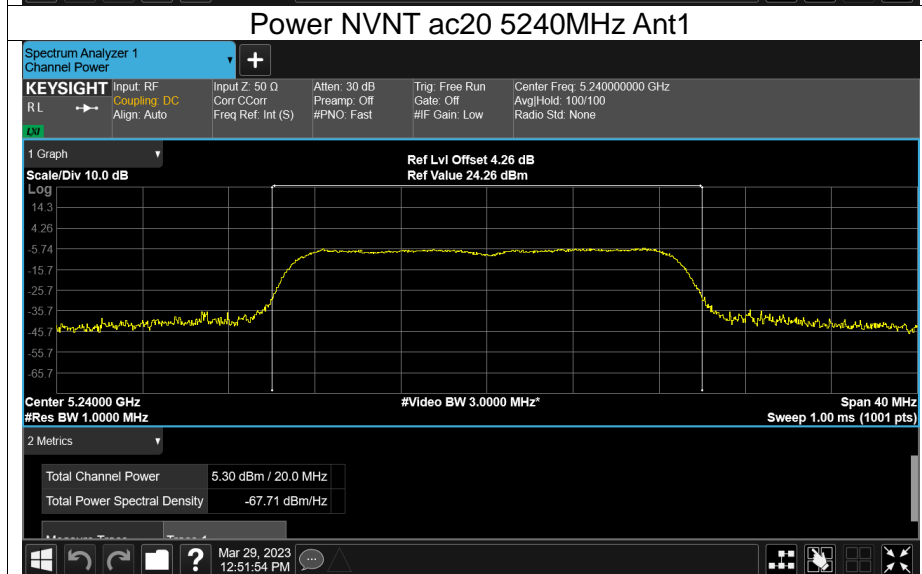
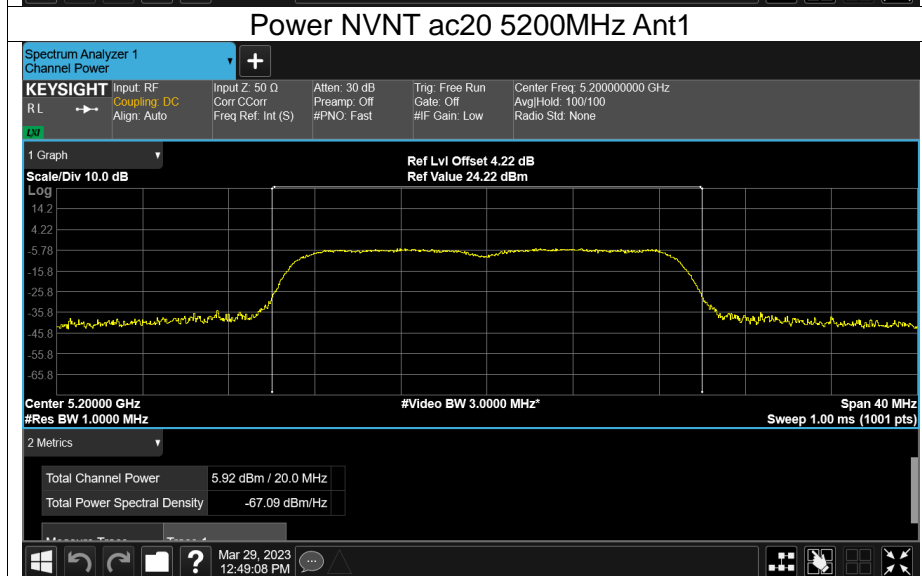
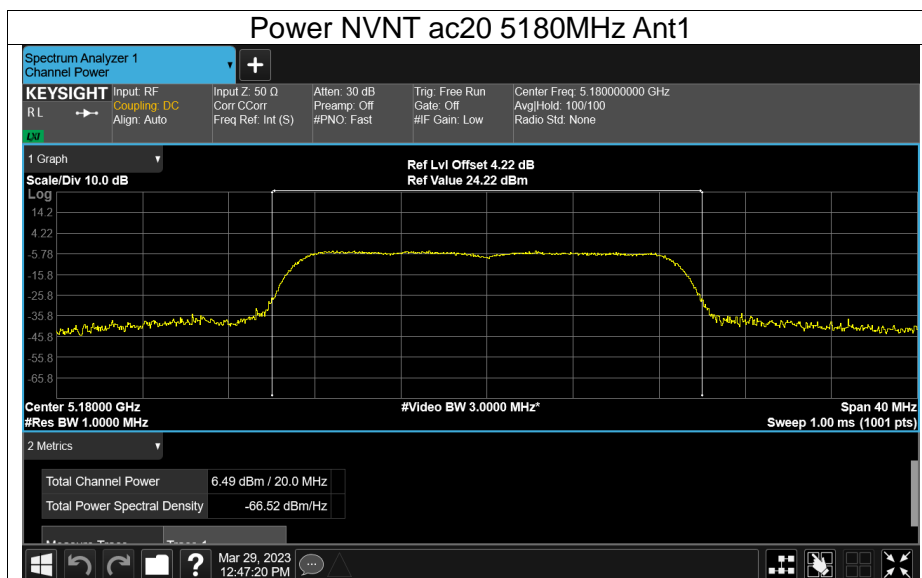


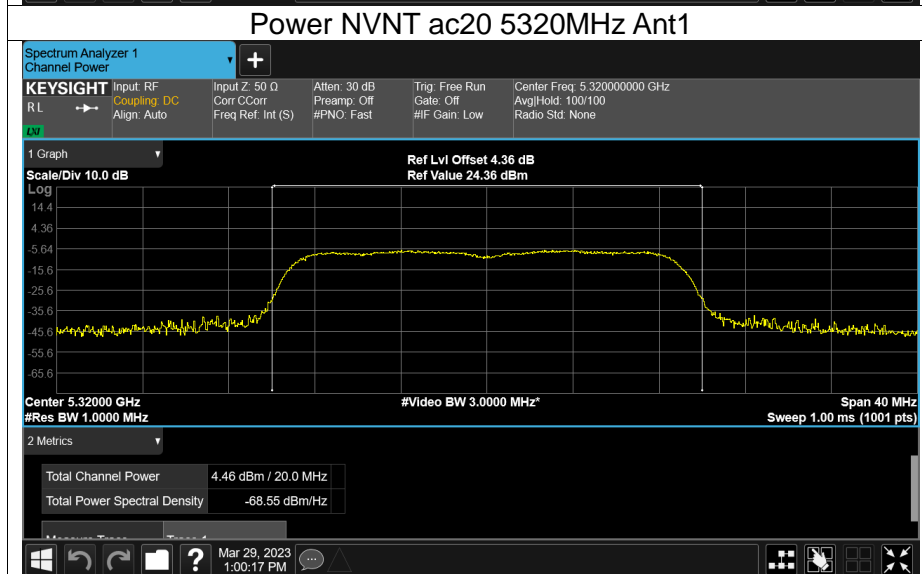
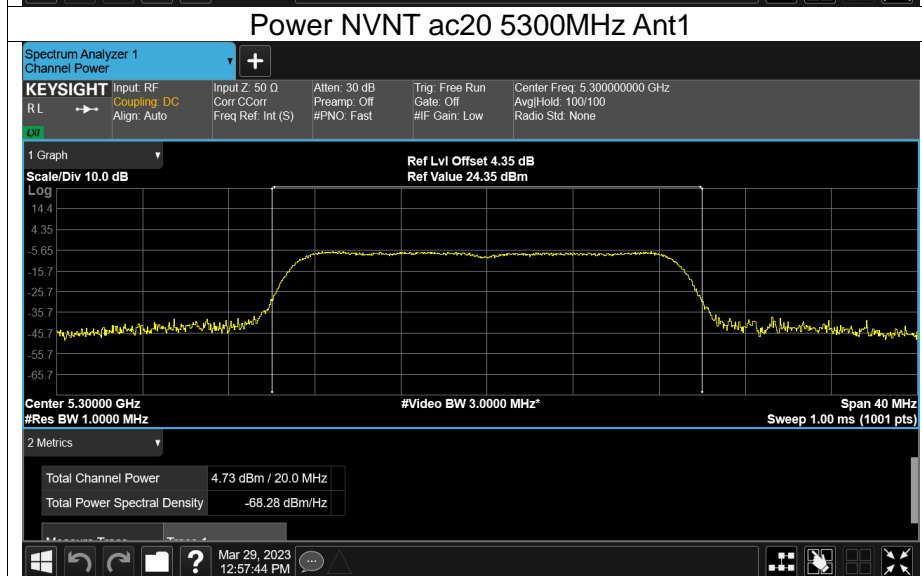
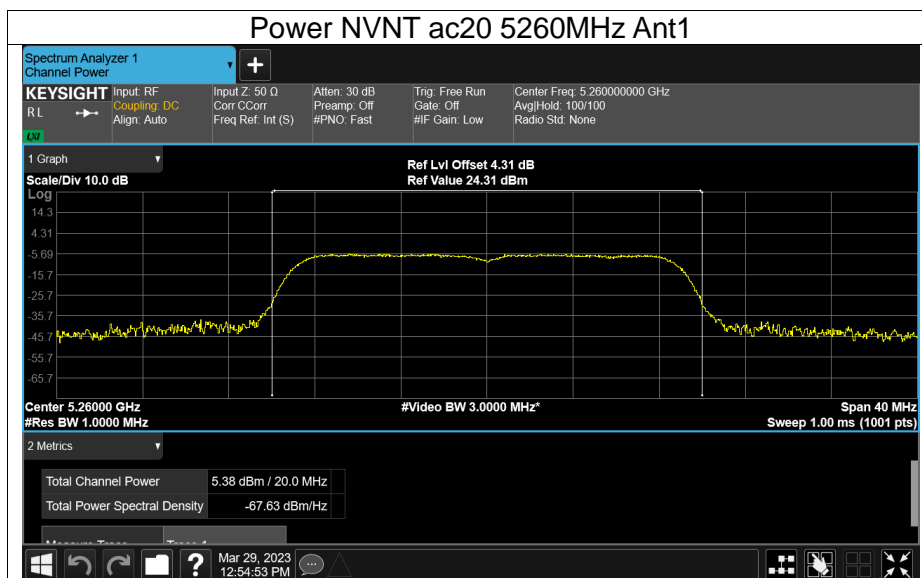







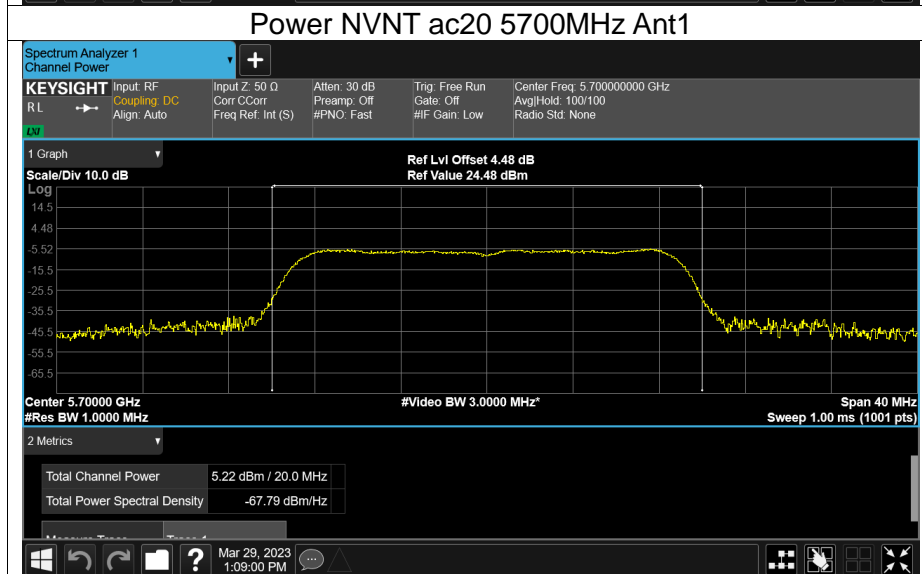
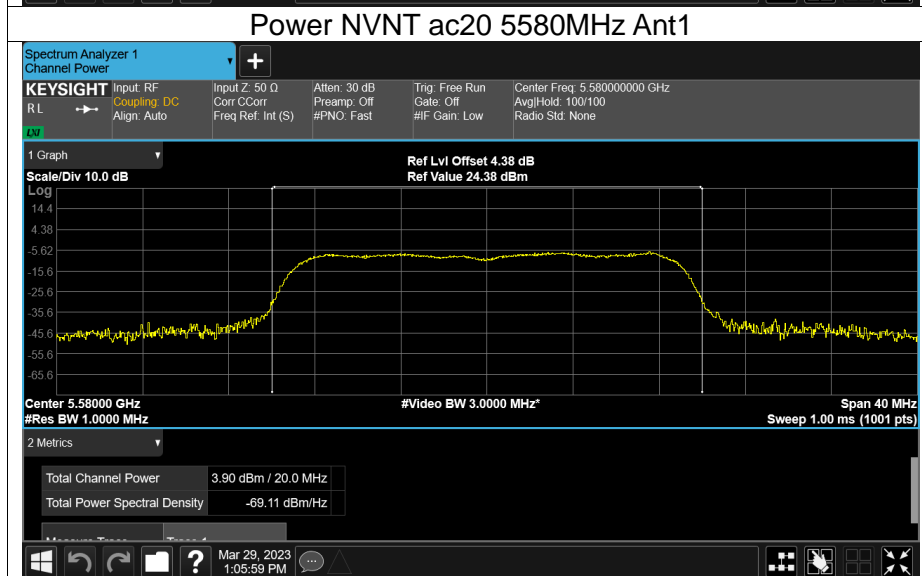
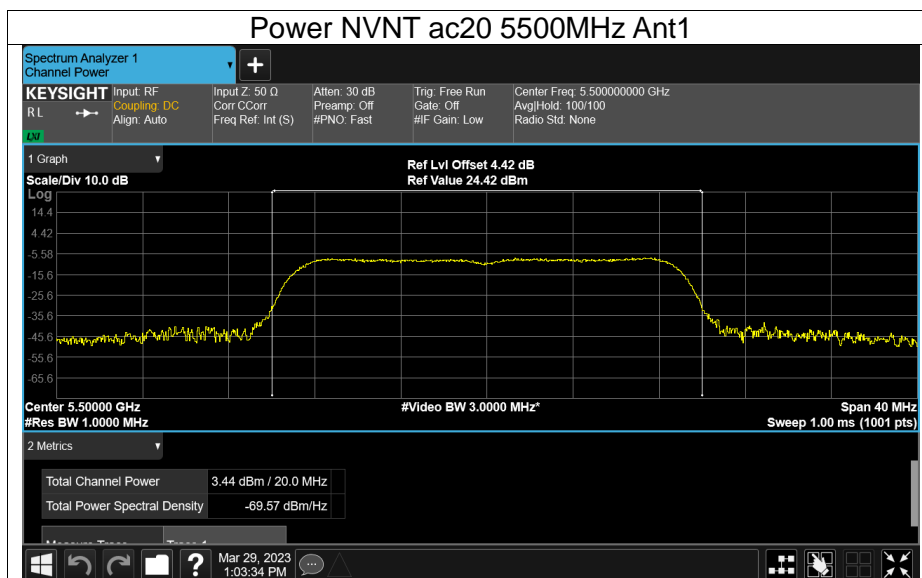


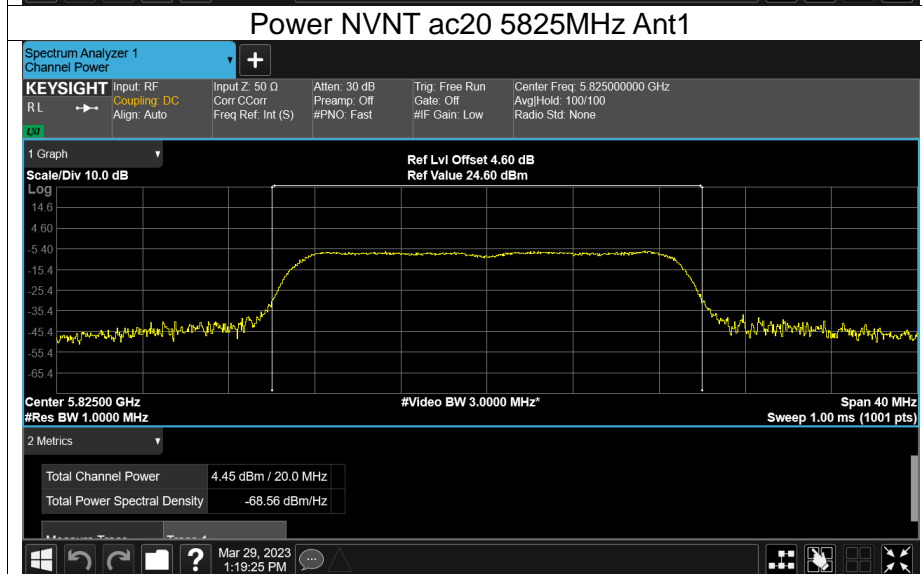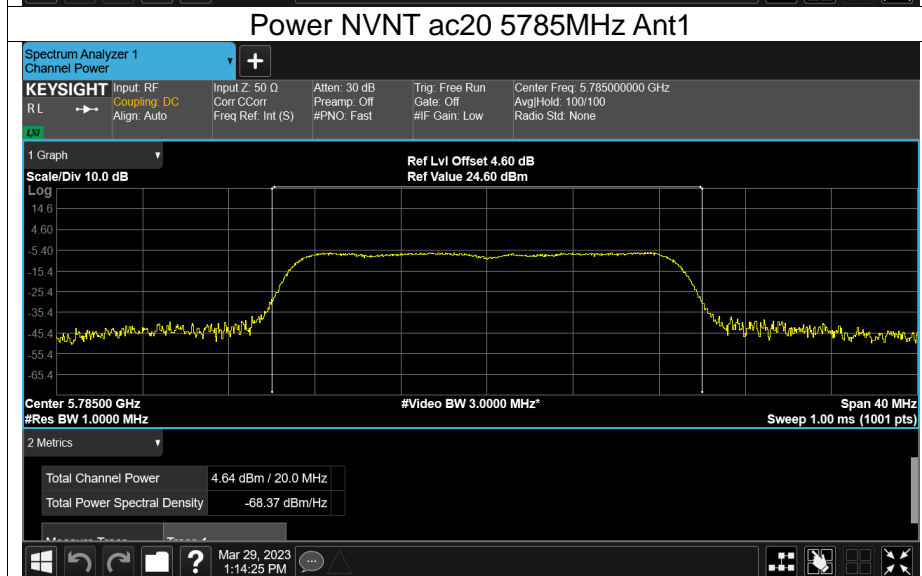
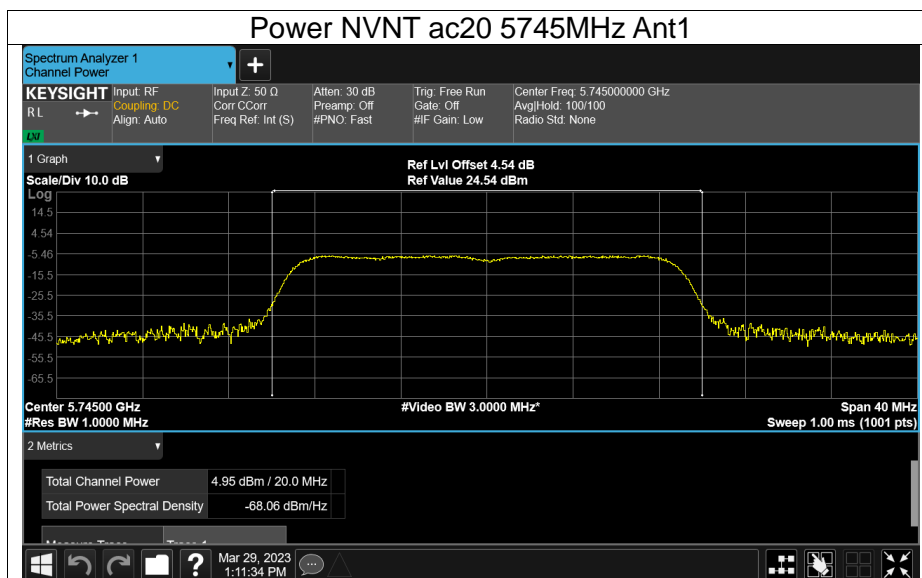


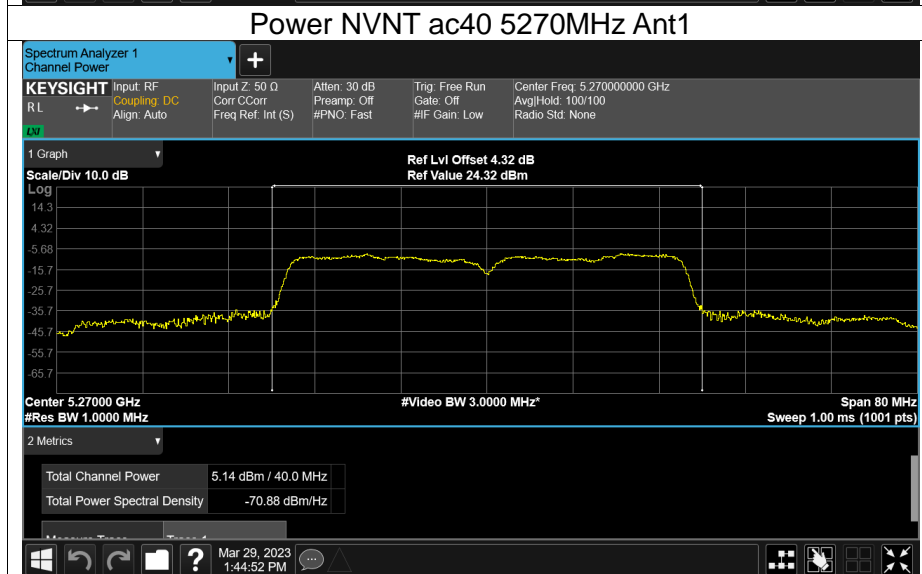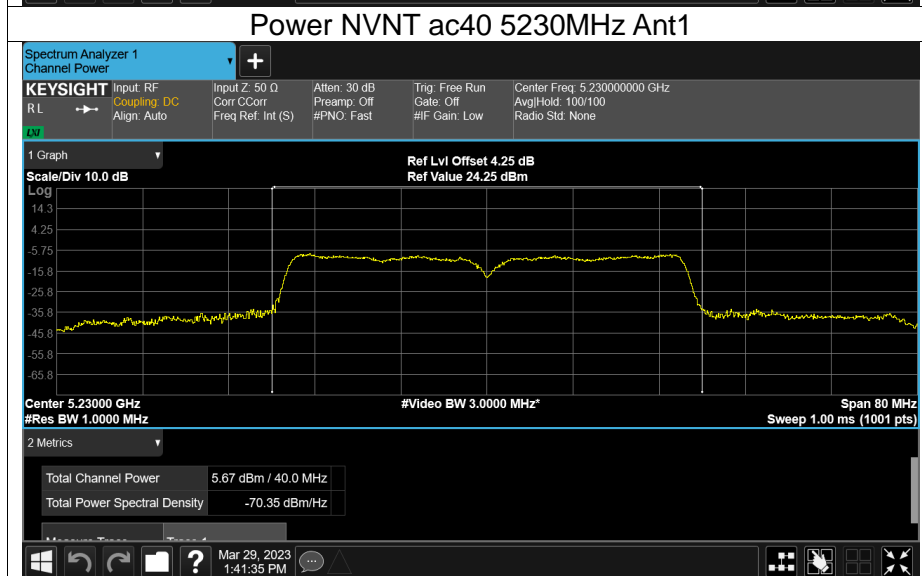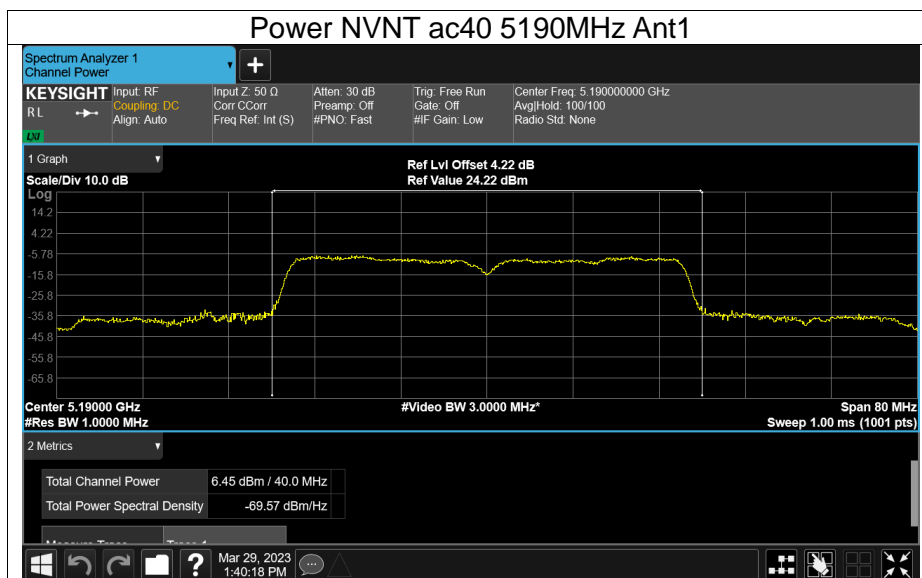

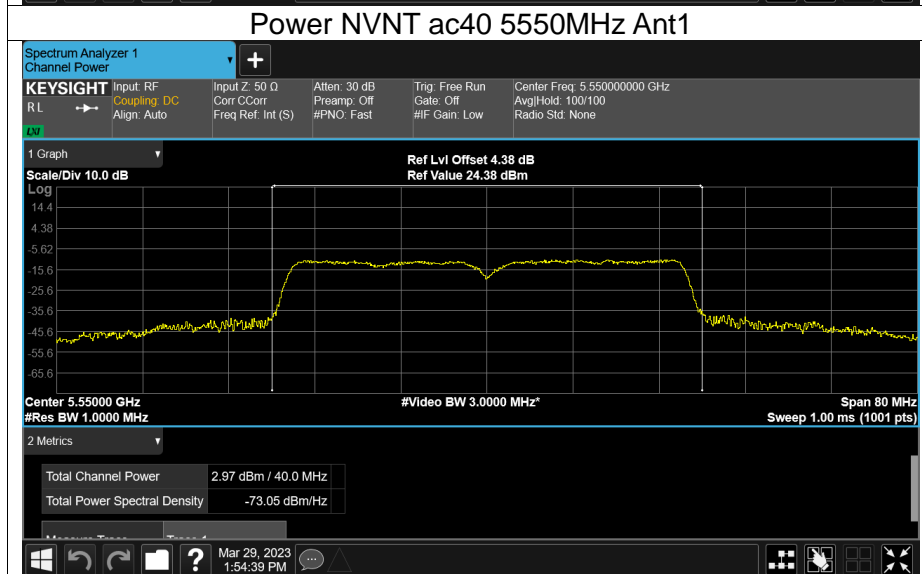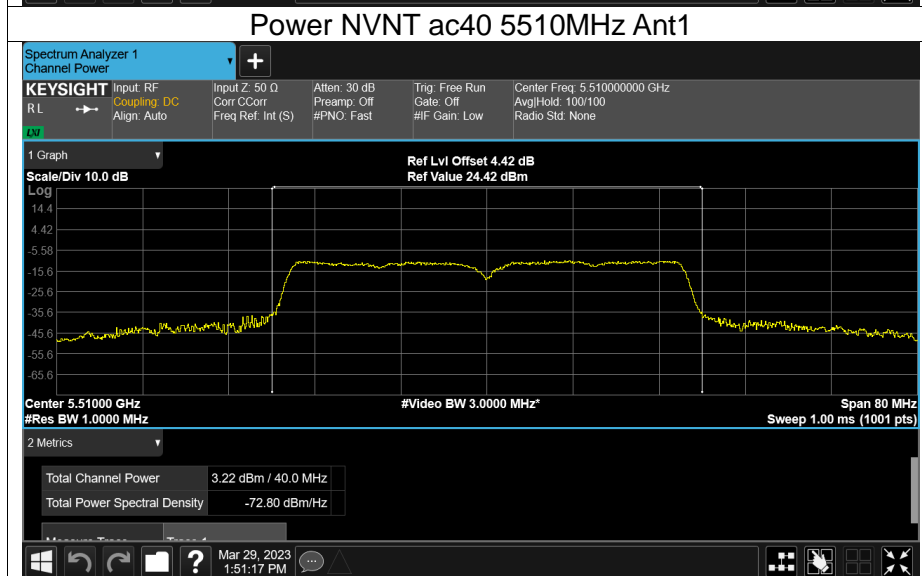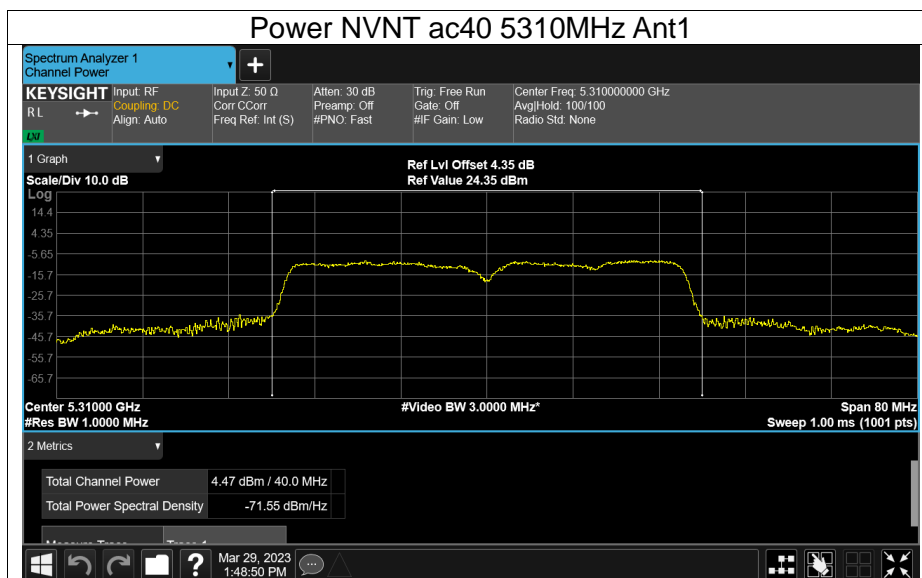

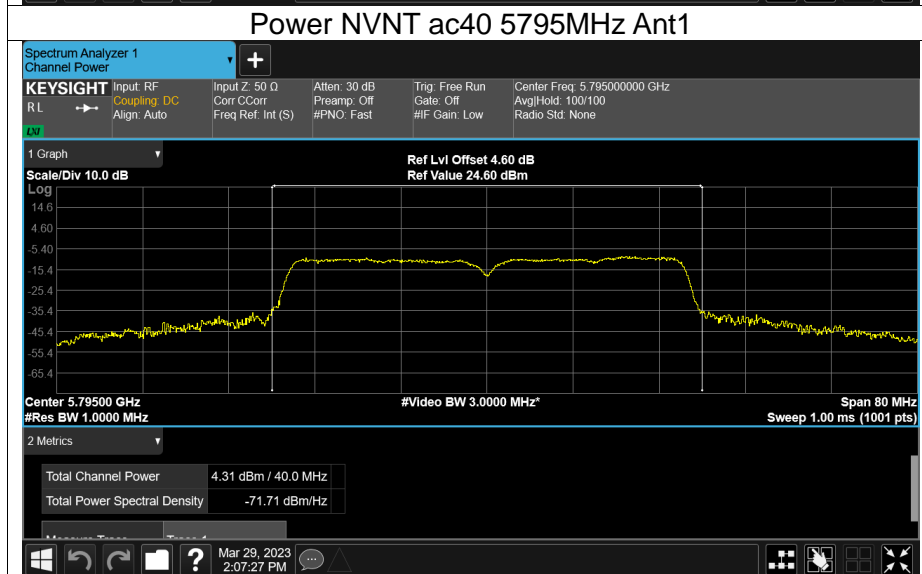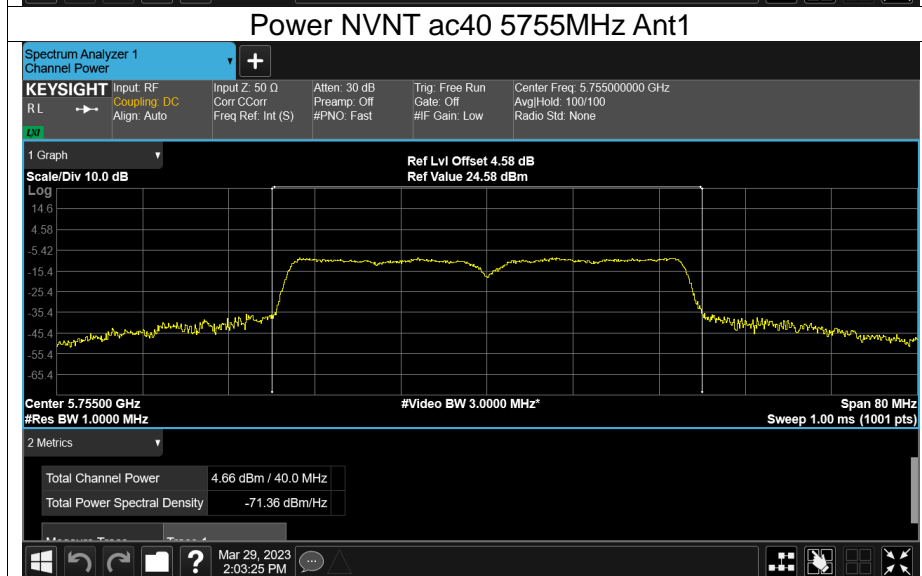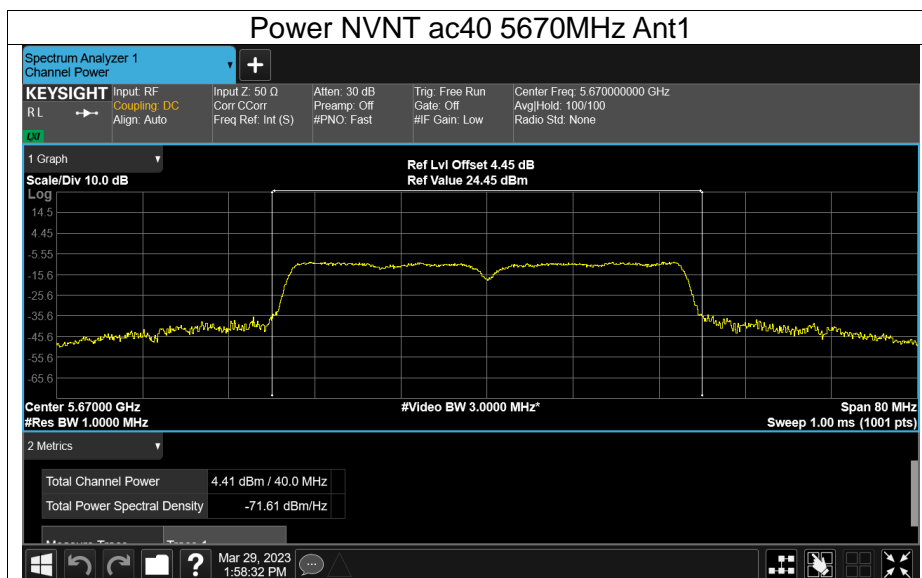

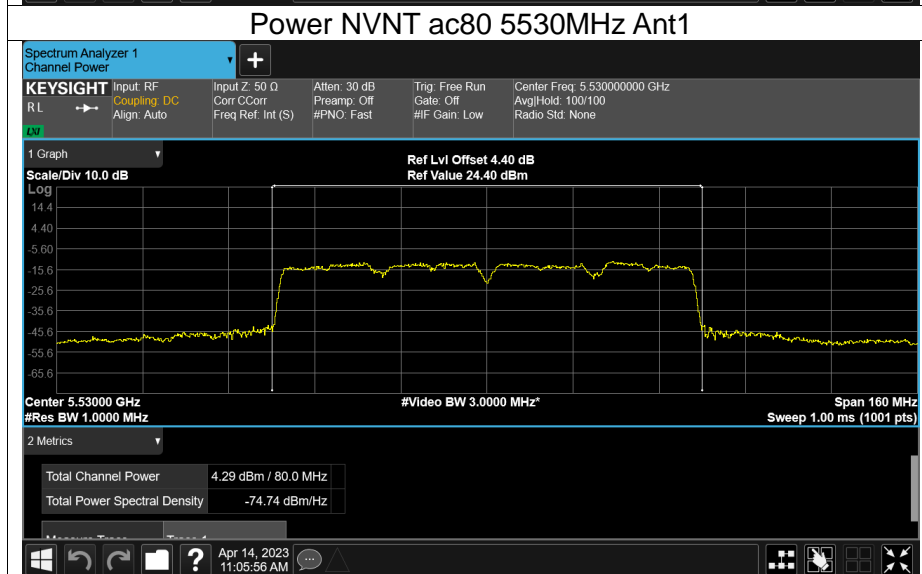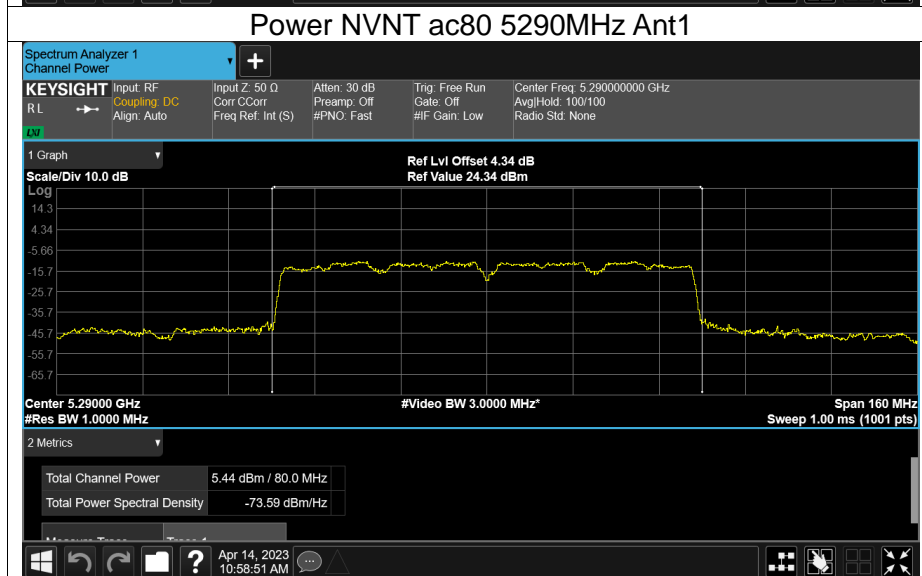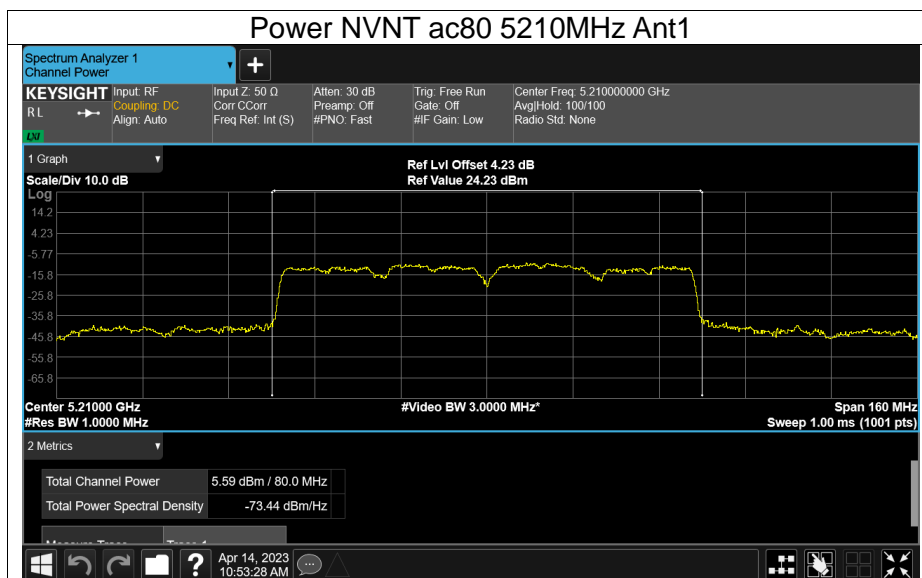

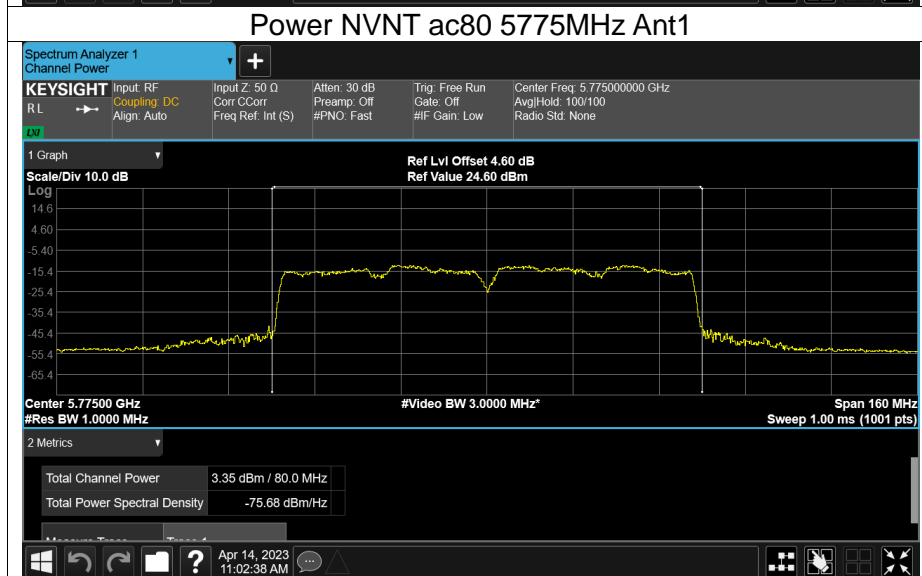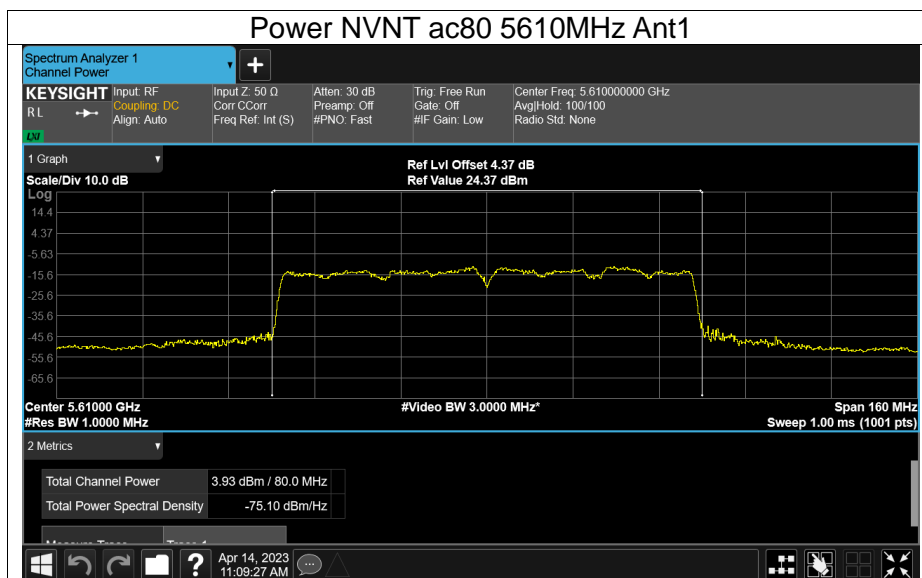



-26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	25.213	0.5	Pass
NVNT	a	5200	Ant1	27.082	0.5	Pass
NVNT	a	5240	Ant1	24.269	0.5	Pass
NVNT	a	5260	Ant1	28.404	0.5	Pass
NVNT	a	5300	Ant1	28.422	0.5	Pass
NVNT	a	5320	Ant1	24.292	0.5	Pass
NVNT	a	5500	Ant1	23.441	0.5	Pass
NVNT	a	5580	Ant1	27.187	0.5	Pass
NVNT	a	5700	Ant1	24.436	0.5	Pass
NVNT	n20	5180	Ant1	27.95	0.5	Pass
NVNT	n20	5200	Ant1	28.804	0.5	Pass
NVNT	n20	5240	Ant1	29.522	0.5	Pass
NVNT	n20	5260	Ant1	26.736	0.5	Pass
NVNT	n20	5300	Ant1	27.528	0.5	Pass
NVNT	n20	5320	Ant1	28.326	0.5	Pass
NVNT	n20	5500	Ant1	29.382	0.5	Pass
NVNT	n20	5580	Ant1	28.245	0.5	Pass
NVNT	n20	5700	Ant1	26.963	0.5	Pass
NVNT	n40	5190	Ant1	55.22	0.5	Pass
NVNT	n40	5230	Ant1	55.808	0.5	Pass
NVNT	n40	5270	Ant1	54.161	0.5	Pass
NVNT	n40	5310	Ant1	53.657	0.5	Pass
NVNT	n40	5510	Ant1	55.335	0.5	Pass
NVNT	n40	5550	Ant1	52.432	0.5	Pass
NVNT	n40	5670	Ant1	54.083	0.5	Pass
NVNT	ac20	5180	Ant1	24.092	0.5	Pass
NVNT	ac20	5200	Ant1	29.326	0.5	Pass
NVNT	ac20	5240	Ant1	26.164	0.5	Pass
NVNT	ac20	5260	Ant1	26.525	0.5	Pass
NVNT	ac20	5300	Ant1	28.061	0.5	Pass
NVNT	ac20	5320	Ant1	25.21	0.5	Pass
NVNT	ac20	5500	Ant1	28.86	0.5	Pass
NVNT	ac20	5580	Ant1	26.486	0.5	Pass
NVNT	ac20	5700	Ant1	25.531	0.5	Pass
NVNT	ac40	5190	Ant1	54.098	0.5	Pass
NVNT	ac40	5230	Ant1	55.083	0.5	Pass
NVNT	ac40	5270	Ant1	55.03	0.5	Pass
NVNT	ac40	5310	Ant1	59.064	0.5	Pass
NVNT	ac40	5510	Ant1	59.189	0.5	Pass
NVNT	ac40	5550	Ant1	59.659	0.5	Pass
NVNT	ac40	5670	Ant1	55.979	0.5	Pass
NVNT	ac80	5210	Ant1	94.905	0.5	Pass
NVNT	ac80	5290	Ant1	82.737	0.5	Pass
NVNT	ac80	5530	Ant1	82.611	0.5	Pass
NVNT	ac80	5610	Ant1	80.702	0.5	Pass