



Appendix C

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Wi-Fi 6E Tri-Band USB 3.0 Adapter - 5374 Mbps

Test Model: AX54005A-USB-WIFI-6E

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng

C.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.342	≥ 0.5	Pass
NVNT	a	5785	Ant1	16.327	≥ 0.5	Pass
NVNT	a	5825	Ant1	16.324	≥ 0.5	Pass
NVNT	n20	5745	Ant1	17.225	≥ 0.5	Pass
NVNT	n20	5785	Ant1	17.24	≥ 0.5	Pass
NVNT	n20	5825	Ant1	17.261	≥ 0.5	Pass
NVNT	n40	5755	Ant1	35.869	≥ 0.5	Pass
NVNT	n40	5795	Ant1	35.885	≥ 0.5	Pass
NVNT	ac20	5745	Ant1	17.259	≥ 0.5	Pass
NVNT	ac20	5785	Ant1	17.246	≥ 0.5	Pass
NVNT	ac20	5825	Ant1	17.252	≥ 0.5	Pass
NVNT	ac40	5755	Ant1	35.738	≥ 0.5	Pass
NVNT	ac40	5795	Ant1	35.794	≥ 0.5	Pass
NVNT	ac80	5775	Ant1	75.431	≥ 0.5	Pass
NVNT	ax20	5745	Ant1	17.525	≥ 0.5	Pass
NVNT	ax20	5785	Ant1	17.378	≥ 0.5	Pass
NVNT	ax20	5825	Ant1	17.287	≥ 0.5	Pass
NVNT	ax40	5755	Ant1	35.479	≥ 0.5	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	ax40	5795	Ant1	35.877	≥ 0.5	Pass
NVNT	ax80	5775	Ant1	75.295	≥ 0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

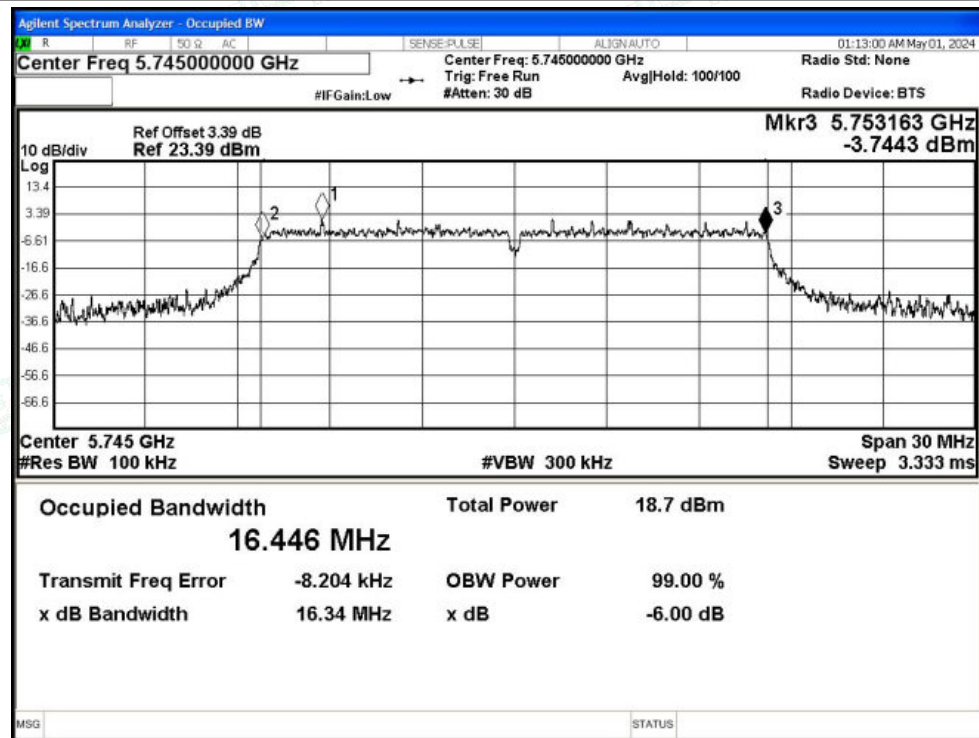


-6dB Bandwidth NVNT a 5785MHz Ant1

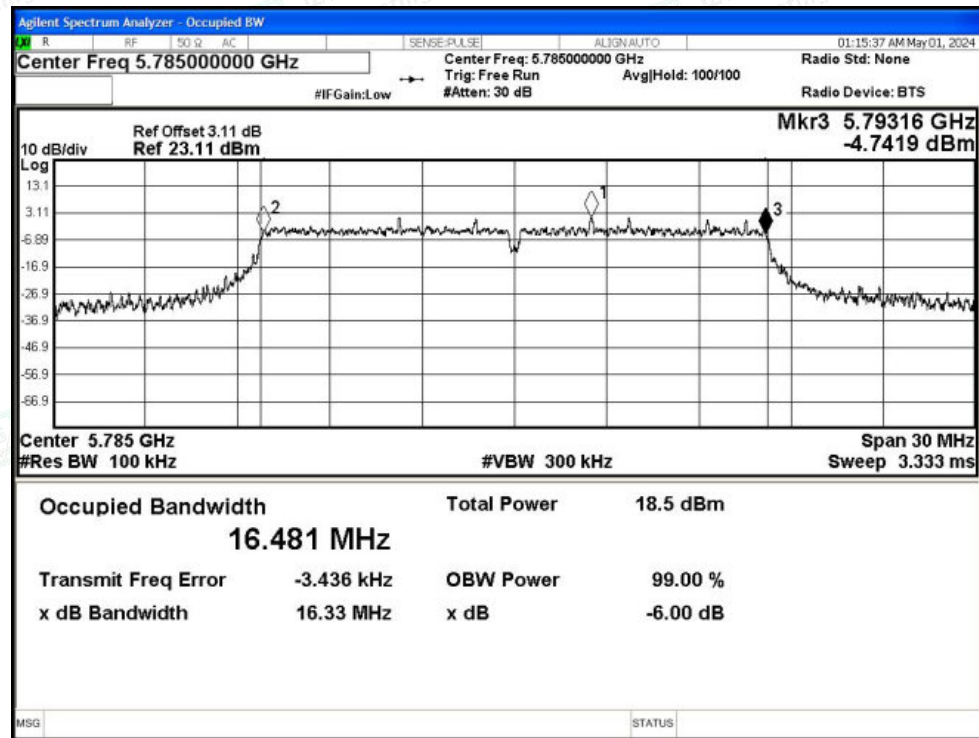




-6dB Bandwidth NVNT a 5825MHz Ant1

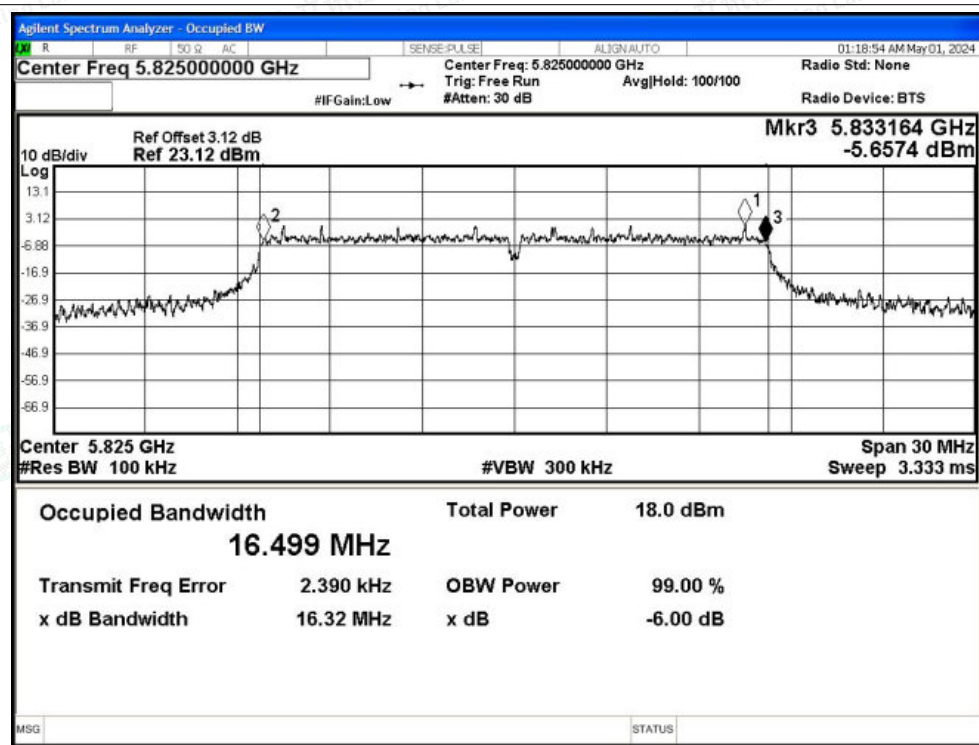


-6dB Bandwidth NVNT n20 5745MHz Ant1

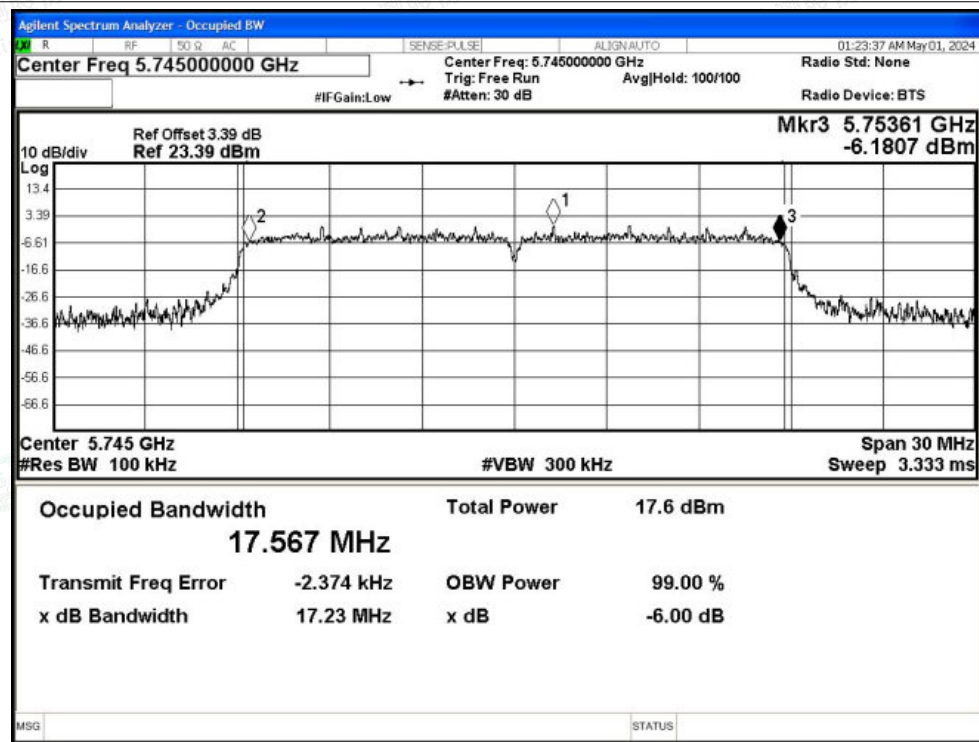




-6dB Bandwidth NVNT n20 5785MHz Ant1

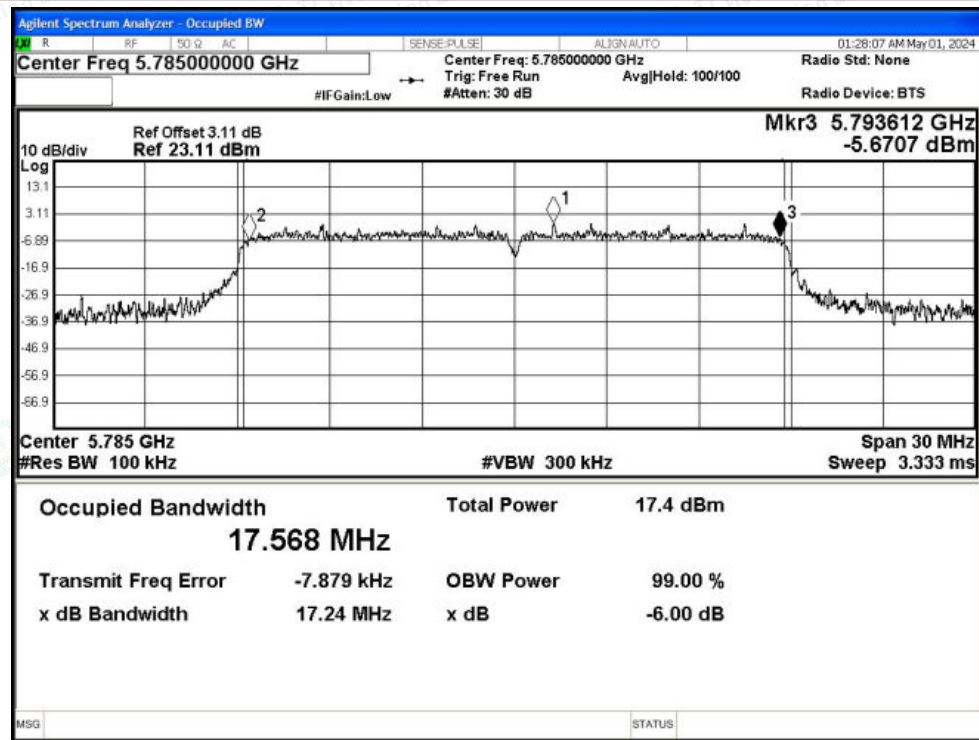


-6dB Bandwidth NVNT n20 5825MHz Ant1

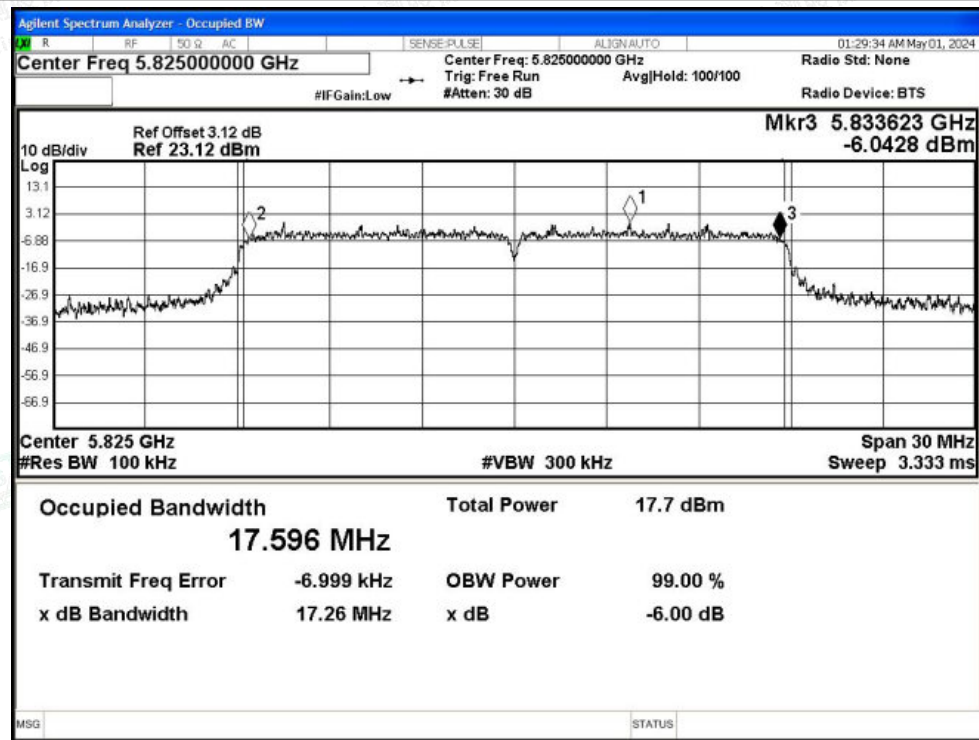




-6dB Bandwidth NVNT n40 5755MHz Ant1

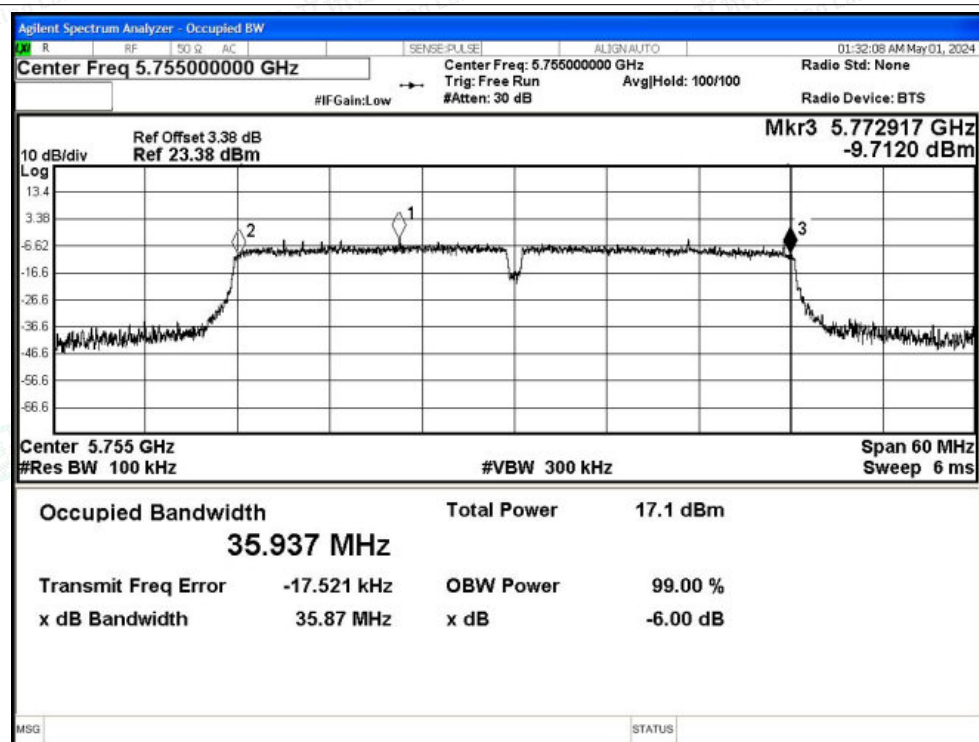


-6dB Bandwidth NVNT n40 5795MHz Ant1

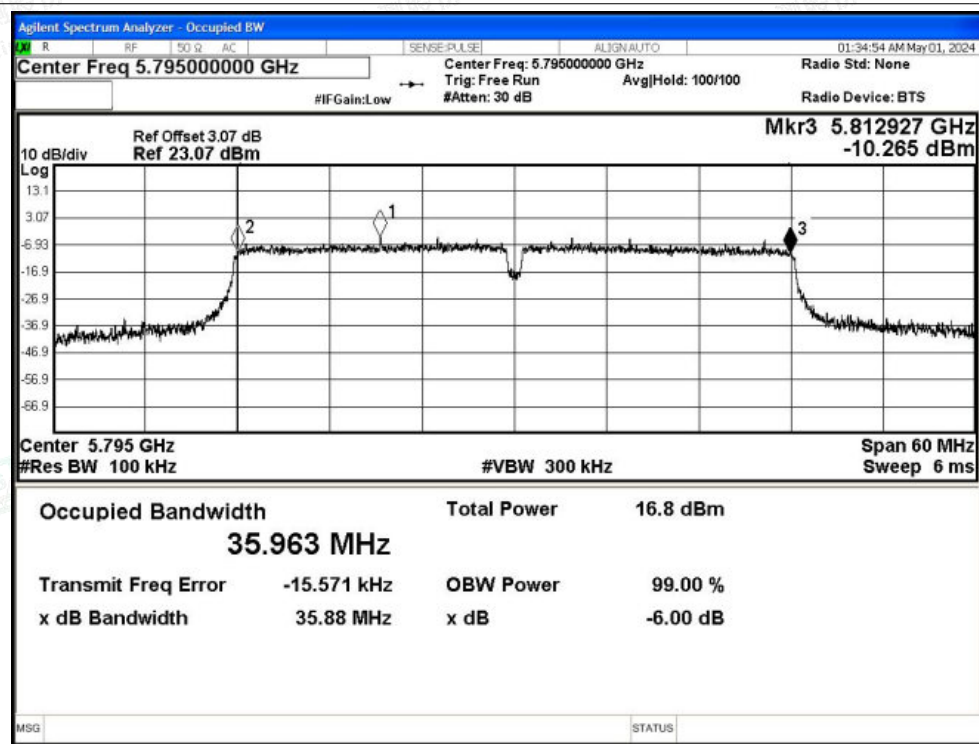




-6dB Bandwidth NVNT ac20 5745MHz Ant1

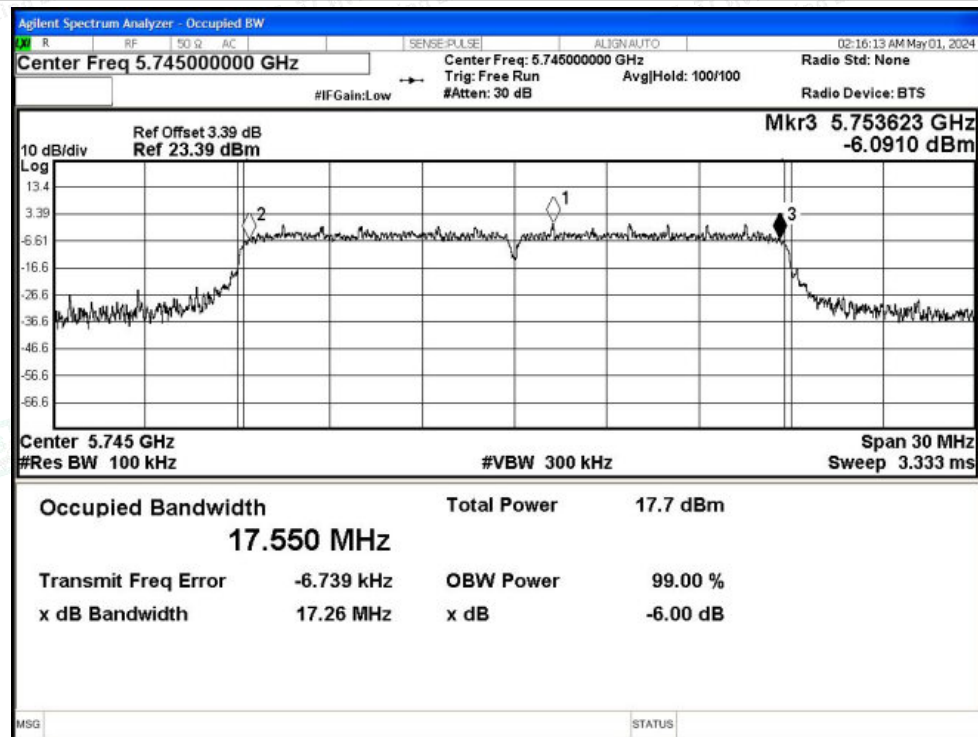


-6dB Bandwidth NVNT ac20 5785MHz Ant1

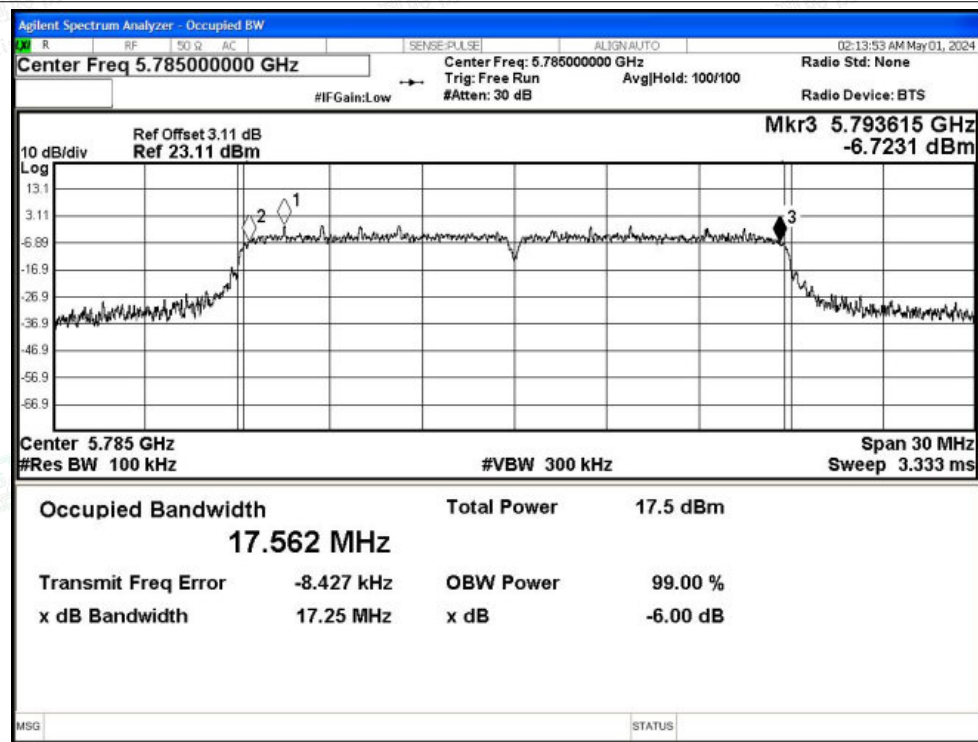




-6dB Bandwidth NVNT ac20 5825MHz Ant1

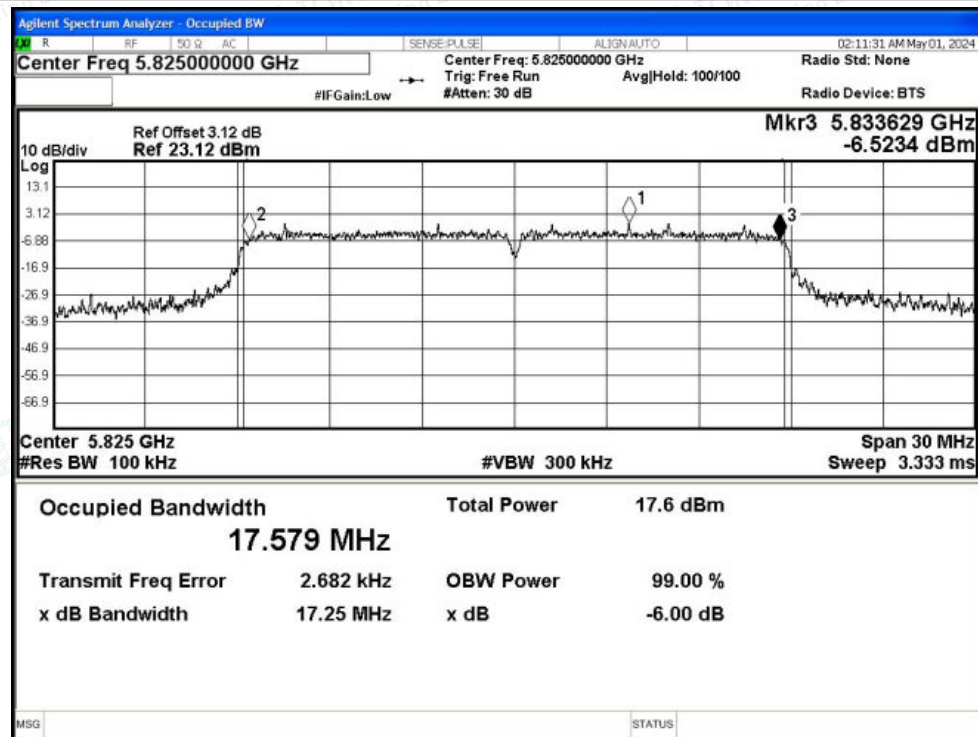


-6dB Bandwidth NVNT ac40 5755MHz Ant1

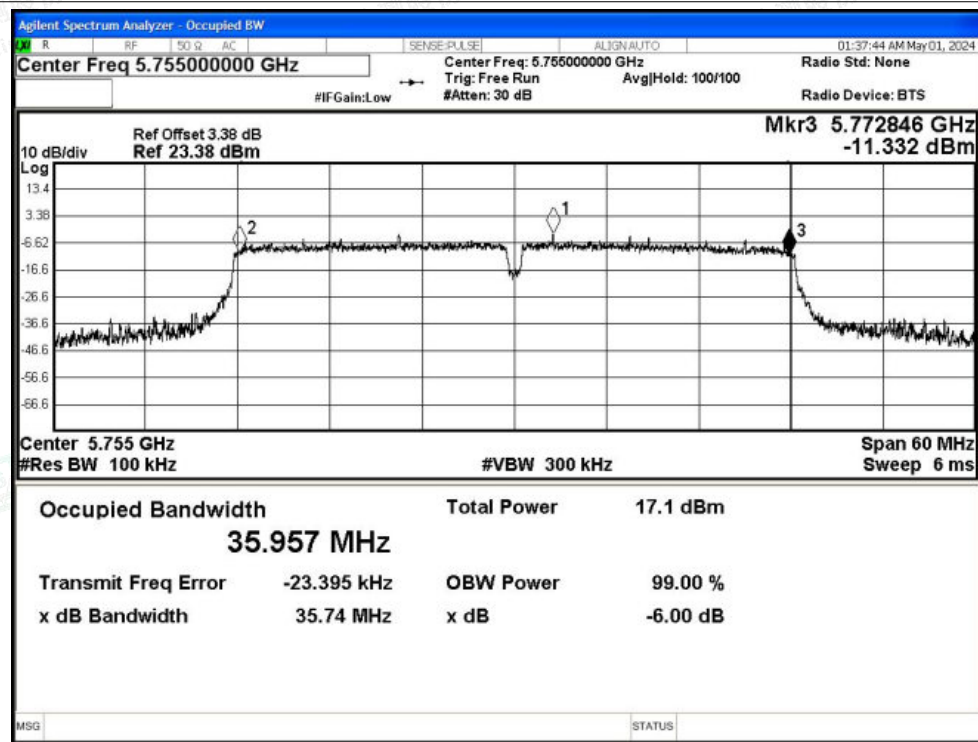




-6dB Bandwidth NVNT ac40 5795MHz Ant1

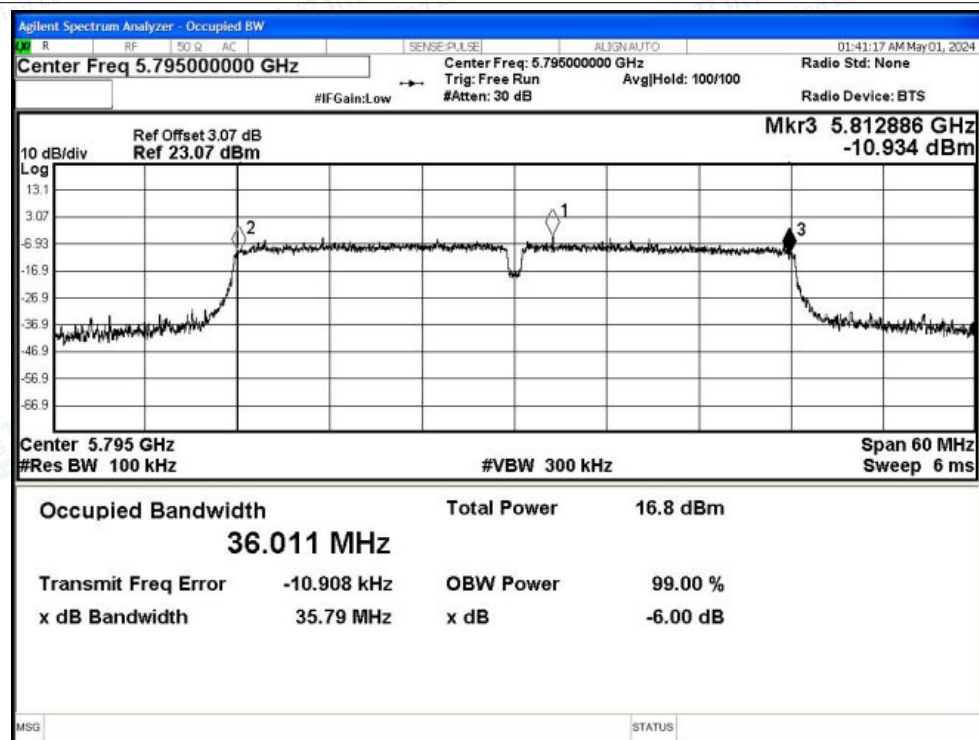


-6dB Bandwidth NVNT ac80 5775MHz Ant1

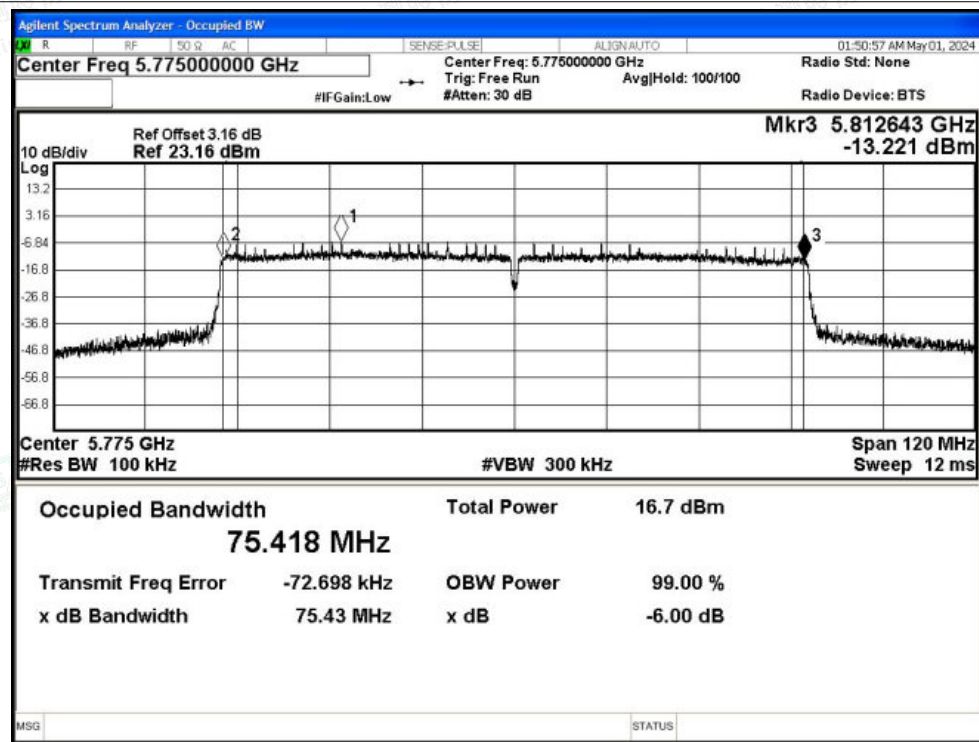




-6dB Bandwidth NVNT ax20 5745MHz Ant1

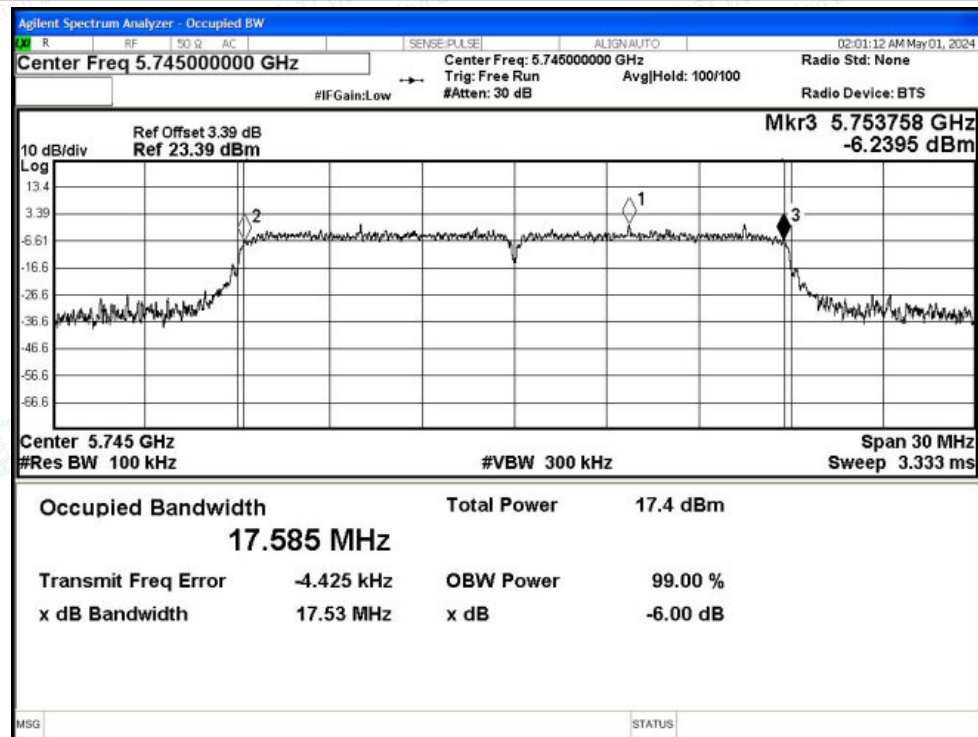

-6dB Bandwidth NVNT ax20 5785MHz Ant1

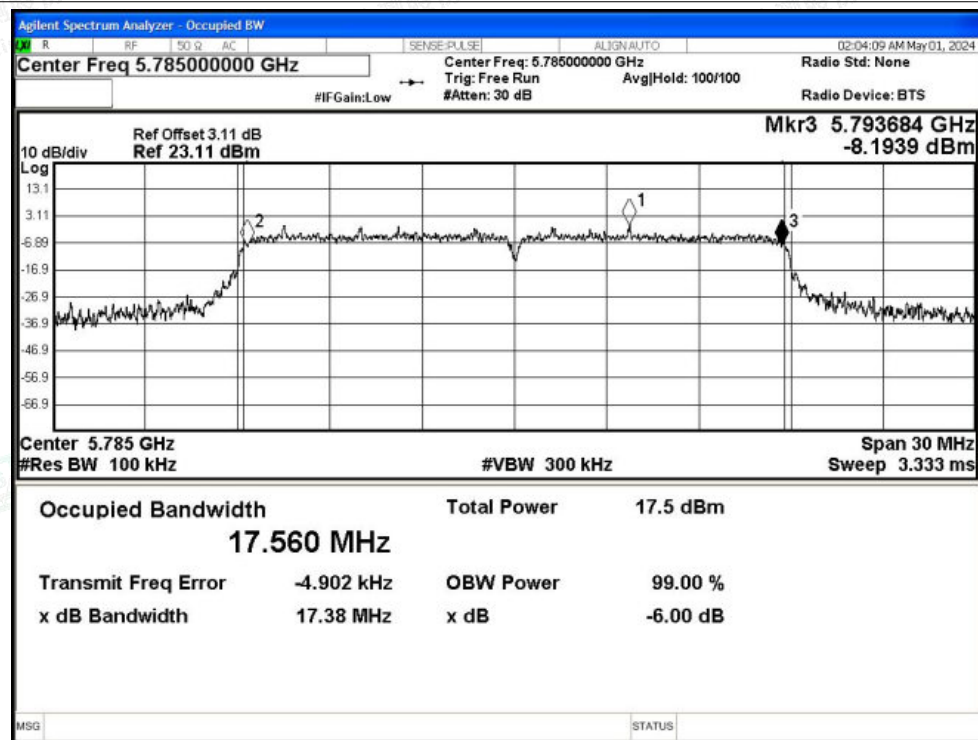




-6dB Bandwidth NVNT ax20 5825MHz Ant1




-6dB Bandwidth NVNT ax40 5755MHz Ant1

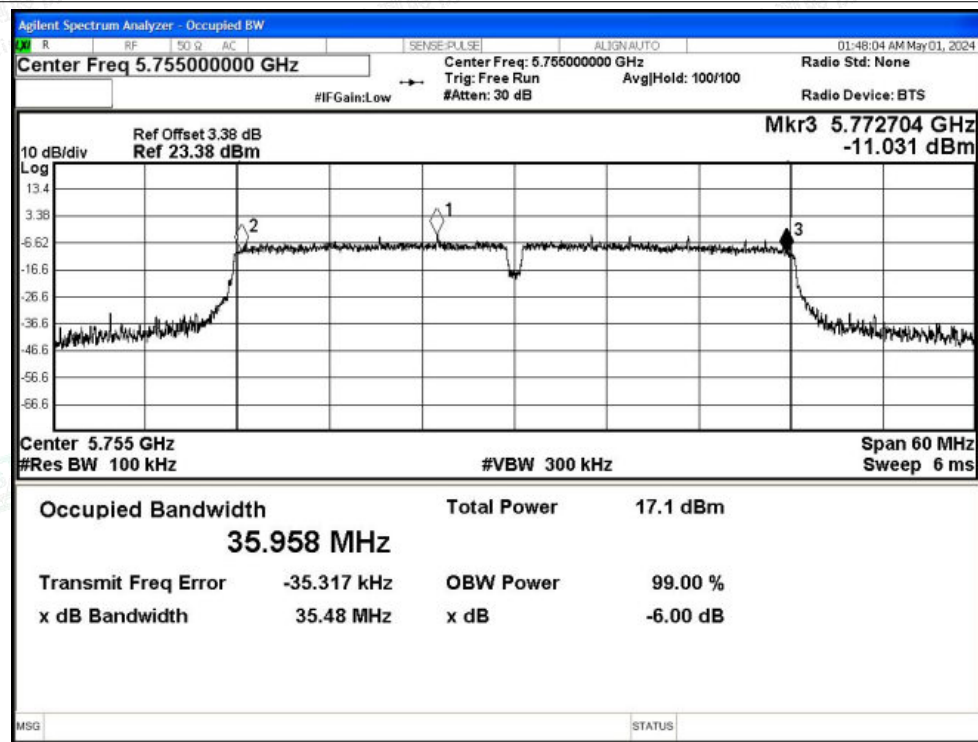




-6dB Bandwidth NVNT ax40 5795MHz Ant1

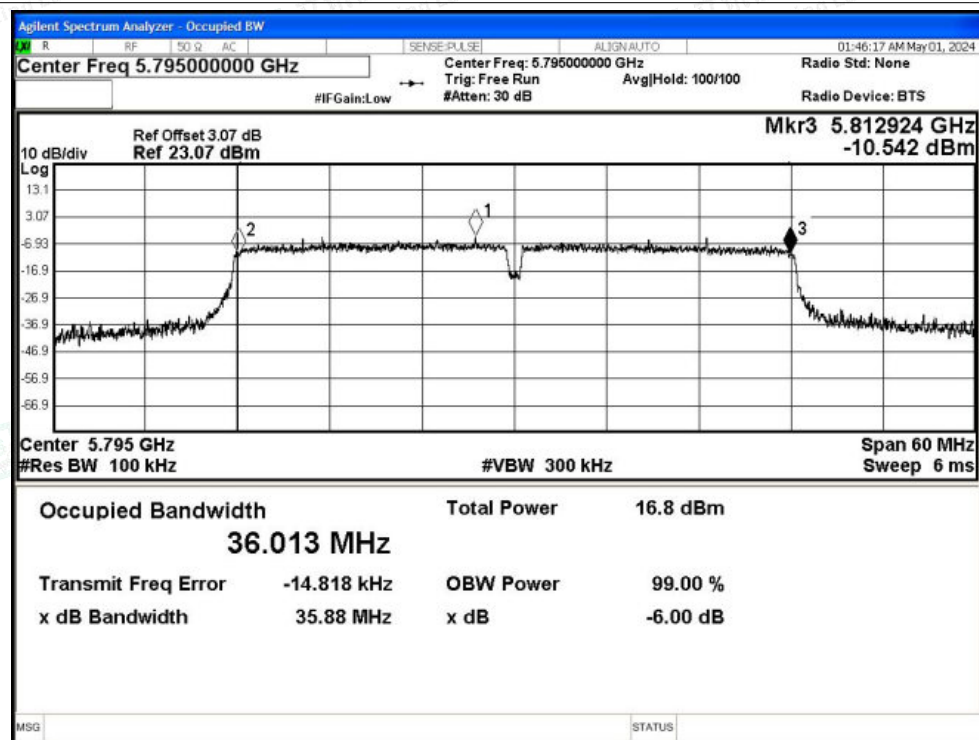

-6dB Bandwidth NVNT ax80 5775MHz Ant1

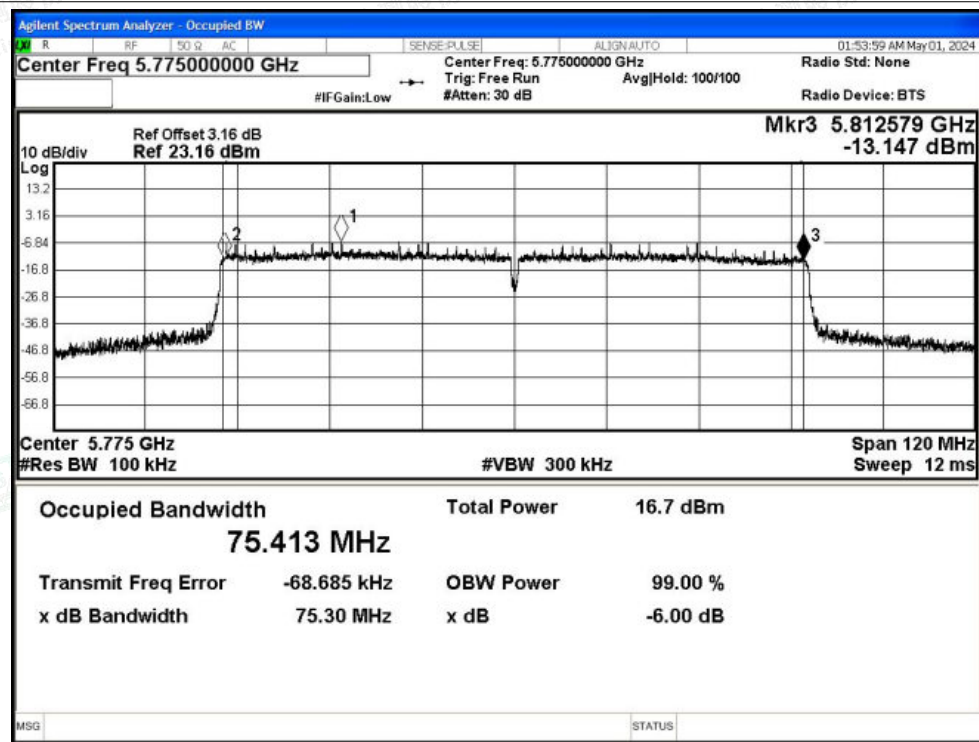




Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant2	16.339	≥ 0.5	Pass
NVNT	a	5785	Ant2	16.332	≥ 0.5	Pass
NVNT	a	5825	Ant2	16.361	≥ 0.5	Pass
NVNT	n20	5745	Ant2	17.419	≥ 0.5	Pass
NVNT	n20	5785	Ant2	17.145	≥ 0.5	Pass
NVNT	n20	5825	Ant2	17.234	≥ 0.5	Pass
NVNT	n40	5755	Ant2	36.27	≥ 0.5	Pass
NVNT	n40	5795	Ant2	35.878	≥ 0.5	Pass
NVNT	ac20	5745	Ant2	17.502	≥ 0.5	Pass
NVNT	ac20	5785	Ant2	17.264	≥ 0.5	Pass
NVNT	ac20	5825	Ant2	17.393	≥ 0.5	Pass
NVNT	ac40	5755	Ant2	36.289	≥ 0.5	Pass
NVNT	ac40	5795	Ant2	35.492	≥ 0.5	Pass
NVNT	ac80	5775	Ant2	75.24	≥ 0.5	Pass
NVNT	ax20	5745	Ant2	17.378	≥ 0.5	Pass
NVNT	ax20	5785	Ant2	17.225	≥ 0.5	Pass
NVNT	ax20	5825	Ant2	17.462	≥ 0.5	Pass
NVNT	ax40	5755	Ant2	36.268	≥ 0.5	Pass
NVNT	ax40	5795	Ant2	35.858	≥ 0.5	Pass
NVNT	ax80	5775	Ant2	74.128	≥ 0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant2

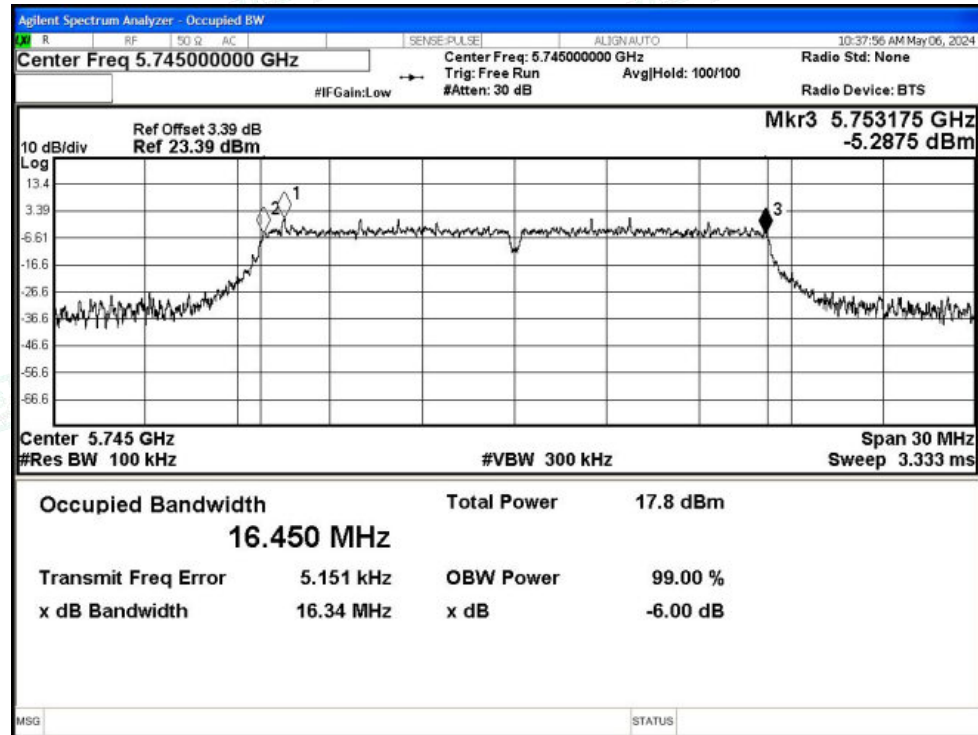


-6dB Bandwidth NVNT a 5785MHz Ant2

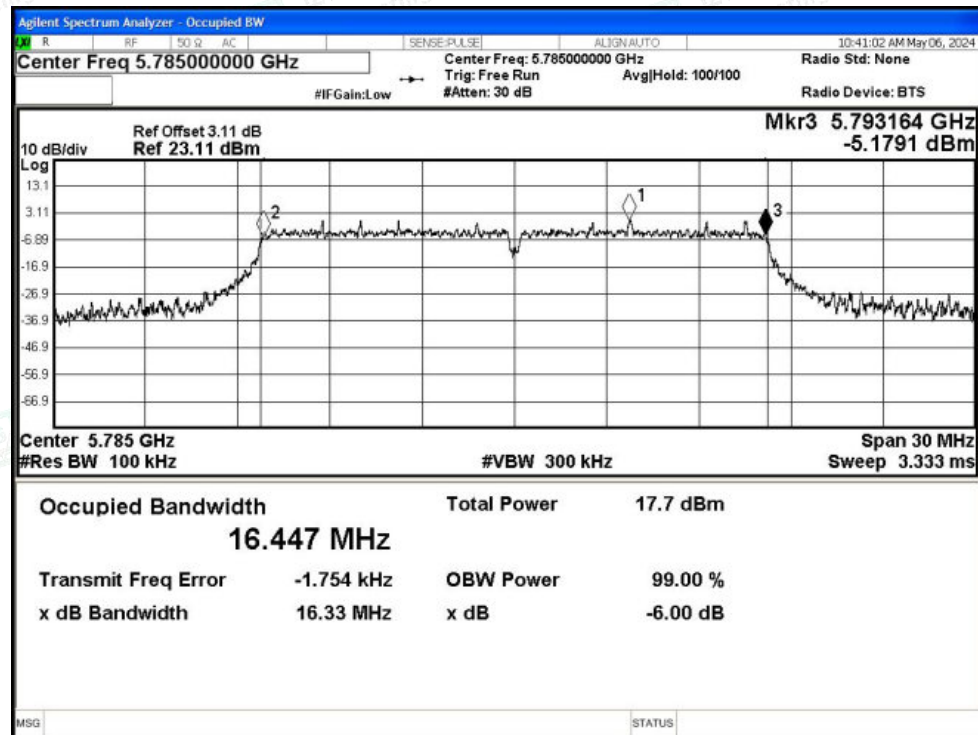




-6dB Bandwidth NVNT a 5825MHz Ant2

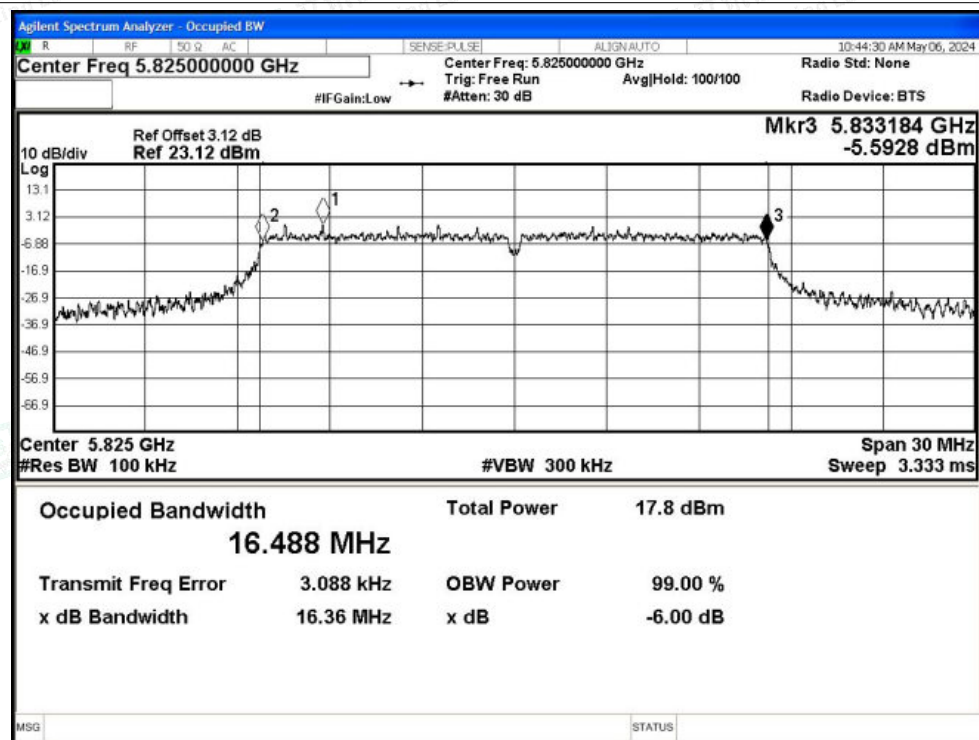


-6dB Bandwidth NVNT n20 5745MHz Ant2

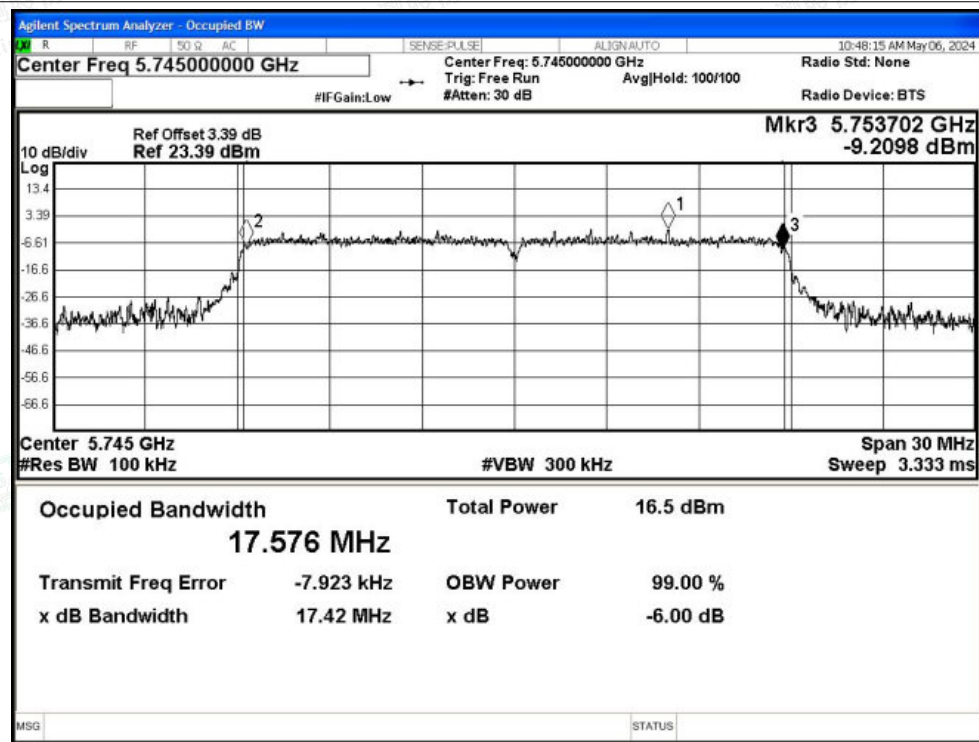




-6dB Bandwidth NVNT n20 5785MHz Ant2

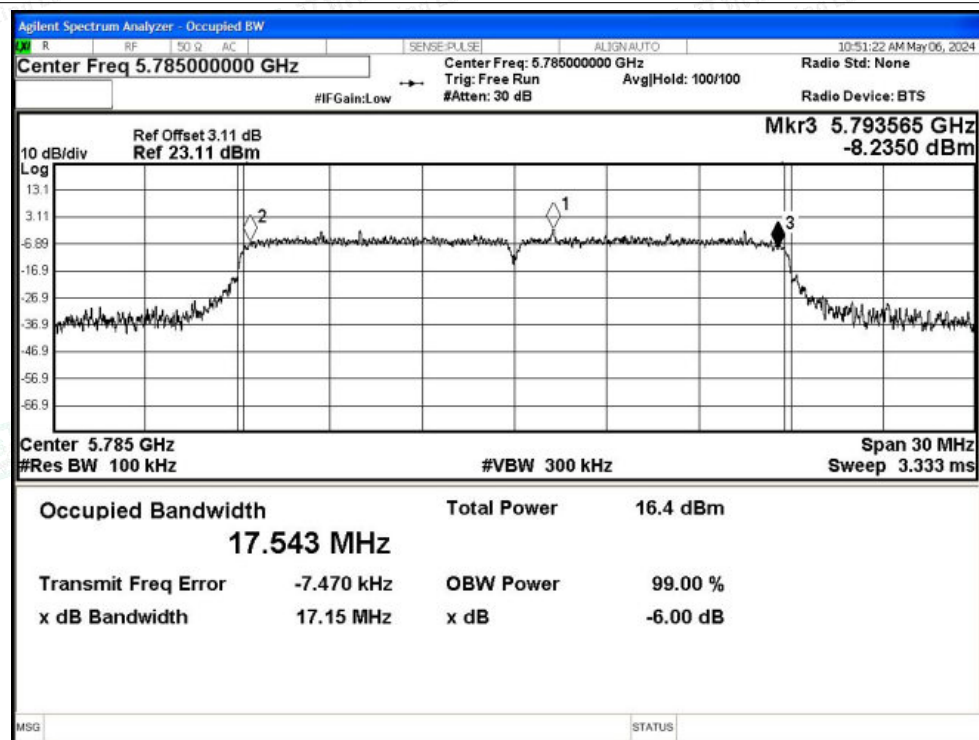


-6dB Bandwidth NVNT n20 5825MHz Ant2

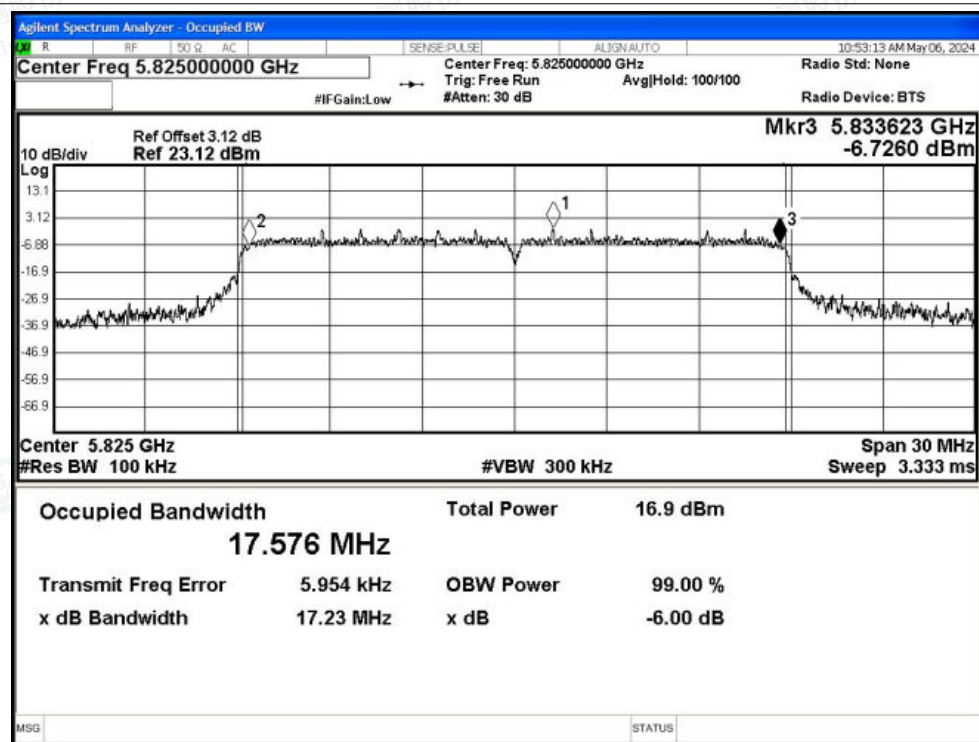




-6dB Bandwidth NVNT n40 5755MHz Ant2

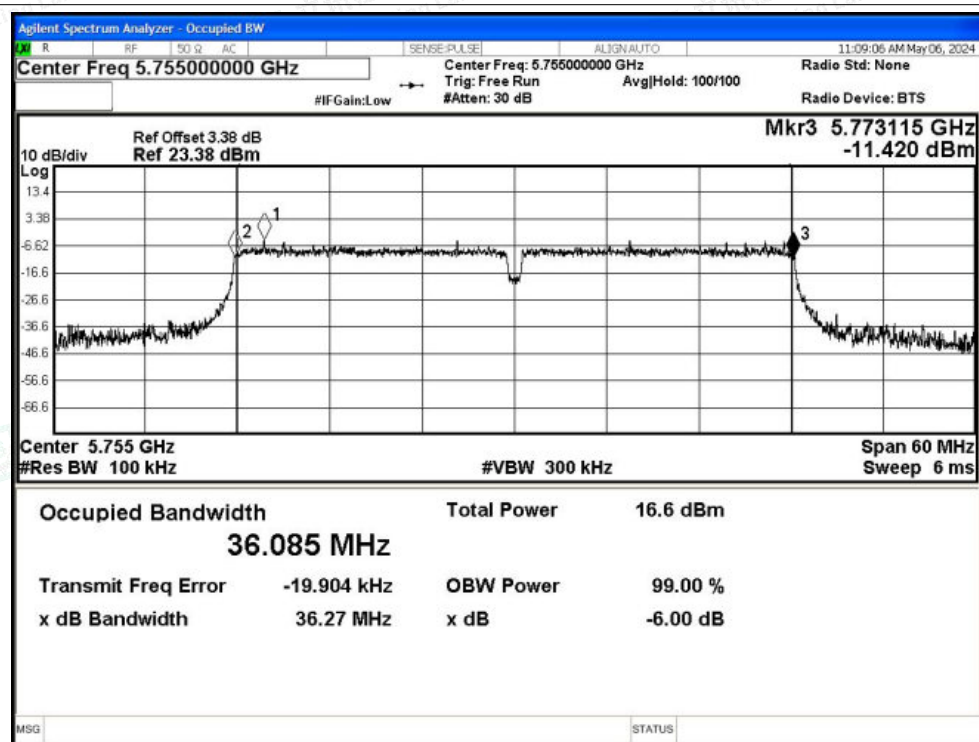


-6dB Bandwidth NVNT n40 5795MHz Ant2

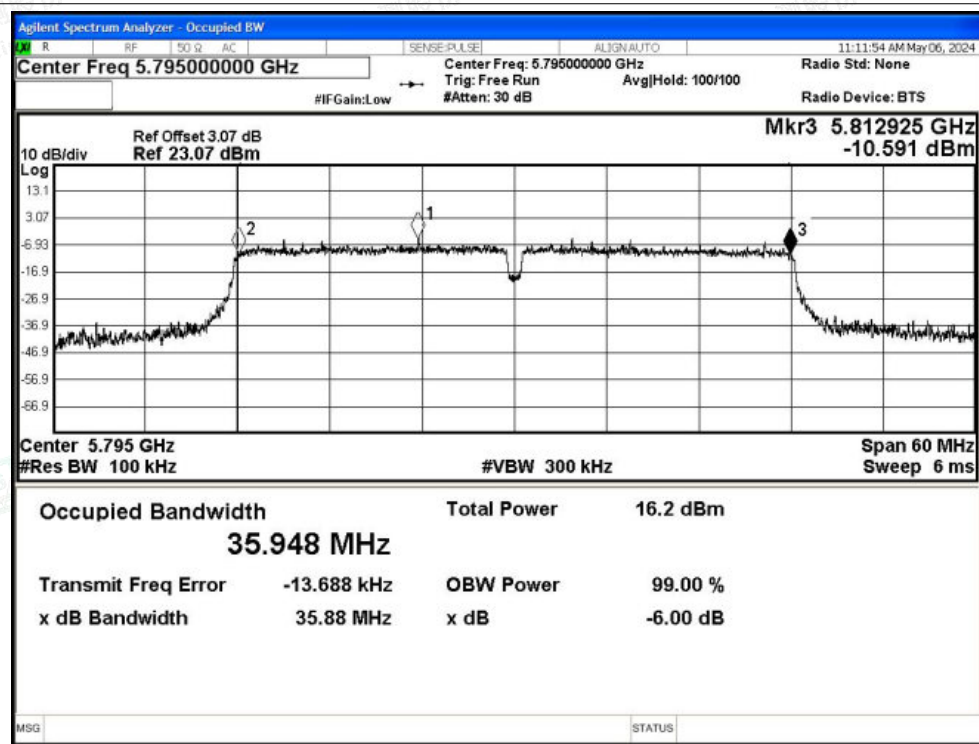




-6dB Bandwidth NVNT ac20 5745MHz Ant2

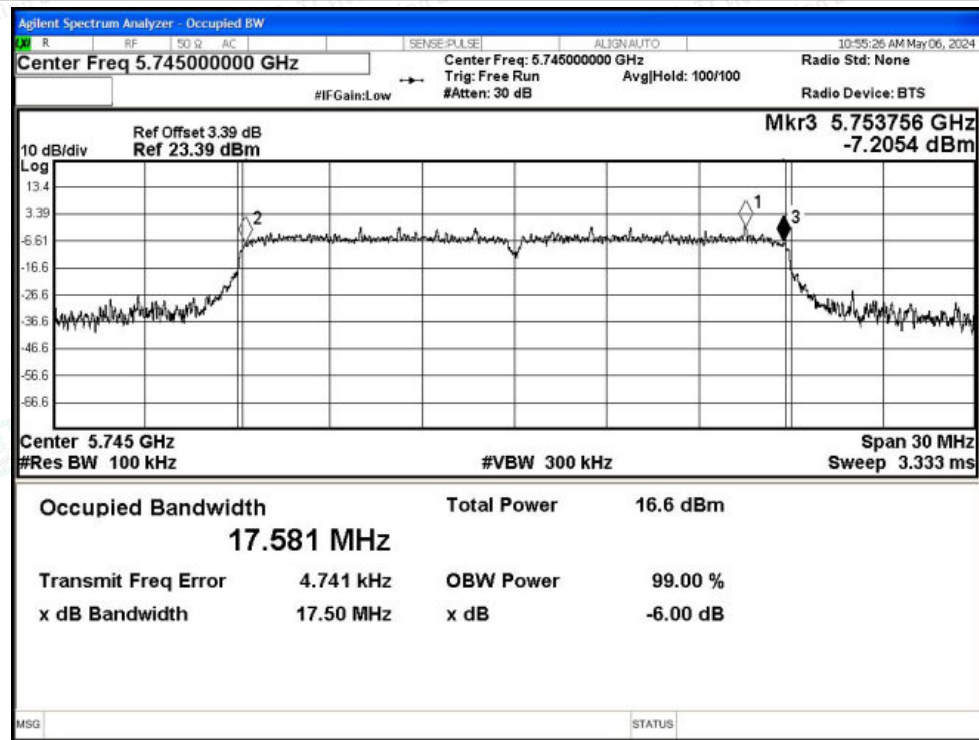


-6dB Bandwidth NVNT ac20 5785MHz Ant2

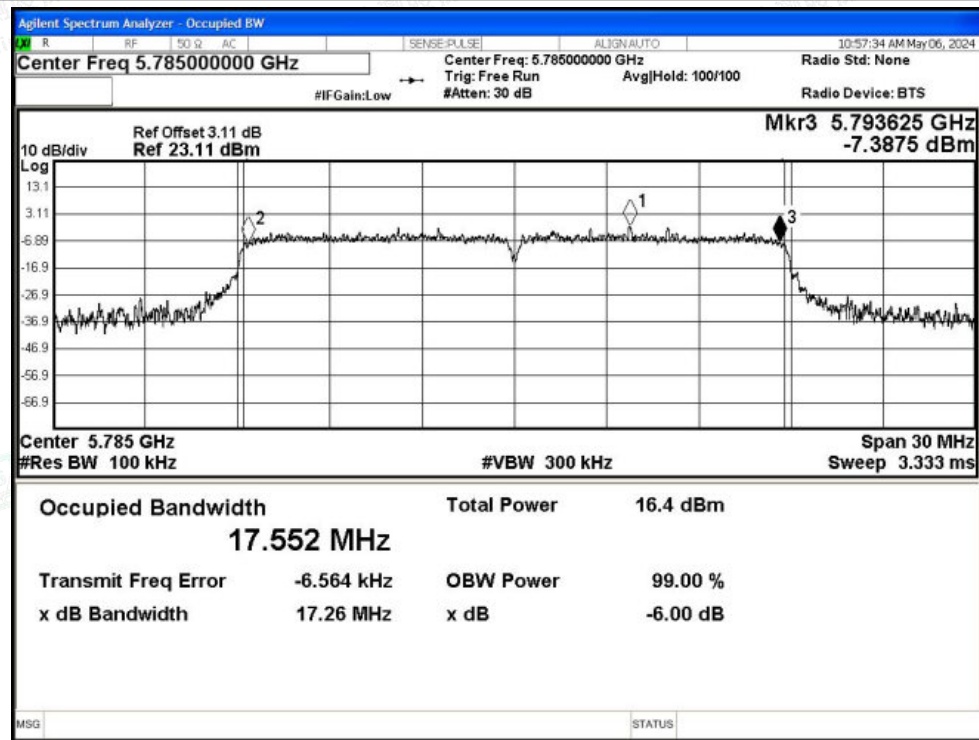




-6dB Bandwidth NVNT ac20 5825MHz Ant2

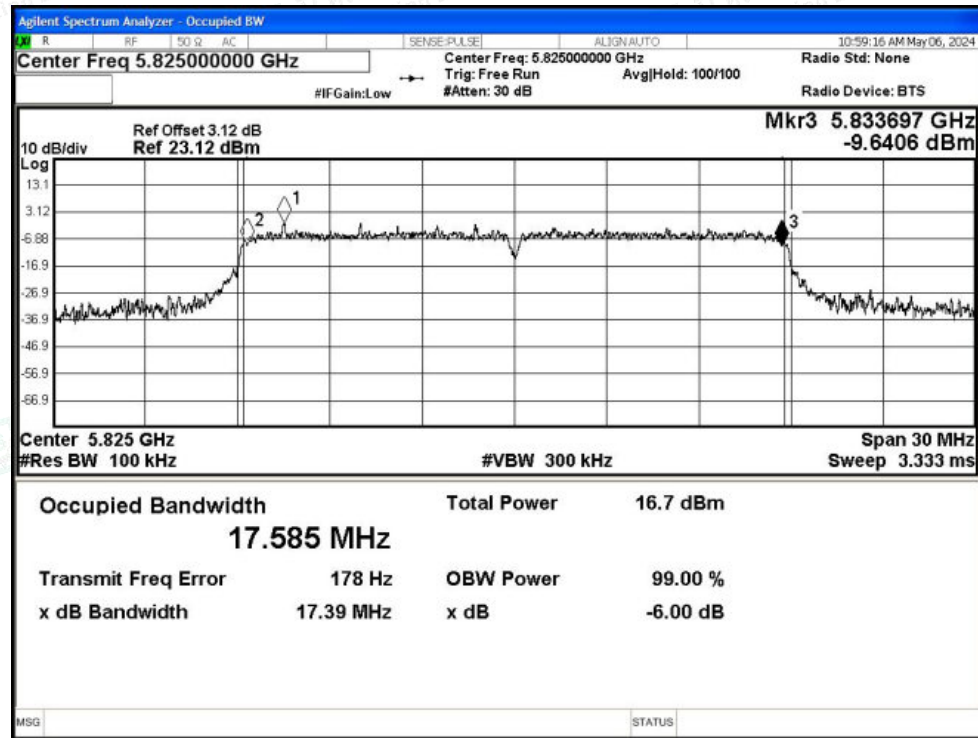


-6dB Bandwidth NVNT ac40 5755MHz Ant2

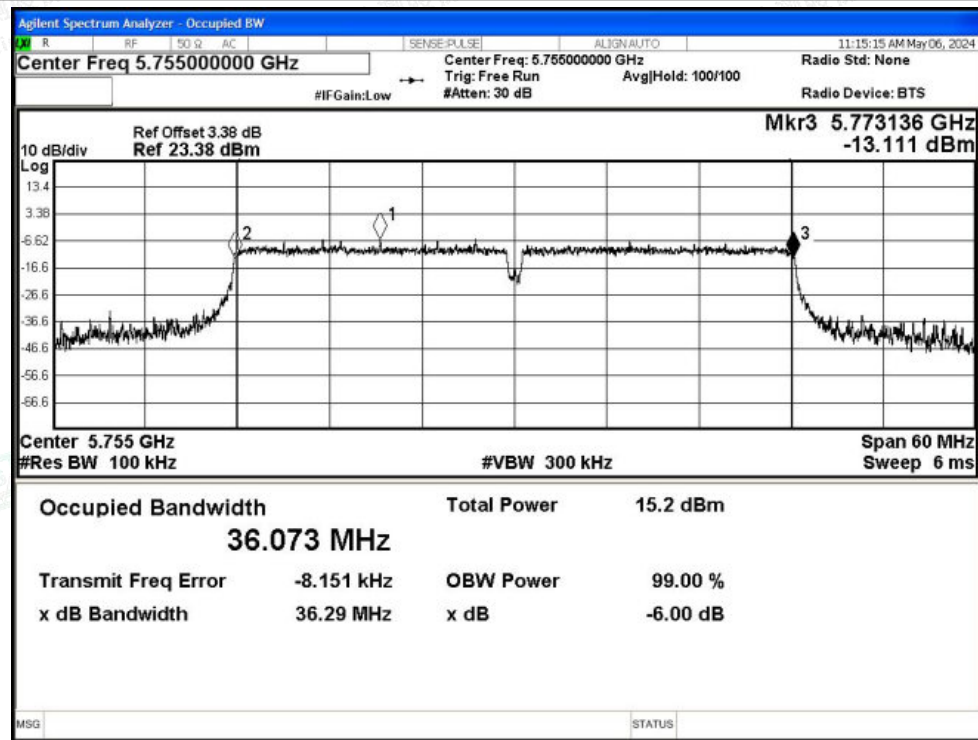




-6dB Bandwidth NVNT ac40 5795MHz Ant2

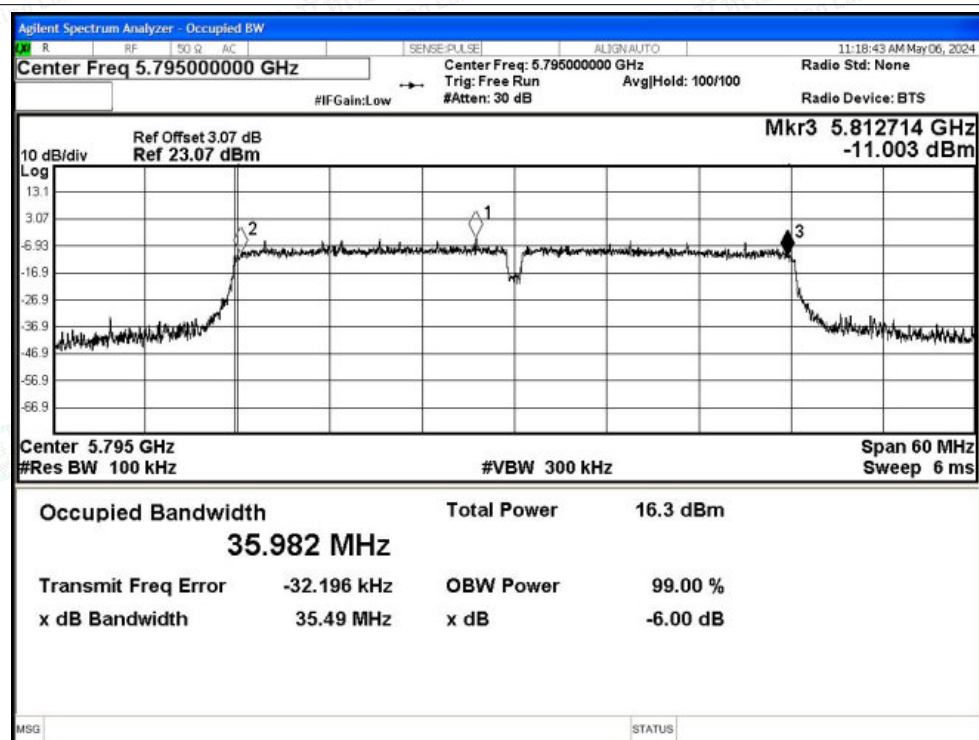


-6dB Bandwidth NVNT ac80 5775MHz Ant2

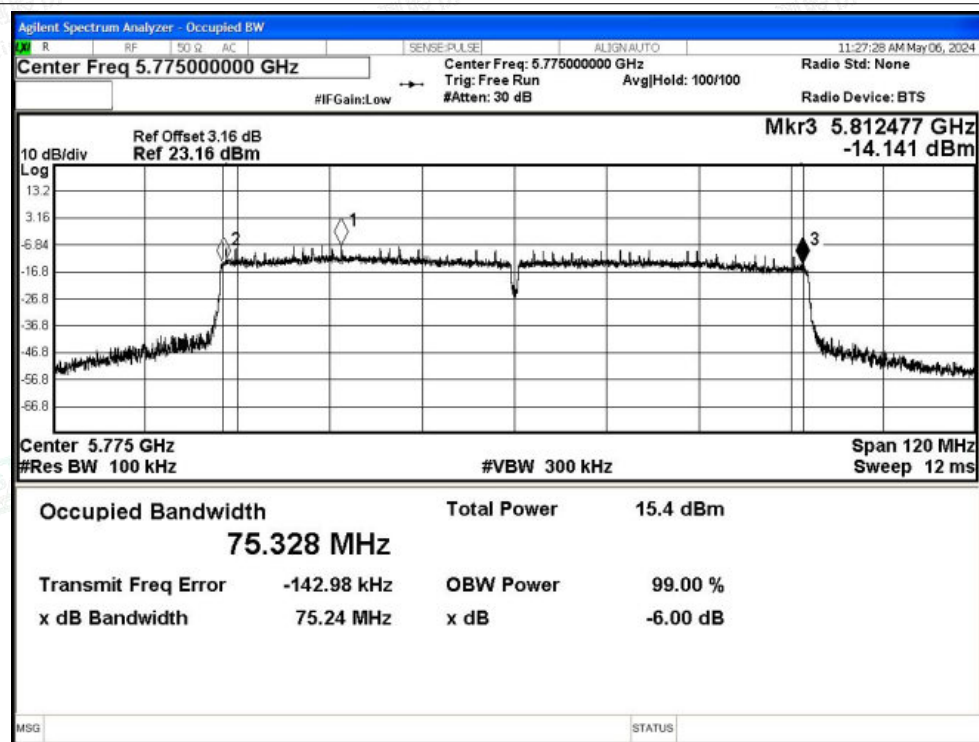




-6dB Bandwidth NVNT ax20 5745MHz Ant2

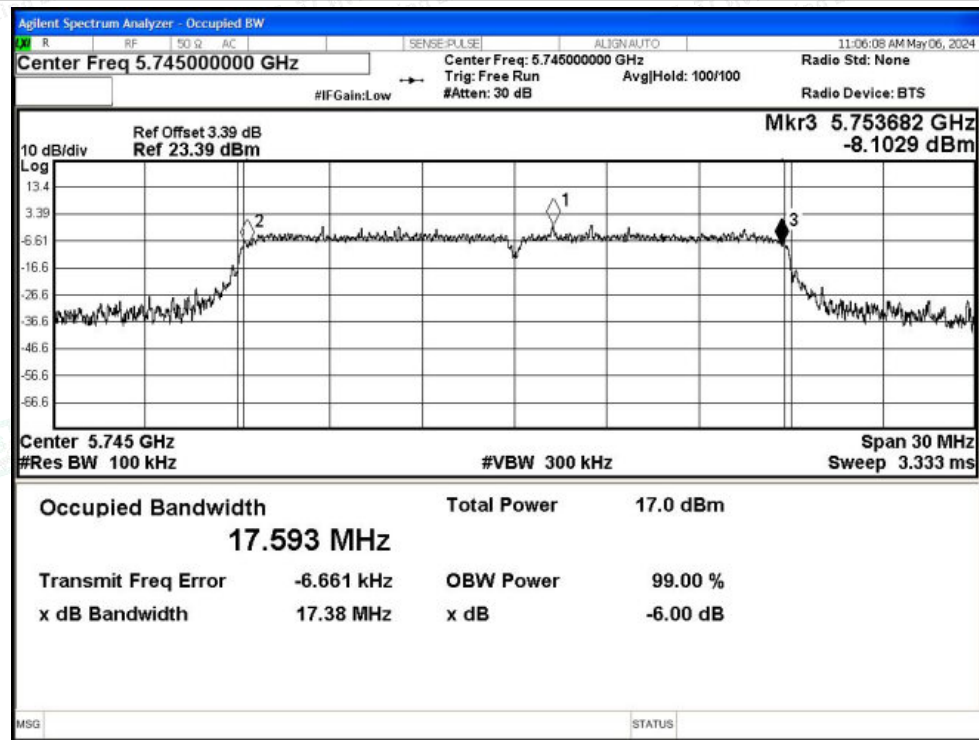


-6dB Bandwidth NVNT ax20 5785MHz Ant2

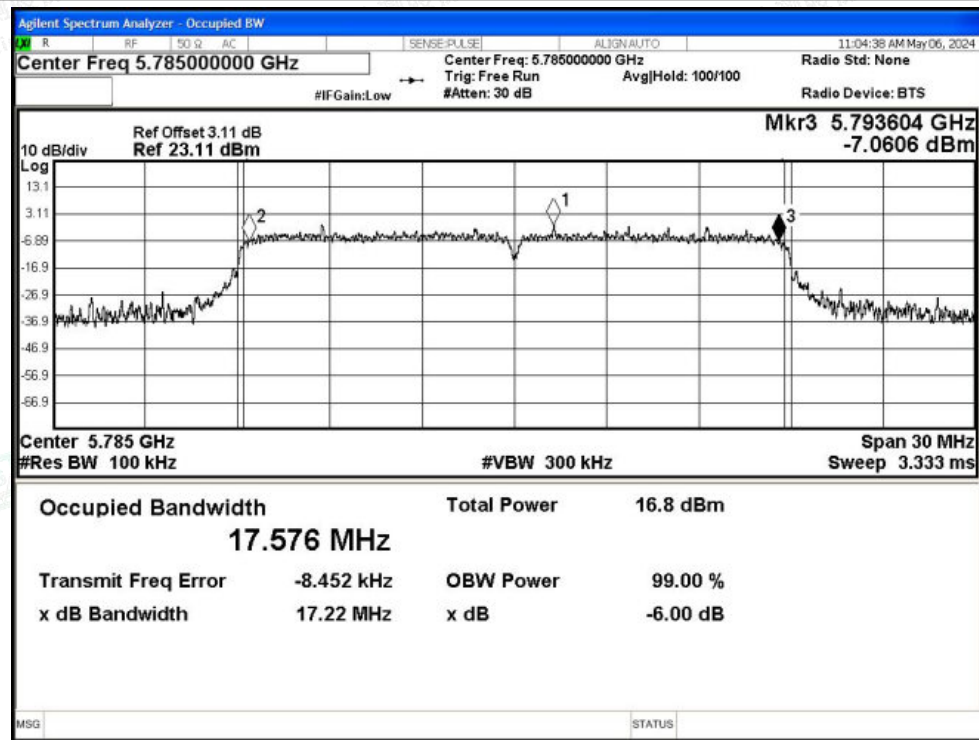




-6dB Bandwidth NVNT ax20 5825MHz Ant2

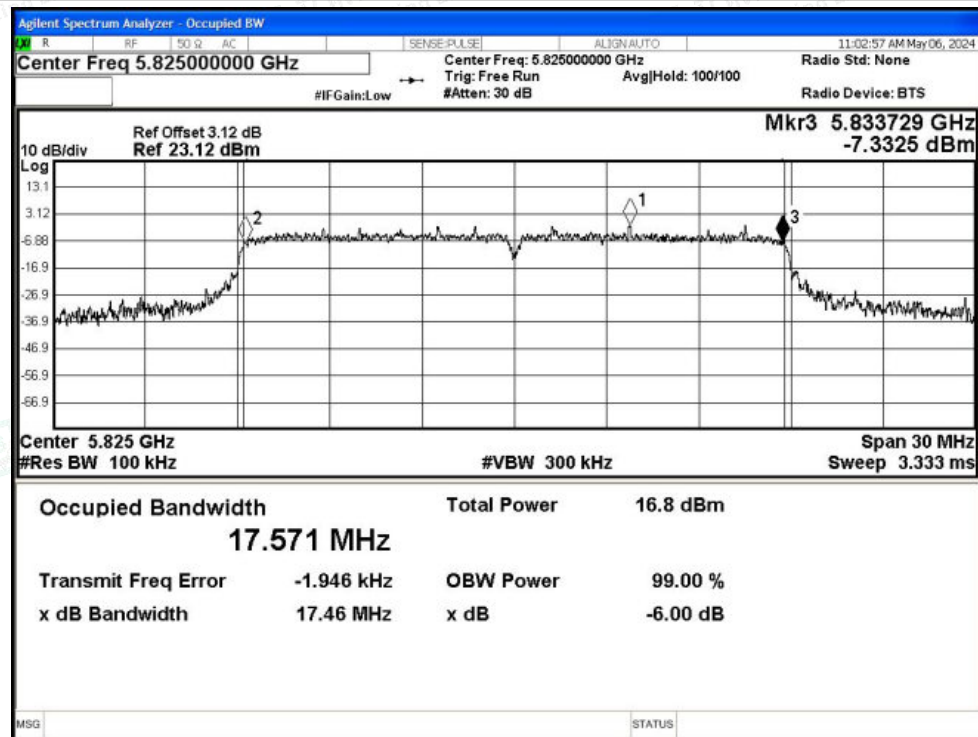


-6dB Bandwidth NVNT ax40 5755MHz Ant2

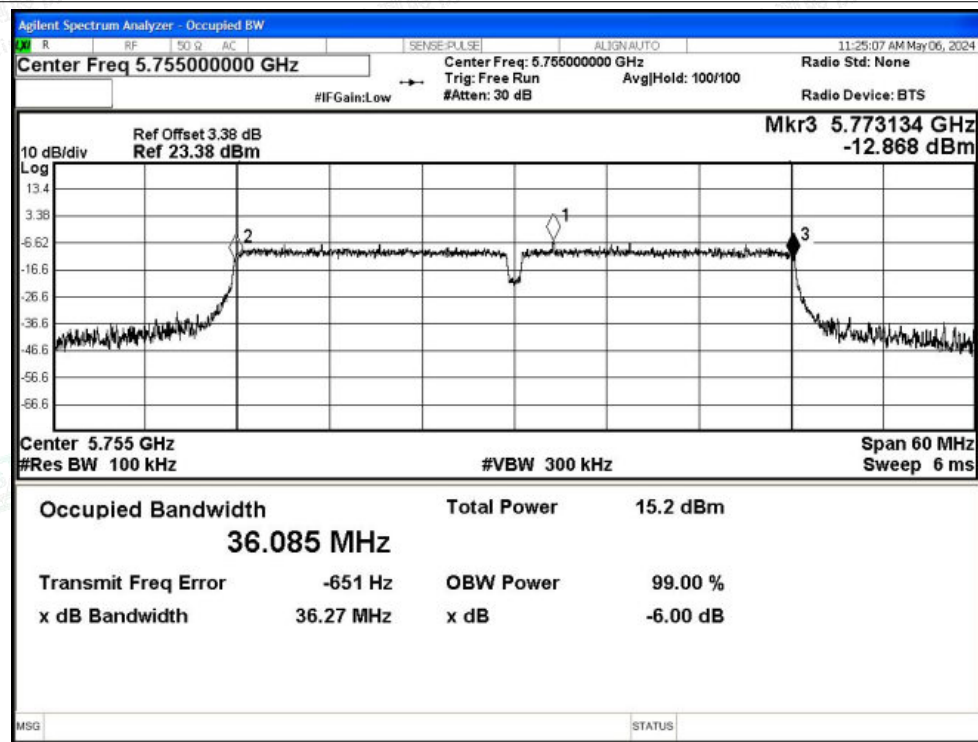




-6dB Bandwidth NVNT ax40 5795MHz Ant2

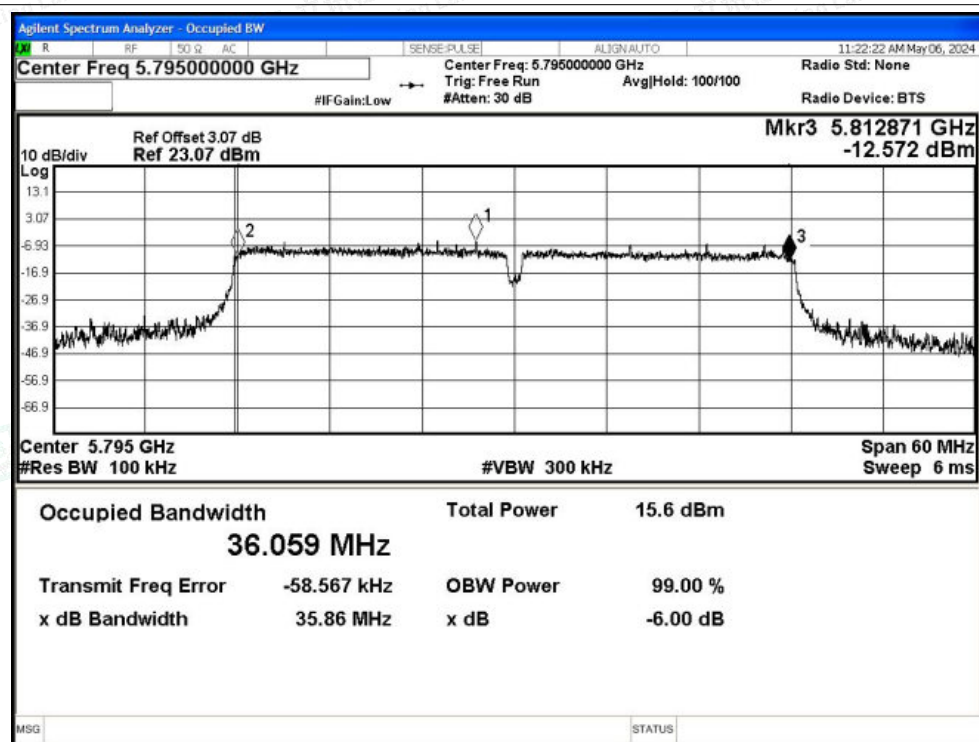

-6dB Bandwidth NVNT ax80 5775MHz Ant2

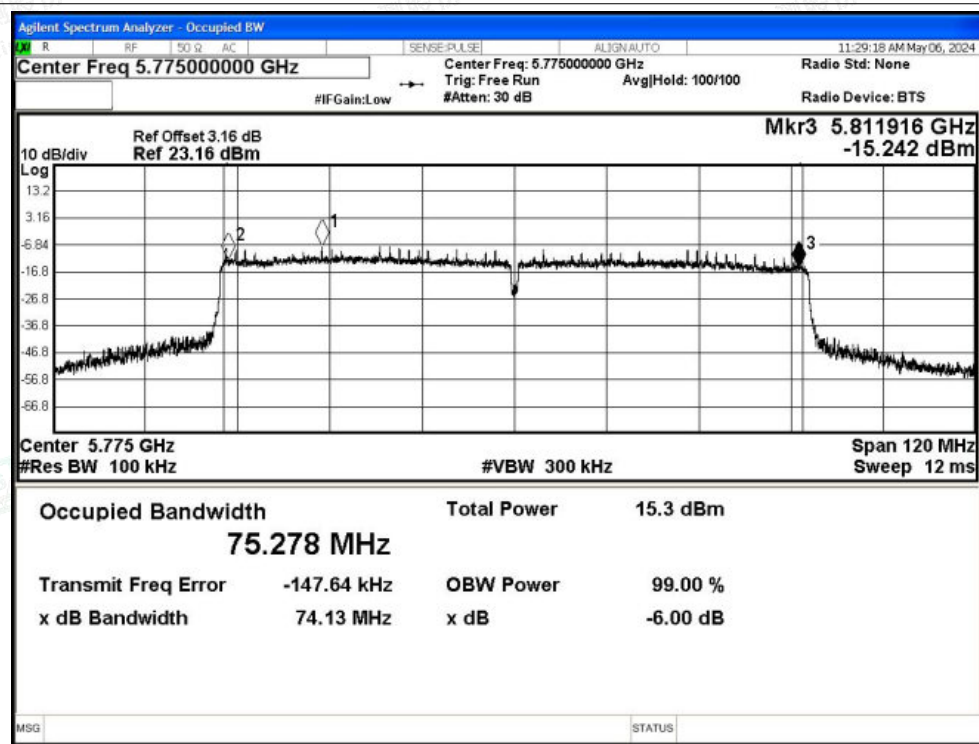



C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.65	0.24	12.89	30	Pass
NVNT	a	5785	Ant1	12.43	0.24	12.67	30	Pass
NVNT	a	5825	Ant1	11.95	0.24	12.19	30	Pass
NVNT	n20	5745	Ant1	11.17	0.28	11.45	30	Pass
NVNT	n20	5785	Ant1	11.01	0.28	11.29	30	Pass
NVNT	n20	5825	Ant1	11.25	0.28	11.53	30	Pass
NVNT	n40	5755	Ant1	10.73	0.12	10.85	30	Pass
NVNT	n40	5795	Ant1	10.48	0.12	10.6	30	Pass
NVNT	ac20	5745	Ant1	11.17	0.28	11.45	30	Pass
NVNT	ac20	5785	Ant1	11.03	0.28	11.31	30	Pass
NVNT	ac20	5825	Ant1	11.24	0.28	11.52	30	Pass
NVNT	ac40	5755	Ant1	10.76	0.12	10.88	30	Pass
NVNT	ac40	5795	Ant1	10.5	0.12	10.62	30	Pass
NVNT	ac80	5775	Ant1	9.79	0.25	10.04	30	Pass
NVNT	ax20	5745	Ant1	11.19	0.28	11.47	30	Pass
NVNT	ax20	5785	Ant1	11.09	0.28	11.37	30	Pass
NVNT	ax20	5825	Ant1	11.21	0.28	11.49	30	Pass
NVNT	ax40	5755	Ant1	10.72	0.12	10.84	30	Pass
NVNT	ax40	5795	Ant1	10.49	0.12	10.61	30	Pass
NVNT	ax80	5775	Ant1	9.68	0.25	9.93	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	11.8	0.24	12.04	30	Pass
NVNT	a	5785	Ant2	11.67	0.24	11.91	30	Pass
NVNT	a	5825	Ant2	11.88	0.24	12.12	30	Pass
NVNT	n20	5745	Ant2	10.14	0.28	10.42	30	Pass
NVNT	n20	5785	Ant2	9.95	0.28	10.23	30	Pass
NVNT	n20	5825	Ant2	10.31	0.28	10.59	30	Pass
NVNT	n40	5755	Ant2	9	0.12	9.12	30	Pass
NVNT	n40	5795	Ant2	9.18	0.12	9.3	30	Pass
NVNT	ac20	5745	Ant2	10.1	0.28	10.38	30	Pass
NVNT	ac20	5785	Ant2	9.97	0.28	10.25	30	Pass
NVNT	ac20	5825	Ant2	10.32	0.28	10.6	30	Pass
NVNT	ac40	5755	Ant2	9.41	0.12	9.53	30	Pass
NVNT	ac40	5795	Ant2	9.13	0.12	9.25	30	Pass
NVNT	ac80	5775	Ant2	8.4	0.25	8.65	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ax20	5745	Ant2	10.45	0.28	10.73	30	Pass
NVNT	ax20	5785	Ant2	10.46	0.28	10.74	30	Pass
NVNT	ax20	5825	Ant2	10.42	0.28	10.7	30	Pass
NVNT	ax40	5755	Ant2	9.32	0.12	9.44	30	Pass
NVNT	ax40	5795	Ant2	9.04	0.12	9.16	30	Pass
NVNT	ax80	5775	Ant2	8.39	0.25	8.64	30	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+ Ant2		
NVNT	n20	5745	11.45	10.42	13.98	28.03	Pass
NVNT	n20	5785	11.29	10.23	13.80	28.03	Pass
NVNT	n20	5825	11.53	10.59	14.10	28.03	Pass
NVNT	n40	5755	10.85	9.12	13.08	28.03	Pass
NVNT	n40	5795	10.6	9.3	13.01	28.03	Pass
NVNT	ac20	5745	11.45	10.38	13.96	28.03	Pass
NVNT	ac20	5785	11.31	10.25	13.82	28.03	Pass
NVNT	ac20	5825	11.52	10.6	14.09	28.03	Pass
NVNT	ac40	5755	10.88	9.53	13.27	28.03	Pass
NVNT	ac40	5795	10.62	9.25	13.00	28.03	Pass
NVNT	ac80	5775	10.04	8.65	12.41	28.03	Pass
NVNT	ax20	5745	11.47	10.73	14.13	28.03	Pass
NVNT	ax20	5785	11.37	10.74	14.08	28.03	Pass
NVNT	ax20	5825	11.49	10.7	14.12	28.03	Pass
NVNT	ax40	5755	10.84	9.44	13.21	28.03	Pass
NVNT	ax40	5795	10.61	9.16	12.96	28.03	Pass
NVNT	ax80	5775	9.93	8.64	12.34	28.03	Pass





C.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-1.09	0.24	-0.85	30	Pass
NVNT	a	5785	Ant1	-1.21	0.24	-0.97	30	Pass
NVNT	a	5825	Ant1	-1.73	0.24	-1.49	30	Pass
NVNT	n20	5745	Ant1	-2.7	0.28	-2.42	30	Pass
NVNT	n20	5785	Ant1	-2.86	0.28	-2.58	30	Pass
NVNT	n20	5825	Ant1	-2.58	0.28	-2.3	30	Pass
NVNT	n40	5755	Ant1	-5.92	0.12	-5.8	30	Pass
NVNT	n40	5795	Ant1	-6.04	0.12	-5.92	30	Pass
NVNT	ac20	5745	Ant1	-2.62	0.28	-2.34	30	Pass
NVNT	ac20	5785	Ant1	-2.72	0.28	-2.44	30	Pass
NVNT	ac20	5825	Ant1	-2.25	0.28	-1.97	30	Pass
NVNT	ac40	5755	Ant1	-5.83	0.12	-5.71	30	Pass
NVNT	ac40	5795	Ant1	-6.2	0.12	-6.08	30	Pass
NVNT	ac80	5775	Ant1	-9.65	0.25	-9.4	30	Pass
NVNT	ax20	5745	Ant1	-2.68	0.28	-2.4	30	Pass
NVNT	ax20	5785	Ant1	-2.62	0.28	-2.34	30	Pass
NVNT	ax20	5825	Ant1	-2.49	0.28	-2.21	30	Pass
NVNT	ax40	5755	Ant1	-6.05	0.12	-5.93	30	Pass
NVNT	ax40	5795	Ant1	-6	0.12	-5.88	30	Pass
NVNT	ax80	5775	Ant1	-9.68	0.25	-9.43	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant2	-1.75	0.24	-1.51	30	Pass
NVNT	a	5785	Ant2	-1.93	0.24	-1.69	30	Pass
NVNT	a	5825	Ant2	-1.21	0.24	-0.97	30	Pass
NVNT	n20	5745	Ant2	-3.77	0.28	-3.49	30	Pass
NVNT	n20	5785	Ant2	-3.87	0.28	-3.59	30	Pass
NVNT	n20	5825	Ant2	-3.45	0.28	-3.17	30	Pass
NVNT	n40	5755	Ant2	-6.65	0.12	-6.53	30	Pass
NVNT	n40	5795	Ant2	-6.77	0.12	-6.65	30	Pass
NVNT	ac20	5745	Ant2	-3.72	0.28	-3.44	30	Pass
NVNT	ac20	5785	Ant2	-3.93	0.28	-3.65	30	Pass
NVNT	ac20	5825	Ant2	-3.45	0.28	-3.17	30	Pass
NVNT	ac40	5755	Ant2	-7.78	0.12	-7.66	30	Pass
NVNT	ac40	5795	Ant2	-6.67	0.12	-6.55	30	Pass
NVNT	ac80	5775	Ant2	-10.71	0.25	-10.46	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ax20	5745	Ant2	-3.26	0.28	-2.98	30	Pass
NVNT	ax20	5785	Ant2	-3.27	0.28	-2.99	30	Pass
NVNT	ax20	5825	Ant2	-3.37	0.28	-3.09	30	Pass
NVNT	ax40	5755	Ant2	-7.69	0.12	-7.57	30	Pass
NVNT	ax40	5795	Ant2	-7.15	0.12	-7.03	30	Pass
NVNT	ax80	5775	Ant2	-10.86	0.25	-10.61	30	Pass

MIMO


Condition	Mode	Frequency (MHz)	Total PSD (dBm/500KHz)			Limit (dBm/500KHz)	Verdict
			Ant1	Ant2	Ant1+ Ant2		
NVNT	n20	5745	-2.42	-3.49	0.09	28.85	Pass
NVNT	n20	5785	-2.58	-3.59	-0.05	28.85	Pass
NVNT	n20	5825	-2.3	-3.17	0.30	28.85	Pass
NVNT	n40	5755	-5.8	-6.53	-3.14	28.85	Pass
NVNT	n40	5795	-5.92	-6.65	-3.26	28.85	Pass
NVNT	ac20	5745	-2.34	-3.44	0.16	28.85	Pass
NVNT	ac20	5785	-2.44	-3.65	0.01	28.85	Pass
NVNT	ac20	5825	-1.97	-3.17	0.48	28.85	Pass
NVNT	ac40	5755	-5.71	-7.66	-3.57	28.85	Pass
NVNT	ac40	5795	-6.08	-6.55	-3.30	28.85	Pass
NVNT	ac80	5775	-9.4	-10.46	-6.89	28.85	Pass
NVNT	ax20	5745	-2.4	-2.98	0.33	28.85	Pass
NVNT	ax20	5785	-2.34	-2.99	0.36	28.85	Pass
NVNT	ax20	5825	-2.21	-3.09	0.38	28.85	Pass
NVNT	ax40	5755	-5.93	-7.57	-3.66	28.85	Pass
NVNT	ax40	5795	-5.88	-7.03	-3.41	28.85	Pass
NVNT	ax80	5775	-9.43	-10.61	-6.97	28.85	Pass






Test Graphs

PSD NVNT a 5745MHz Ant1

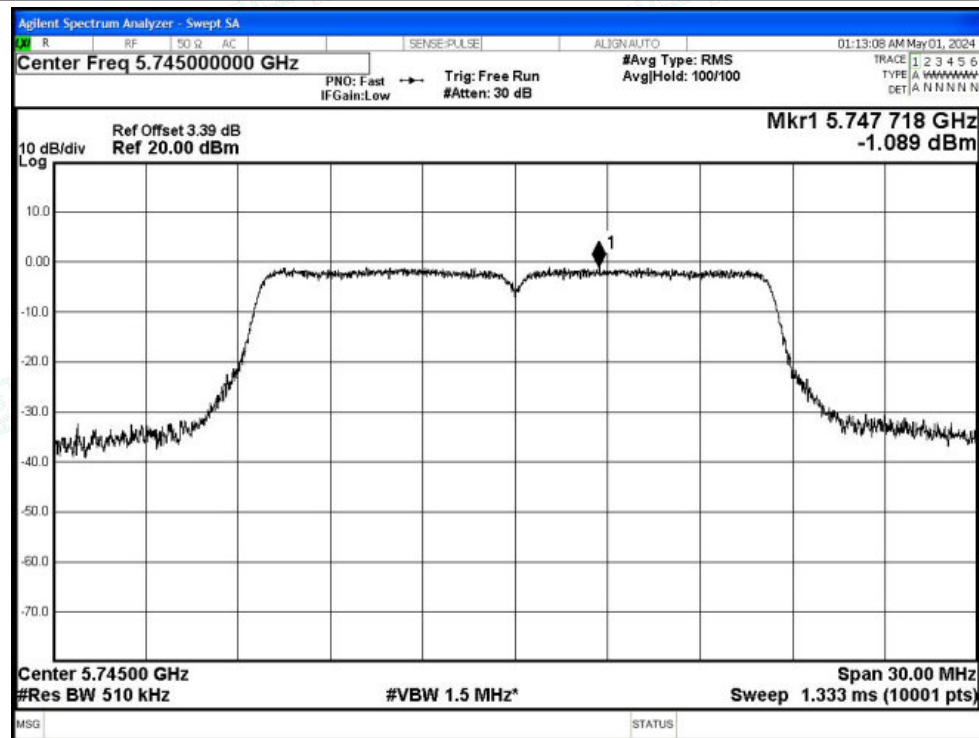


PSD NVNT a 5785MHz Ant1

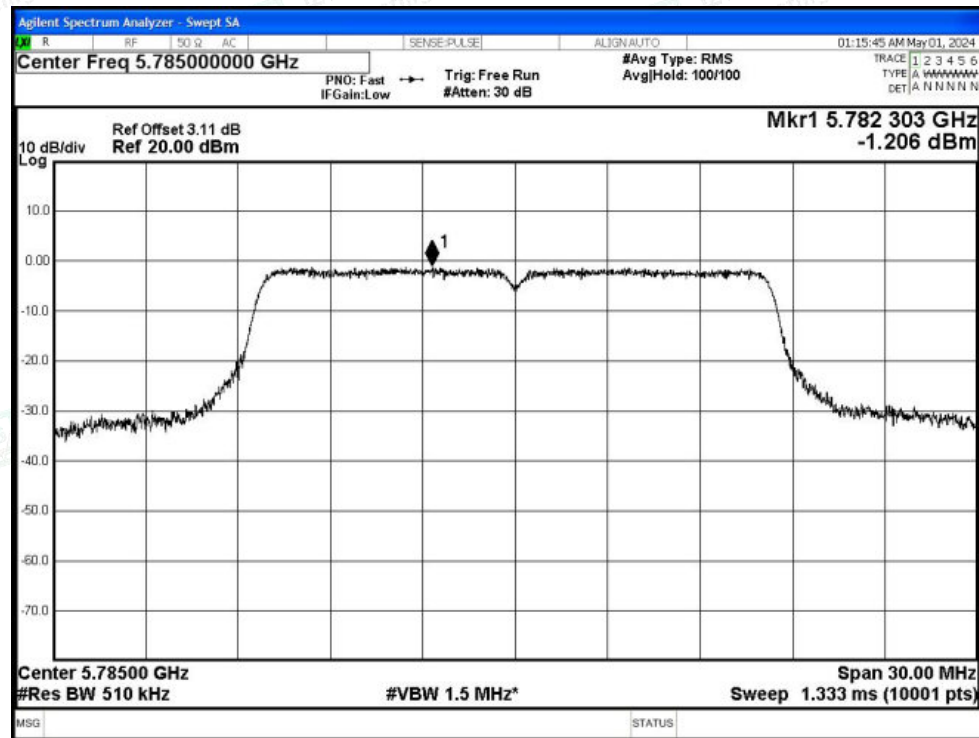








PSD NVNT a 5825MHz Ant1

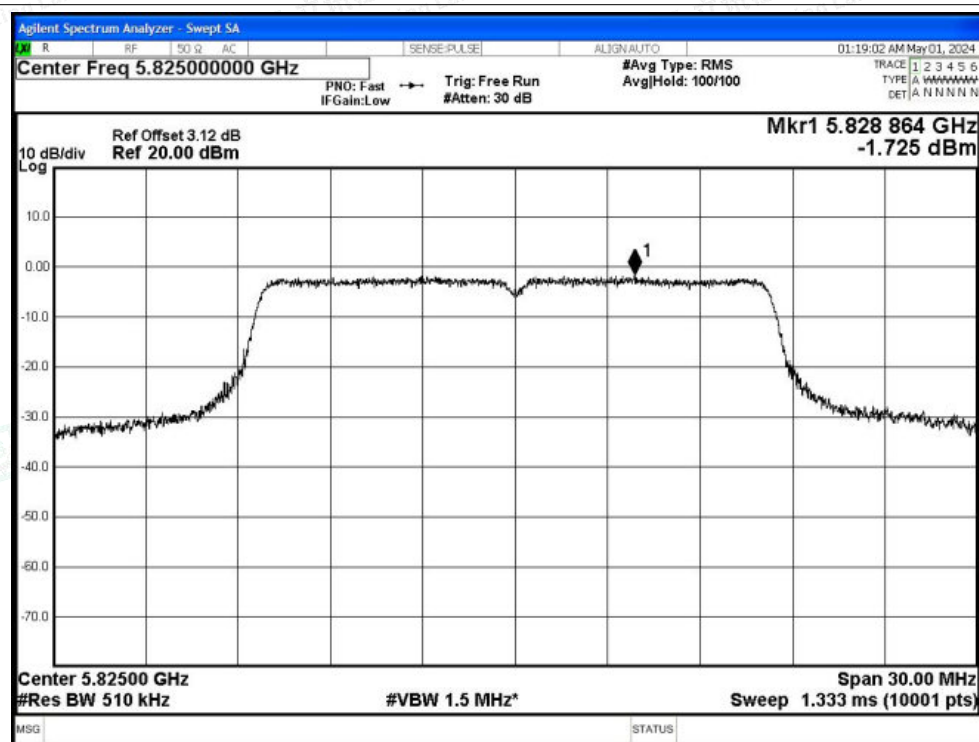

PSD NVNT n20 5745MHz Ant1

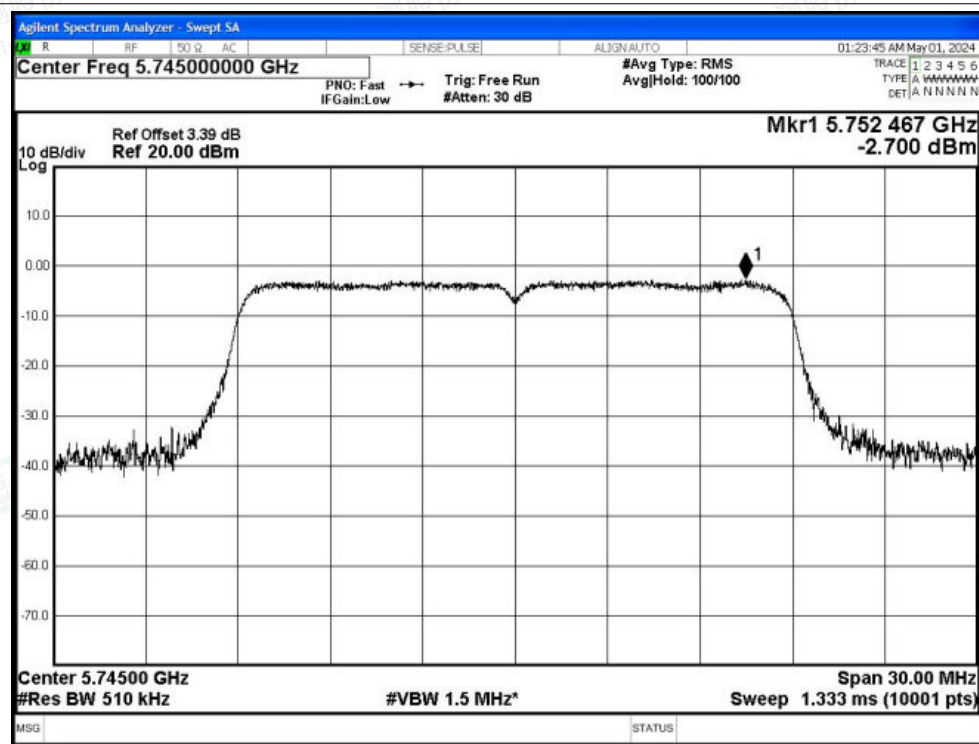


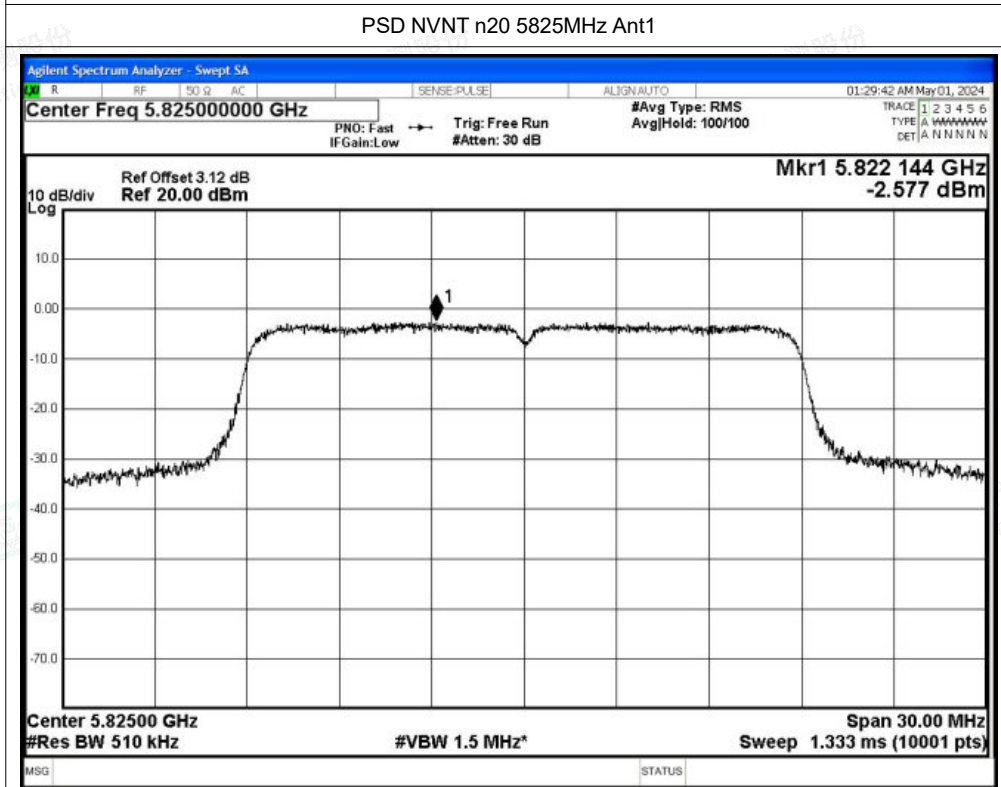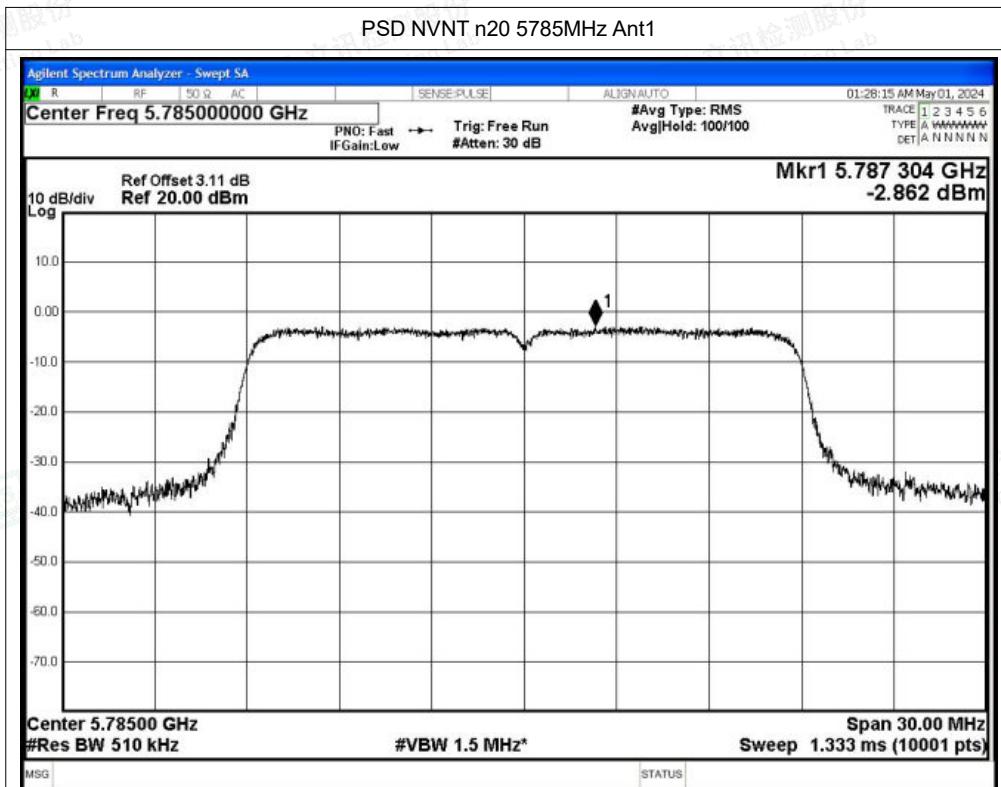

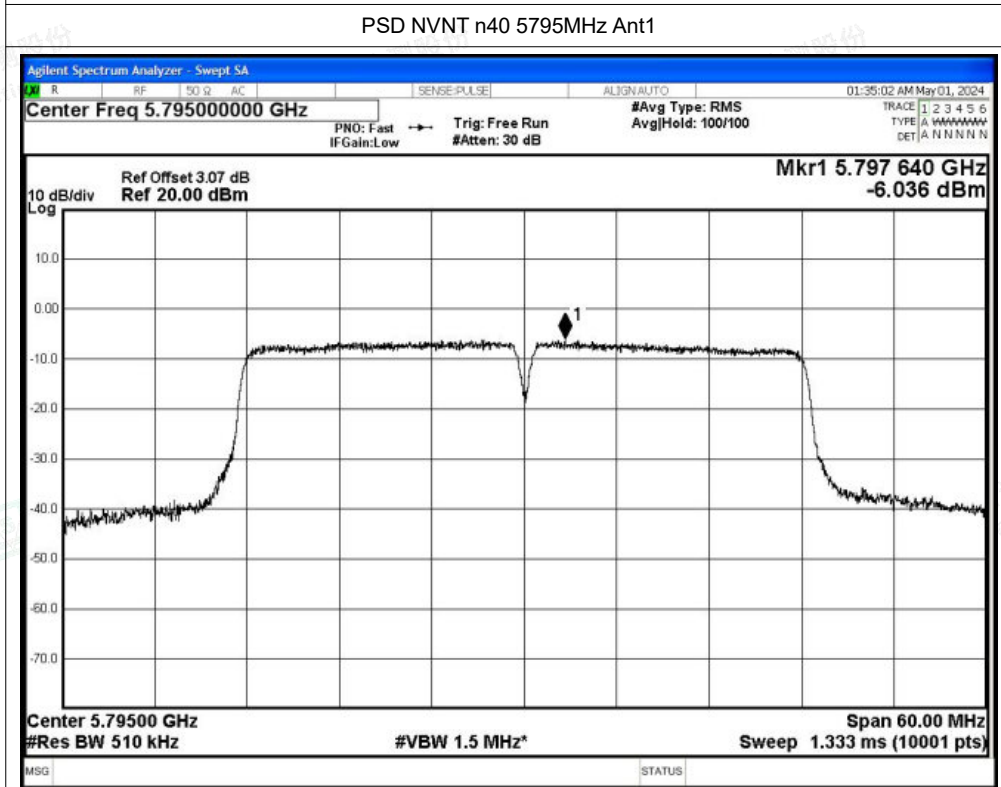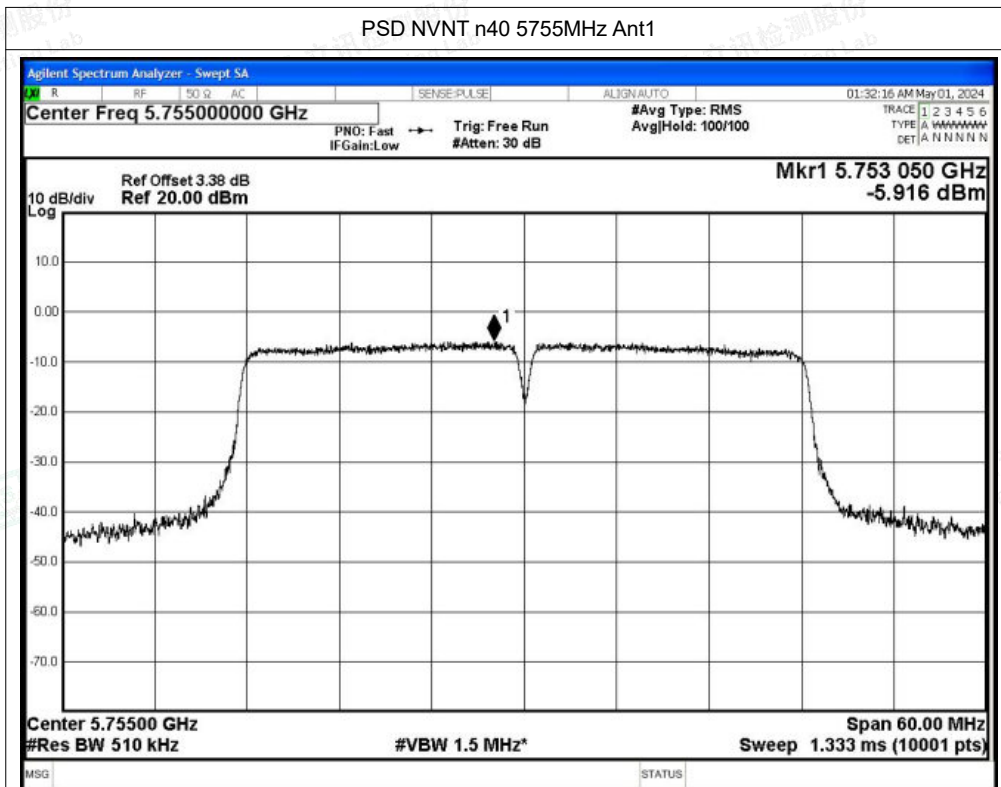




PSD NVNT ac20 5745MHz Ant1

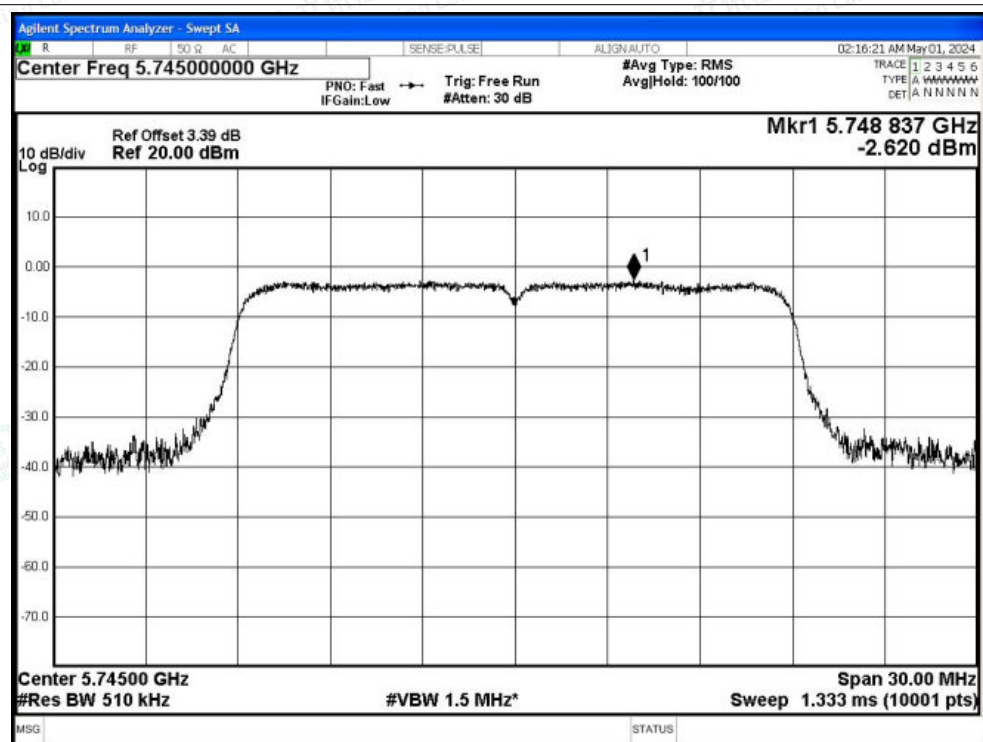


PSD NVNT ac20 5785MHz Ant1

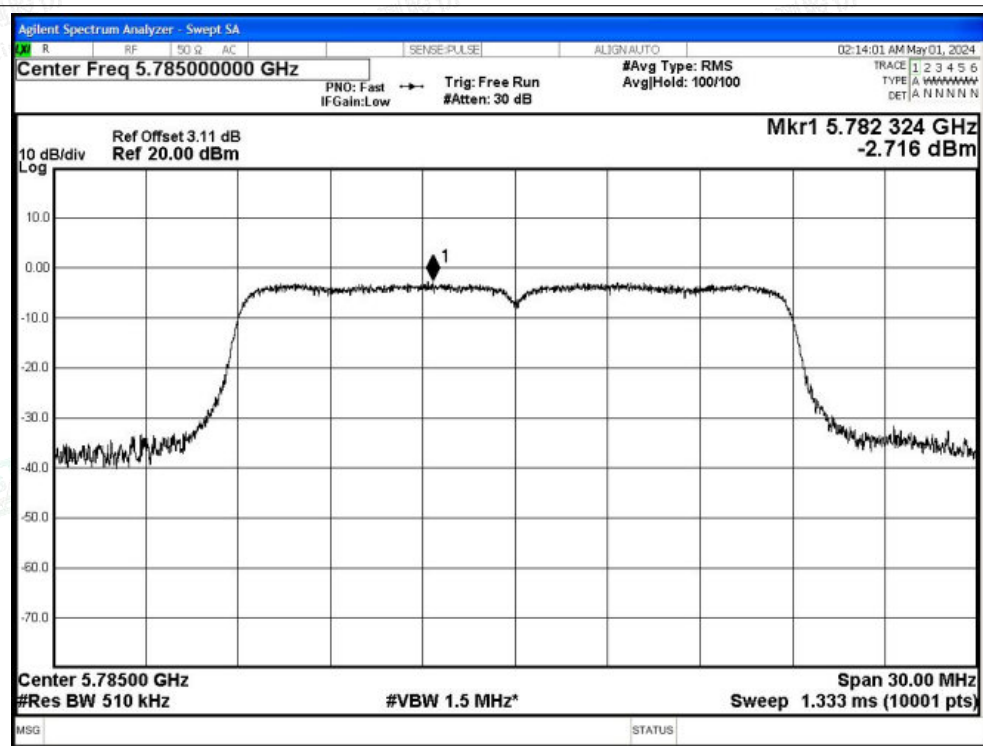




PSD NVNT ac20 5825MHz Ant1

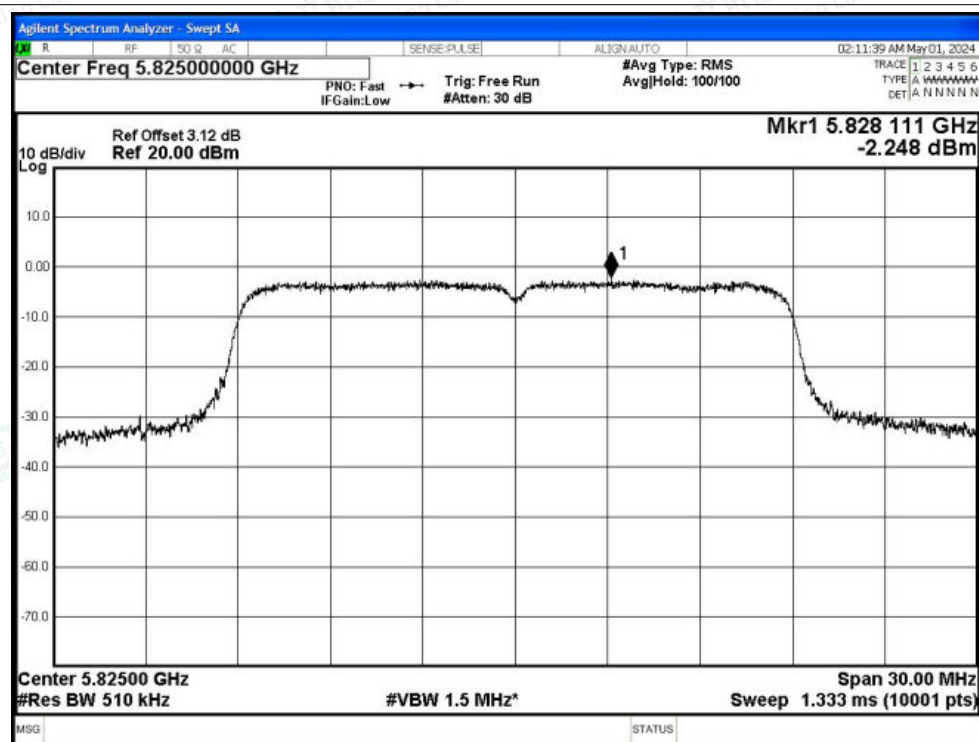


PSD NVNT ac40 5755MHz Ant1

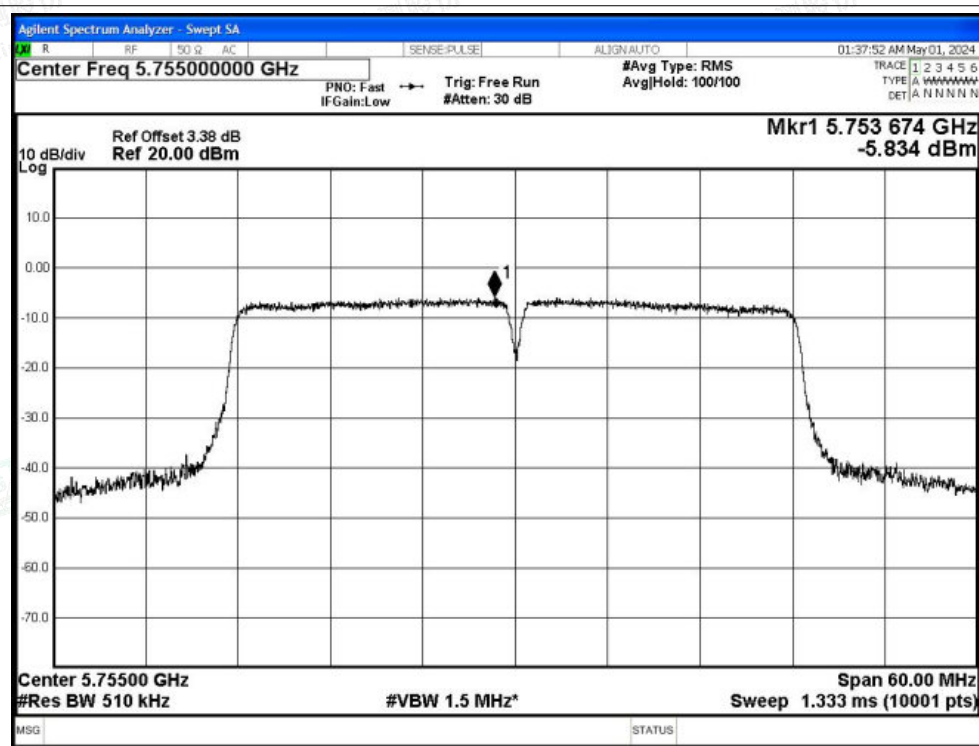




PSD NVNT ax20 5745MHz Ant1

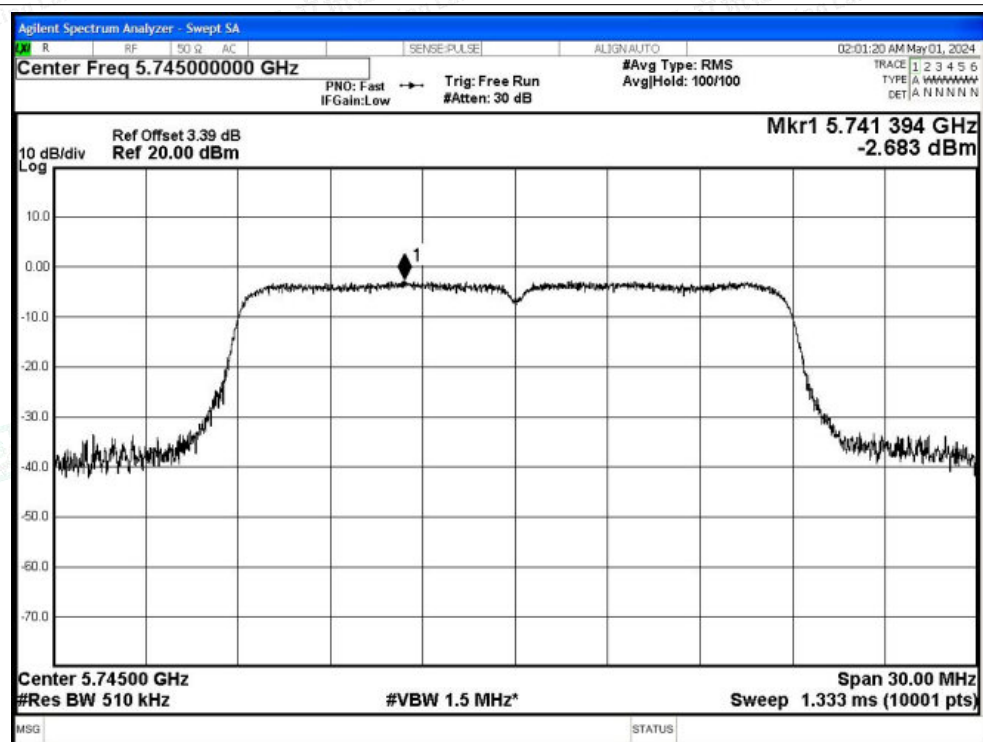


PSD NVNT ax20 5785MHz Ant1

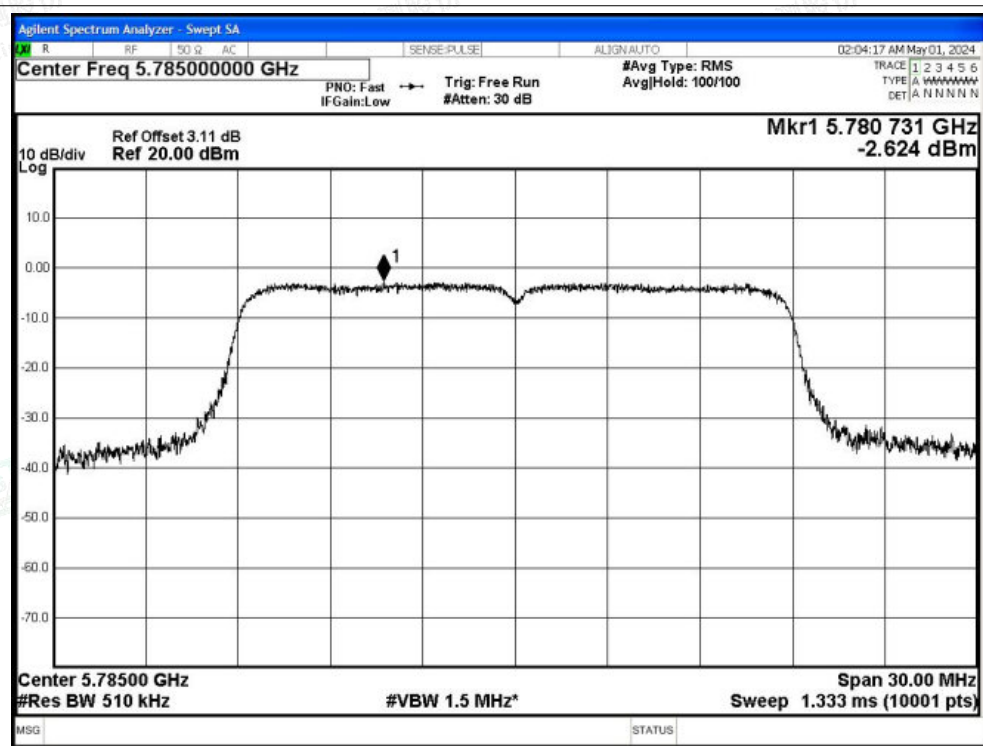




PSD NVNT ax20 5825MHz Ant1

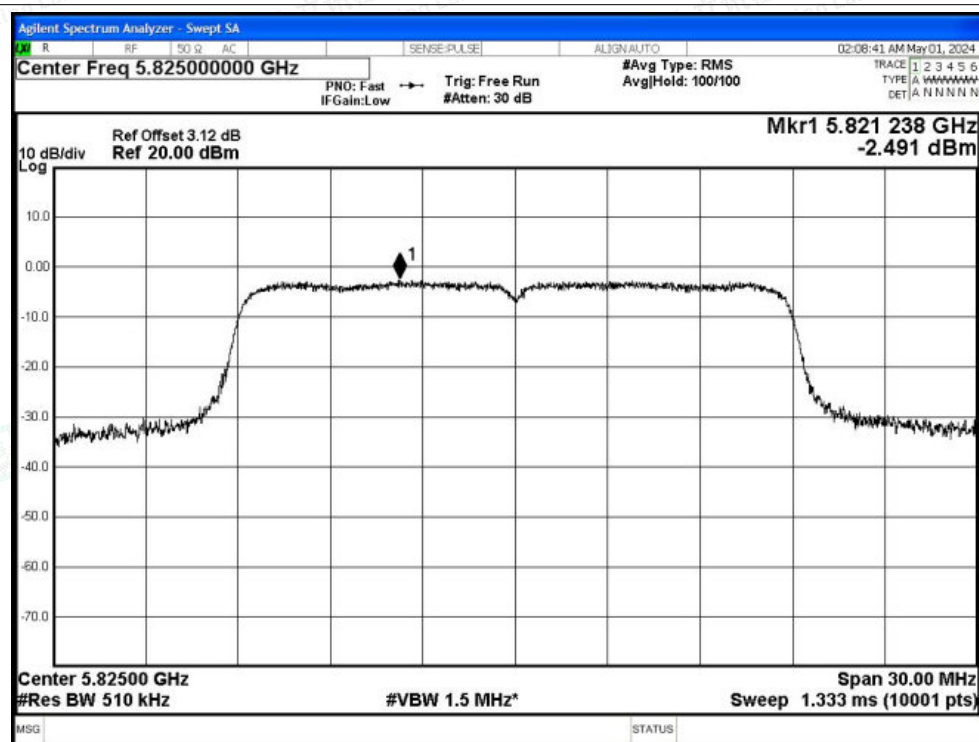


PSD NVNT ax40 5755MHz Ant1

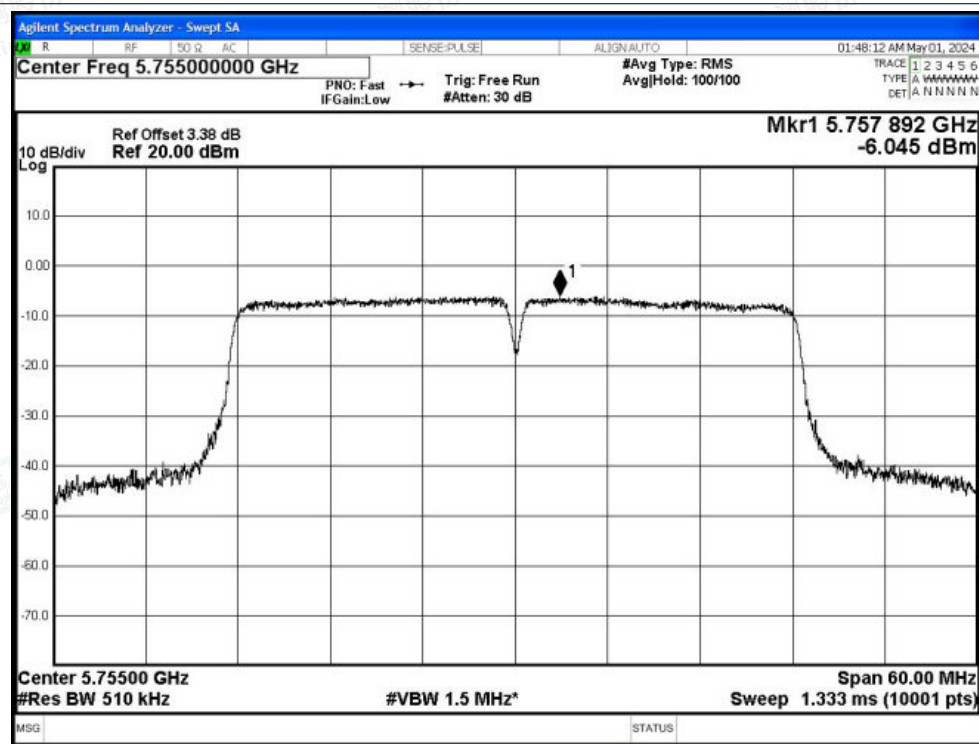




PSD NVNT ax40 5795MHz Ant1

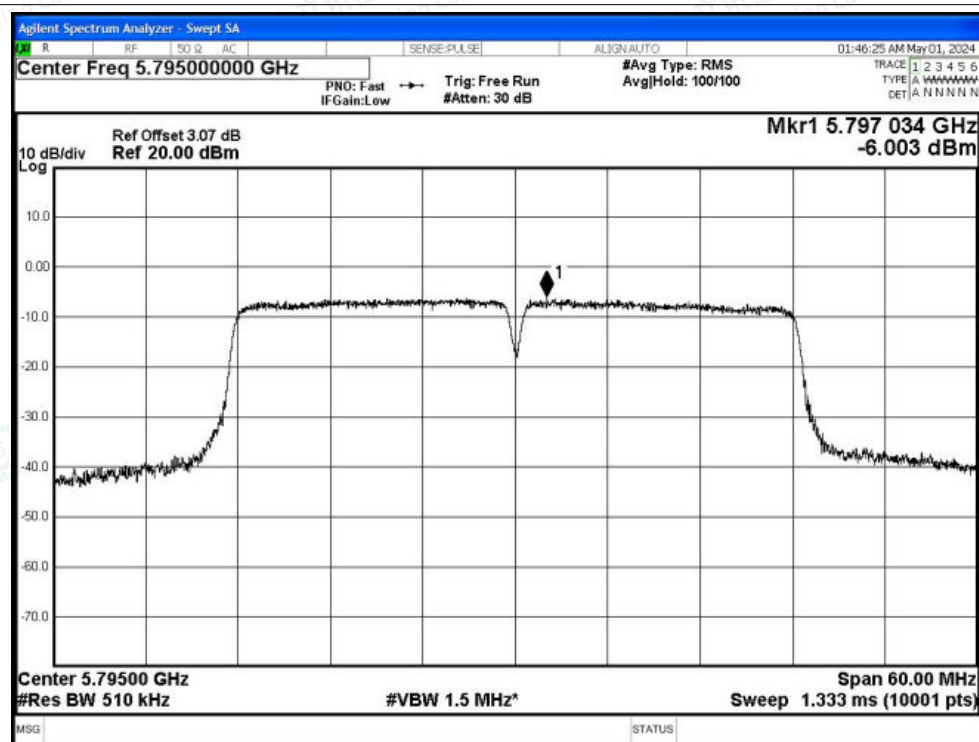


PSD NVNT ax80 5775MHz Ant1

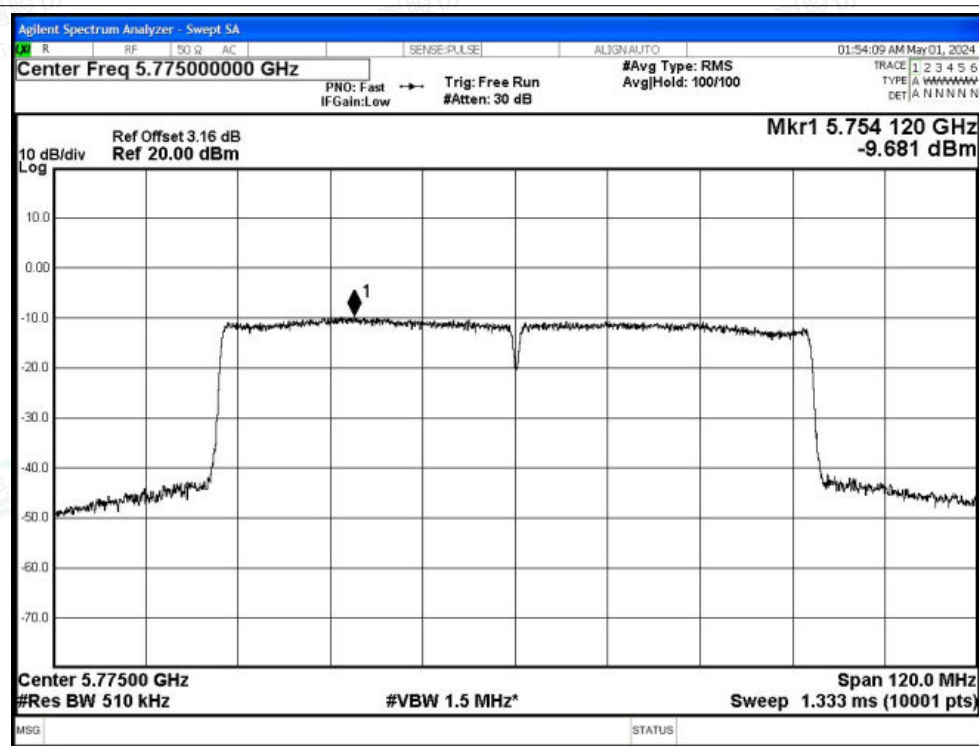




Test Graphs

PSD NVNT a 5745MHz Ant2

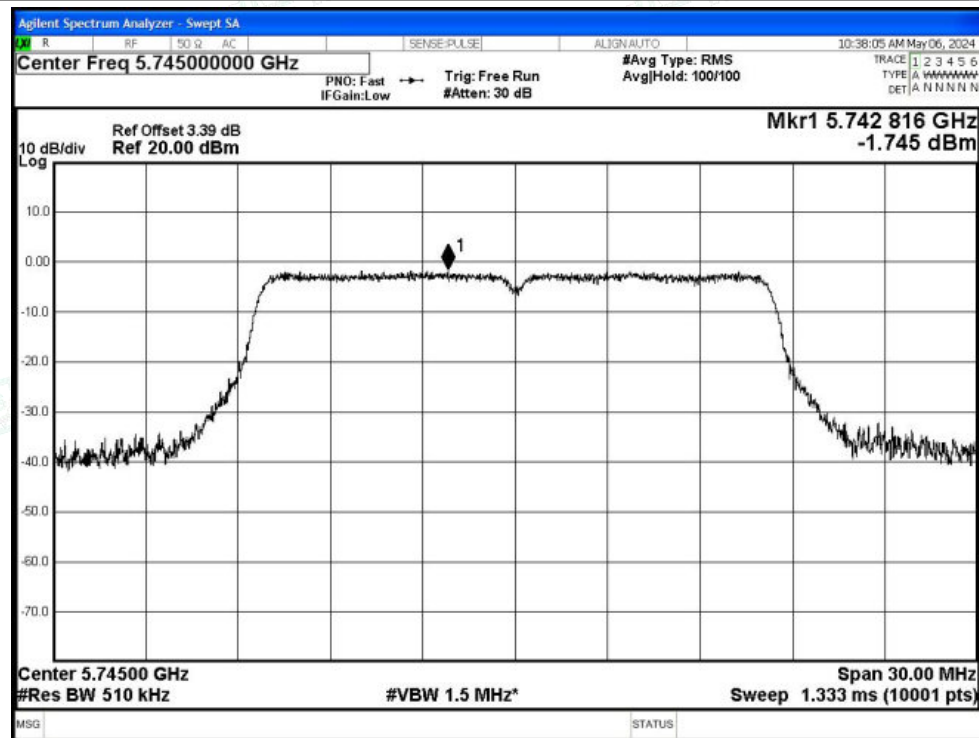


PSD NVNT a 5785MHz Ant2

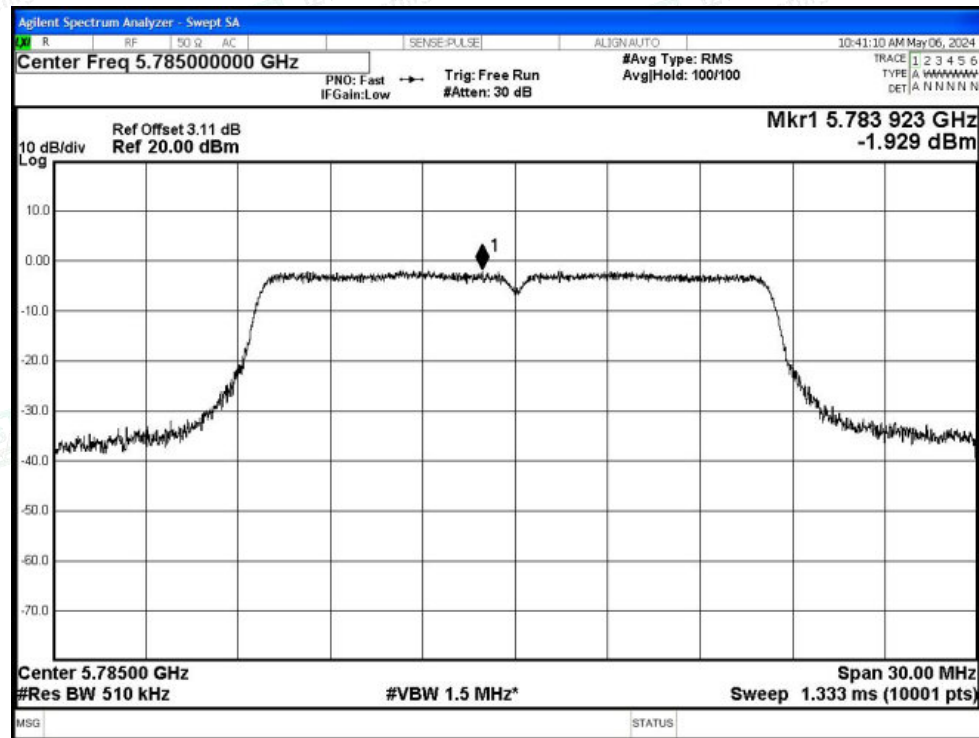



PSD NVNT a 5825MHz Ant2

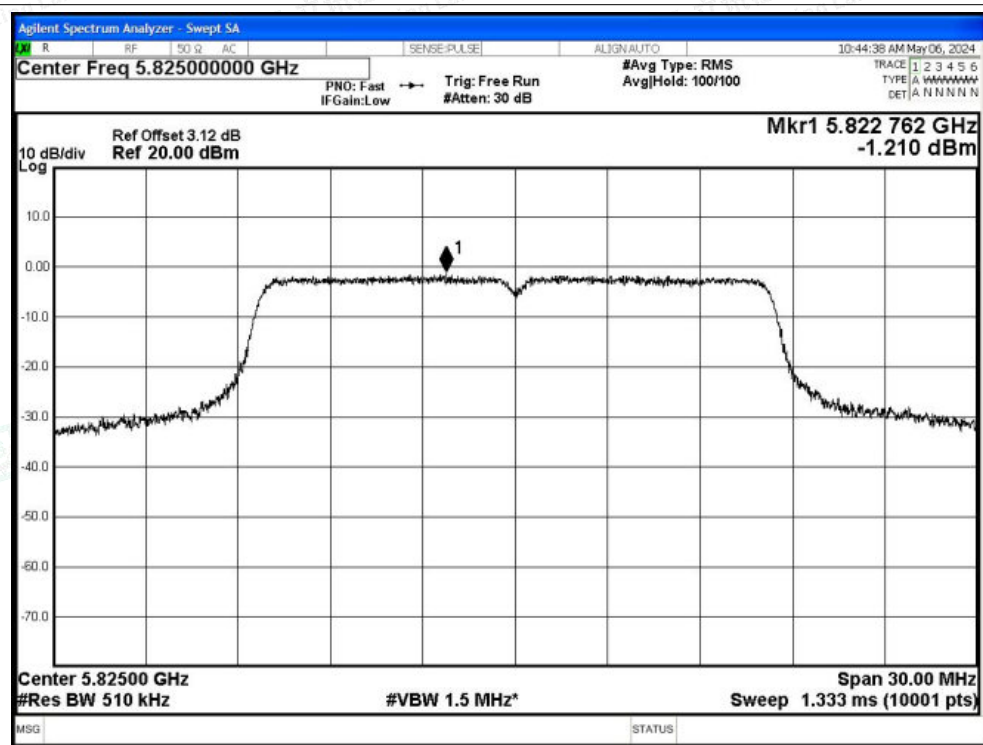

PSD NVNT n20 5745MHz Ant2

