


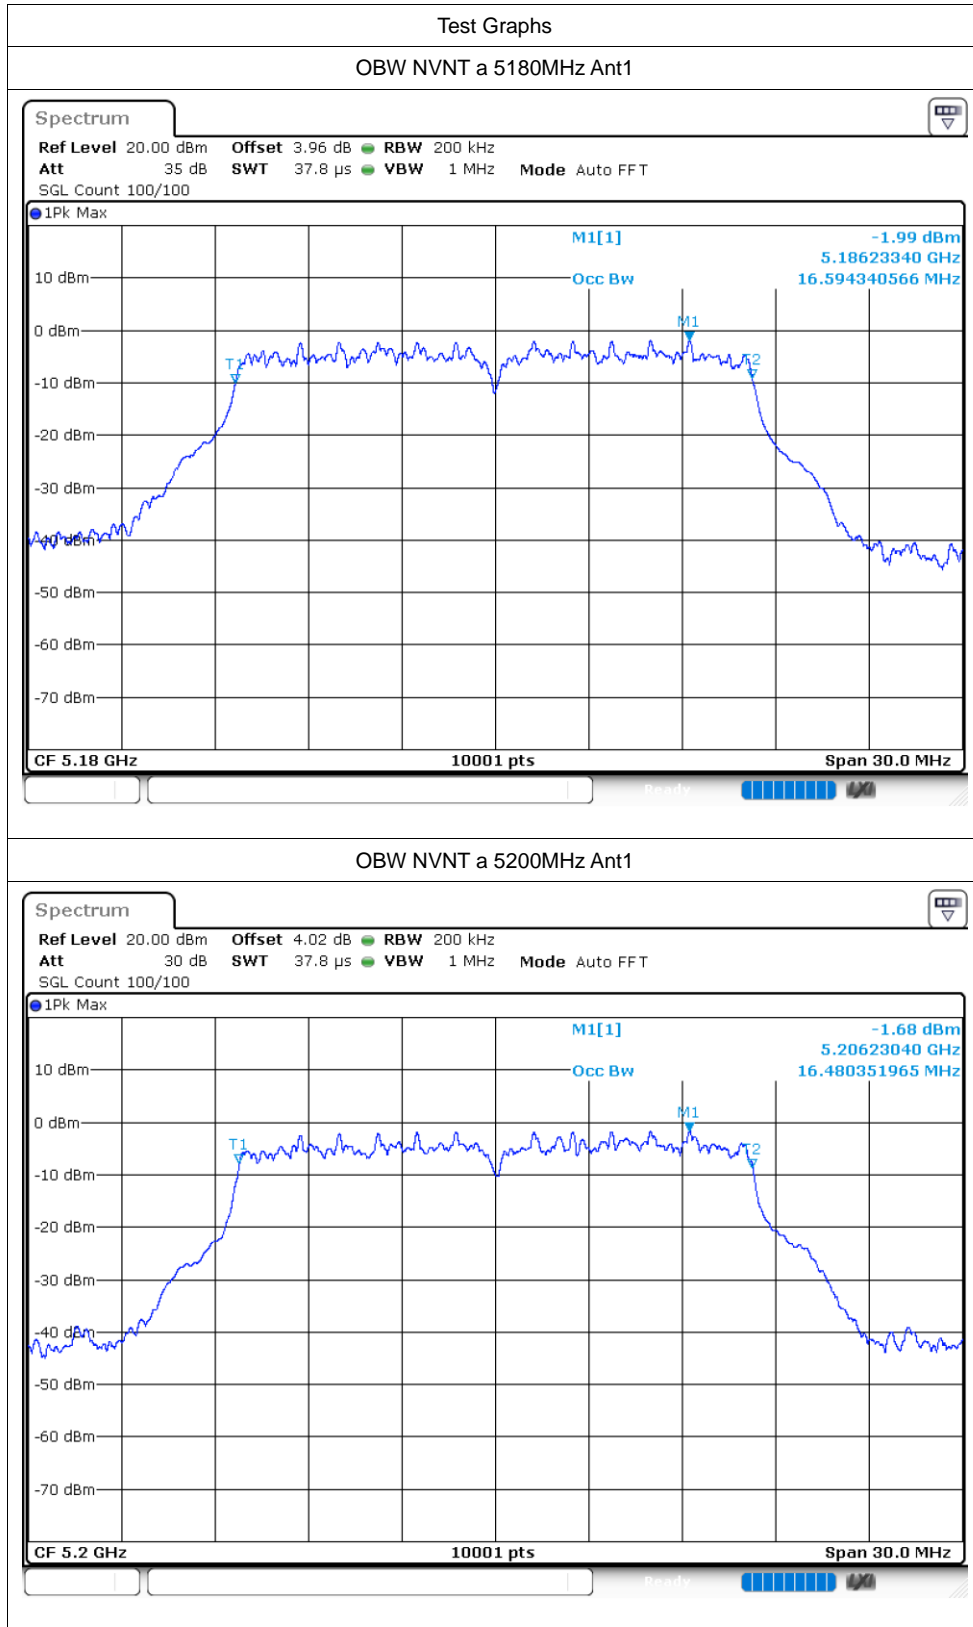
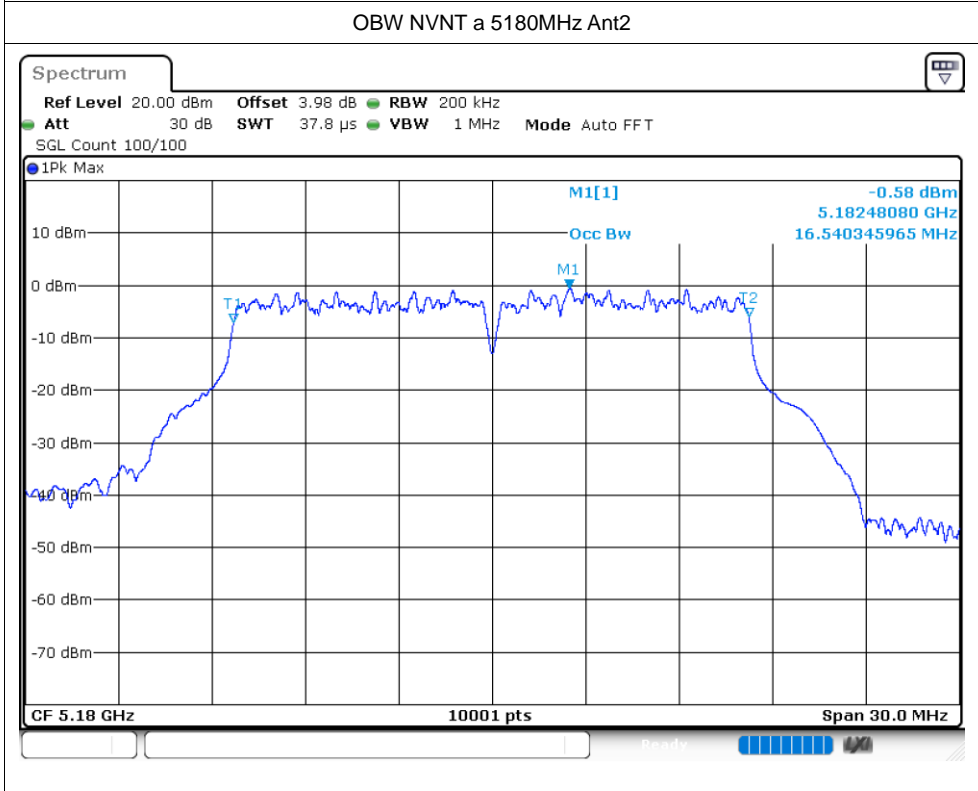




Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.594
NVNT	a	5200	Ant1	16.48
NVNT	a	5240	Ant1	16.543
NVNT	a	5180	Ant2	16.54
NVNT	a	5200	Ant2	16.621
NVNT	a	5240	Ant2	16.594
NVNT	n20	5180	Ant1	17.869
NVNT	n20	5200	Ant1	17.809
NVNT	n20	5240	Ant1	17.716
NVNT	n20	5180	Ant2	17.575
NVNT	n20	5200	Ant2	17.503
NVNT	n20	5240	Ant2	17.491
NVNT	n40	5190	Ant1	36.38
NVNT	n40	5230	Ant1	36.332
NVNT	n40	5190	Ant2	36.344
NVNT	n40	5230	Ant2	36.338
NVNT	ac20	5180	Ant1	17.842
NVNT	ac20	5200	Ant1	17.704
NVNT	ac20	5240	Ant1	17.767
NVNT	ac20	5180	Ant2	17.782
NVNT	ac20	5200	Ant2	17.749
NVNT	ac20	5240	Ant2	17.734
NVNT	ac40	5190	Ant1	36.428
NVNT	ac40	5230	Ant1	36.368
NVNT	ac40	5190	Ant2	36.35
NVNT	ac40	5230	Ant2	36.368
NVNT	ac80	5210	Ant1	75.82
NVNT	ac80	5210	Ant2	75.832
NVNT	ax20	5180	Ant1	19.03
NVNT	ax20	5200	Ant1	18.973
NVNT	ax20	5240	Ant1	18.931
NVNT	ax20	5180	Ant2	18.988
NVNT	ax20	5200	Ant2	19
NVNT	ax20	5240	Ant2	19.069
NVNT	ax40	5190	Ant1	37.61
NVNT	ax40	5230	Ant1	37.568
NVNT	ax40	5190	Ant2	37.544
NVNT	ax40	5230	Ant2	37.574
NVNT	ax80	5210	Ant1	77.056
NVNT	ax80	5210	Ant2	77.056


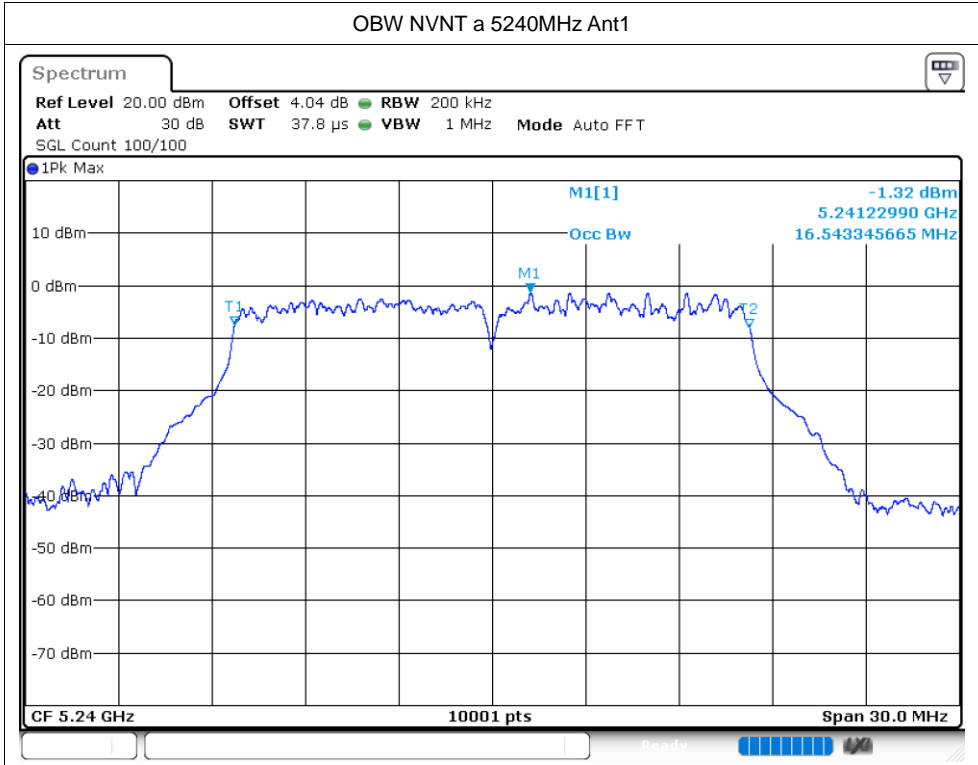



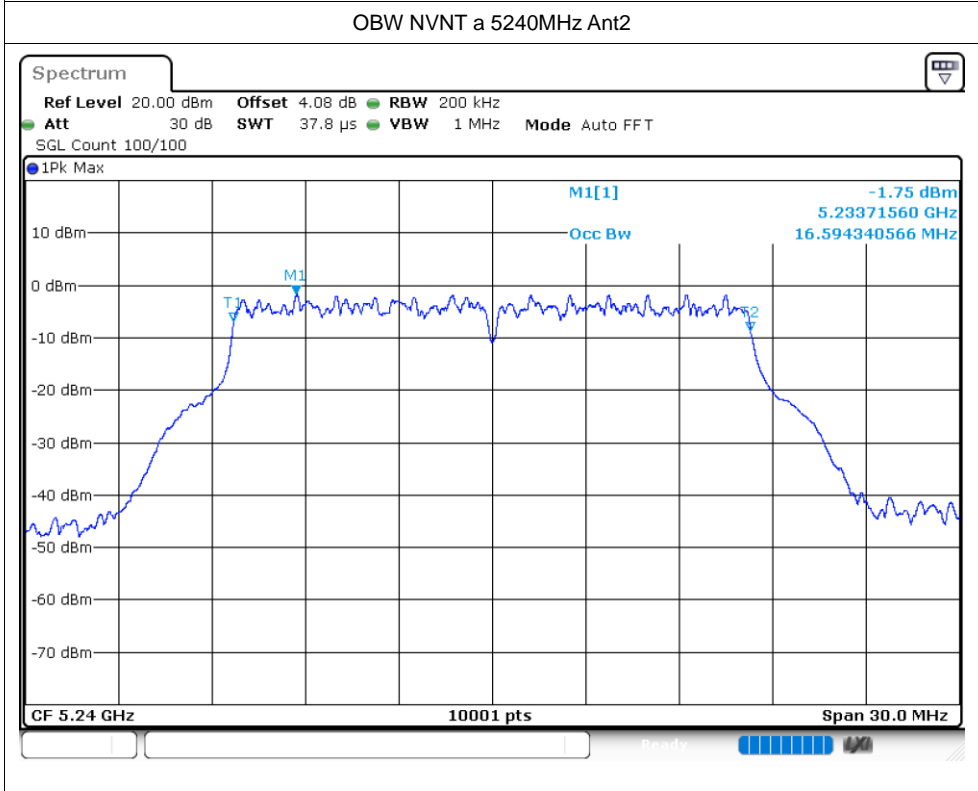



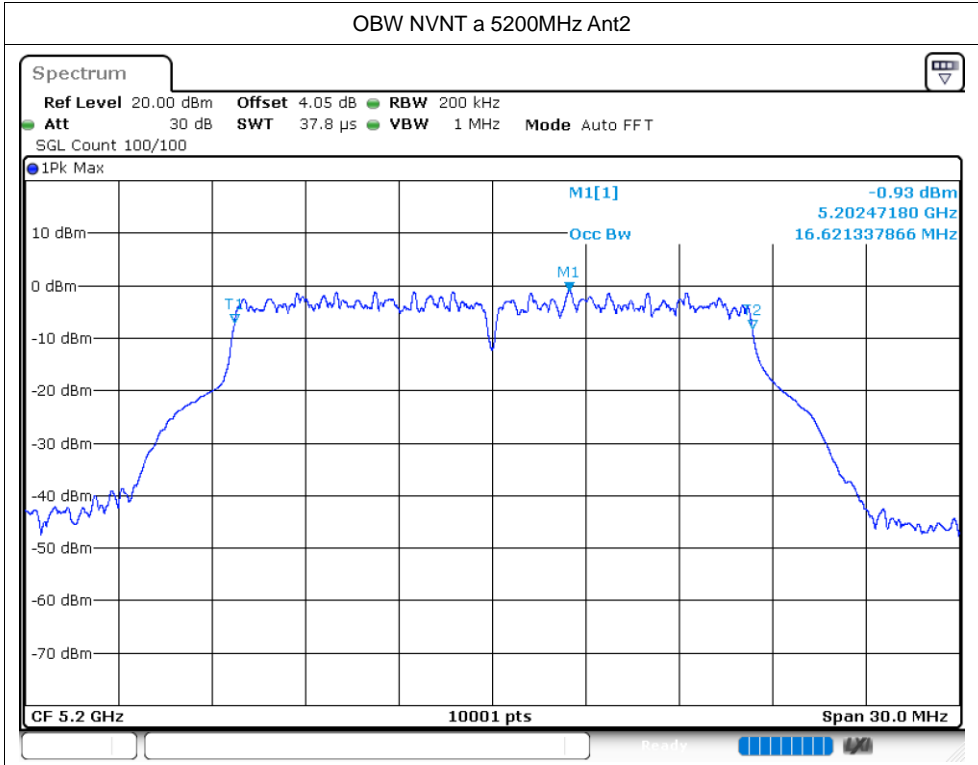


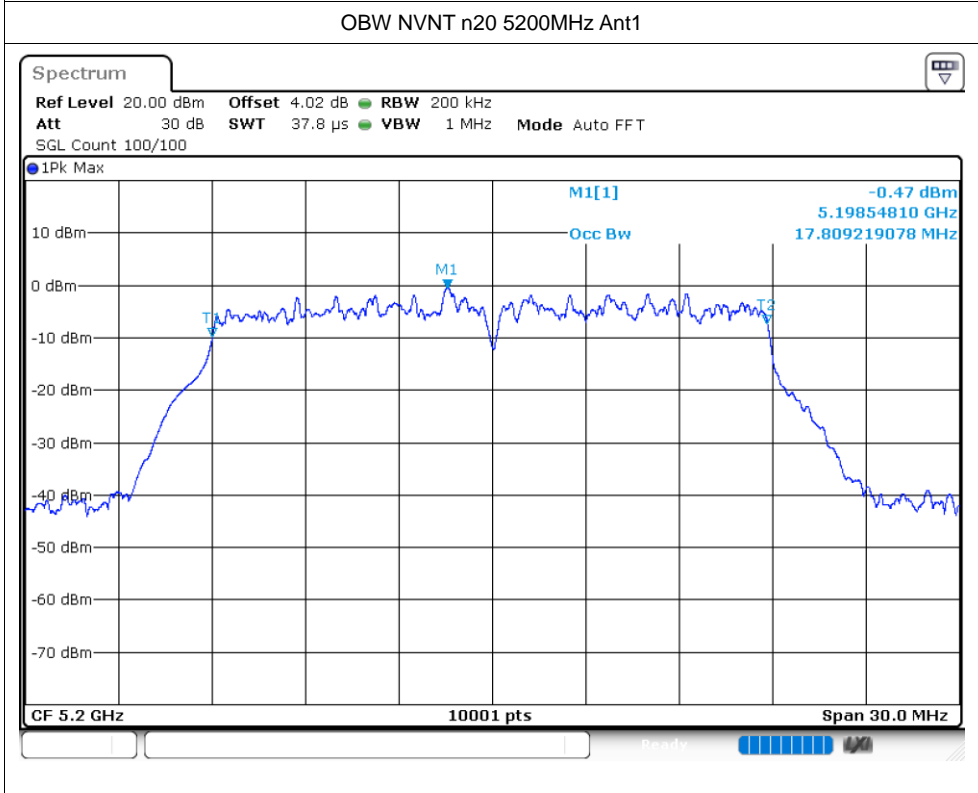
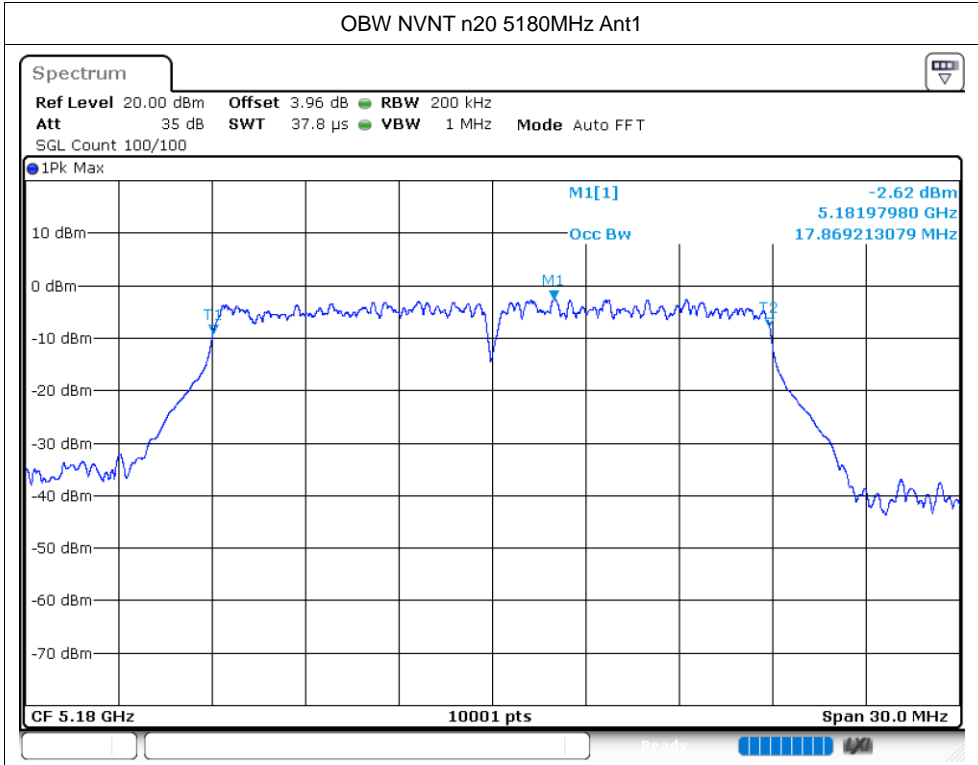


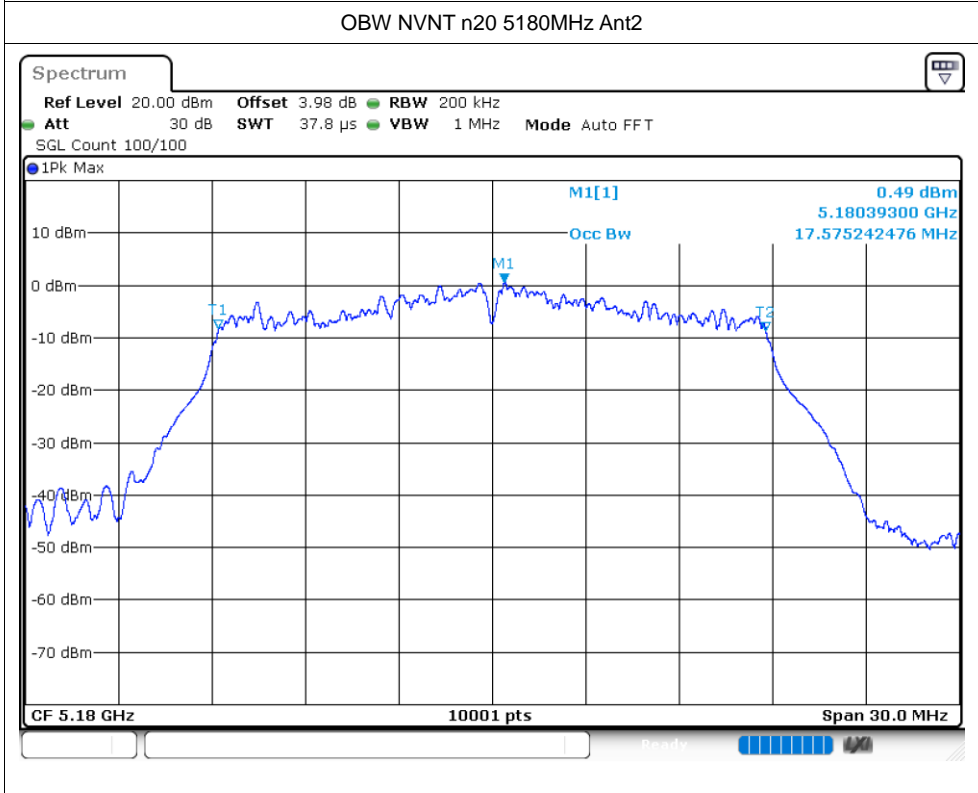
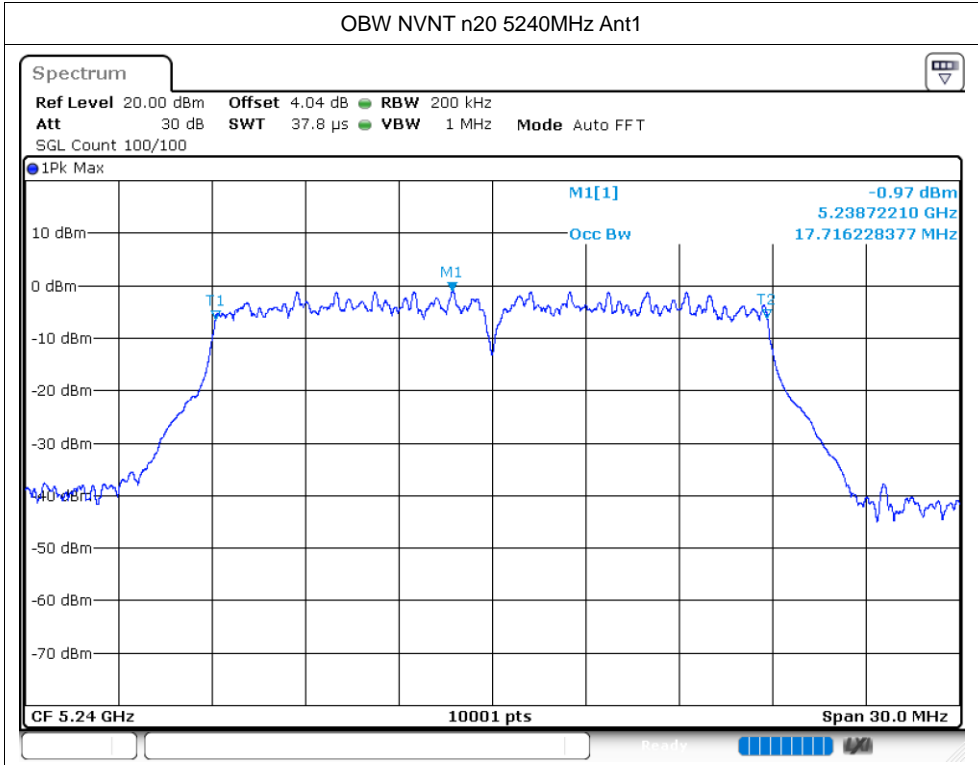


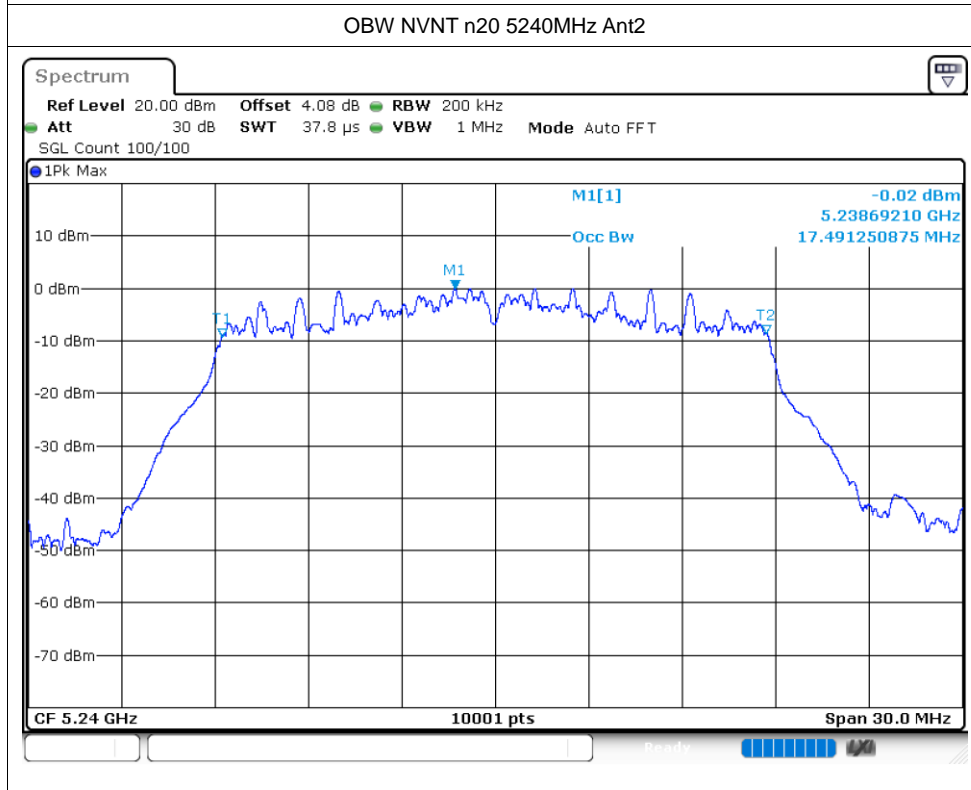
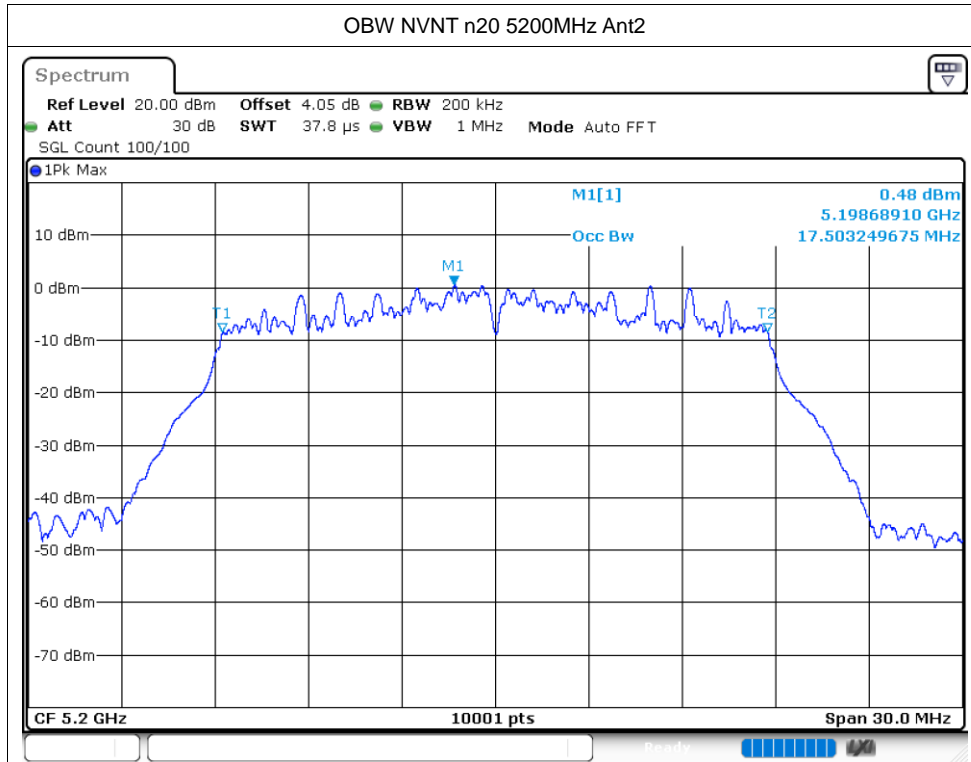


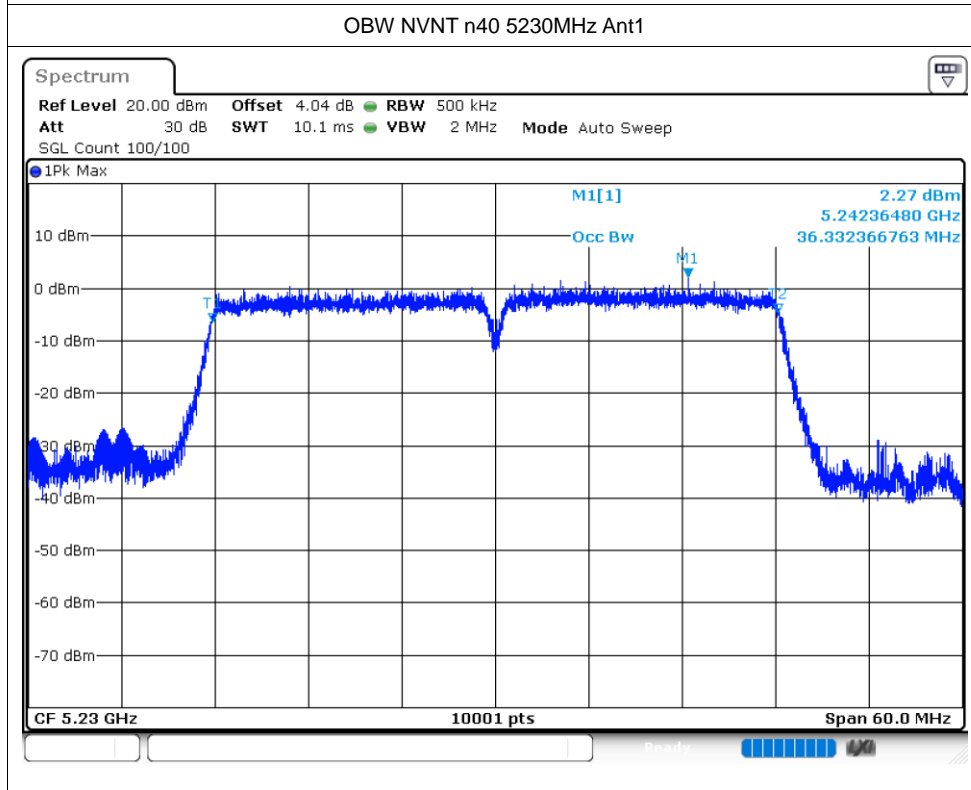
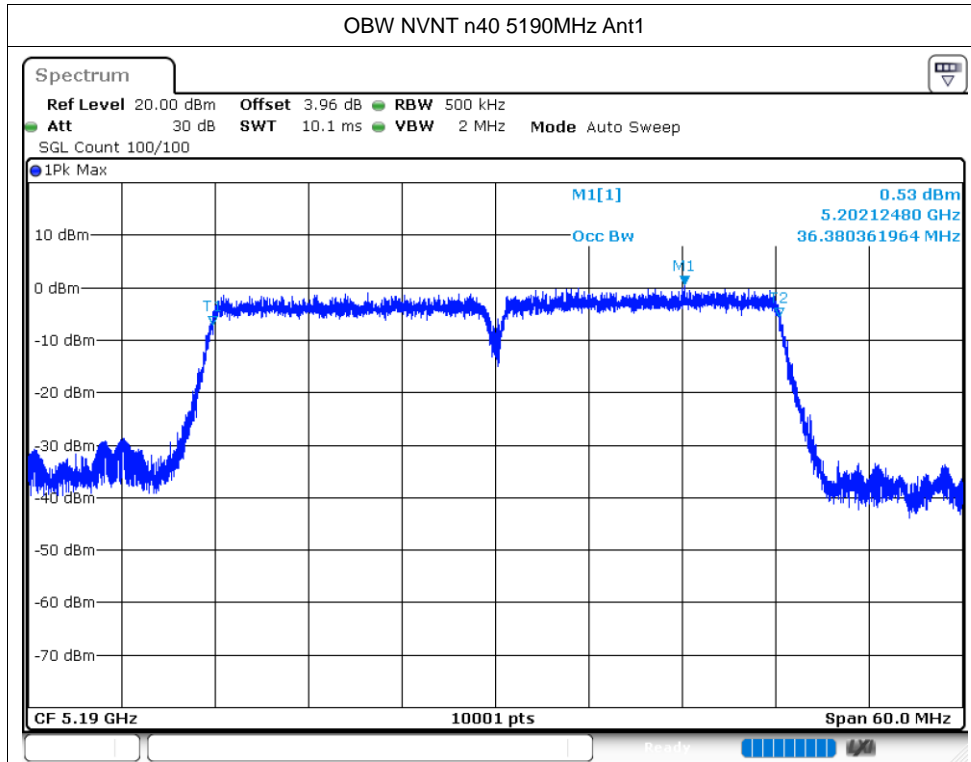


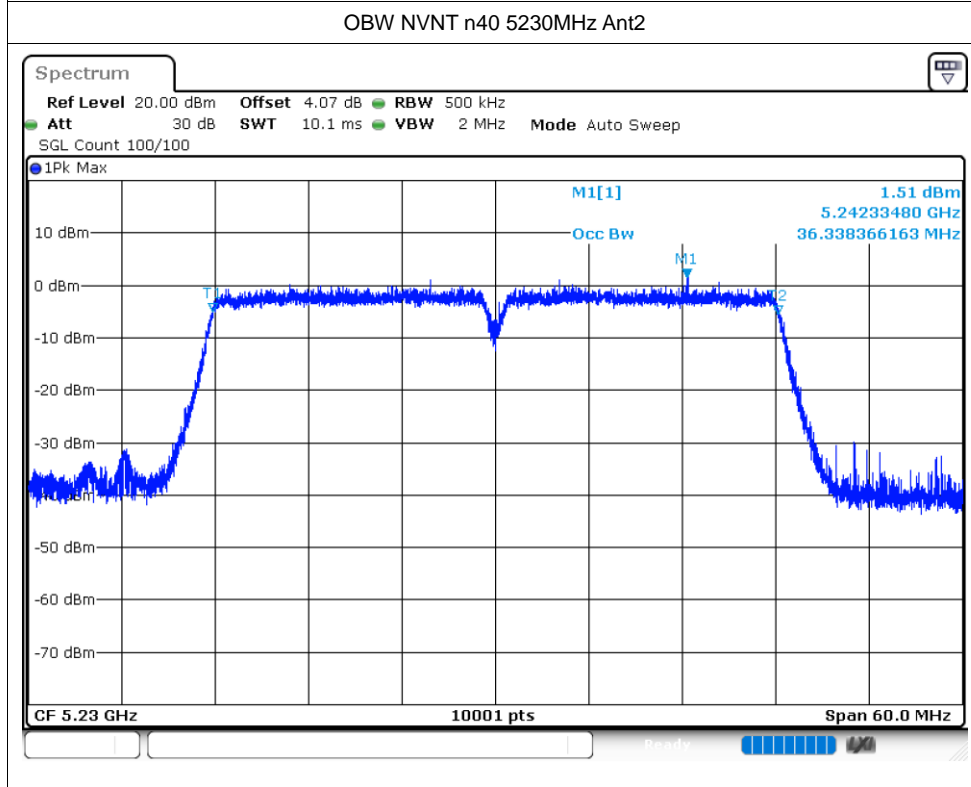
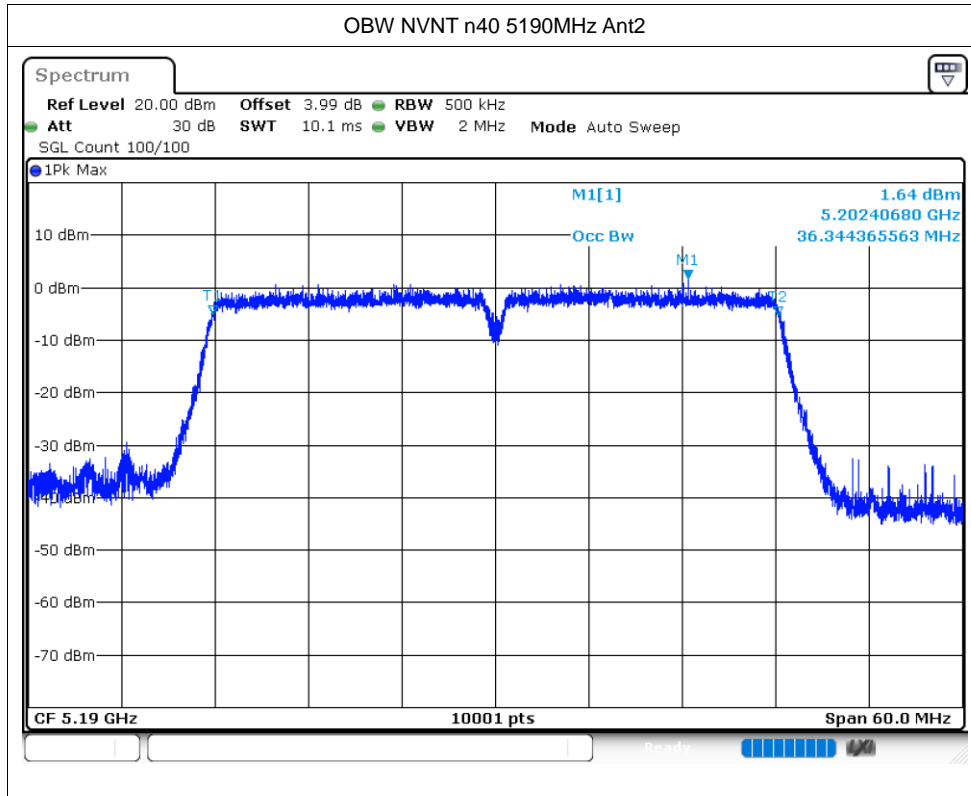


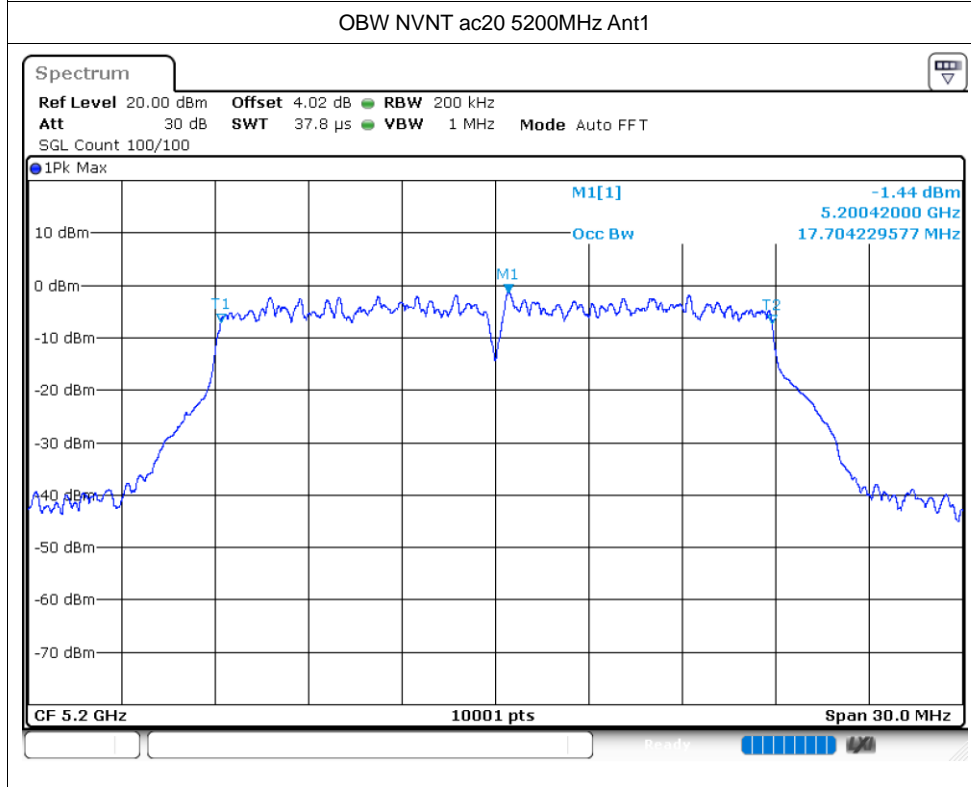
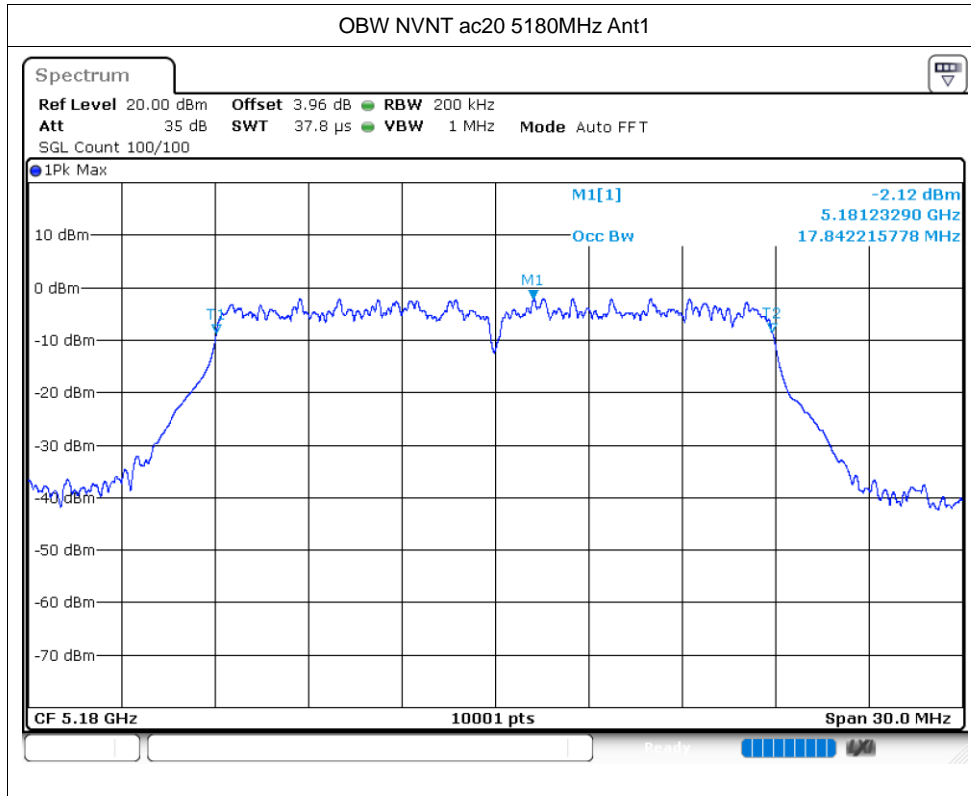


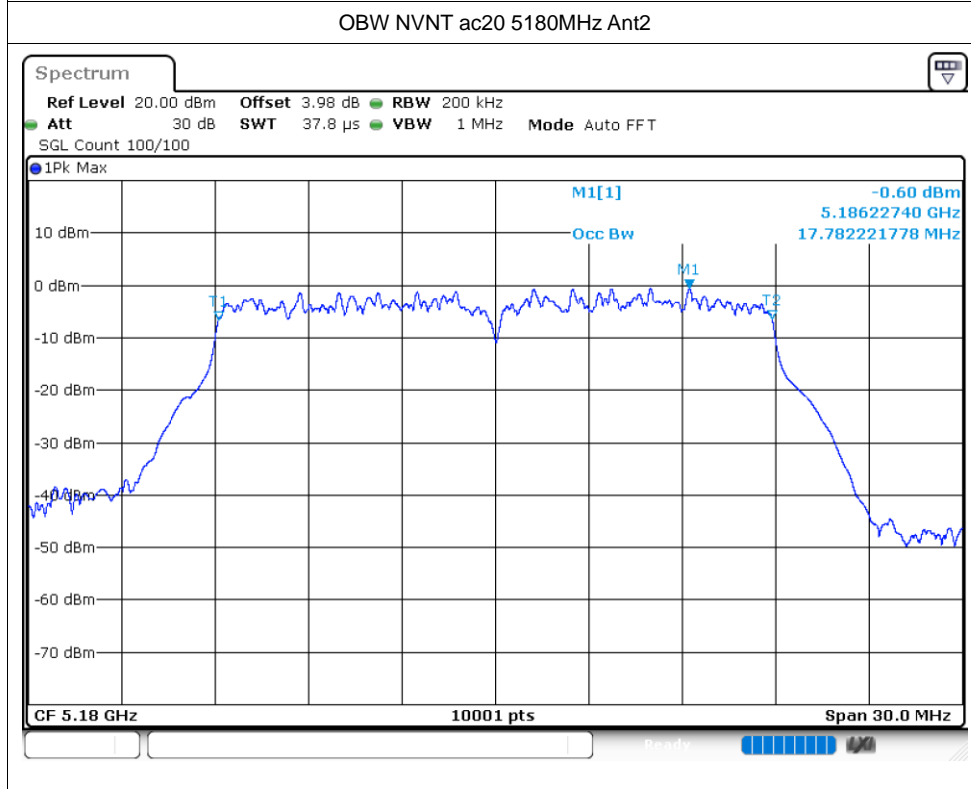
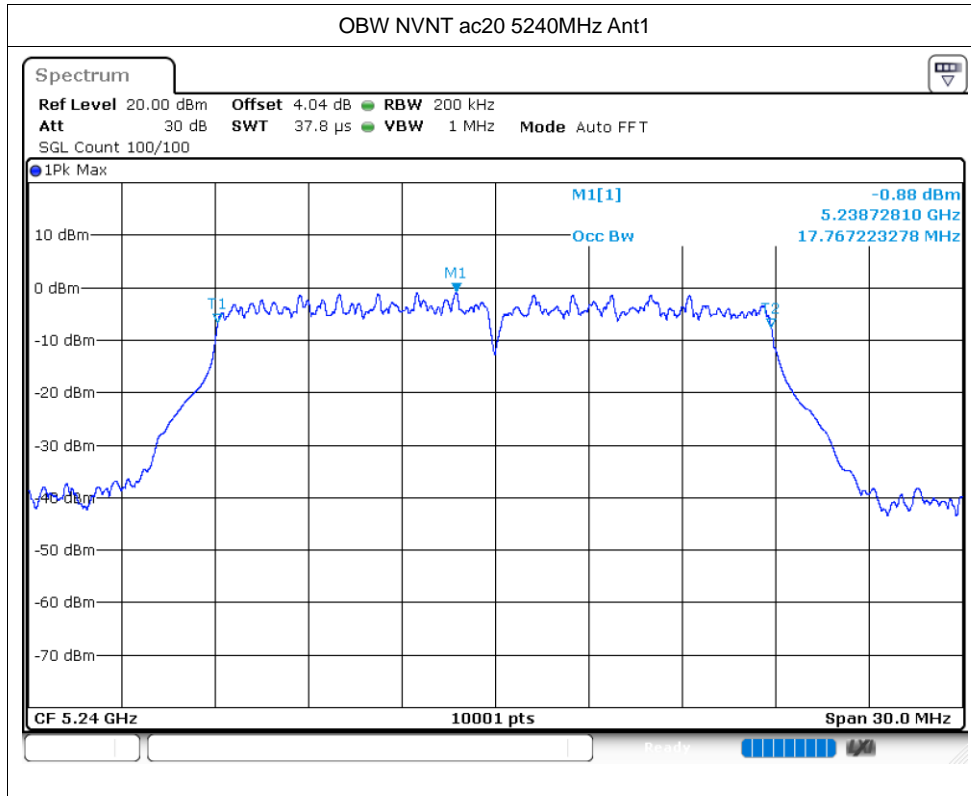


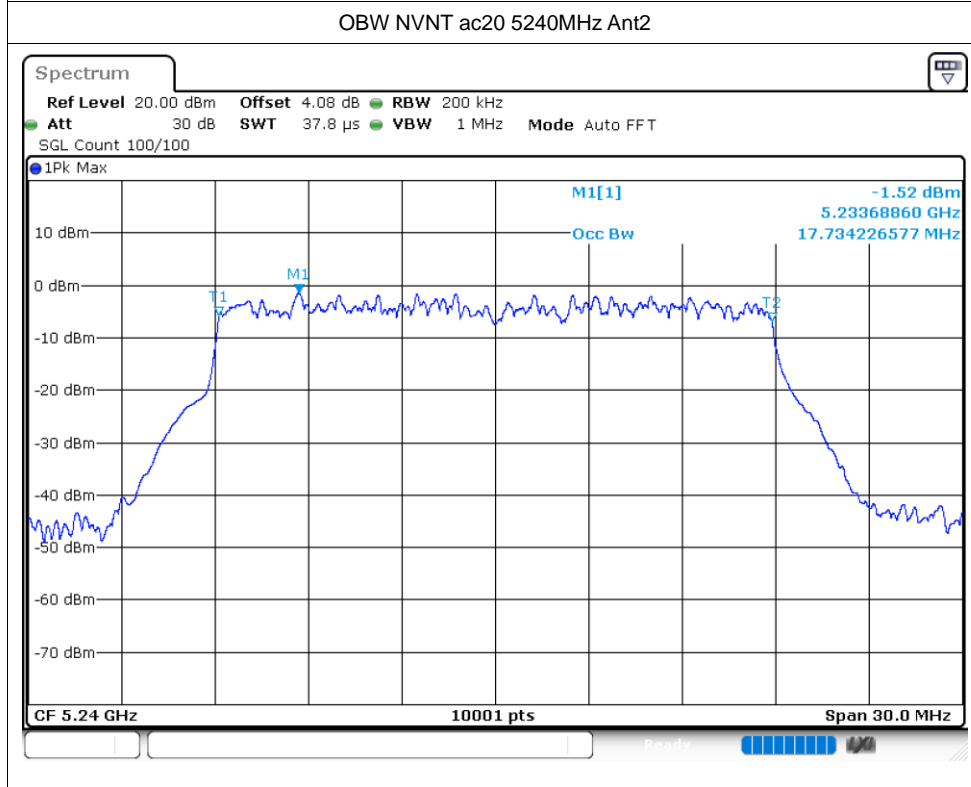
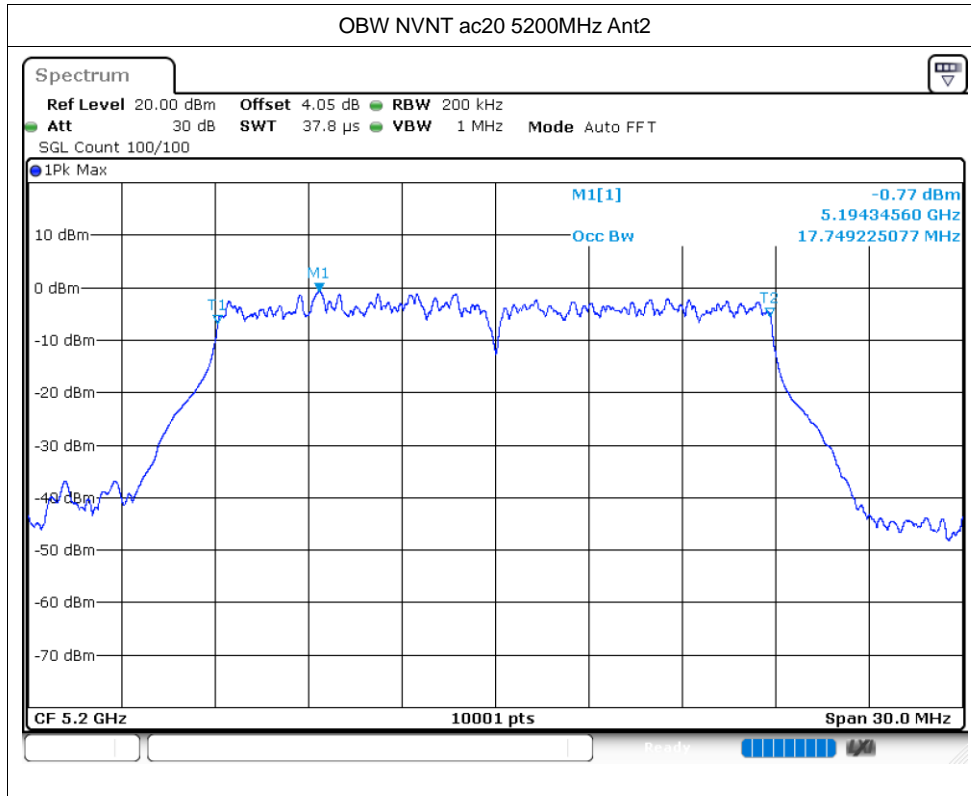


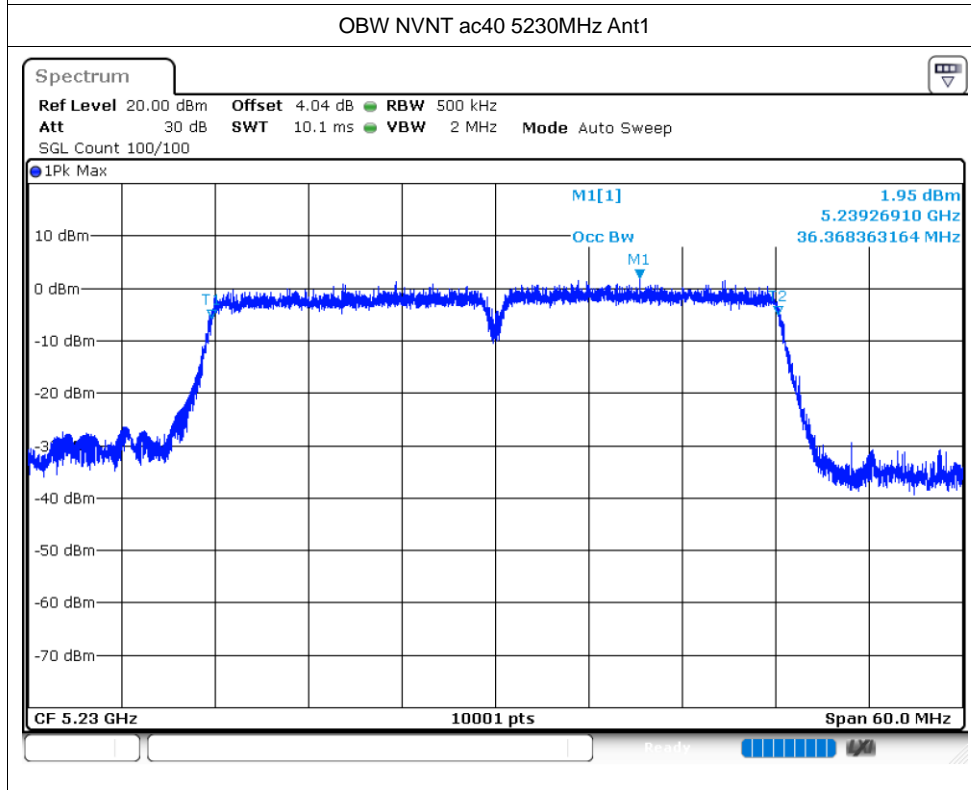
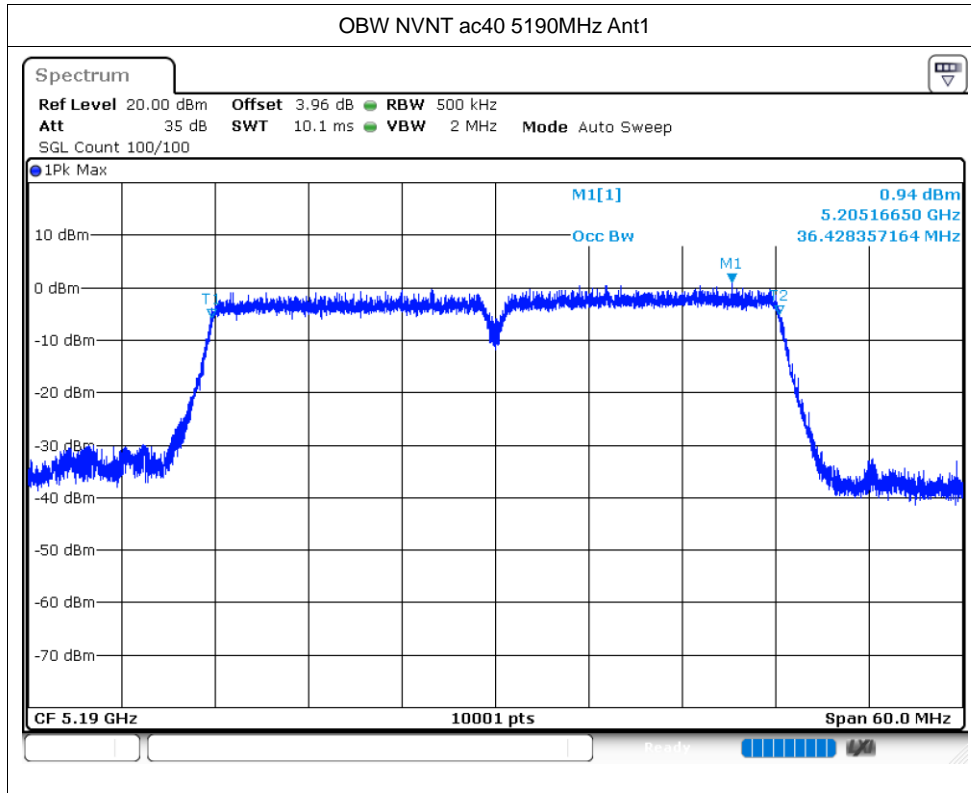


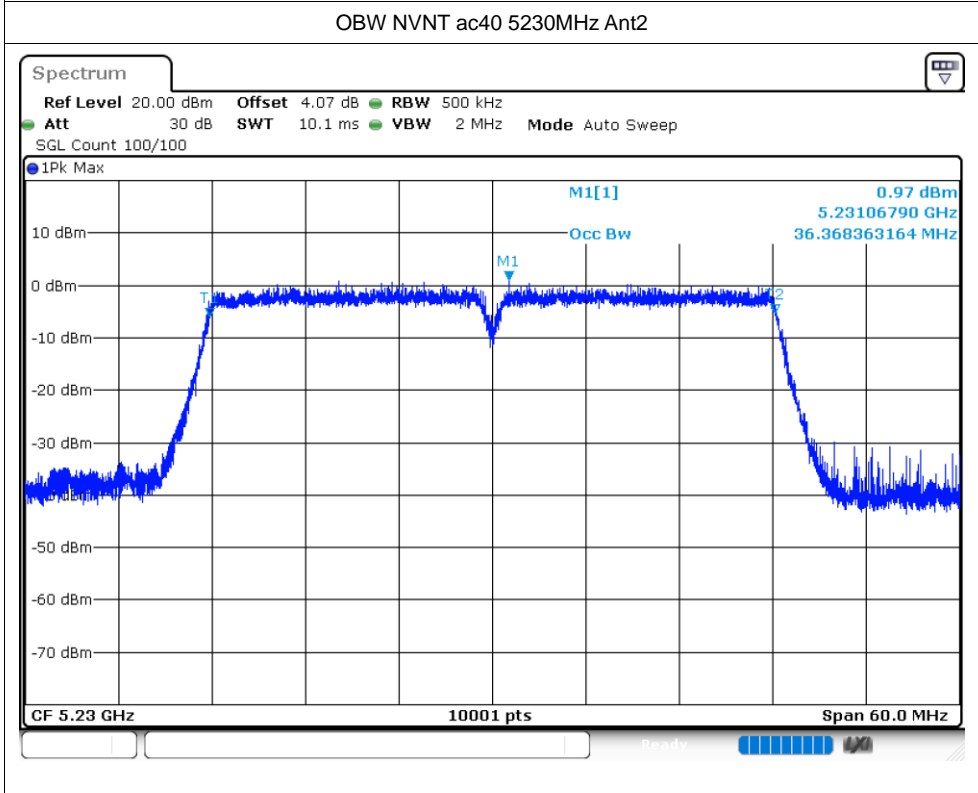
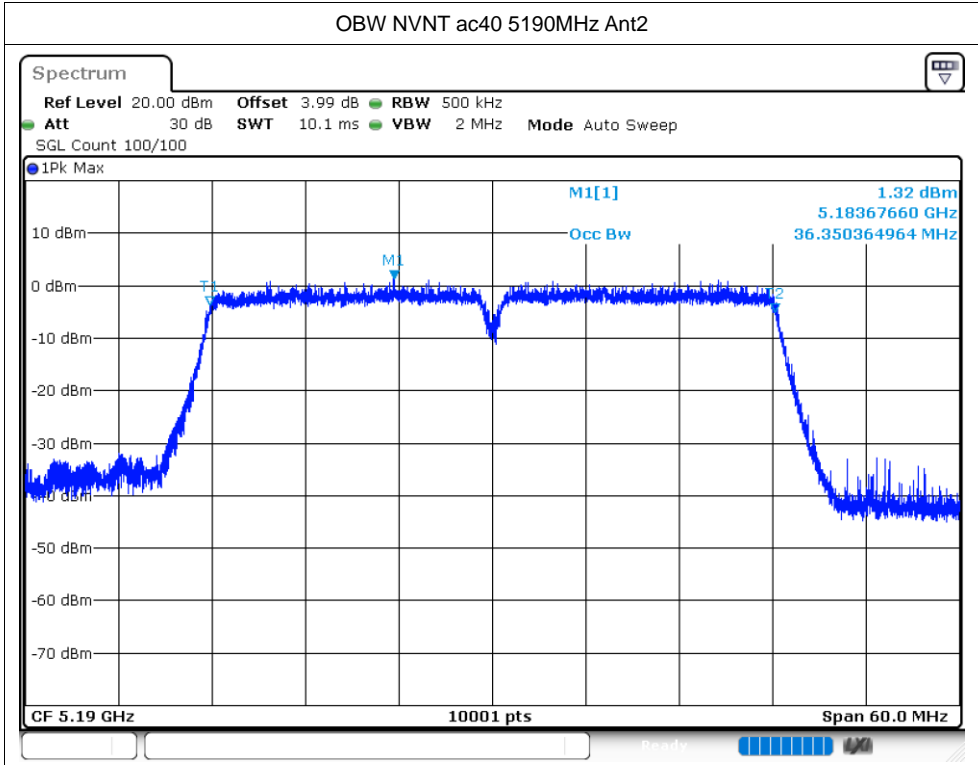


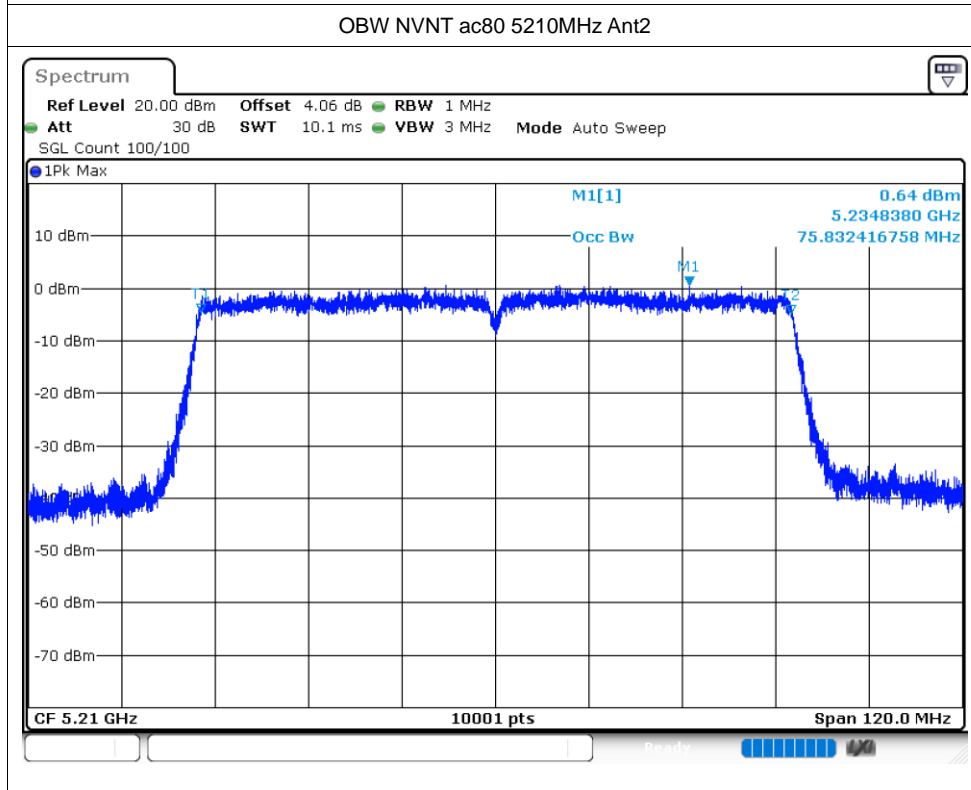
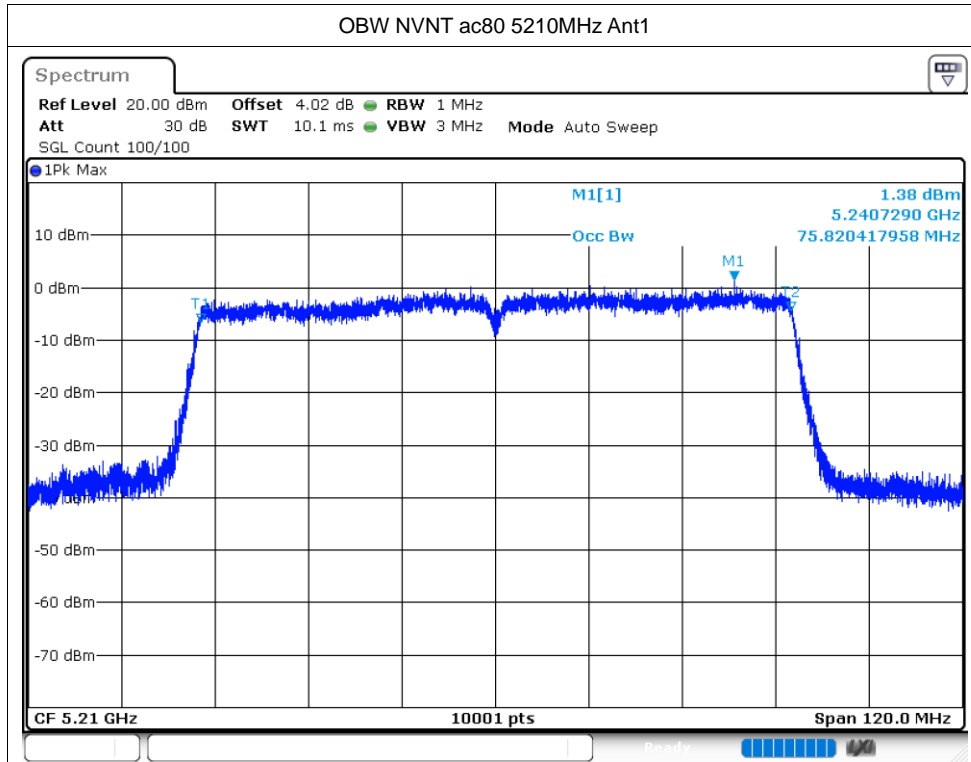


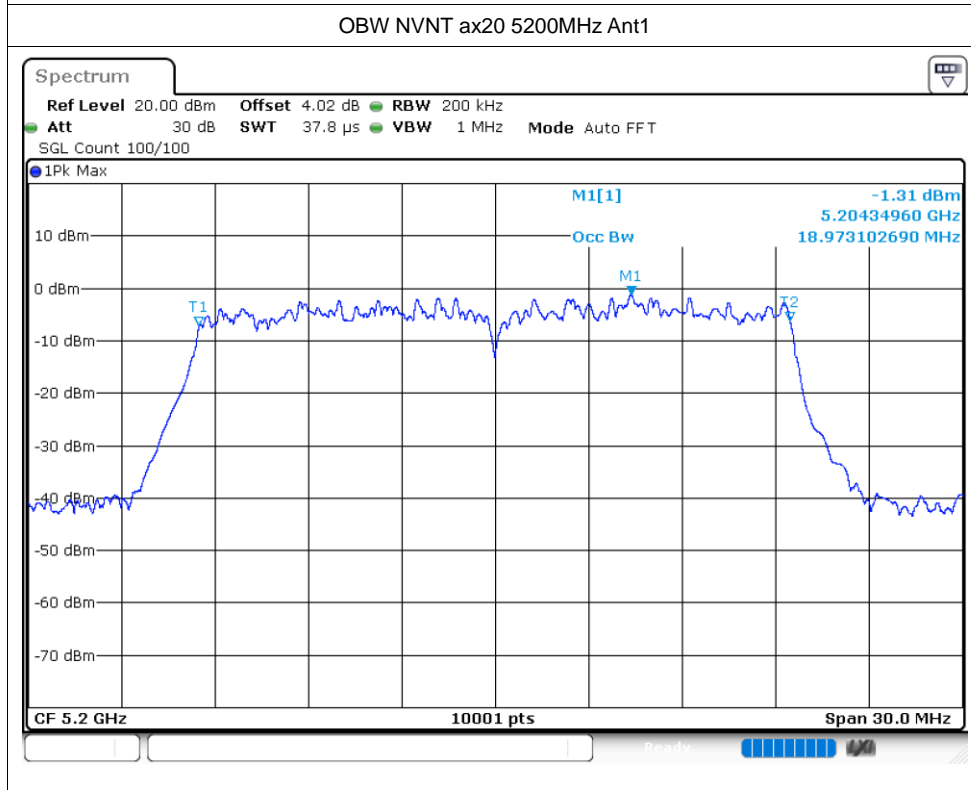
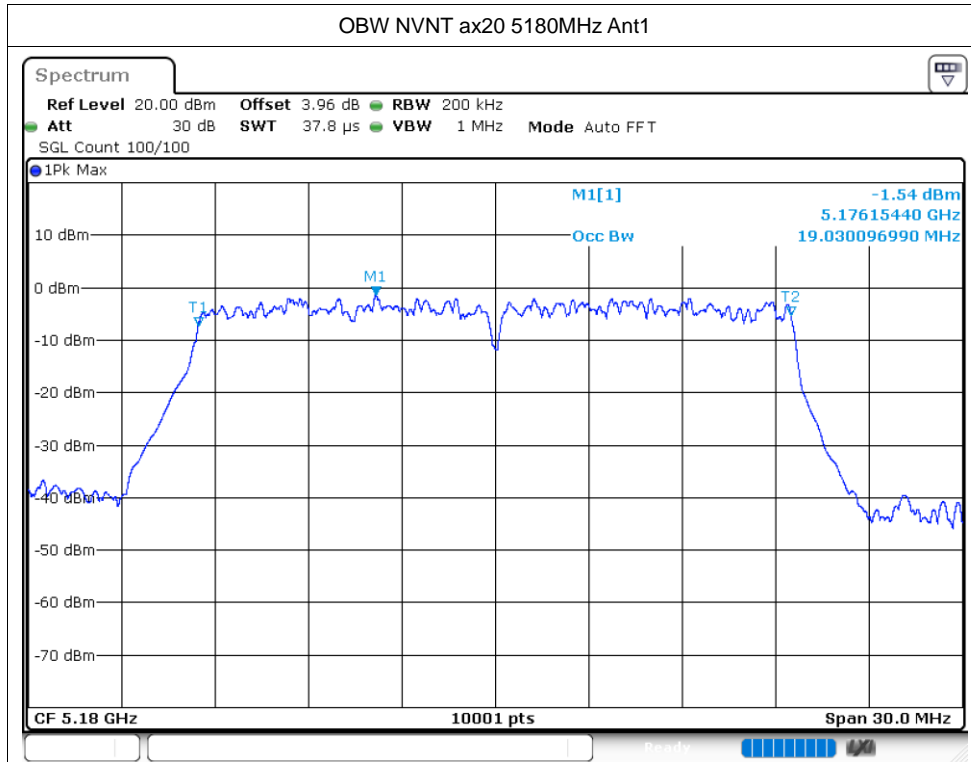


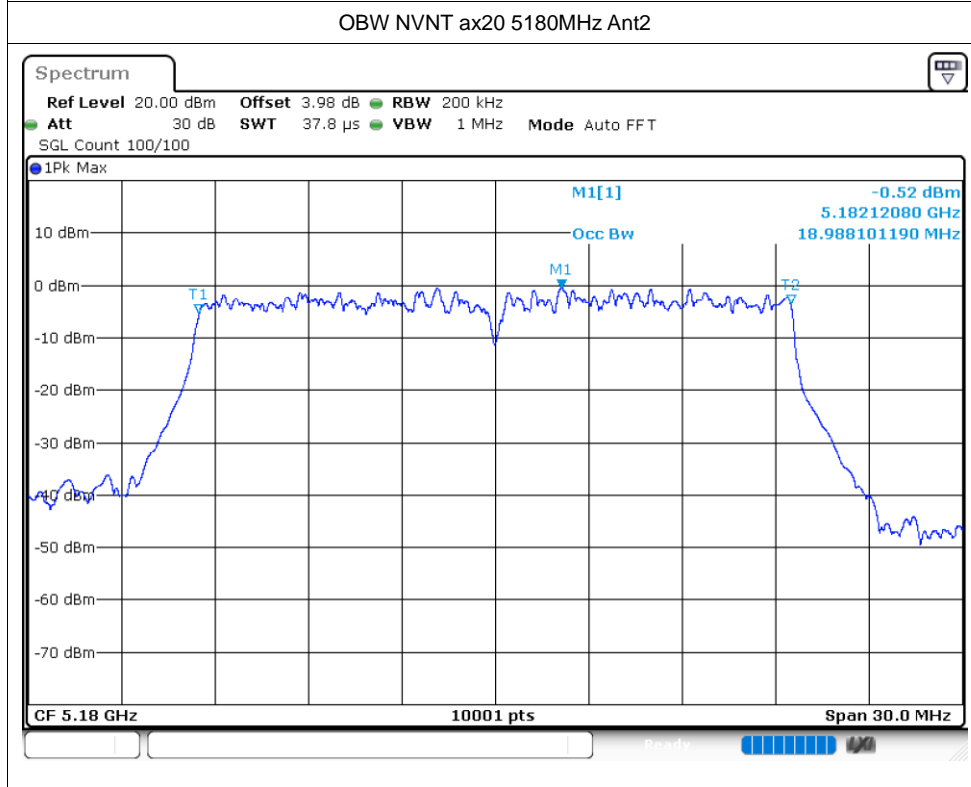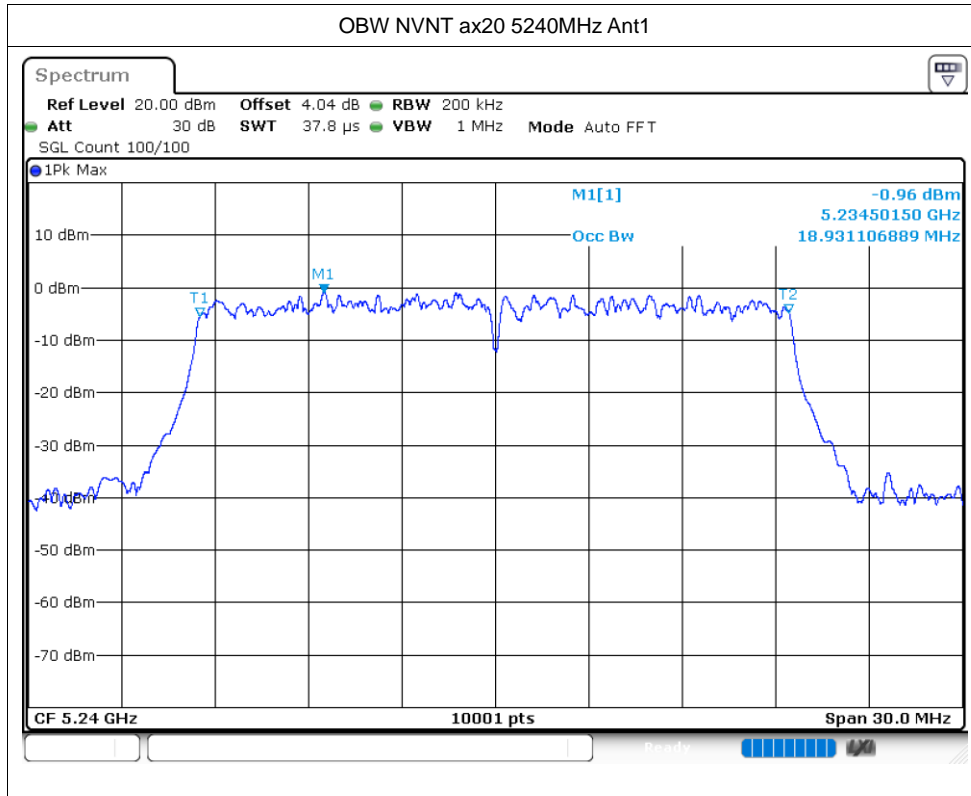

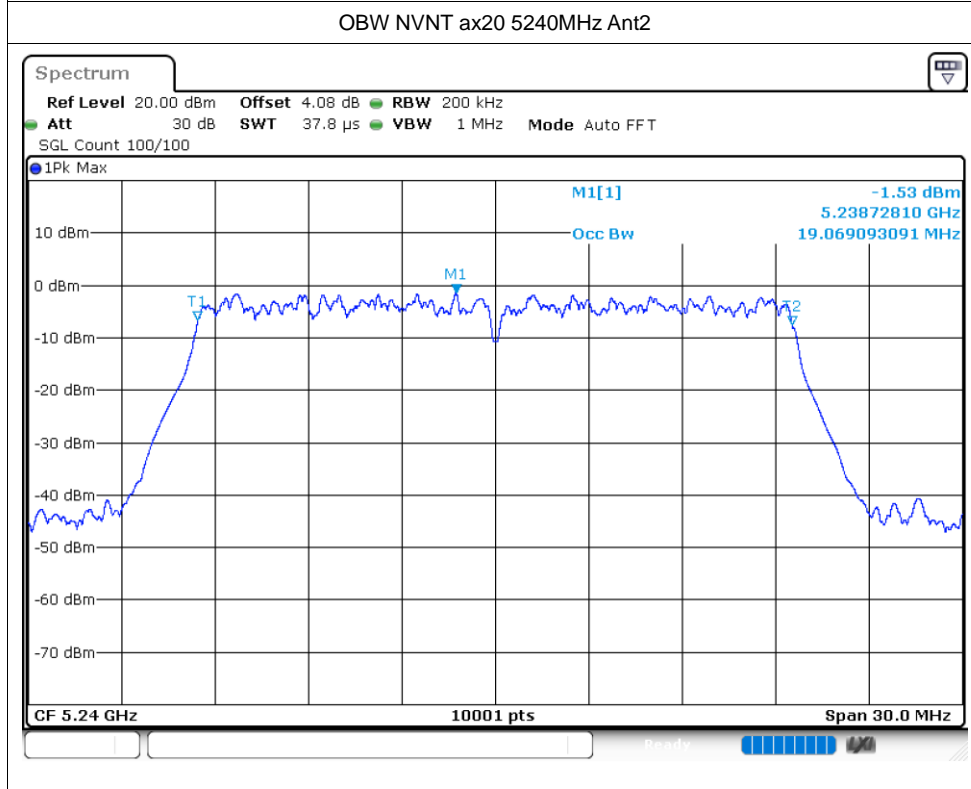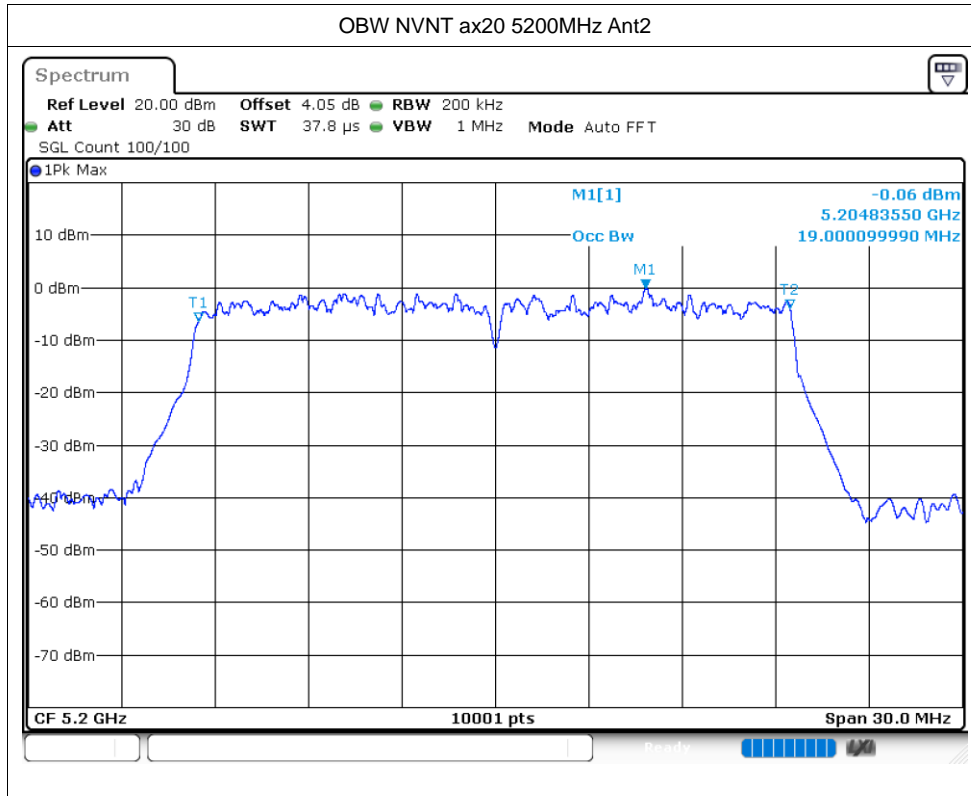

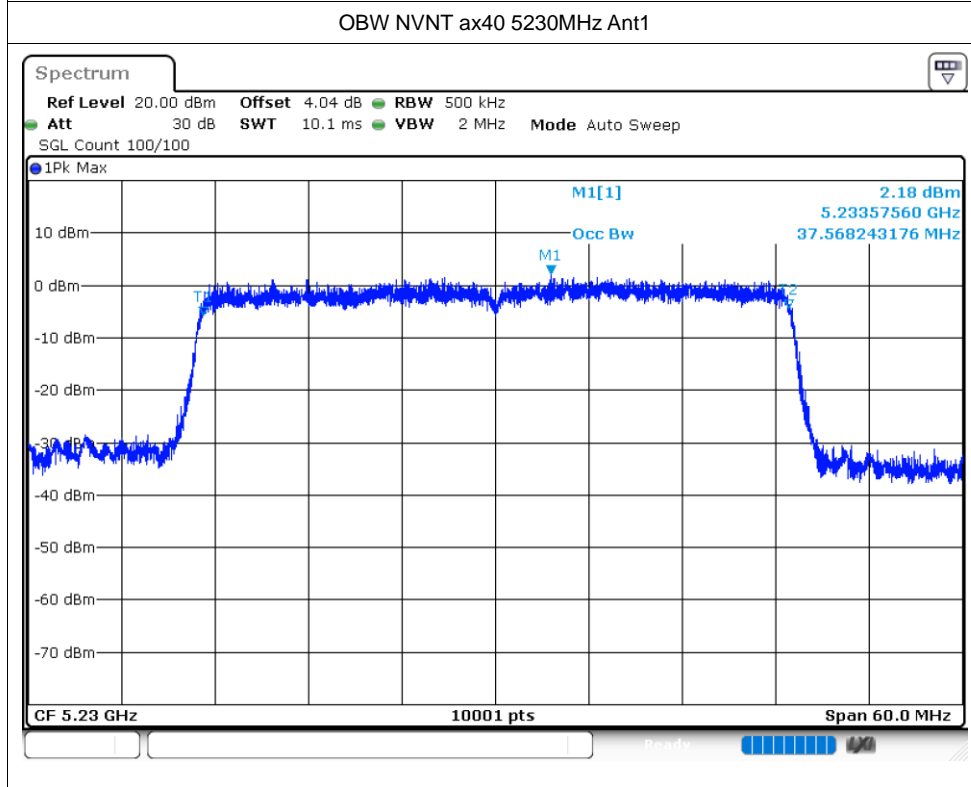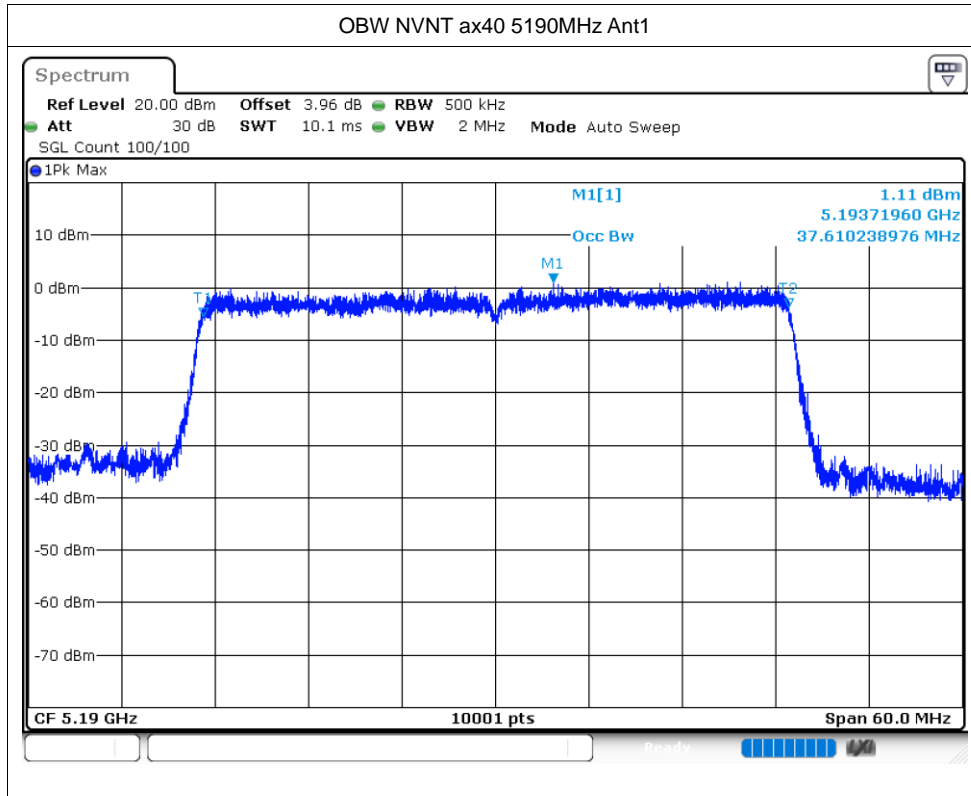

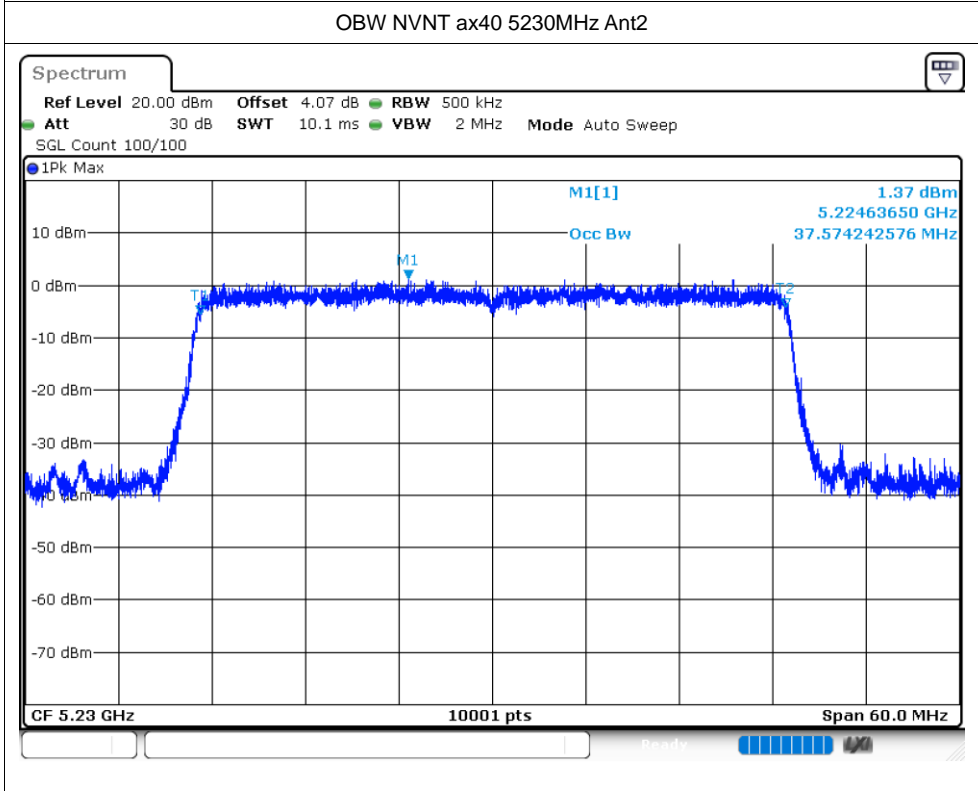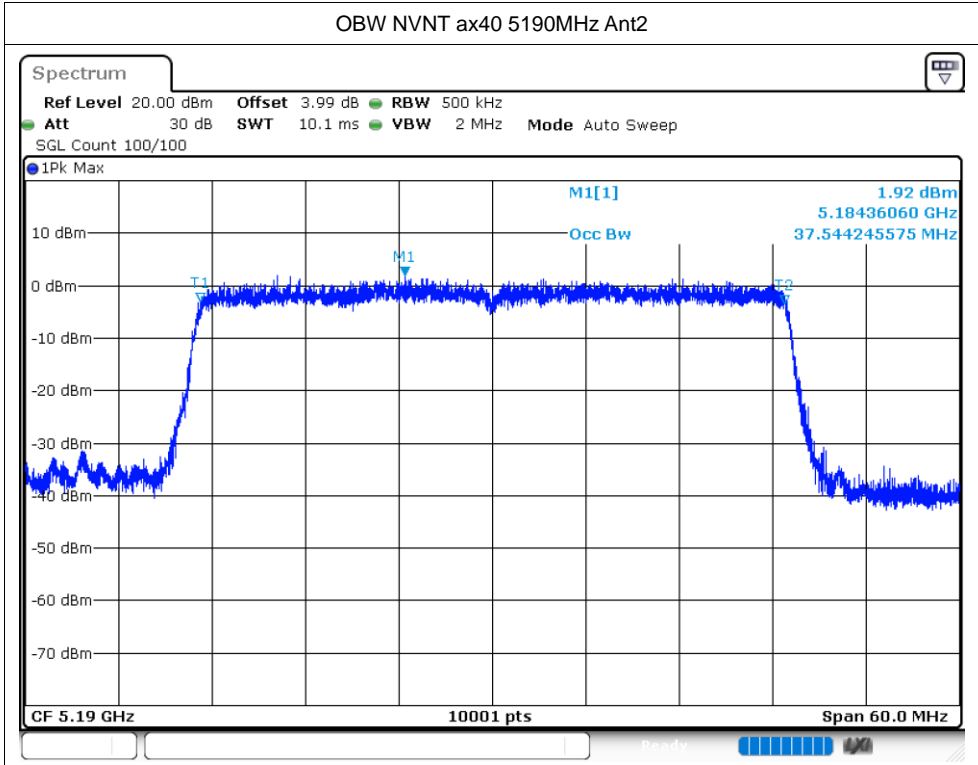

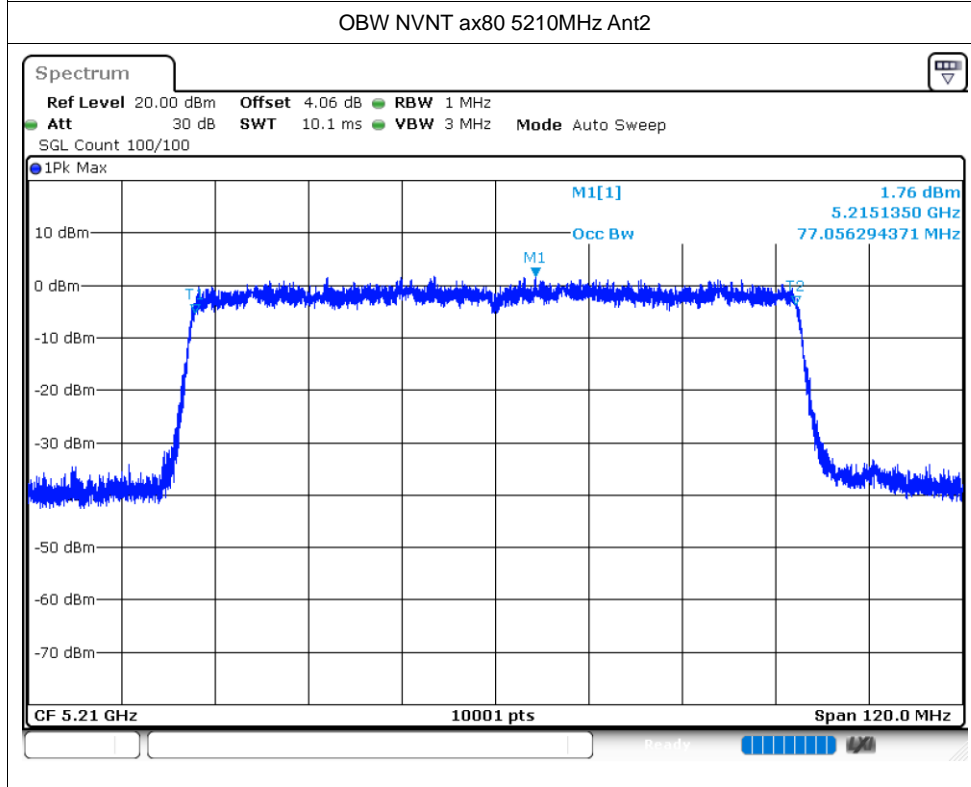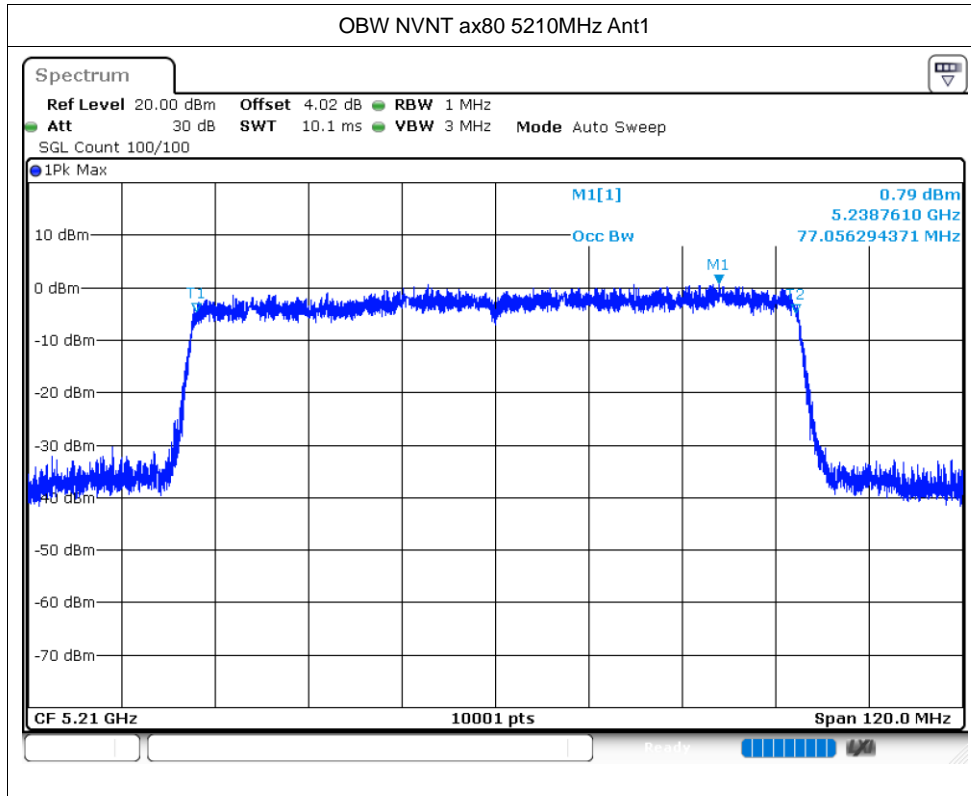

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-10.76	0.72	-10.04	11	Pass
NVNT	a	5200	Ant1	-10.09	0.72	-9.37	11	Pass
NVNT	a	5240	Ant1	-9.74	0.73	-9.01	11	Pass
NVNT	a	5180	Ant2	-4.22	0.28	-3.94	11	Pass
NVNT	a	5200	Ant2	-5.71	0.28	-5.43	11	Pass
NVNT	a	5240	Ant2	-5.57	0.28	-5.29	11	Pass
NVNT	n20	5180	Ant1	-13.55	0.94	-12.61	11	Pass
NVNT	n20	5200	Ant1	-12.27	0.94	-11.33	11	Pass
NVNT	n20	5240	Ant1	-10.43	0.94	-9.49	11	Pass
NVNT	n20	5180	Ant2	-0.23	0.04	-0.19	11	Pass
NVNT	n20	5200	Ant2	-0.76	0.04	-0.72	11	Pass
NVNT	n20	5240	Ant2	-0.84	0.04	-0.8	11	Pass
NVNT	n40	5190	Ant1	-27.41	2.57	-24.84	11	Pass
NVNT	n40	5230	Ant1	-25.28	2.58	-22.7	11	Pass
NVNT	n40	5190	Ant2	-11.24	0.51	-10.73	11	Pass
NVNT	n40	5230	Ant2	-10.82	0.51	-10.31	11	Pass
NVNT	ac20	5180	Ant1	-7.36	0.37	-6.99	11	Pass
NVNT	ac20	5200	Ant1	-7.8	0.37	-7.43	11	Pass
NVNT	ac20	5240	Ant1	-6.48	0.37	-6.11	11	Pass
NVNT	ac20	5180	Ant2	-5.67	0.35	-5.32	11	Pass
NVNT	ac20	5200	Ant2	-6.76	0.35	-6.41	11	Pass
NVNT	ac20	5240	Ant2	-5.55	0.35	-5.2	11	Pass
NVNT	ac40	5190	Ant1	-7.84	0.23	-7.61	11	Pass
NVNT	ac40	5230	Ant1	-7.57	0.23	-7.34	11	Pass
NVNT	ac40	5190	Ant2	-7.73	0.19	-7.54	11	Pass
NVNT	ac40	5230	Ant2	-9.4	0.19	-9.21	11	Pass
NVNT	ac80	5210	Ant1	-29.14	3.39	-25.75	11	Pass
NVNT	ac80	5210	Ant2	-32.14	3.32	-28.82	11	Pass
NVNT	ax20	5180	Ant1	-6.77	0.46	-6.31	11	Pass
NVNT	ax20	5200	Ant1	-8.88	0.46	-8.42	11	Pass
NVNT	ax20	5240	Ant1	-7.92	0.46	-7.46	11	Pass
NVNT	ax20	5180	Ant2	-7.88	0.44	-7.44	11	Pass
NVNT	ax20	5200	Ant2	-8.21	0.44	-7.77	11	Pass
NVNT	ax20	5240	Ant2	-7.28	0.44	-6.84	11	Pass
NVNT	ax40	5190	Ant1	-14.47	0.61	-13.86	11	Pass
NVNT	ax40	5230	Ant1	-11.71	0.6	-11.11	11	Pass
NVNT	ax40	5190	Ant2	-13.68	0.59	-13.09	11	Pass
NVNT	ax40	5230	Ant2	-13.76	0.61	-13.15	11	Pass
NVNT	ax80	5210	Ant1	-17.48	0.74	-16.74	11	Pass
NVNT	ax80	5210	Ant2	-13.99	0.74	-13.25	11	Pass

