

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.51	0.28	11.79	30	Pass
NVNT	a	5785	Ant1	11.76	0.3	12.06	30	Pass
NVNT	a	5825	Ant1	10.8	0.28	11.08	30	Pass
NVNT	a	5745	Ant2	12.05	0.3	12.35	30	Pass
NVNT	a	5785	Ant2	11.7	0.3	12	30	Pass
NVNT	a	5825	Ant2	11.31	0.3	11.61	30	Pass
NVNT	n20	5745	Ant1	12.42	0.04	12.46	30	Pass
NVNT	n20	5785	Ant1	12.37	0.04	12.41	30	Pass
NVNT	n20	5825	Ant1	11.59	0.04	11.63	30	Pass
NVNT	n20	5745	Ant2	11.94	0.04	11.98	30	Pass
NVNT	n20	5785	Ant2	11.58	0.04	11.62	30	Pass
NVNT	n20	5825	Ant2	11.07	0.04	11.11	30	Pass
NVNT	n40	5755	Ant1	11.9	0.56	12.46	30	Pass
NVNT	n40	5795	Ant1	11.8	0.51	12.31	30	Pass
NVNT	n40	5755	Ant2	11.34	0.56	11.9	30	Pass
NVNT	n40	5795	Ant2	11.03	0.56	11.59	30	Pass
NVNT	ac20	5745	Ant1	12.43	0.35	12.78	30	Pass
NVNT	ac20	5785	Ant1	12.52	0.37	12.89	30	Pass
NVNT	ac20	5825	Ant1	11.64	0.35	11.99	30	Pass
NVNT	ac20	5745	Ant2	12.03	0.37	12.4	30	Pass
NVNT	ac20	5785	Ant2	11.62	0.37	11.99	30	Pass
NVNT	ac20	5825	Ant2	11.4	0.37	11.77	30	Pass
NVNT	ac40	5755	Ant1	11.83	0.18	12.01	30	Pass
NVNT	ac40	5795	Ant1	11.87	0.19	12.06	30	Pass
NVNT	ac40	5755	Ant2	11.32	0.23	11.55	30	Pass
NVNT	ac40	5795	Ant2	11.03	0.23	11.26	30	Pass
NVNT	ac80	5775	Ant1	11.74	3.39	15.13	30	Pass
NVNT	ac80	5775	Ant2	10.97	3.4	14.37	30	Pass
NVNT	ax20	5745	Ant1	12.72	0.46	13.18	30	Pass
NVNT	ax20	5785	Ant1	12.9	0.46	13.36	30	Pass
NVNT	ax20	5825	Ant1	11.92	0.46	12.38	30	Pass
NVNT	ax20	5745	Ant2	12.23	0.5	12.73	30	Pass
NVNT	ax20	5785	Ant2	11.94	0.49	12.43	30	Pass
NVNT	ax20	5825	Ant2	11.57	0.5	12.07	30	Pass
NVNT	ax40	5755	Ant1	12.16	0.62	12.78	30	Pass
NVNT	ax40	5795	Ant1	12.02	0.62	12.64	30	Pass
NVNT	ax40	5755	Ant2	11.43	0.41	11.84	30	Pass
NVNT	ax40	5795	Ant2	11.14	0.59	11.73	30	Pass
NVNT	ax80	5775	Ant1	11.91	0.74	12.65	30	Pass



NVNT	ax80	5775	Ant2	11.14	0.74	11.88	30	Pass
------	------	------	------	-------	------	-------	----	------



-6dB Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.464	0.5	Pass
NVNT	a	5785	Ant1	16.473	0.5	Pass
NVNT	a	5825	Ant1	16.437	0.5	Pass
NVNT	a	5745	Ant2	16.506	0.5	Pass
NVNT	a	5785	Ant2	16.524	0.5	Pass
NVNT	a	5825	Ant2	16.482	0.5	Pass
NVNT	n20	5745	Ant1	11.313	0.5	Pass
NVNT	n20	5785	Ant1	11.415	0.5	Pass
NVNT	n20	5825	Ant1	12.51	0.5	Pass
NVNT	n20	5745	Ant2	15.108	0.5	Pass
NVNT	n20	5785	Ant2	12.897	0.5	Pass
NVNT	n20	5825	Ant2	12.639	0.5	Pass
NVNT	n40	5755	Ant1	36.336	0.5	Pass
NVNT	n40	5795	Ant1	36.042	0.5	Pass
NVNT	n40	5755	Ant2	36.408	0.5	Pass
NVNT	n40	5795	Ant2	36.12	0.5	Pass
NVNT	ac20	5745	Ant1	17.646	0.5	Pass
NVNT	ac20	5785	Ant1	17.643	0.5	Pass
NVNT	ac20	5825	Ant1	17.685	0.5	Pass
NVNT	ac20	5745	Ant2	17.67	0.5	Pass
NVNT	ac20	5785	Ant2	17.724	0.5	Pass
NVNT	ac20	5825	Ant2	17.76	0.5	Pass
NVNT	ac40	5755	Ant1	36.264	0.5	Pass
NVNT	ac40	5795	Ant1	36.324	0.5	Pass
NVNT	ac40	5755	Ant2	36.384	0.5	Pass
NVNT	ac40	5795	Ant2	36.354	0.5	Pass
NVNT	ac80	5775	Ant1	75.42	0.5	Pass
NVNT	ac80	5775	Ant2	75.924	0.5	Pass
NVNT	ax20	5745	Ant1	19.086	0.5	Pass
NVNT	ax20	5785	Ant1	18.996	0.5	Pass
NVNT	ax20	5825	Ant1	19.05	0.5	Pass
NVNT	ax20	5745	Ant2	19.095	0.5	Pass
NVNT	ax20	5785	Ant2	18.918	0.5	Pass
NVNT	ax20	5825	Ant2	19.008	0.5	Pass
NVNT	ax40	5755	Ant1	37.326	0.5	Pass
NVNT	ax40	5795	Ant1	37.368	0.5	Pass
NVNT	ax40	5755	Ant2	37.65	0.5	Pass



NVNT	ax40	5795	Ant2	37.128	0.5	Pass
NVNT	ax80	5775	Ant1	76.032	0.5	Pass
NVNT	ax80	5775	Ant2	77.472	0.5	Pass


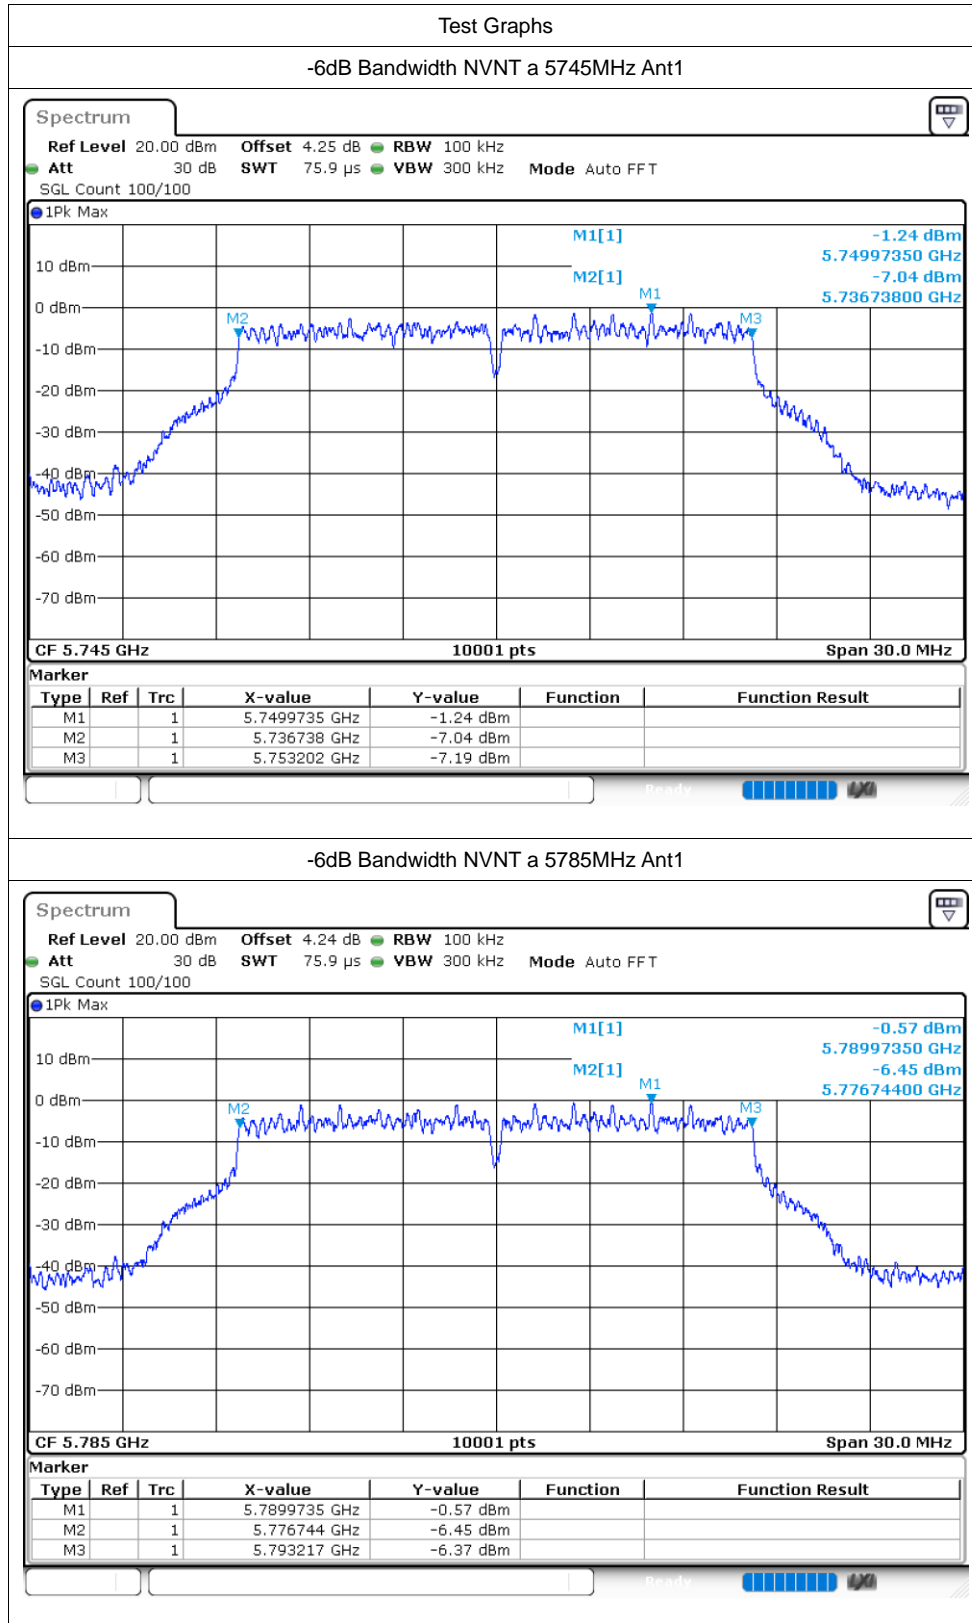


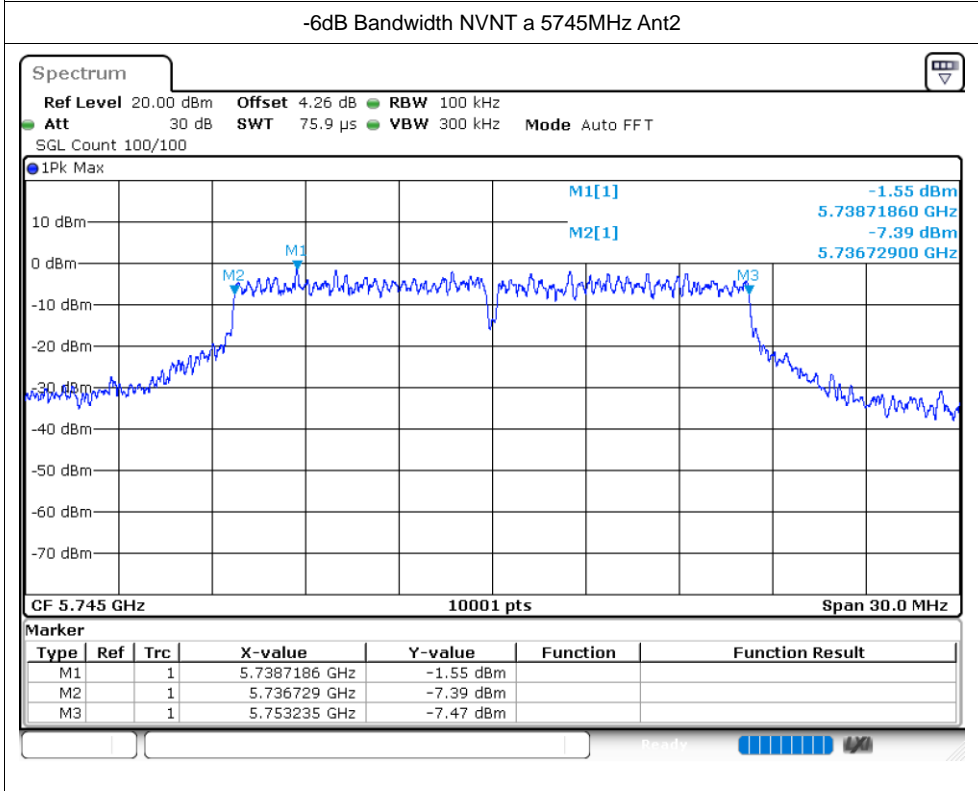
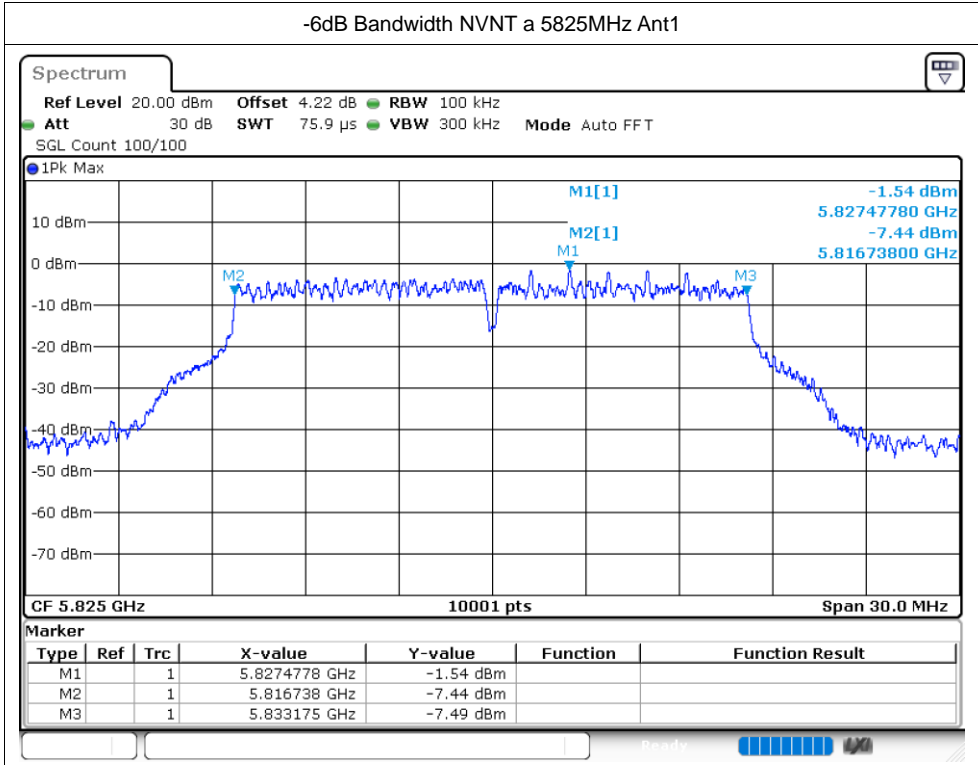


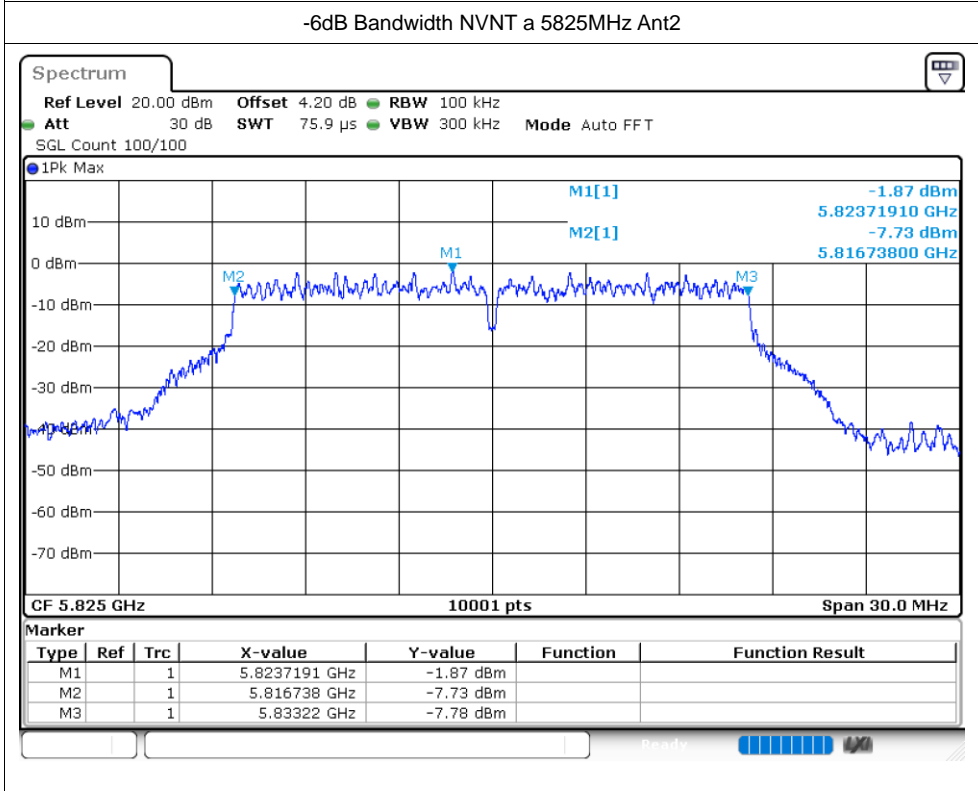
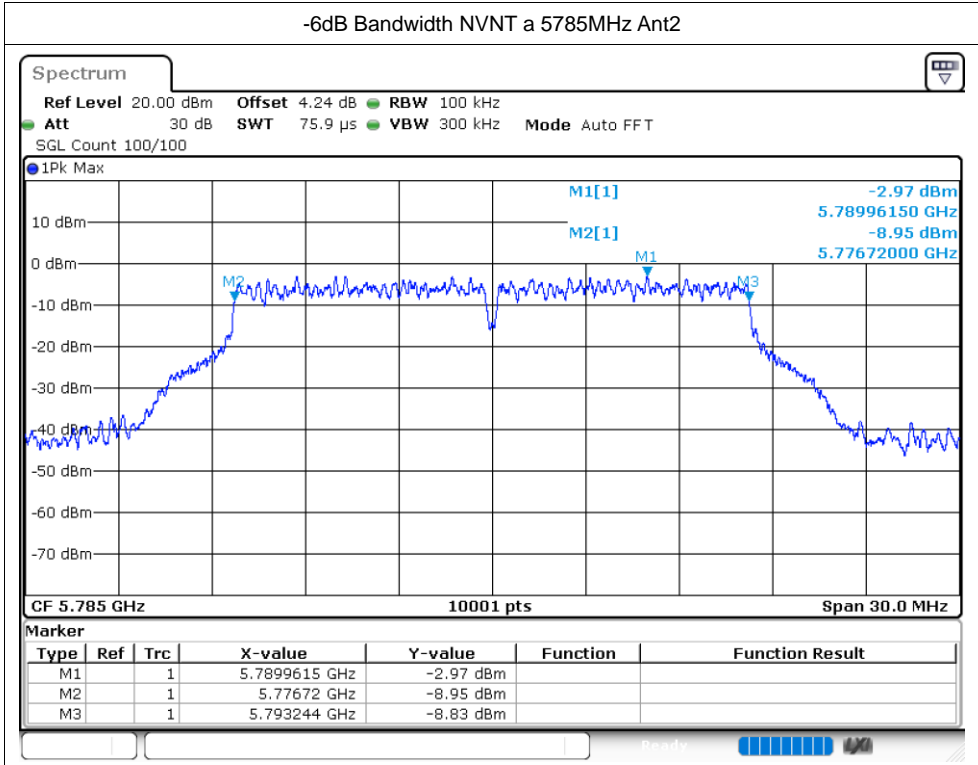


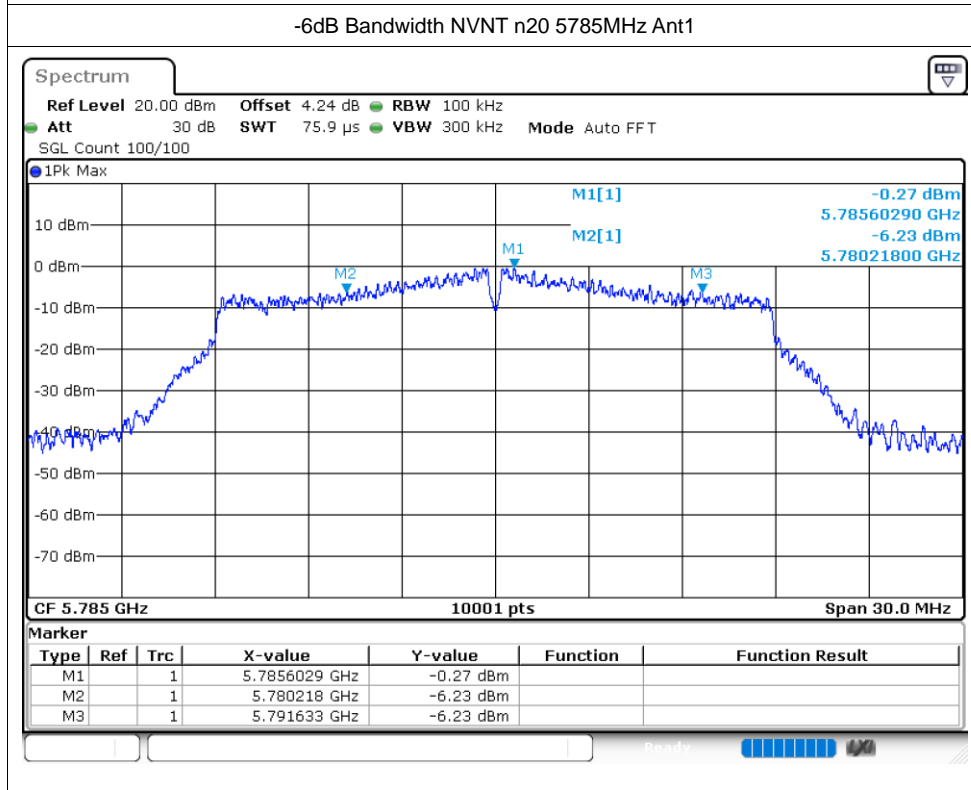
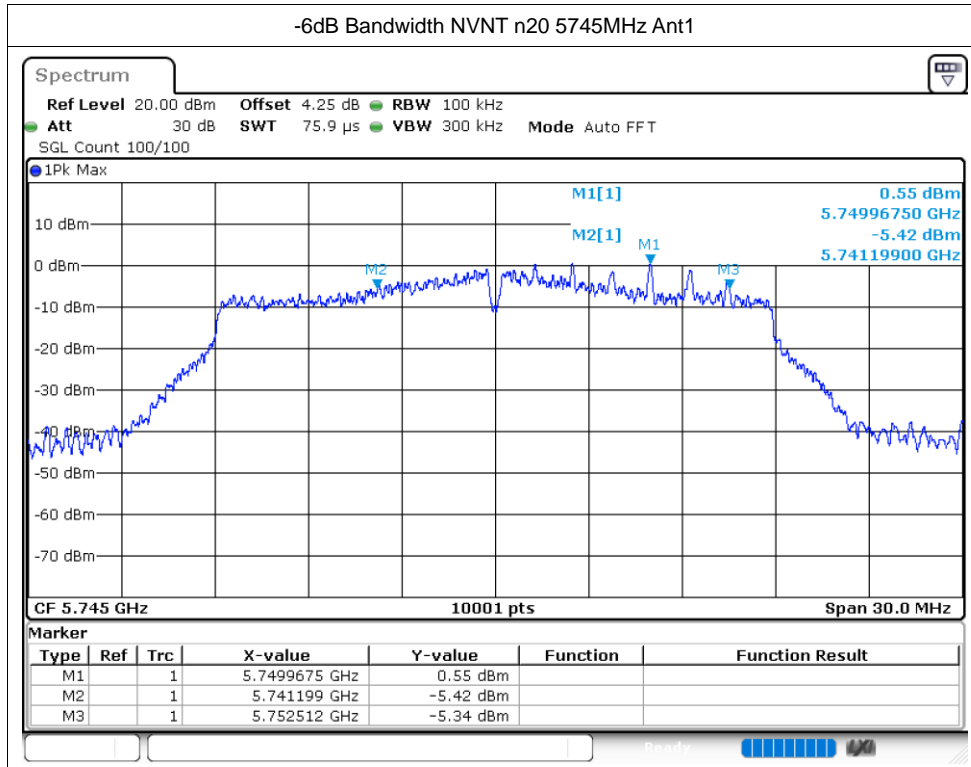


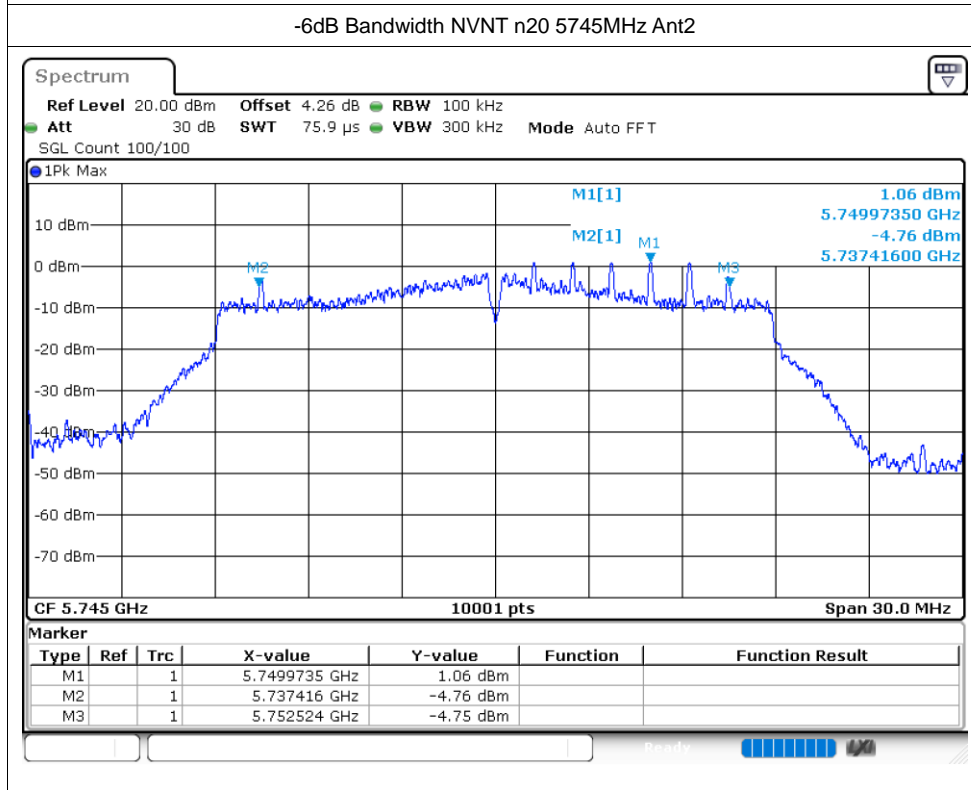
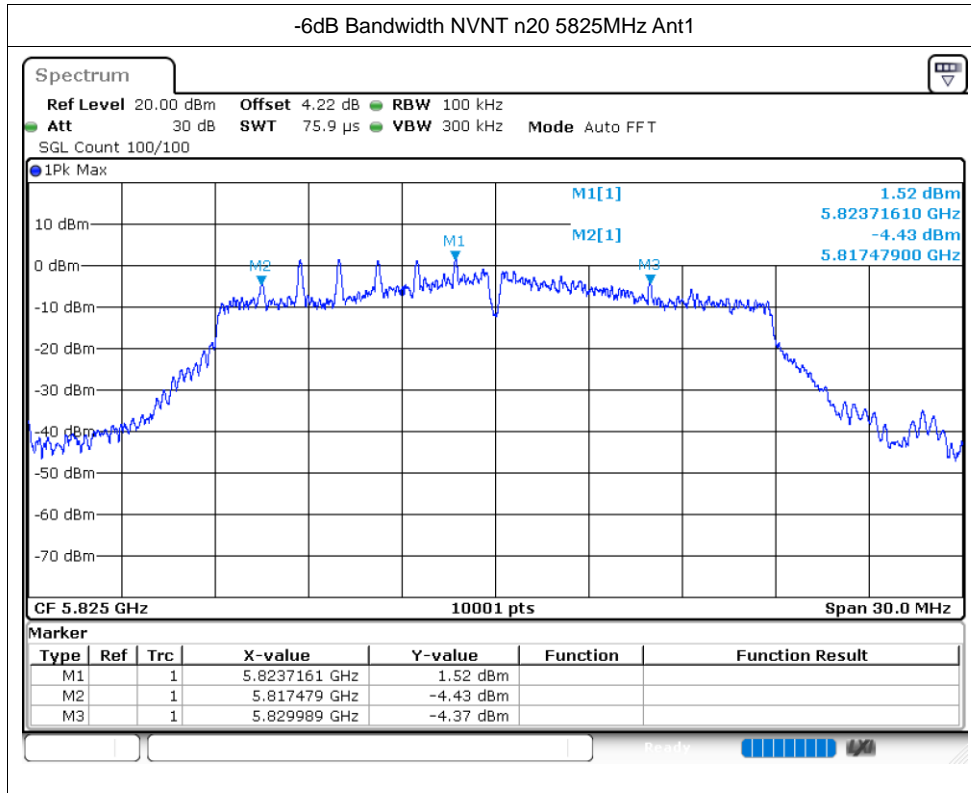


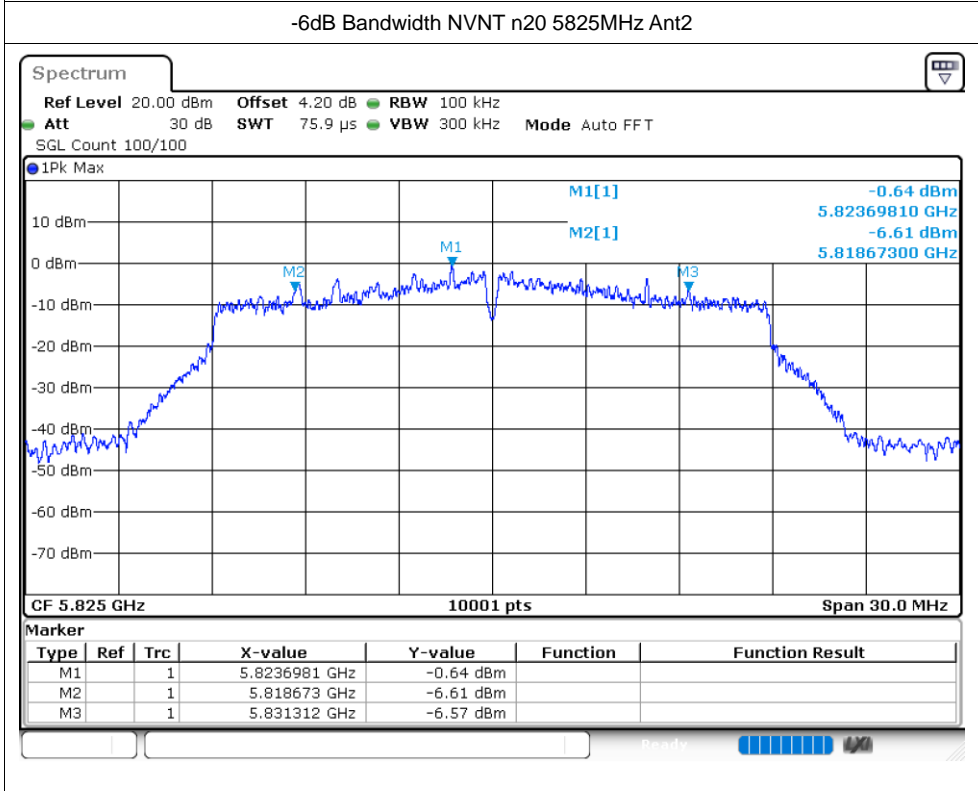
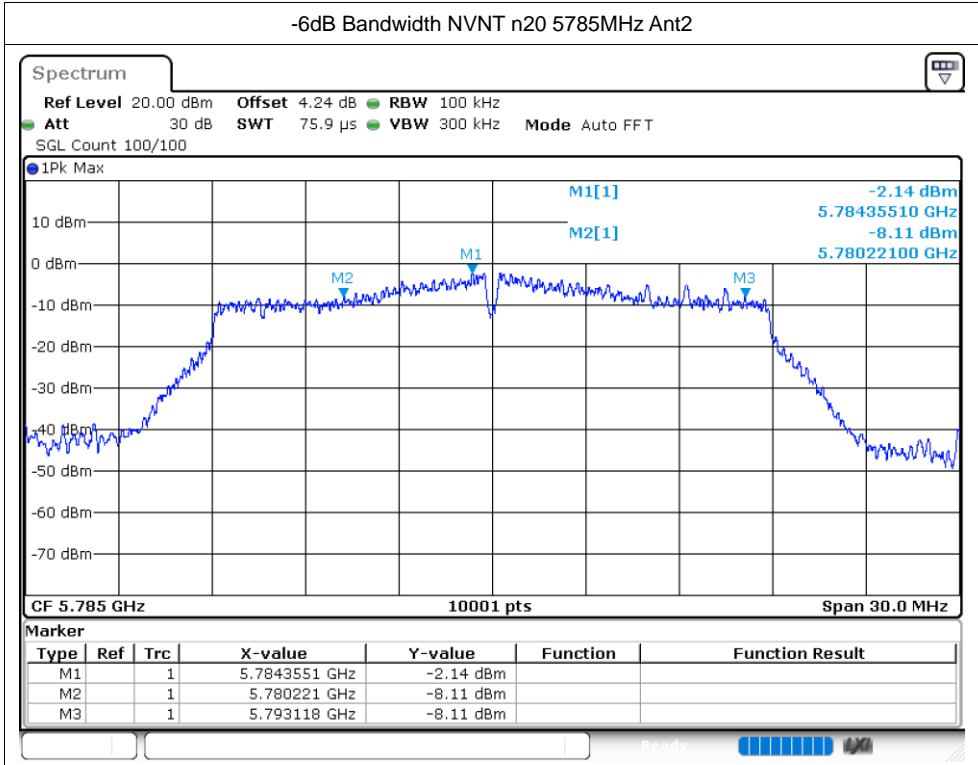


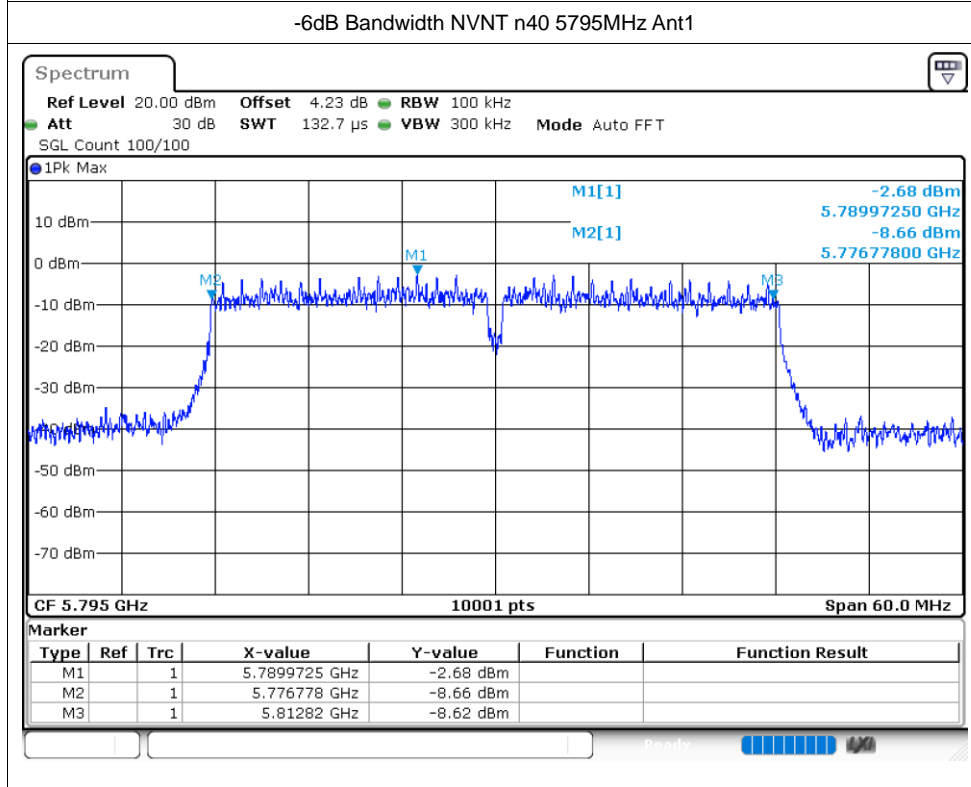
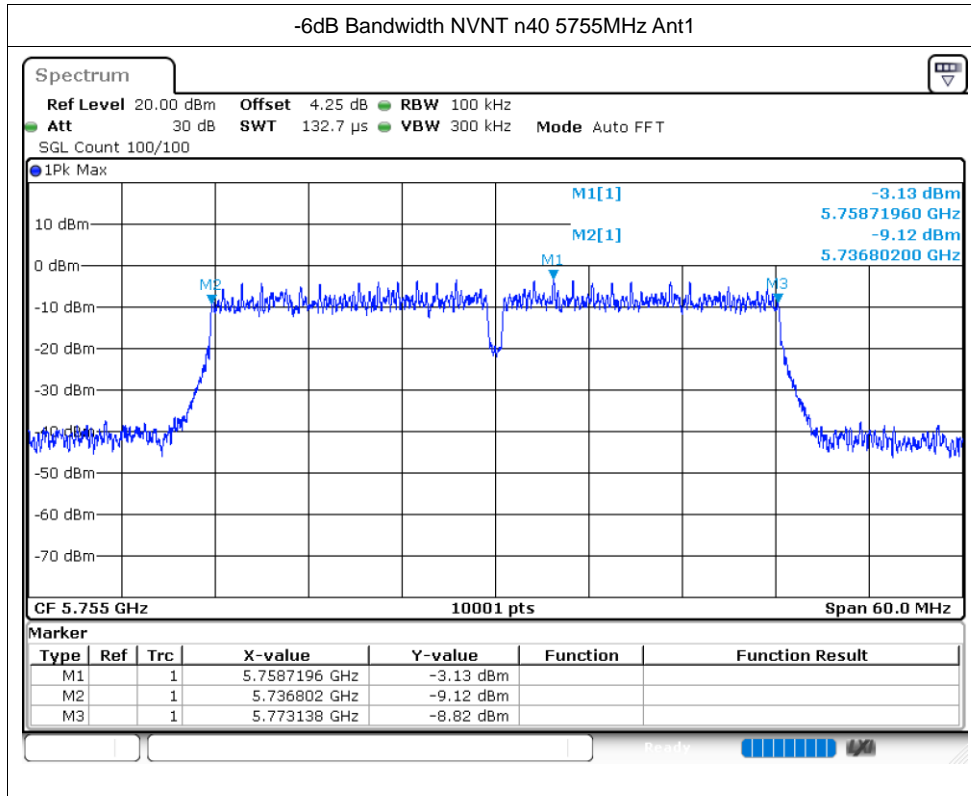


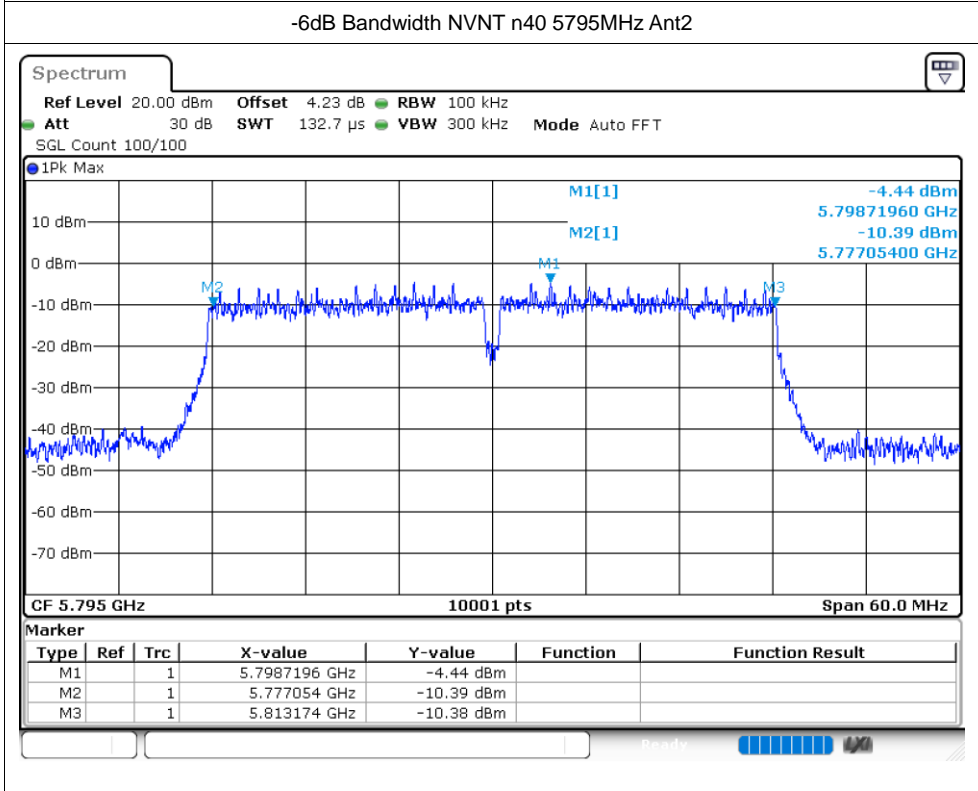
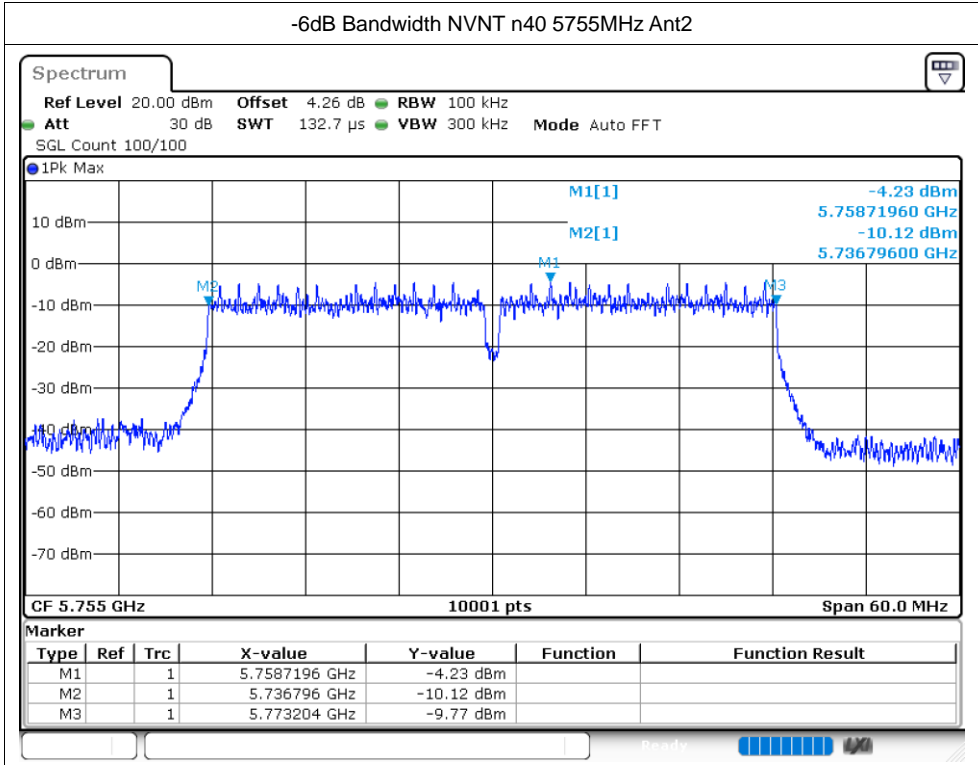


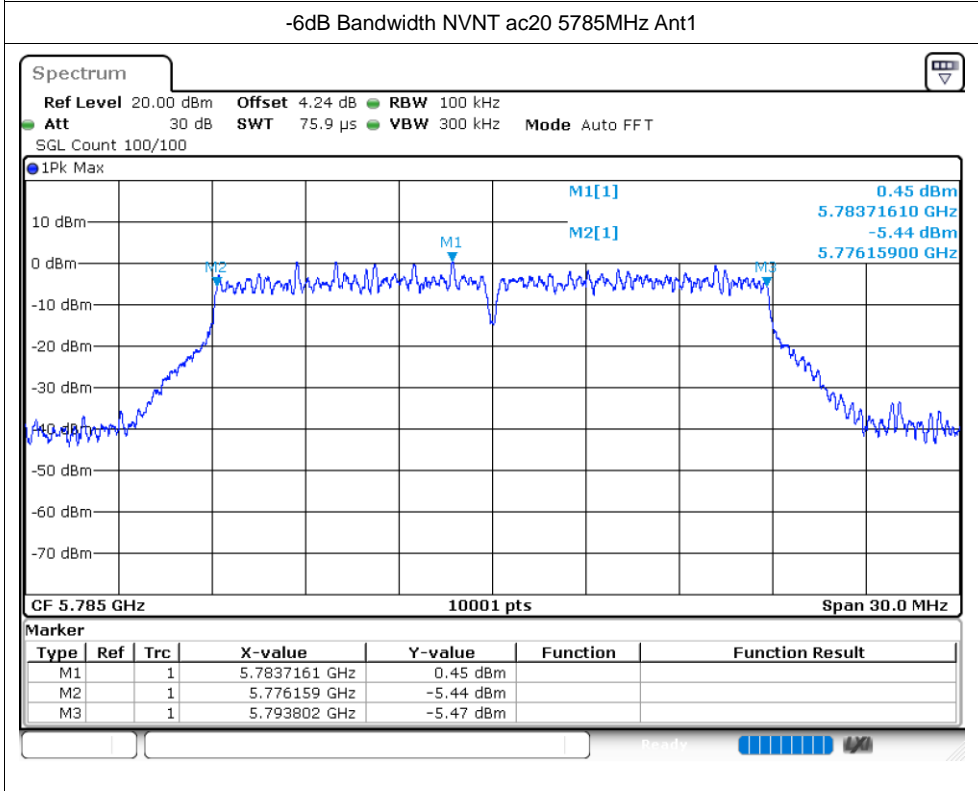
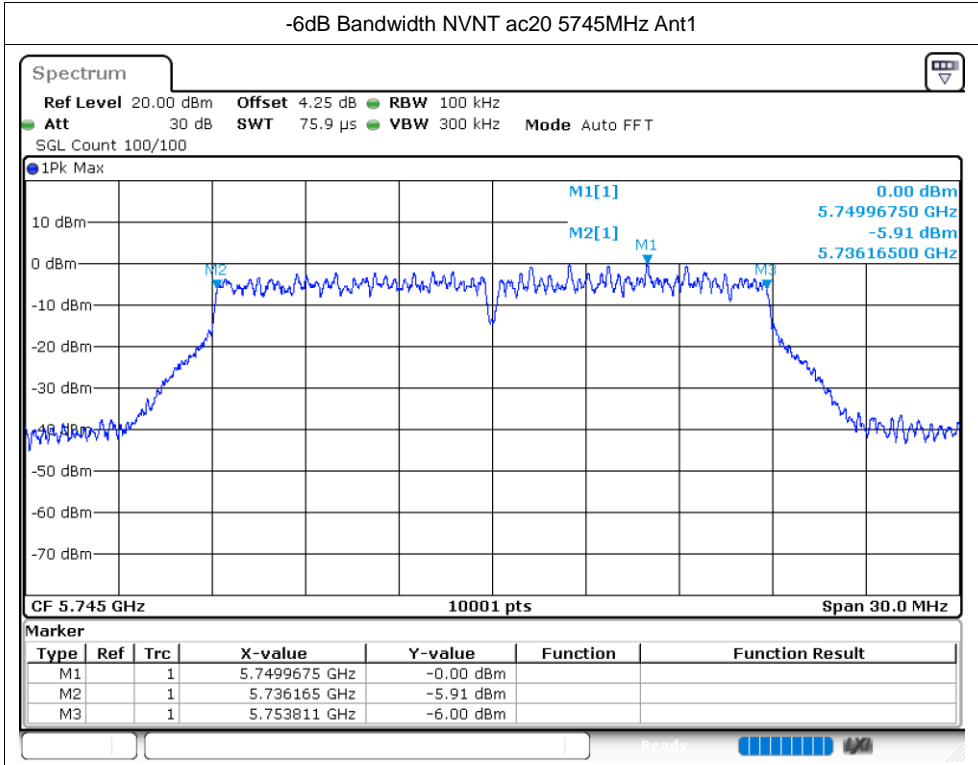


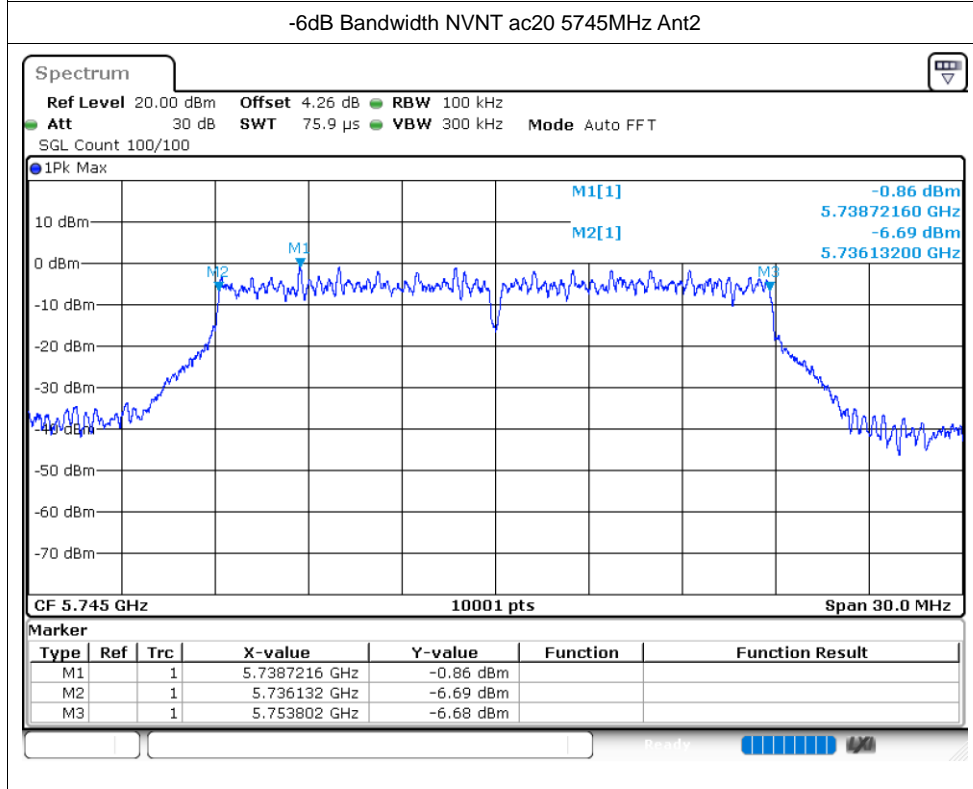
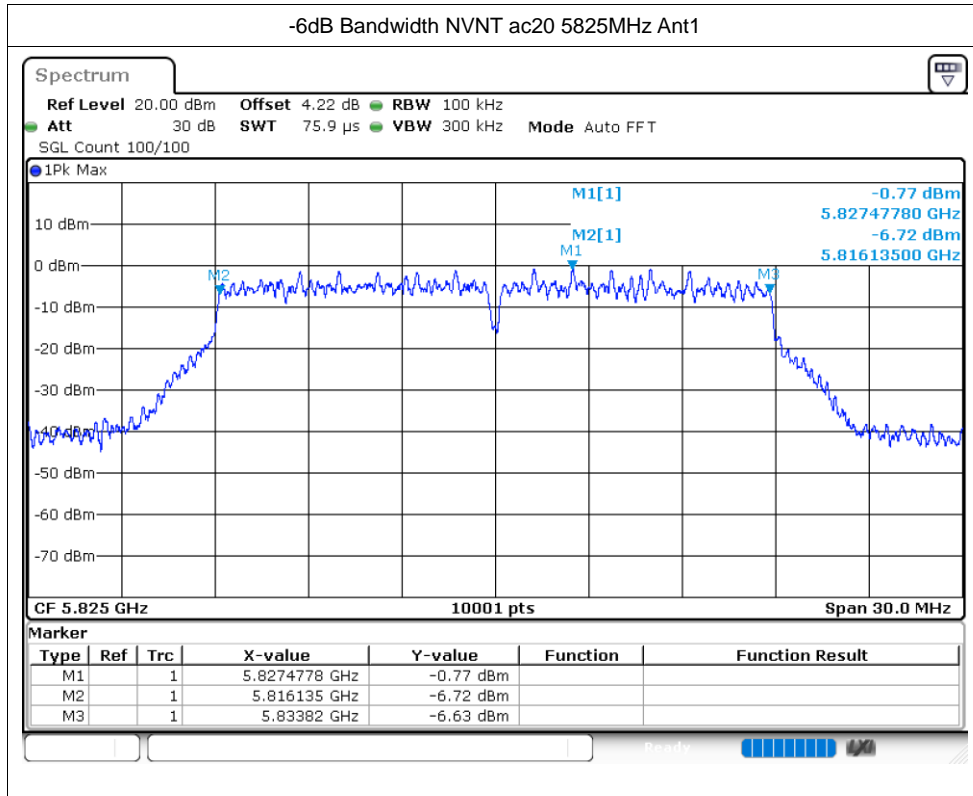


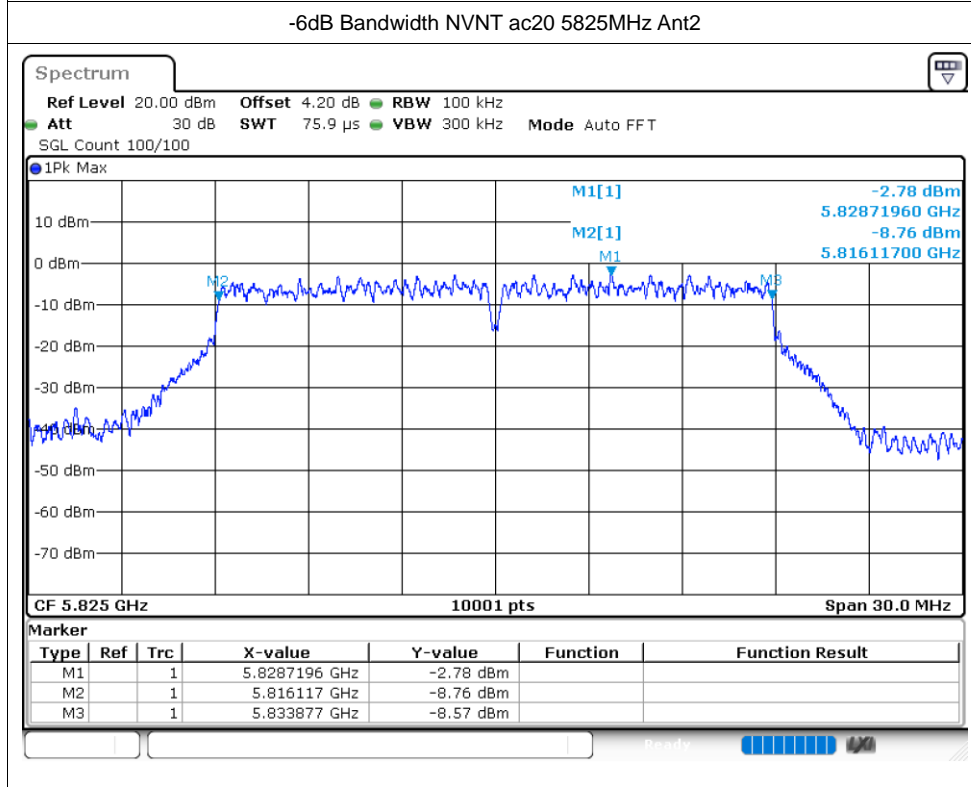
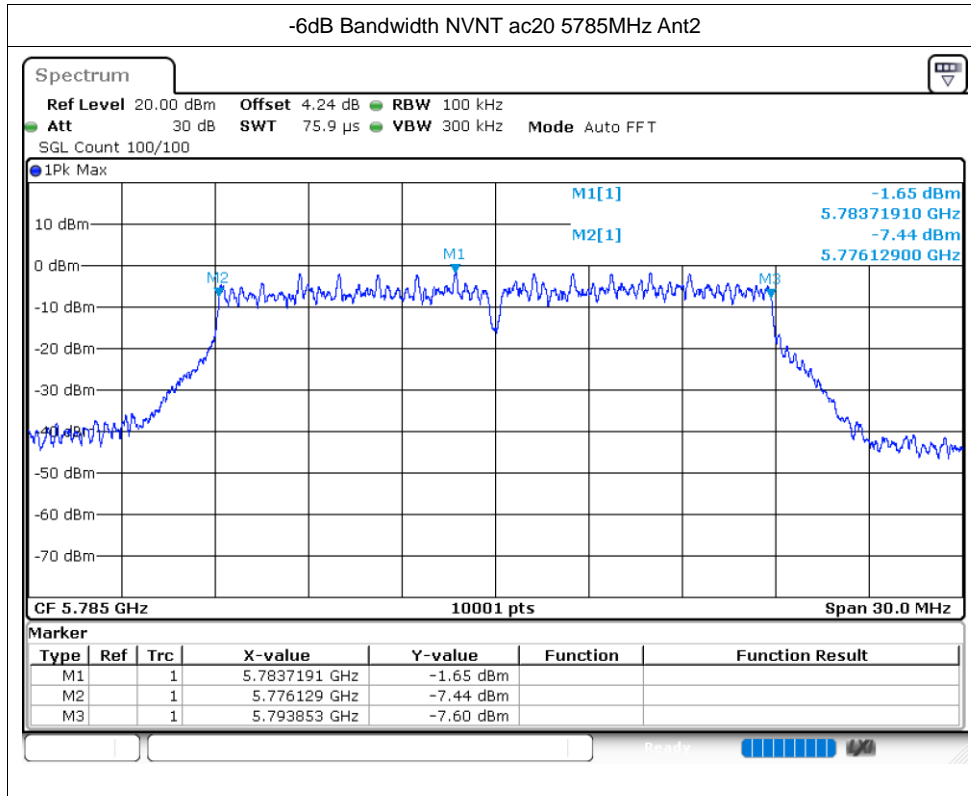


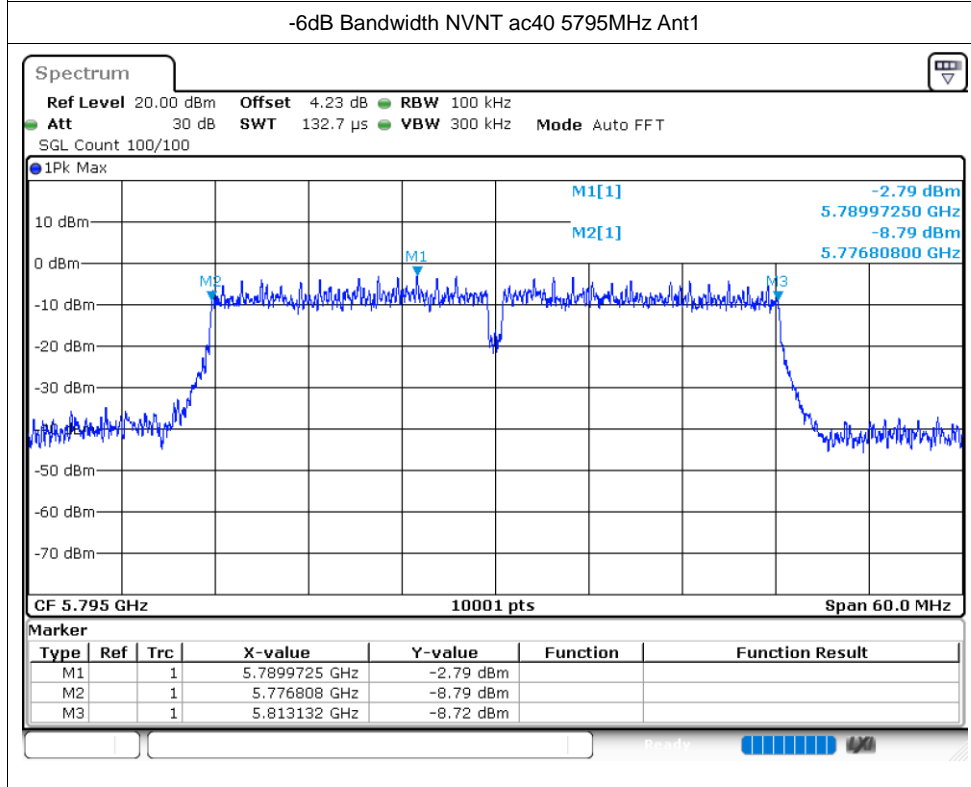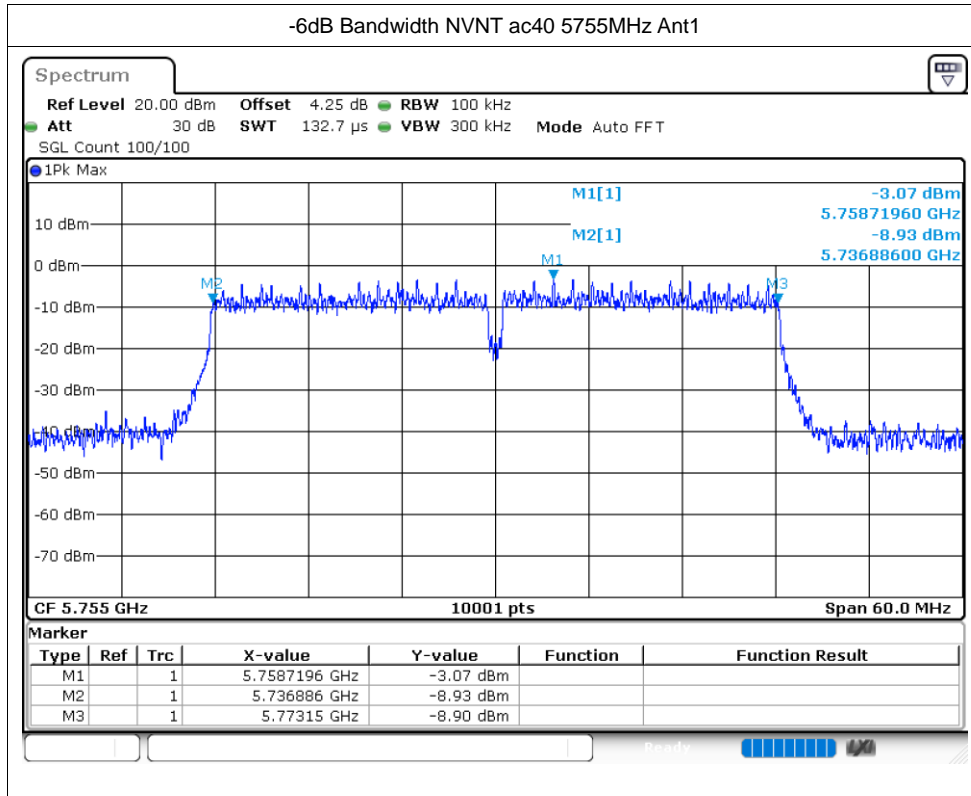


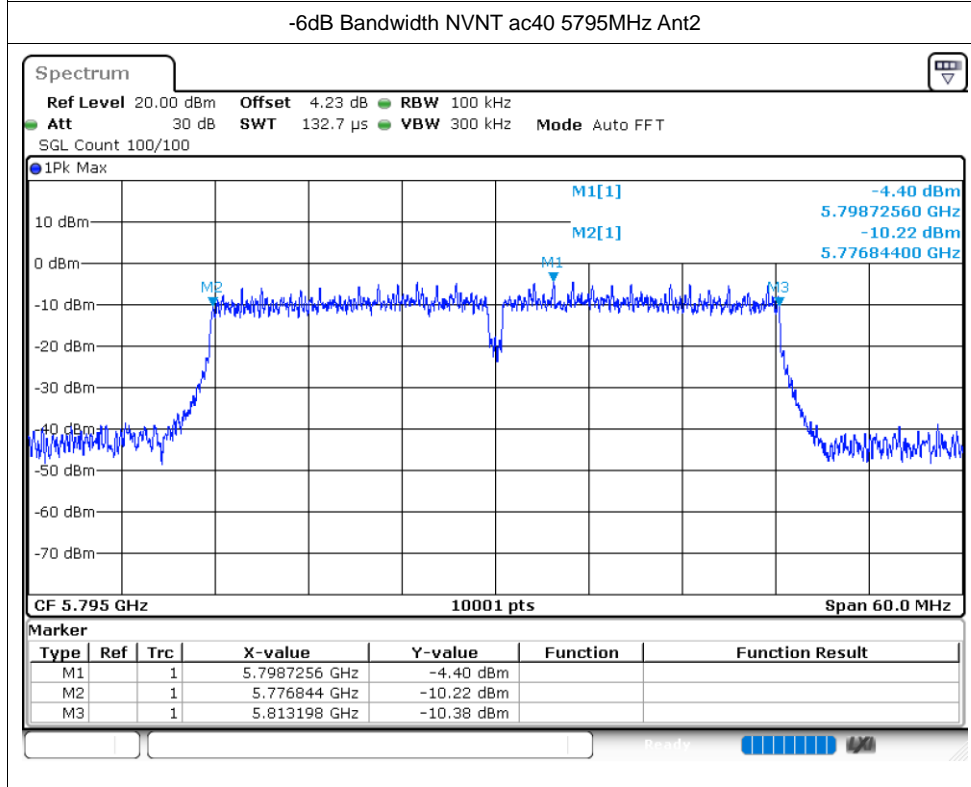
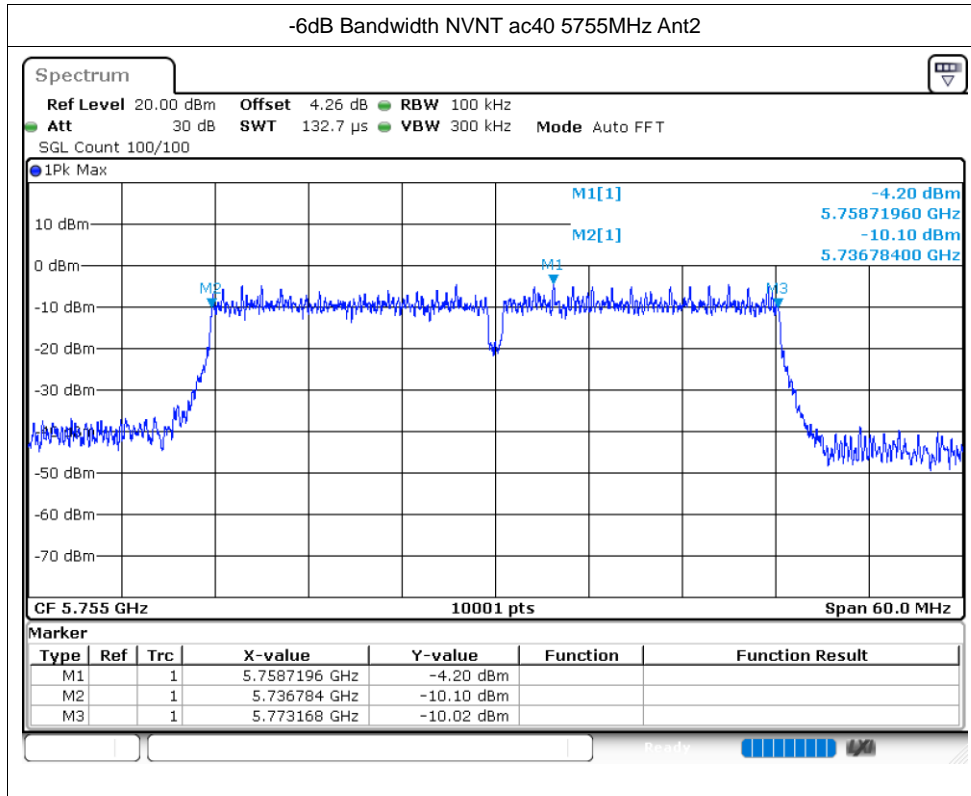


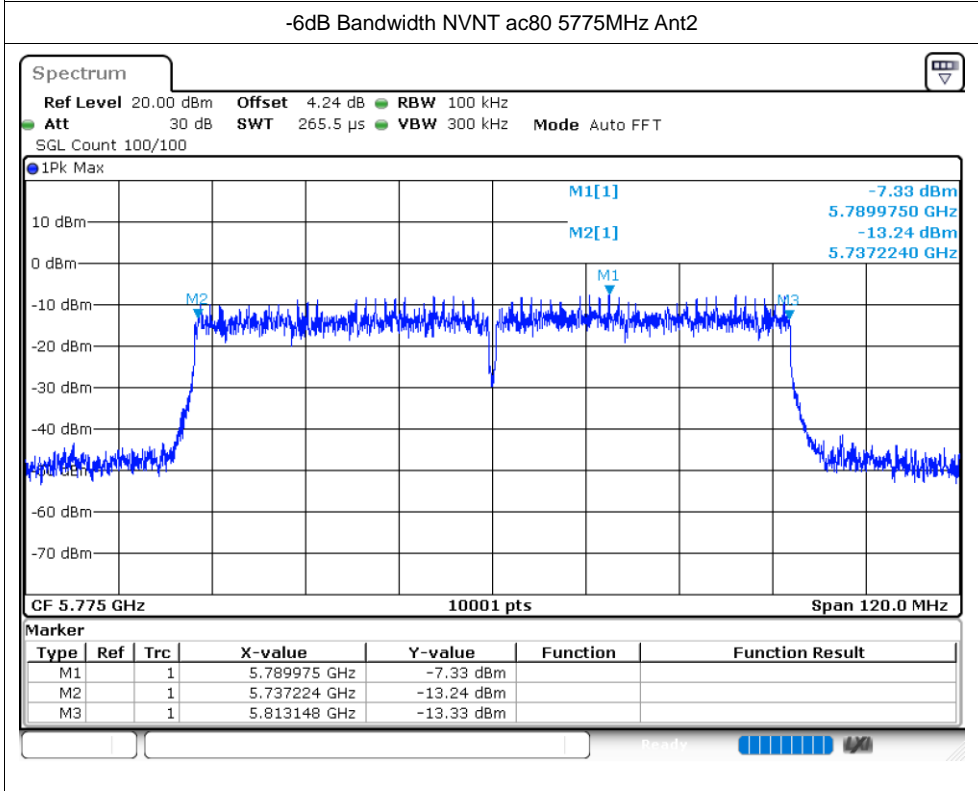
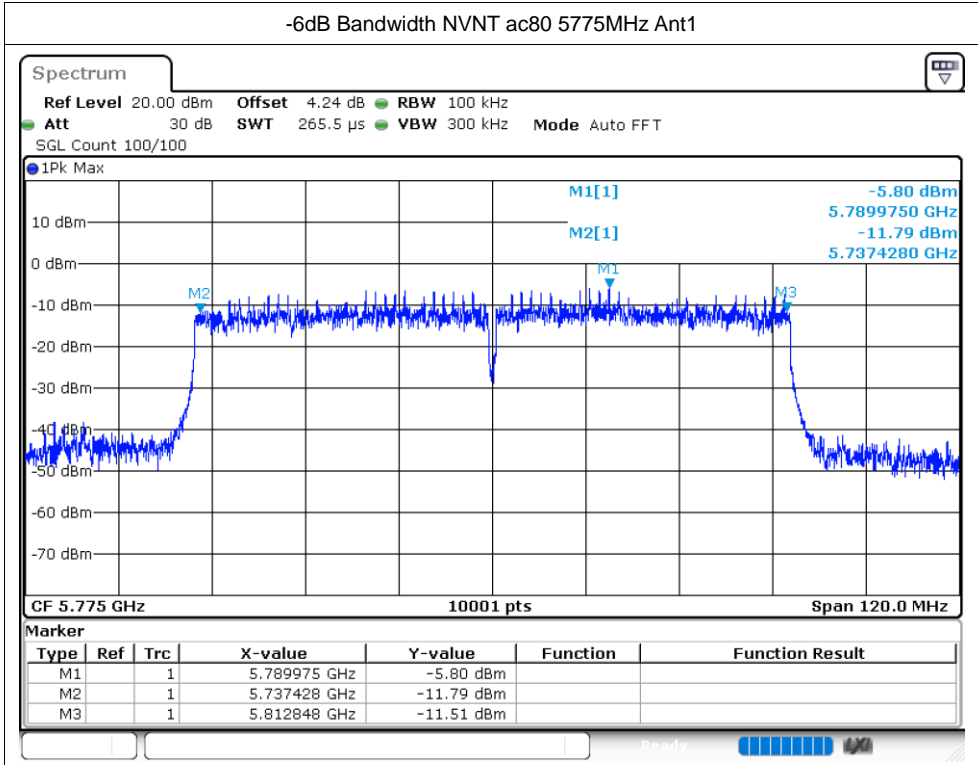


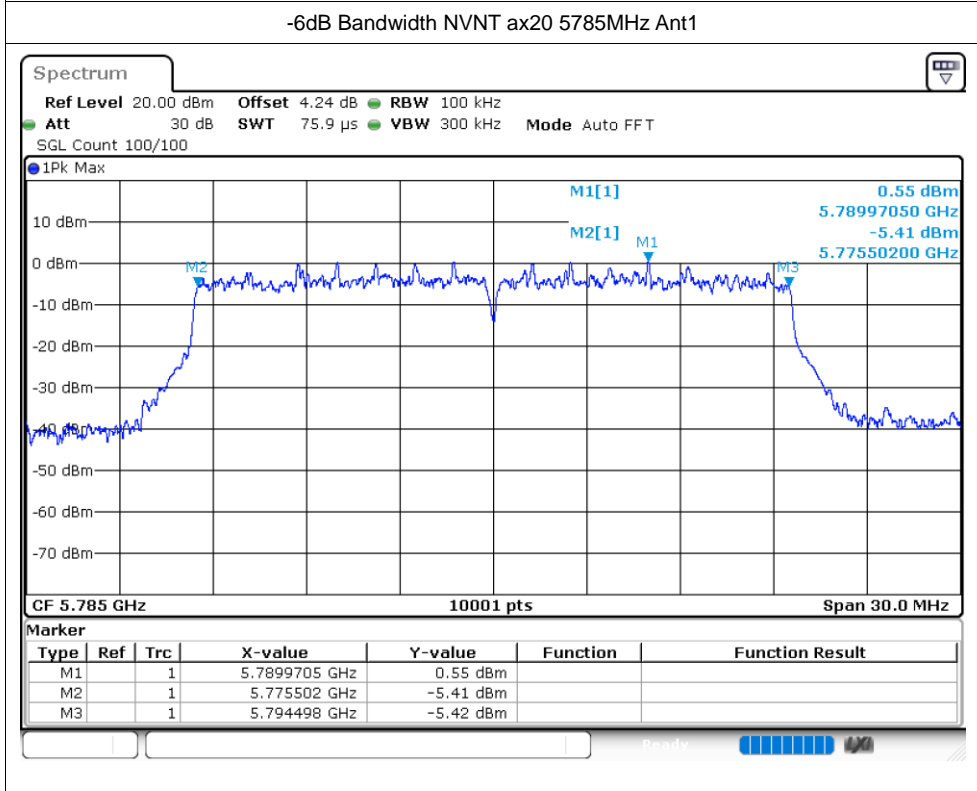
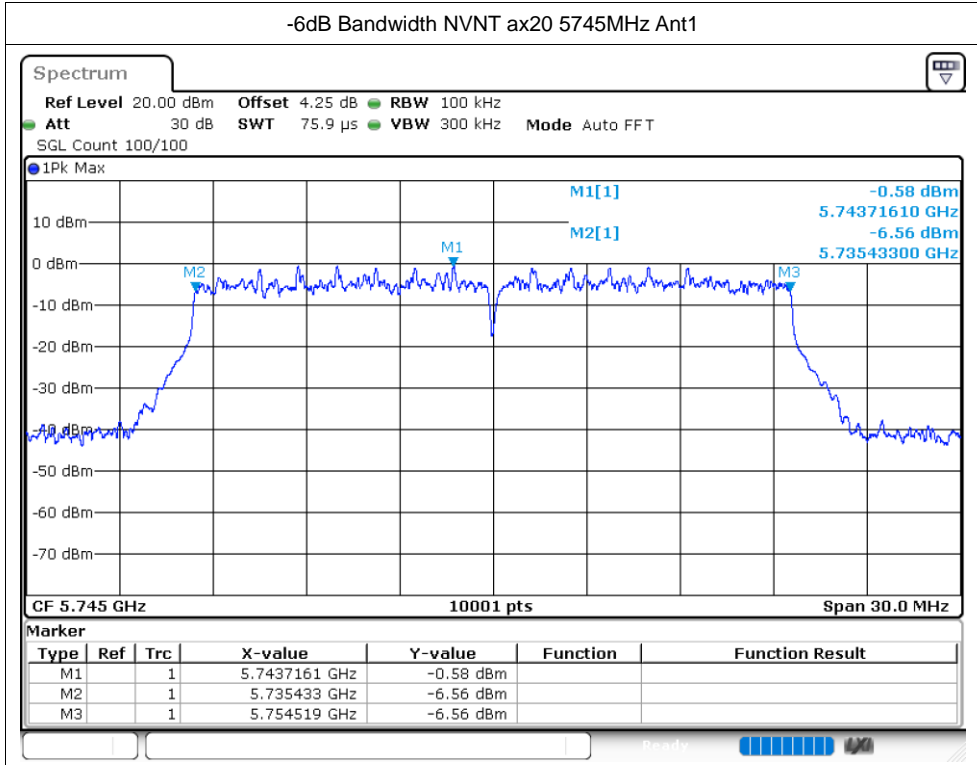


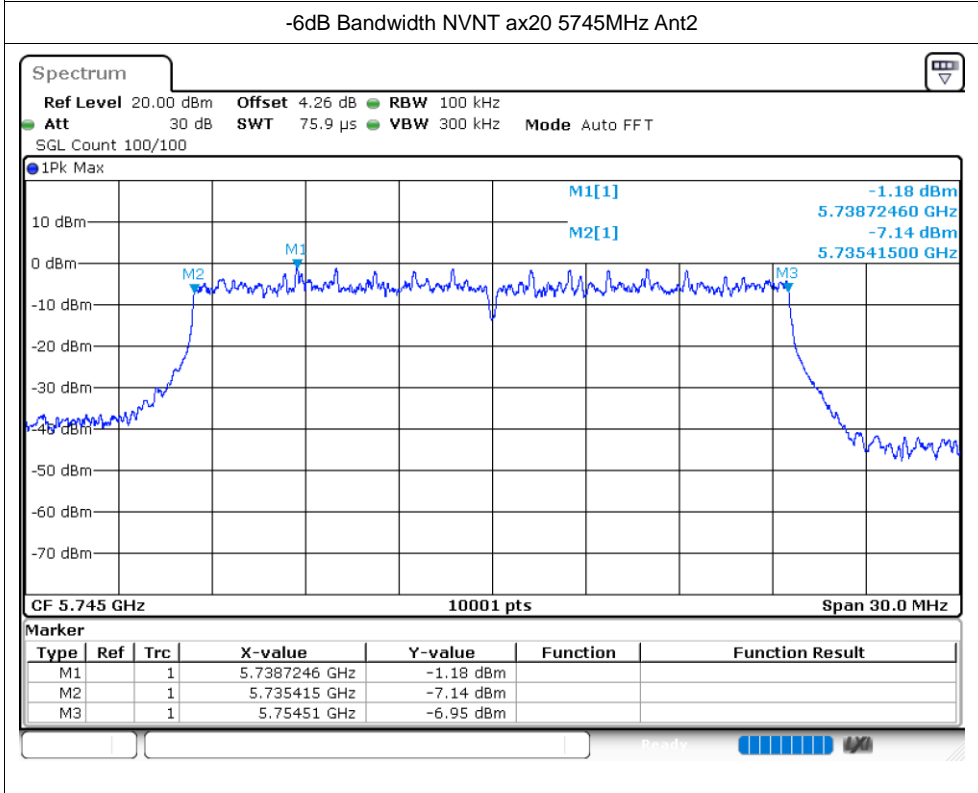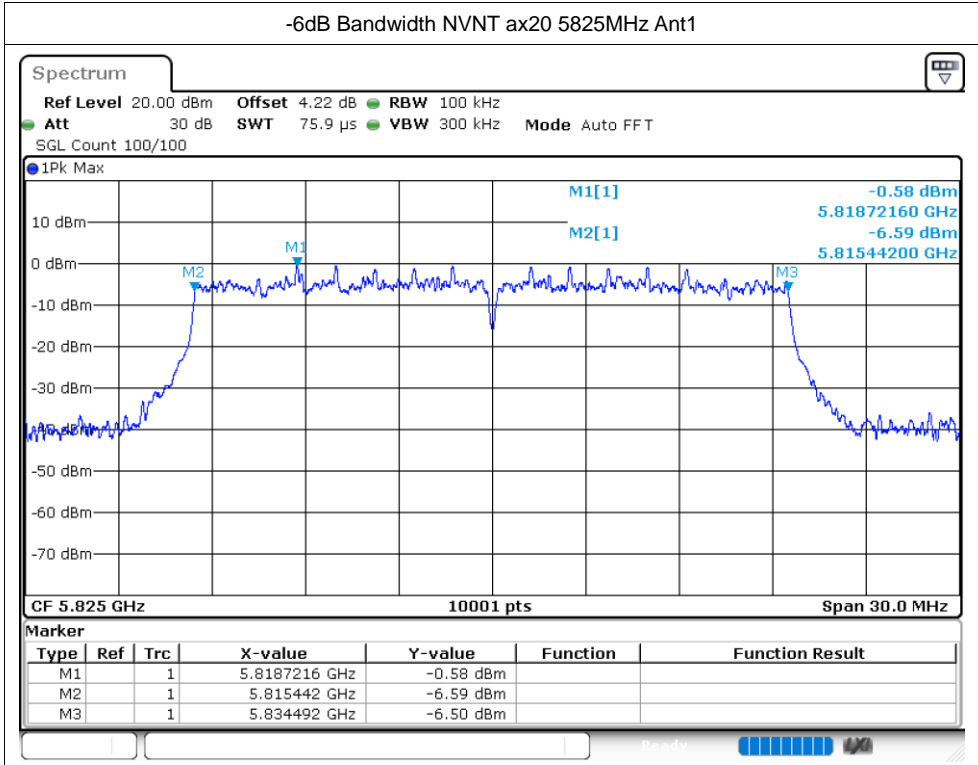

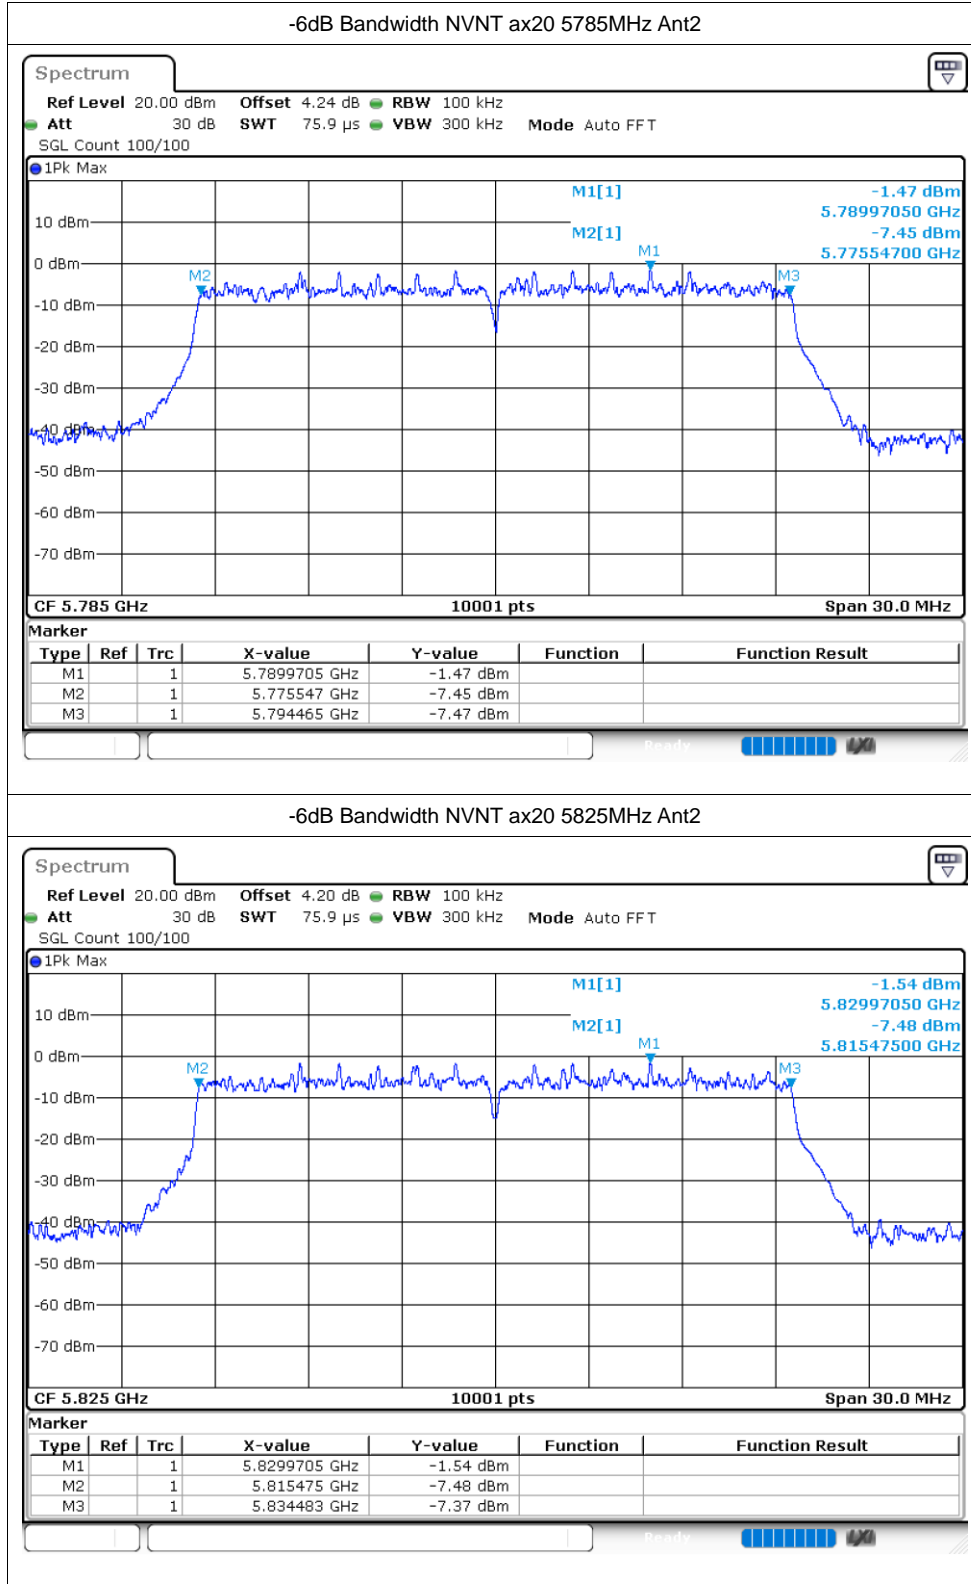

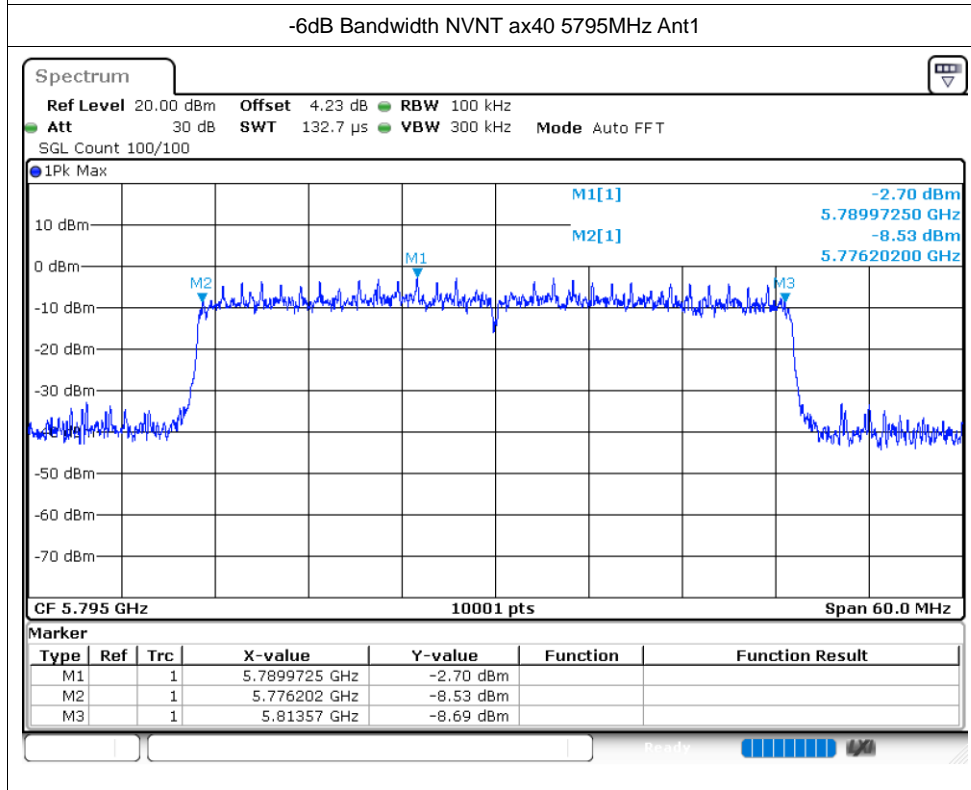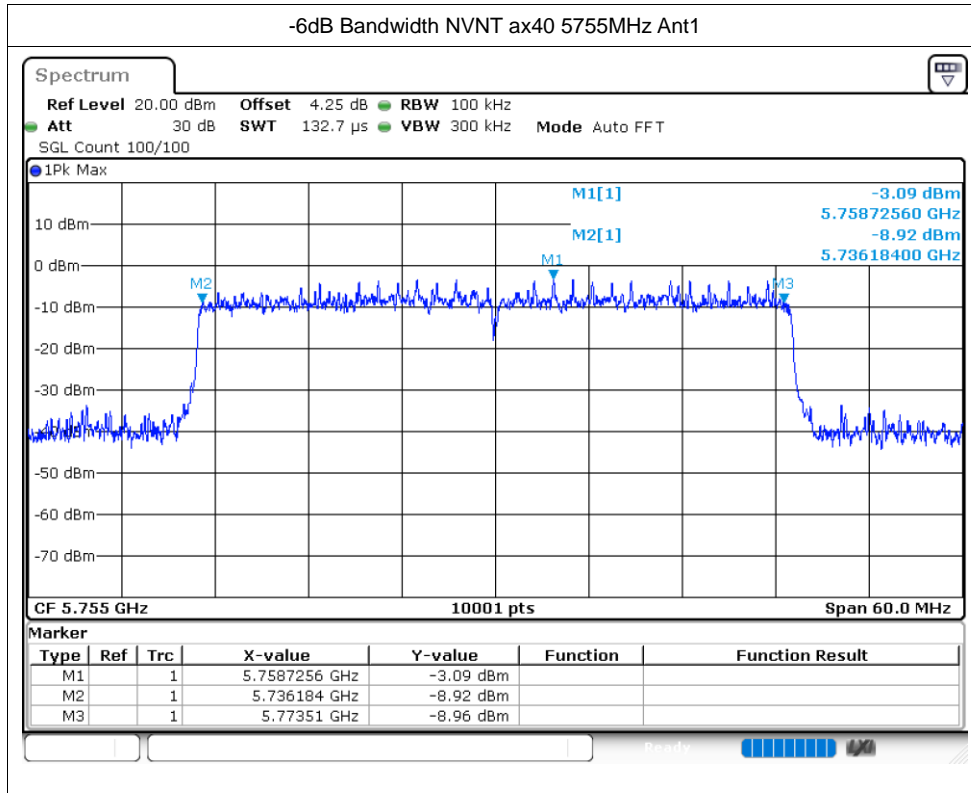

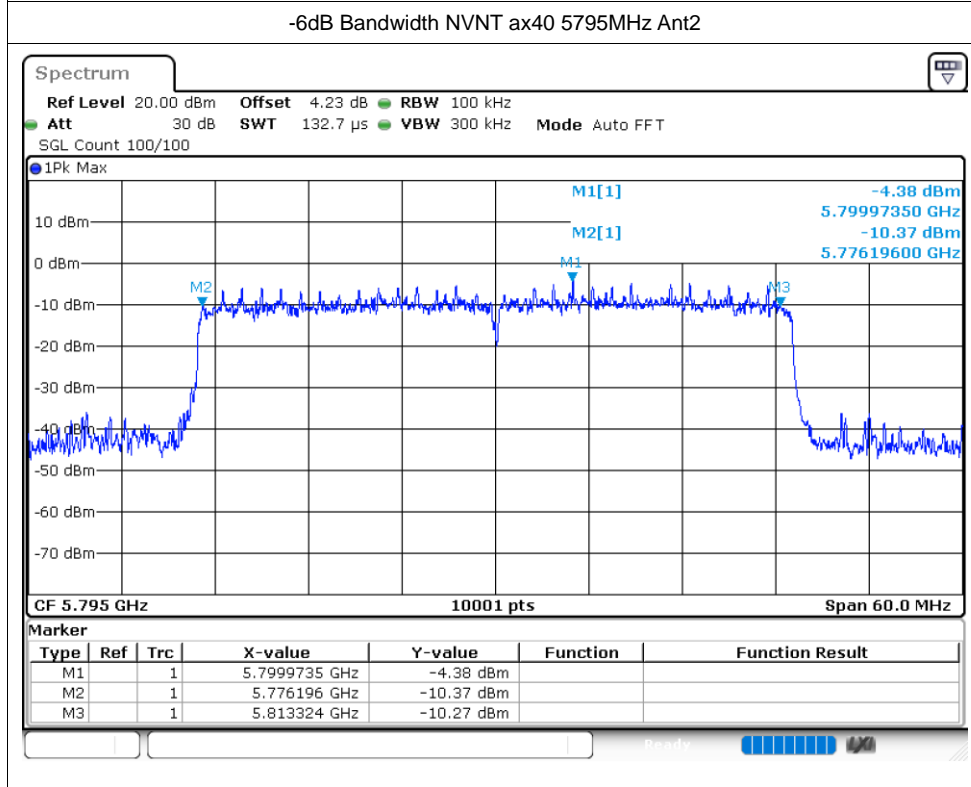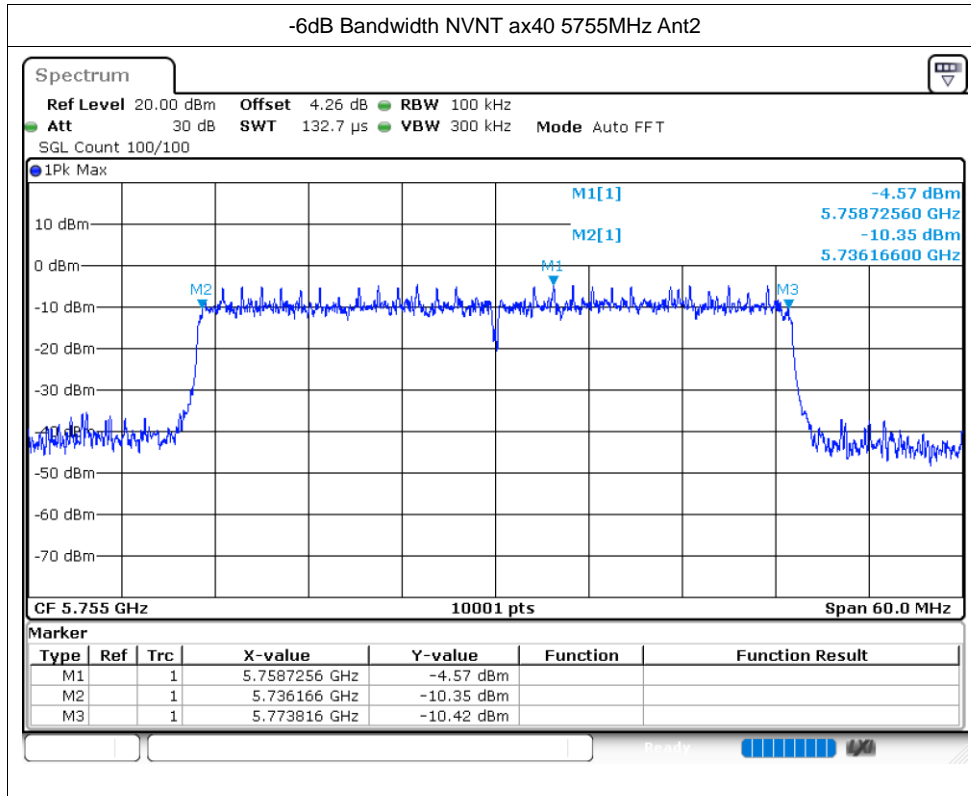

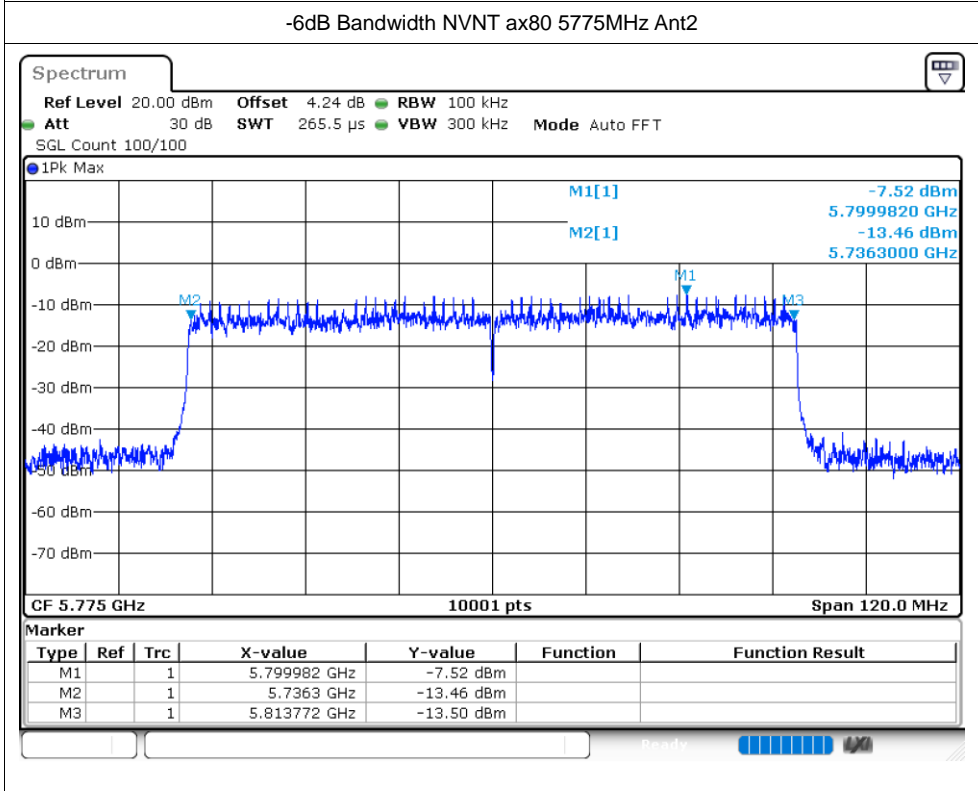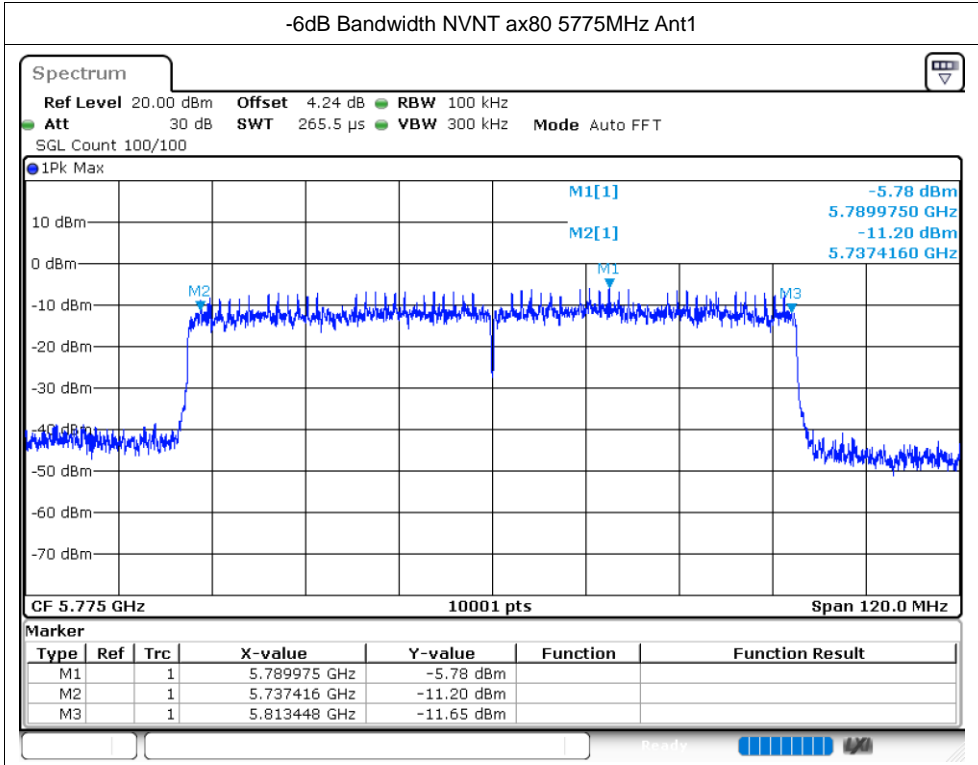

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.579
NVNT	a	5785	Ant1	16.54
NVNT	a	5825	Ant1	16.549
NVNT	a	5745	Ant2	16.66
NVNT	a	5785	Ant2	16.609
NVNT	a	5825	Ant2	16.651
NVNT	n20	5745	Ant1	17.536
NVNT	n20	5785	Ant1	17.578
NVNT	n20	5825	Ant1	17.431
NVNT	n20	5745	Ant2	17.629
NVNT	n20	5785	Ant2	17.581
NVNT	n20	5825	Ant2	17.527
NVNT	n40	5755	Ant1	36.356
NVNT	n40	5795	Ant1	36.266
NVNT	n40	5755	Ant2	36.374
NVNT	n40	5795	Ant2	36.272
NVNT	ac20	5745	Ant1	17.743
NVNT	ac20	5785	Ant1	17.701
NVNT	ac20	5825	Ant1	17.767
NVNT	ac20	5745	Ant2	17.743
NVNT	ac20	5785	Ant2	17.668
NVNT	ac20	5825	Ant2	17.728
NVNT	ac40	5755	Ant1	36.368
NVNT	ac40	5795	Ant1	36.284
NVNT	ac40	5755	Ant2	36.41
NVNT	ac40	5795	Ant2	36.266
NVNT	ac80	5775	Ant1	75.844
NVNT	ac80	5775	Ant2	75.868
NVNT	ax20	5745	Ant1	19.003
NVNT	ax20	5785	Ant1	19.003
NVNT	ax20	5825	Ant1	19
NVNT	ax20	5745	Ant2	18.991
NVNT	ax20	5785	Ant2	18.949
NVNT	ax20	5825	Ant2	18.931
NVNT	ax40	5755	Ant1	37.562
NVNT	ax40	5795	Ant1	37.508
NVNT	ax40	5755	Ant2	37.622
NVNT	ax40	5795	Ant2	37.508
NVNT	ax80	5775	Ant1	77.008
NVNT	ax80	5775	Ant2	77.152

