AUT Report

Product Model： Deco XM73

Manufacturer： TP-LINK CORPORATION PTE.　LTD.

Test Date： 2024.5.15

Tested By： Xuan Shan *Xuan Shan*
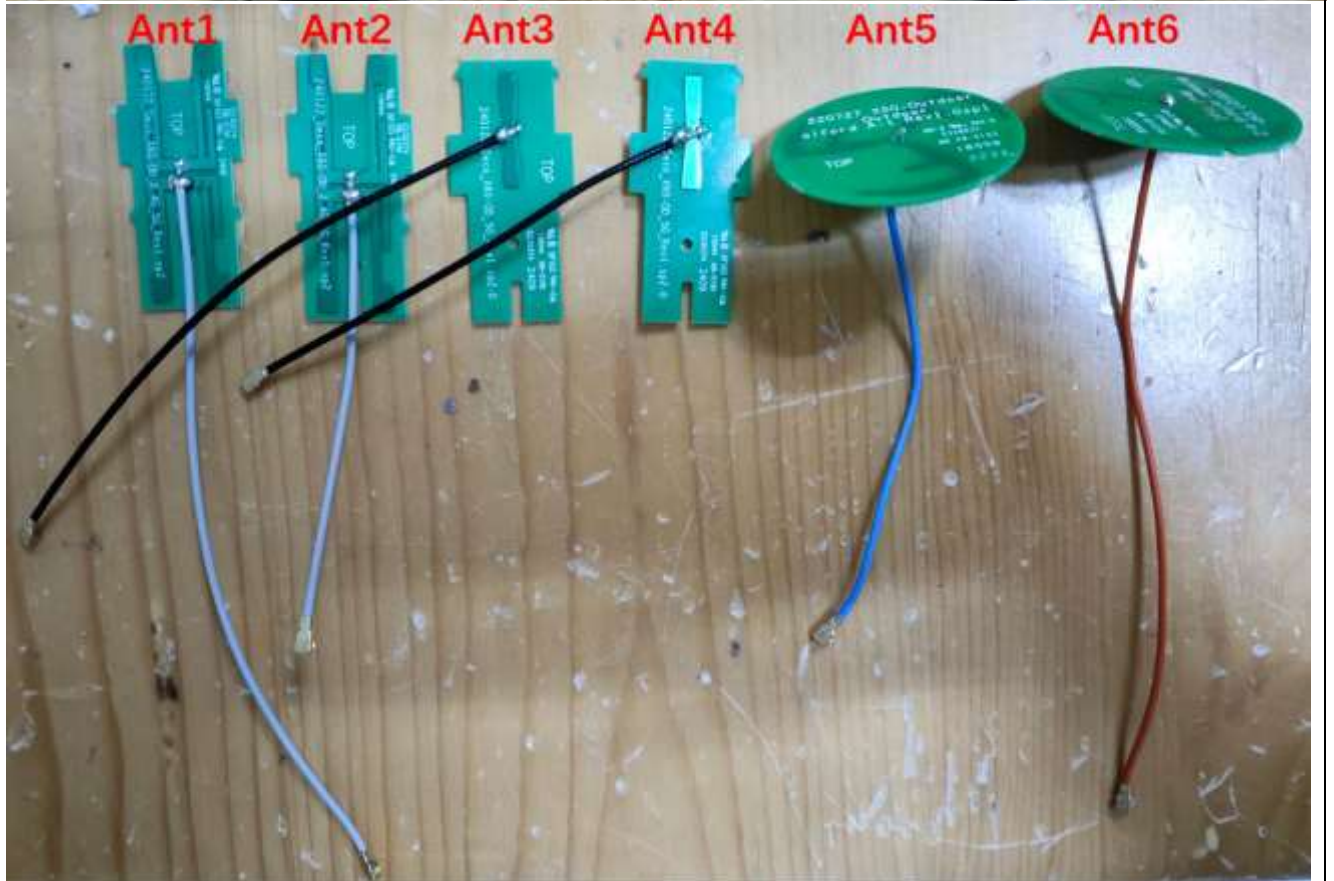
TP-LINK CORPORATION PTE.　LTD.

7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

Index

1. Antenna Distribution

2. Electrical Characteristics

Ant1	
Frequency	2400 ~ 2500&5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.90dBi@2400~2500MHz 2.00dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101505462

Ant2	
Frequency	2400 ~ 2500&5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.90dBi@2400~2500MHz 2.00dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101506968

Ant3	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.00dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101506969

Ant4	
Frequency	5150~5850MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2.00dBi@5150~5850MHz
Radiation pattern	Omni-Directional
P/N	3101506970

Ant5	
Frequency	2400~2500MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.50dBi@2400~2500MHz
Radiation pattern	Omni-Directional
P/N	3101505464

Ant6	
Frequency	2400~2500MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	1.50dBi@2400~2500MHz

Radiation pattern	Omni-Directional
P/N	3101505465

3. Gain and Radiation Pattern

3.1 Measurement Procedure

This measurement experiment adopted an antenna near-field measurement system, and the diagram of the measurement system was shown in Figure 3-1. The excitation signal was generated by the Keysight E5071C (300kHz-20GHz). Under the control of the central computer, the probe rotated in the θ direction, and the EUT rotated in the φ direction with the turntable. The probe sampling frame received and collected signals in the near-field range of the EUT. The software system which was controlled by the central computer completed the processing, output and display of the test data.
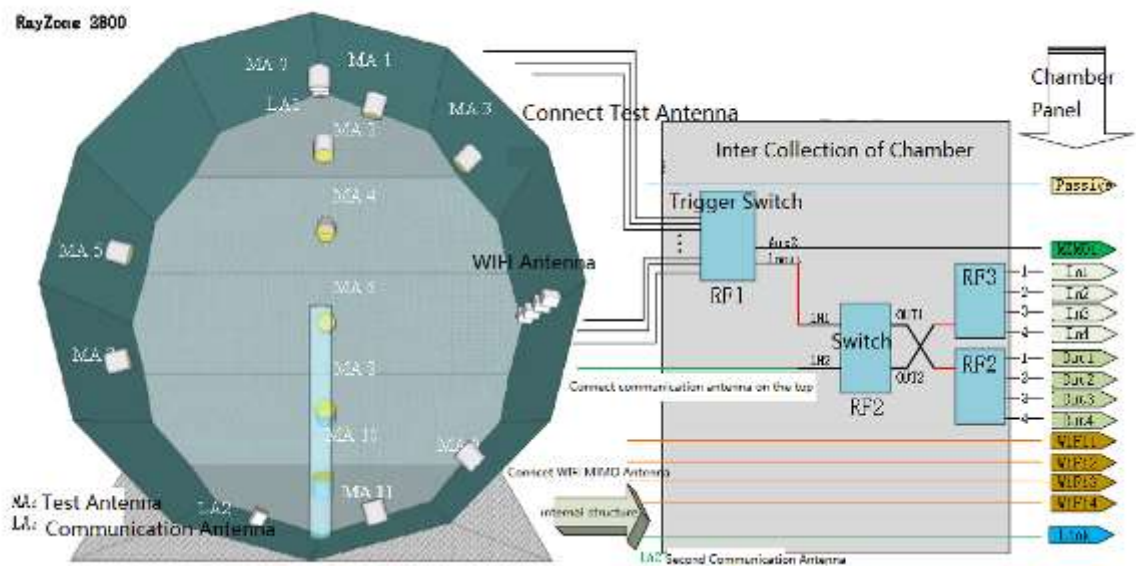

Figure 3-1

The test site was a full anechoic chamber with a size of 3.0m×3.1m×2.97m, which was built by GTS Rayzone2800. All six surfaces of the anechoic chamber were pasted with absorbing materials. And the chamber was calibrated by the authoritative third-party lab every year. The antenna anechoic chamber measurement system adopted a 13-probe multi-probe system. The probe antennas were evenly distributed on the spherical surface surrounding the EUT, and theirs operating frequency was 600MHz~8.5GHz.

During the measurement, the probe antennas were rotated in the θ direction under the control of the probe holder to sample the near-field data at the θ angle. At the same time, the EUT rotated with the turntable in the φ direction to sample the near field data at the φ angle. The sampling accuracy was 15°. The system diagram was shown in Figure 3-2. From the sampling results, the EUT's near-field test data of θ component, φ component and total component could be obtained.
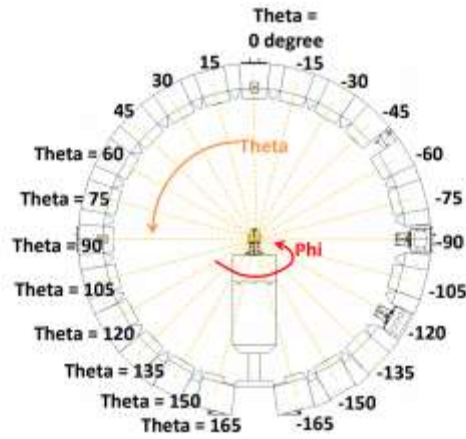
Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY53470435	12months	2024/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2024/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

3.2 Test Setup

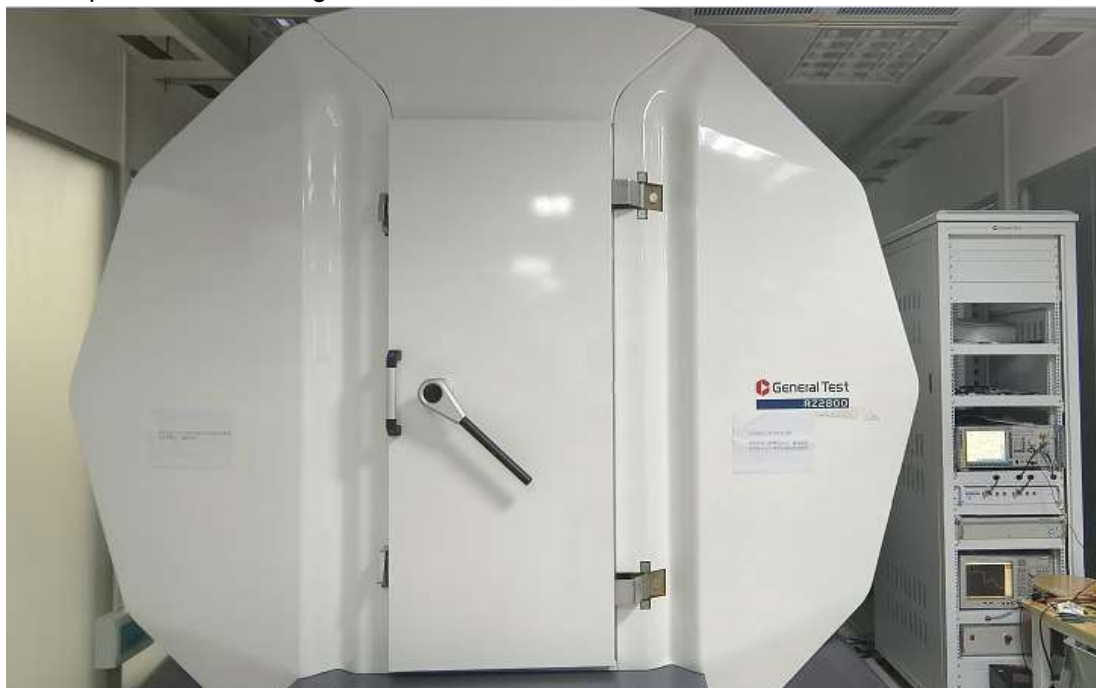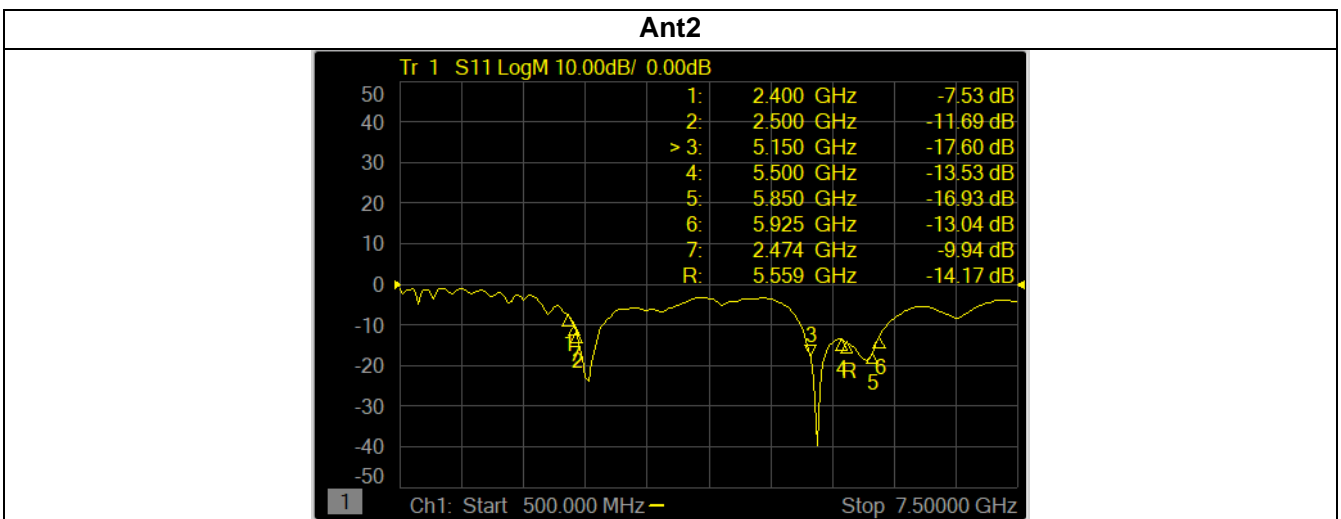The test setup was shown in Figure 3-3, 3-4:
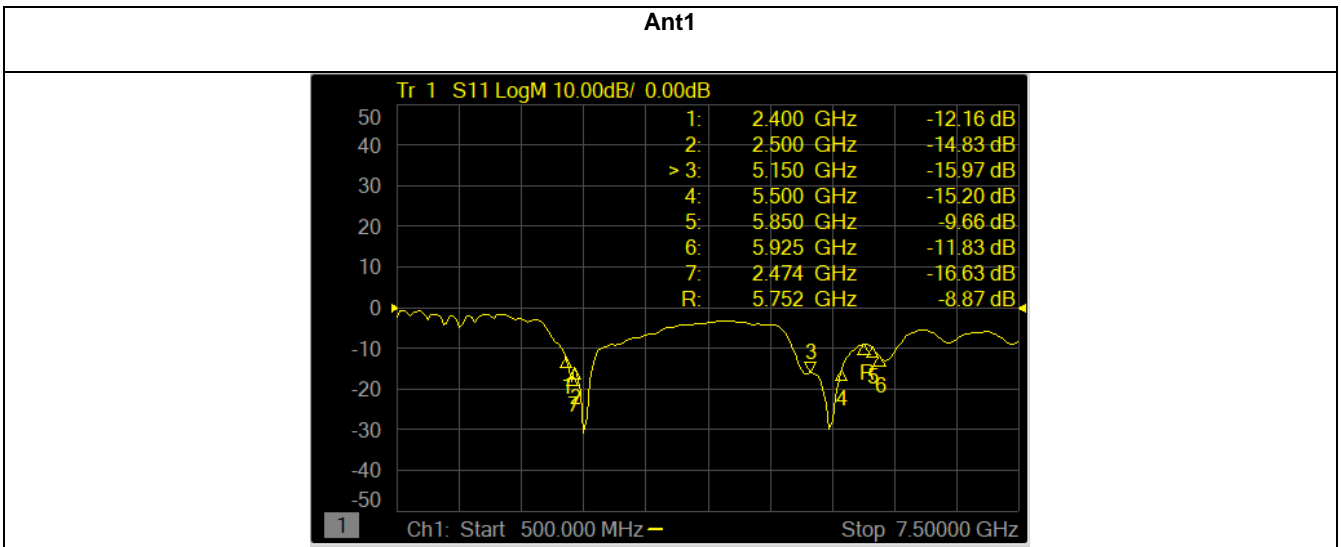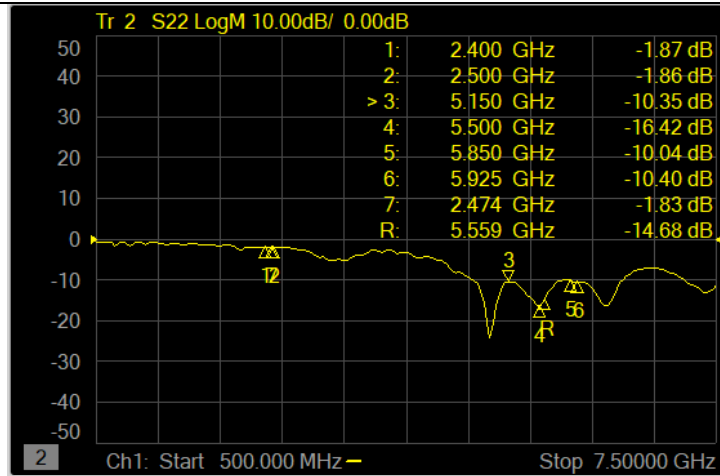

Figure 3-3

Figure 3-4

3.3 S Parameter Test Data

Ant1

Tr 1 S11 LogM 10.00dB/ 0.00dB

1:	2.400 GHz	-12.16 dB
2:	2.500 GHz	-14.83 dB
> 3:	5.150 GHz	-15.97 dB
4:	5.500 GHz	-15.20 dB
5:	5.850 GHz	-9.66 dB
6:	5.925 GHz	-11.83 dB
7:	2.474 GHz	-16.63 dB
R:	5.752 GHz	-8.87 dB

Ch1: Start 500.000 MHz   Stop 7.50000 GHz

Ant2

Tr 1 S11 LogM 10.00dB/ 0.00dB
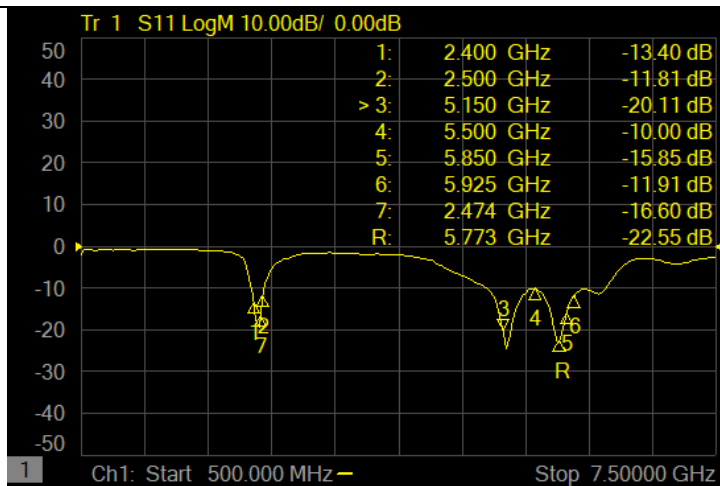
1:	2.400 GHz	-7.53 dB
2:	2.500 GHz	-11.69 dB
> 3:	5.150 GHz	-17.60 dB
4:	5.500 GHz	-13.53 dB
5:	5.850 GHz	-16.93 dB
6:	5.925 GHz	-13.04 dB
7:	2.474 GHz	-9.94 dB
R:	5.559 GHz	-14.17 dB

Ch1: Start 500.000 MHz   Stop 7.50000 GHz

Ant3

Tr 2 S22 LogM 10.00dB/ 0.00dB

1:	2.400 GHz	-1.87 dB
2:	2.500 GHz	-1.86 dB
> 3:	5.150 GHz	-10.35 dB
4:	5.500 GHz	-16.42 dB
5:	5.850 GHz	-10.04 dB
6:	5.925 GHz	-10.40 dB
7:	2.474 GHz	-1.83 dB
R:	5.559 GHz	-14.68 dB

Ch1: Start 500.000 MHz Stop 7.50000 GHz

Ant4

Tr 1 S11 LogM 10.00dB/ 0.00dB

1:	2.400 GHz	-3.21 dB
2:	2.500 GHz	-2.15 dB
> 3:	5.150 GHz	-11.50 dB
4:	5.500 GHz	-26.55 dB
5:	5.850 GHz	-21.98 dB
6:	5.925 GHz	-17.70 dB
7:	2.474 GHz	-2.42 dB
R:	5.800 GHz	-21.10 dB

Ch1: Start 500.000 MHz Stop 7.50000 GHz

Ant5

Tr 1 S11 LogM 10.00dB/ 0.00dB

1:	2.400 GHz	-13.40 dB
2:	2.500 GHz	-11.81 dB
> 3:	5.150 GHz	-20.11 dB
4:	5.500 GHz	-10.00 dB
5:	5.850 GHz	-15.85 dB
6:	5.925 GHz	-11.91 dB
7:	2.474 GHz	-16.60 dB
R:	5.773 GHz	-22.55 dB

Ch1: Start 500.000 MHz Stop 7.50000 GHz
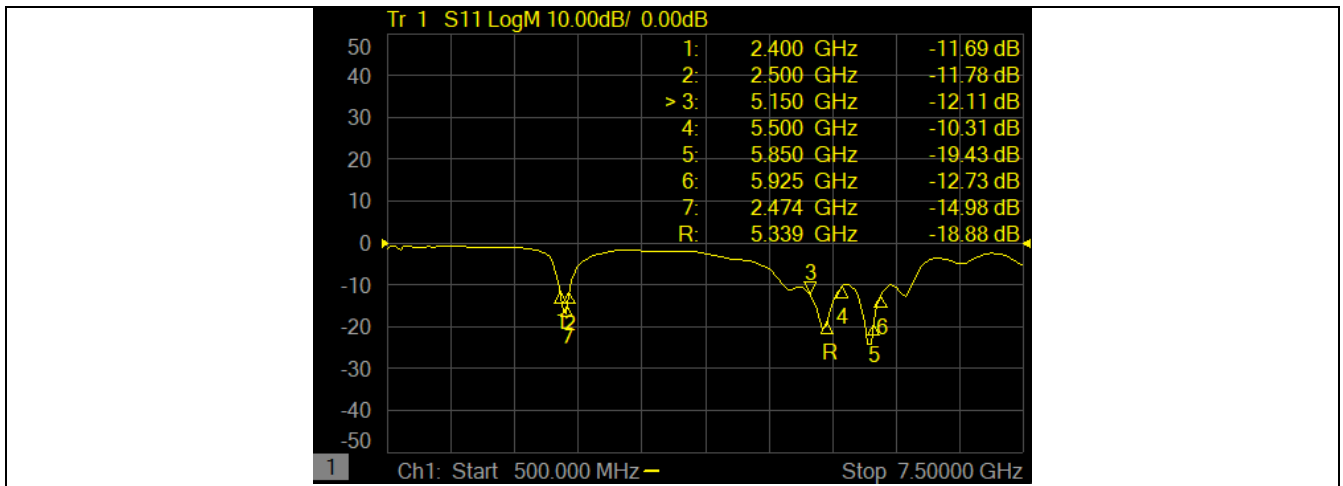
Ant6

3.4 Antenna Gain

3.4.1 Peak Gain

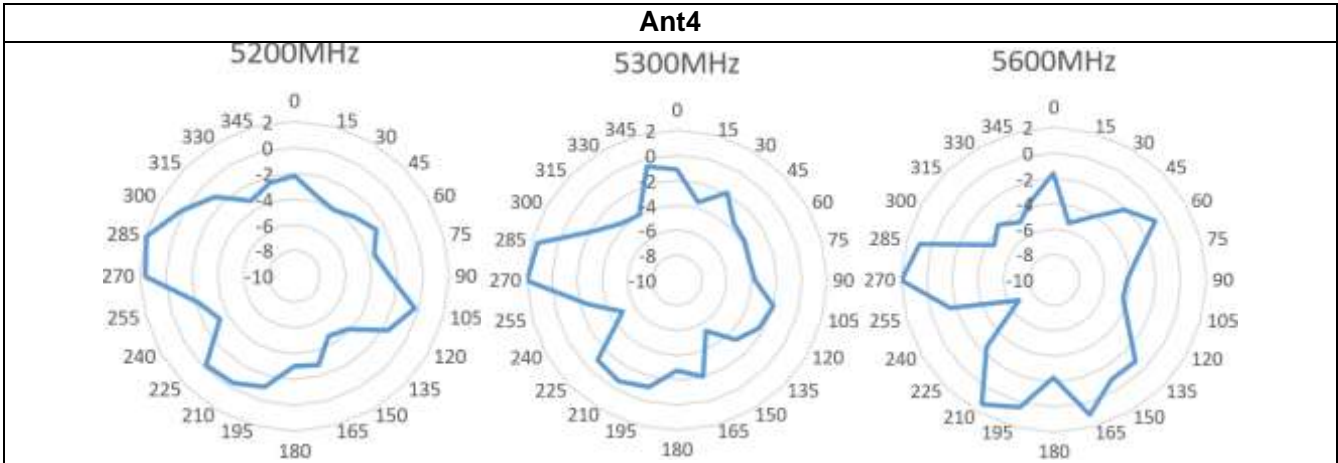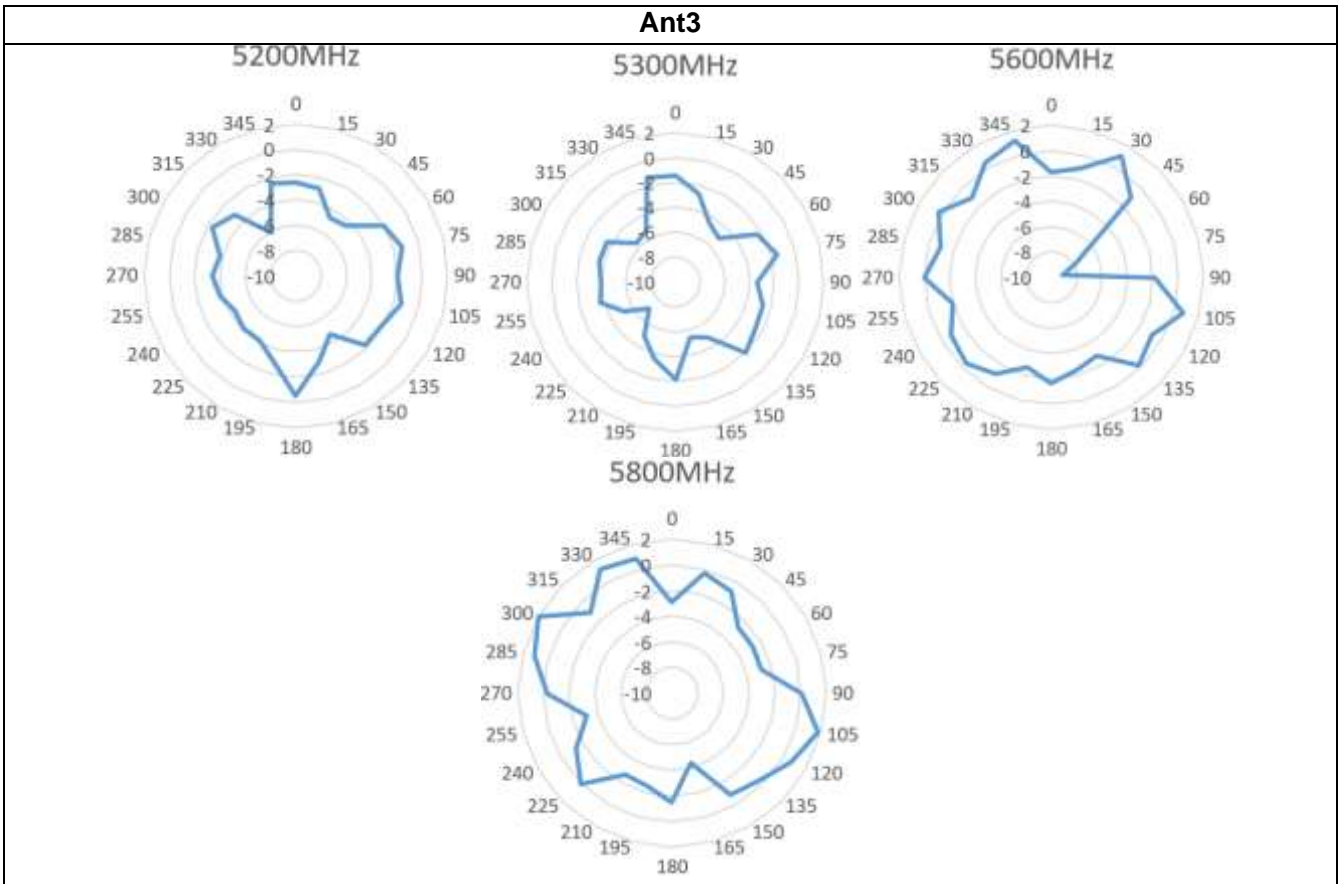| Frequency	2.45GHz 2400~2500MHz	5.2GHz 5150~5250MHz	5.3GHz 5250~5350MHz	5.6GHz 5470~5725MHz	5.8GHz 5725~5895MHz
Ant1 MaxGain(dBi)	1.90	2.00	2.00	2.00	2.00
Ant2 MaxGain(dBi)	1.90	2.00	2.00	2.00	2.00
Ant3 MaxGain(dBi)	\	2.00	2.00	2.00	2.00
Ant4 MaxGain(dBi)	\	2.00	2.00	2.00	2.00
Ant5 MaxGain(dBi)	1.50	\	\	\	\
Ant6 MaxGain(dBi)	1.50	\	\	\	\
Ant1 Polarization/ Φ (°) / θ (°)	Theta/30/75	Theta/345/90	Theta/345/90	Theta/345/75	Theta/0/90
Ant2 Polarization/ Φ (°) / θ (°)	Theta/30/90	Theta/300/75	Theta/210/45	Theta/165/75	Theta/315/75
Ant3 Polarization/ Φ (°) / θ (°)	\	Theta/345°/75°	Theta/345°/75°	Theta/330°/75°	Theta/300°/90°
Ant4 Polarization/ Φ (°) / θ (°)	\	Theta/270°/75°	Theta/270°/90°	Theta/270°/90°	Theta/270°/90°
Ant5 Polarization/ Φ (°) / θ (°)	Phi/105/90	\	\	\	\
Ant6 Polarization/ Φ (°) / θ (°)	Phi/105/75	\	\	\	\
Max Gain(dBi)	1.90	2.00	2.00	2.00	2.00

3.4.2 Horizontal plane Gain

3.4.2.1. 5150~5250MHz

θ	>30°
Ant1 MaxGain(dBi)	-8.02
Ant2 MaxGain(dBi)	-8.01
Ant3 MaxGain(dBi)	-8.00
Ant4 MaxGain(dBi)	-8.01
Ant5 MaxGain(dBi)	\
Ant6 MaxGain(dBi)	\
Max Gain(dBi)	-8.00

3.5 Antenna Radiation Pattern

Ant1

Ant2

5600MHz

5800MHz

Ant3		
5200MHz	5300MHz	5600MHz

5800MHz

Ant4		
5200MHz	5300MHz	5600MHz

5800MHz

Ant5

2450MHz

Ant6

2450MHz
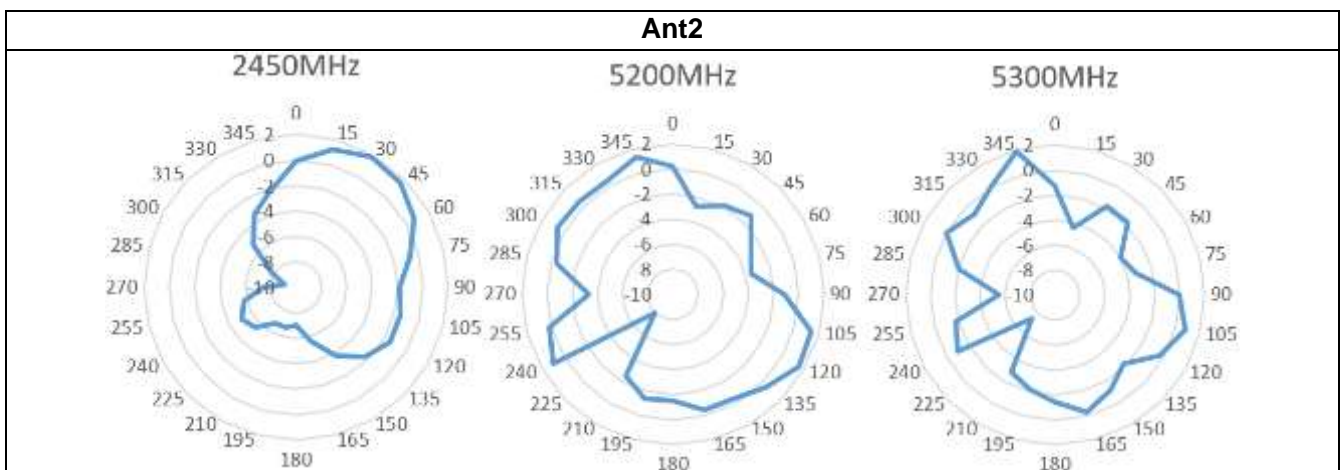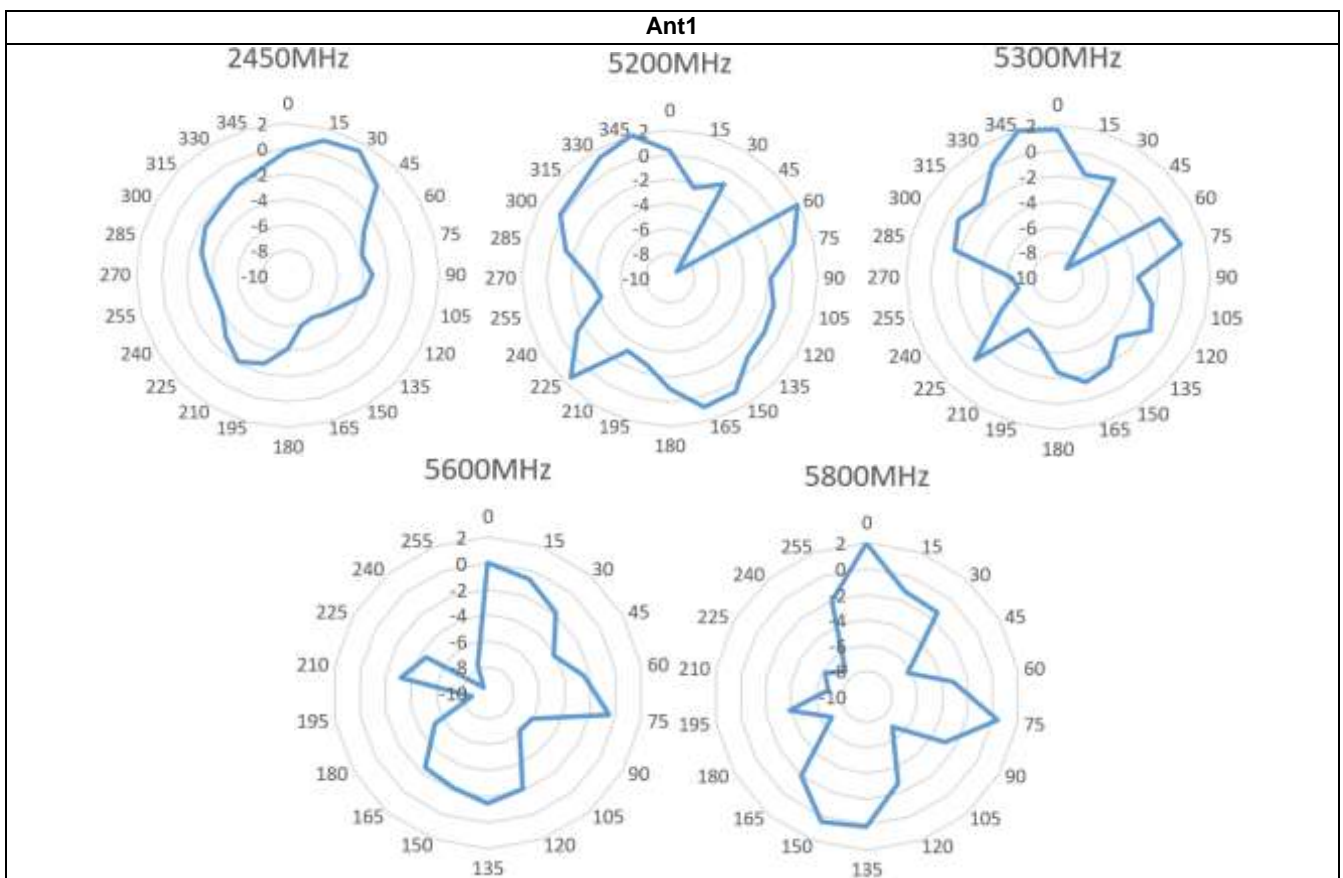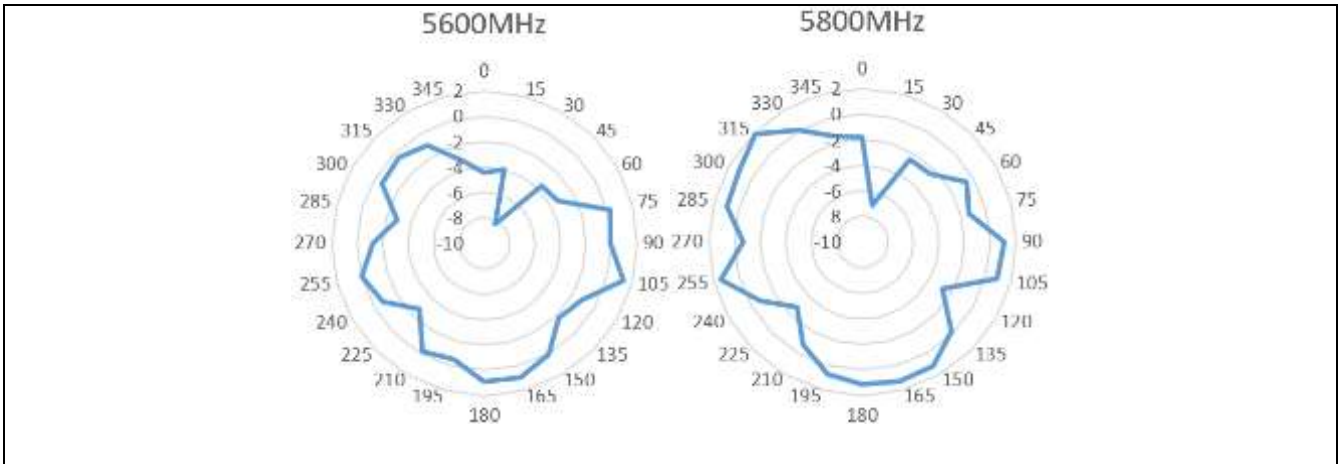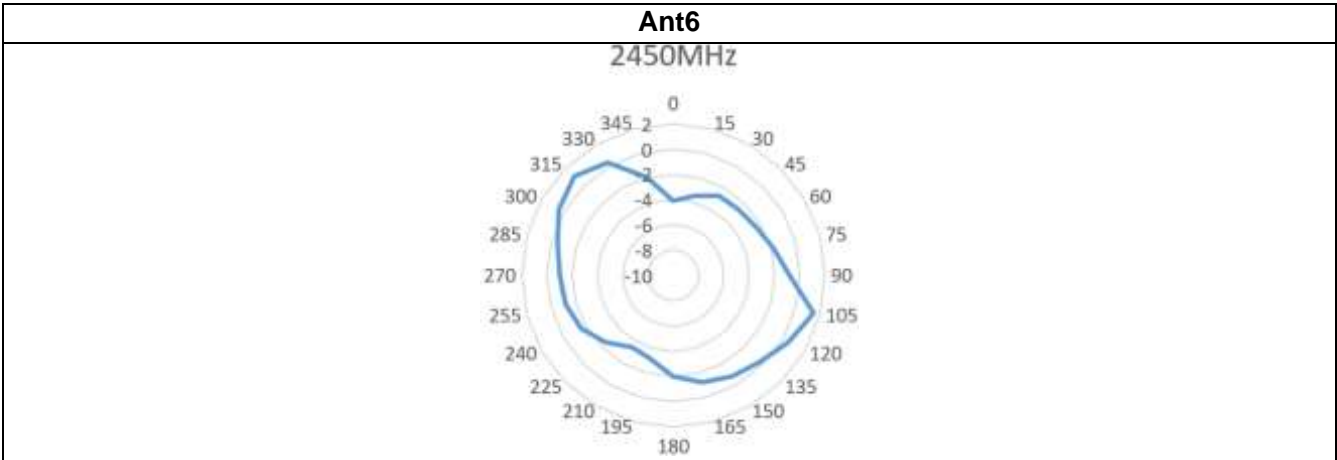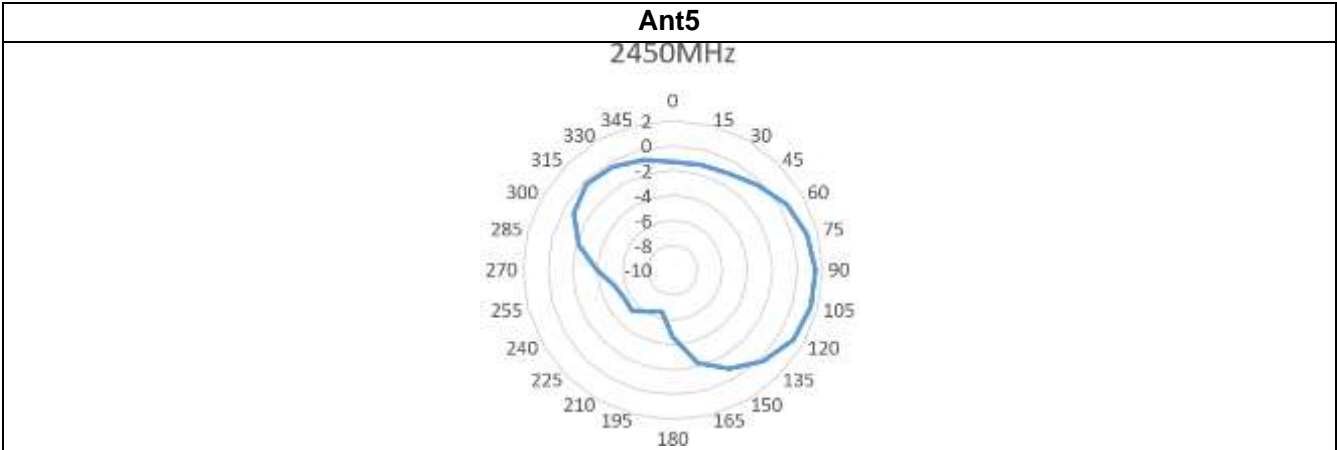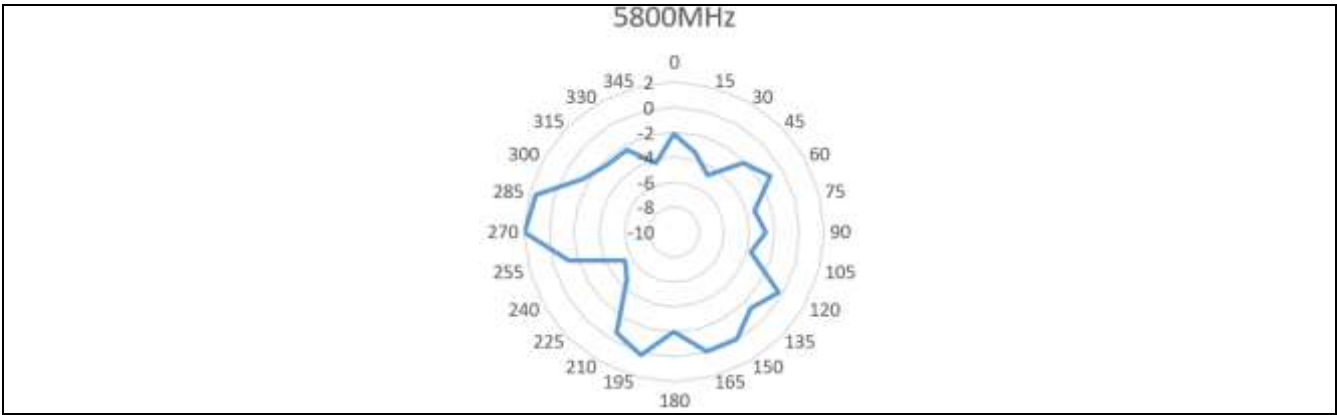
3.6 Antenna Radiation Pattern (above 30° elevation)

Ant1
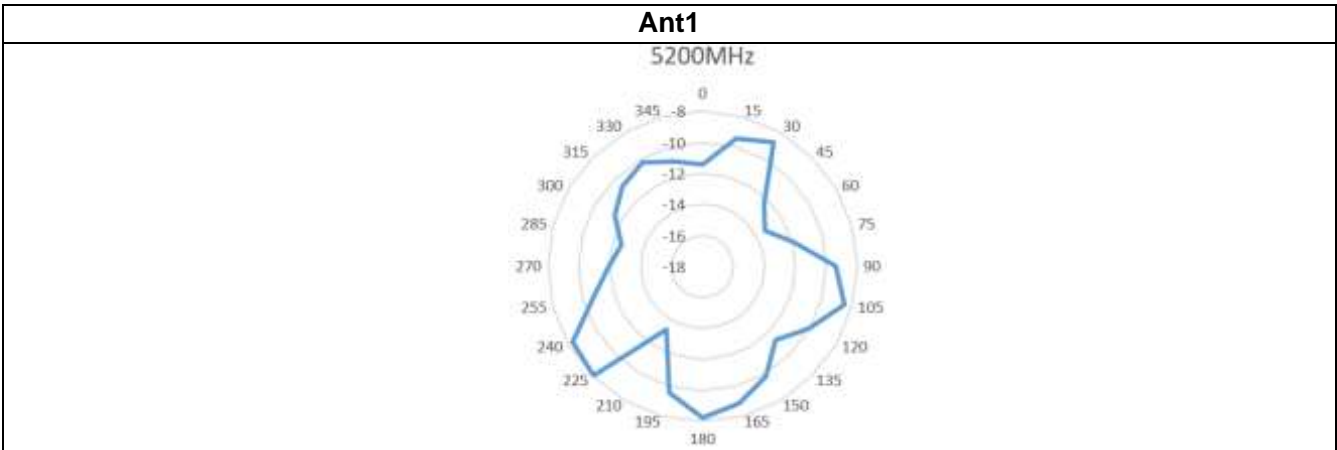
5200MHz

Ant2
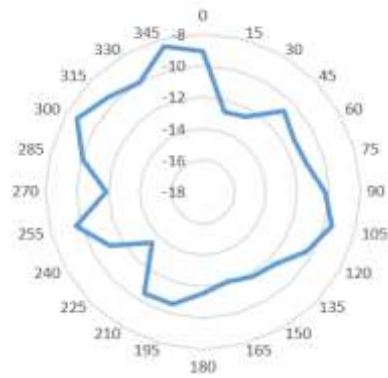
5200MHz

Ant3

5200MHz

Ant4

5200MHz