
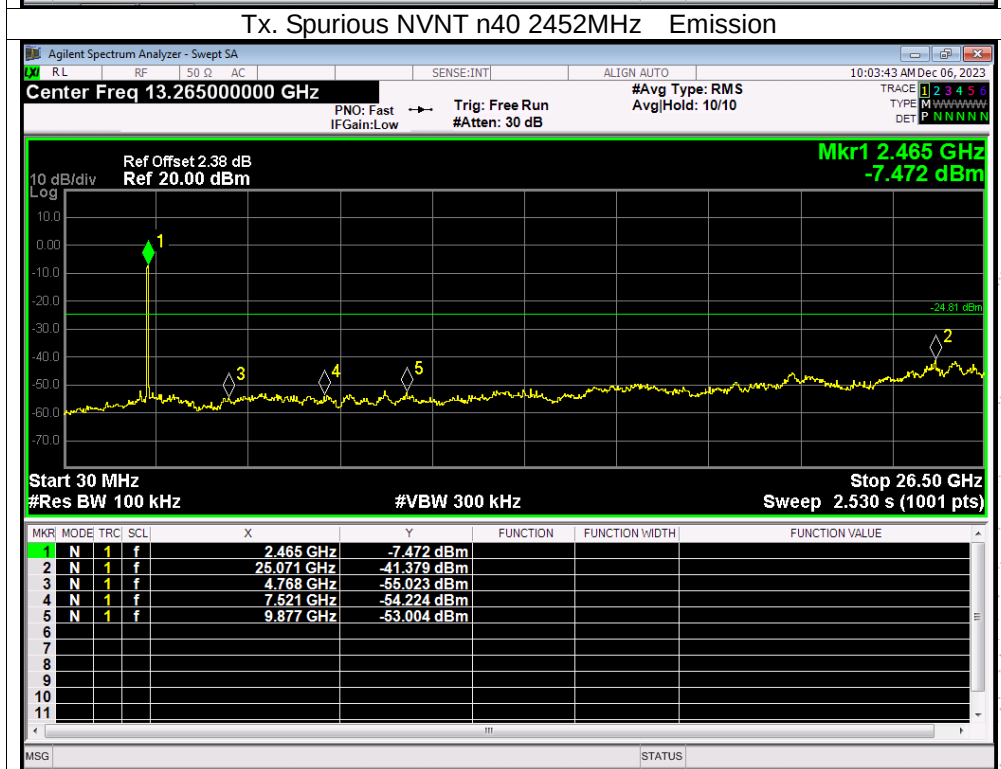


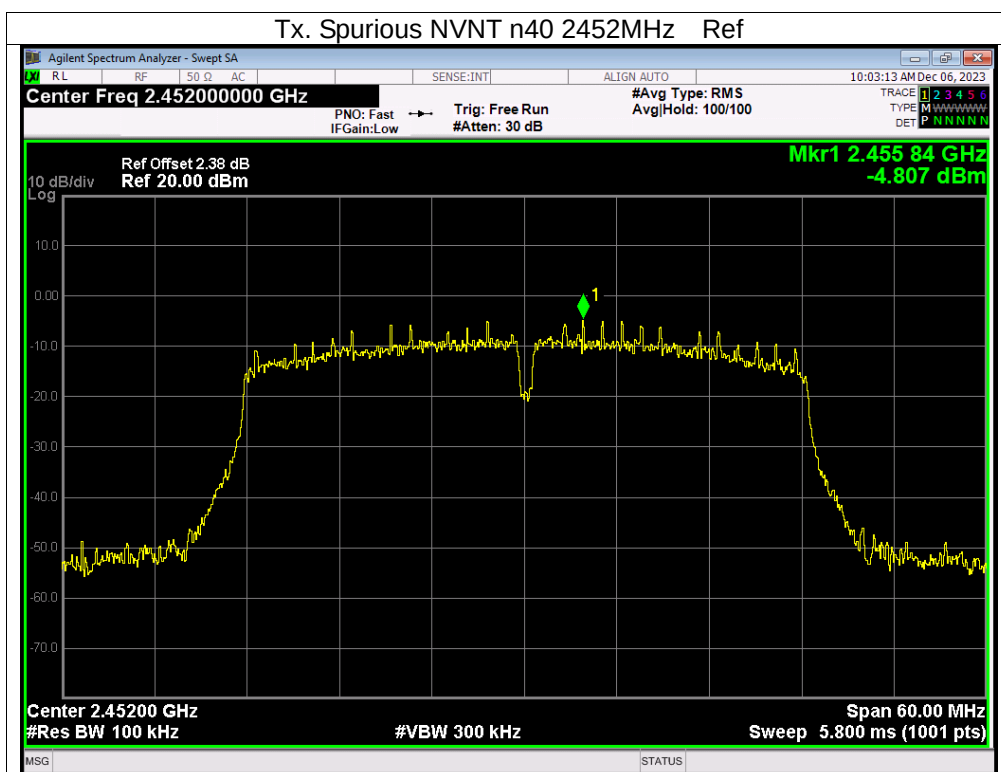

13. Duty Cycle Of Test Signal

13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

13.2 Formula


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

13.3 Test Procedure



1. Set span = Zero
2. RBW = 10MHz
3. VBW = 10MHz,
4. Detector = Peak



13.4 Test Result

Test mode	Duty Cycle(%)	Duty Fator (dB)	1/T (kHz)
802.11b	99.09	0.04	0.12
	99.08	0.04	0.12
	99.09	0.04	0.12
802.11g	99.54	0.02	0.72
	99.51	0.02	0.72
	99.51	0.02	0.72
802.11n(HT20)	99.53	0.02	0.25
	99.53	0.02	0.38
	99.52	0.02	0.77
802.11n(HT40)	100	0	0
	100	0	0
	100	0	0


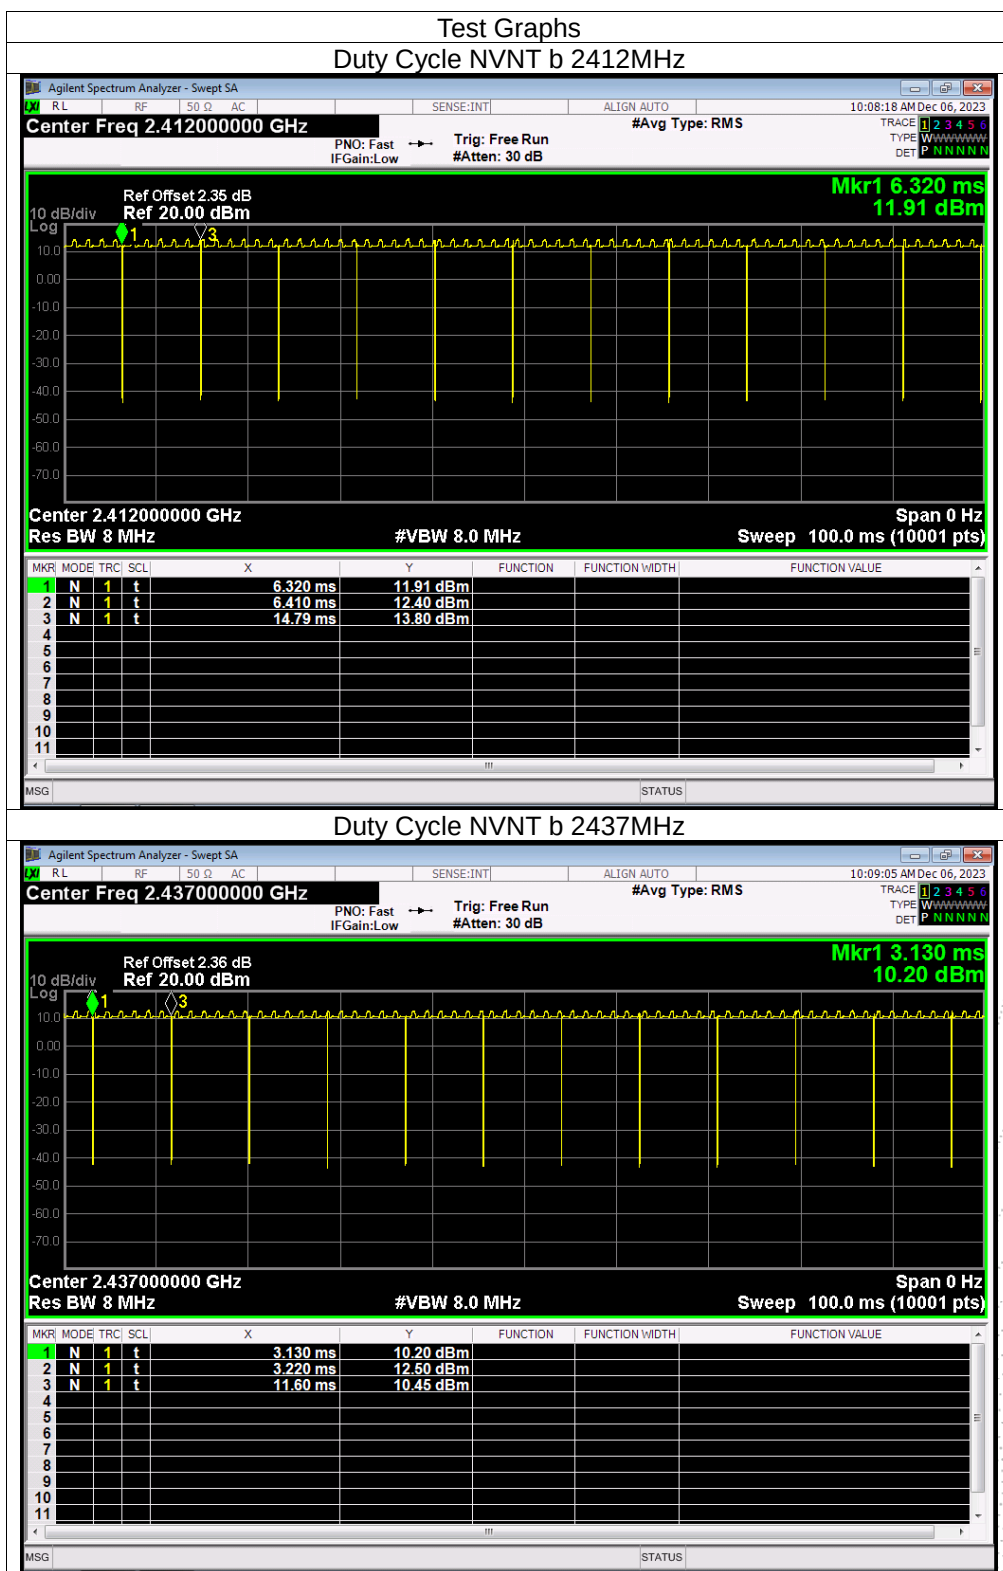


TC
BC
PPR
Report

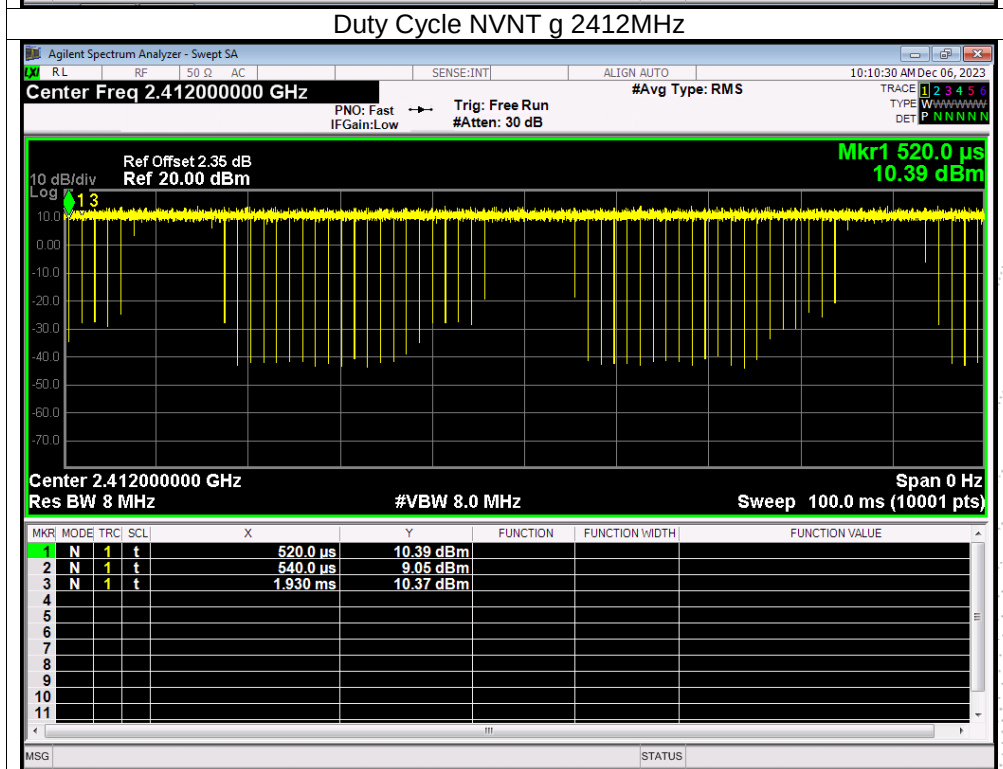
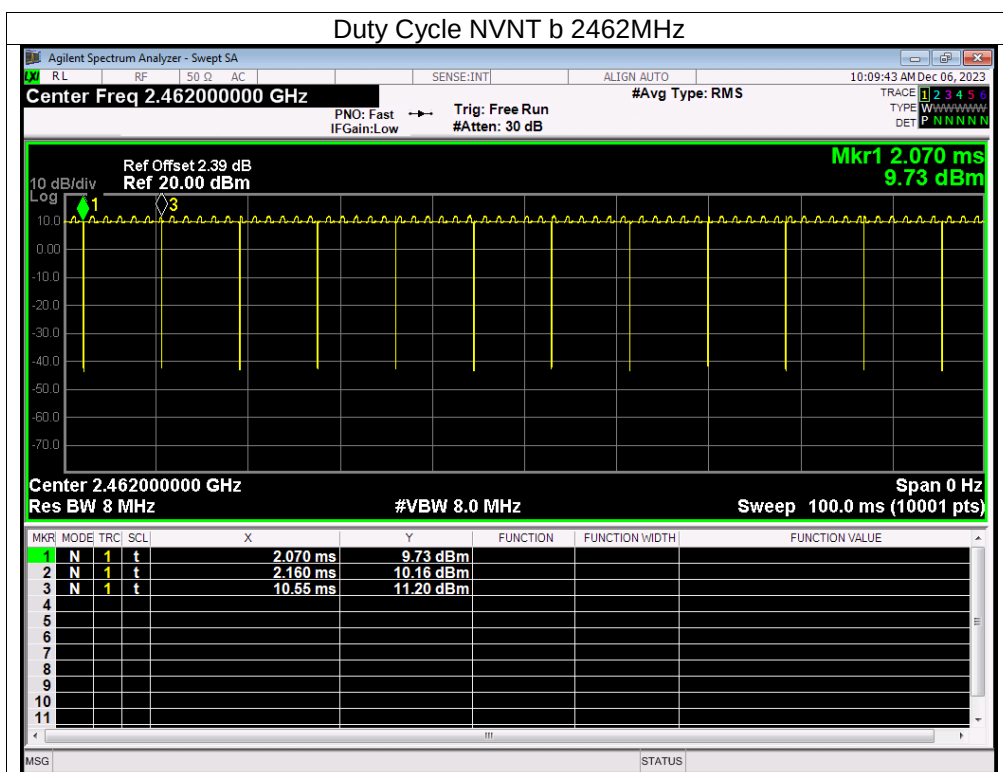


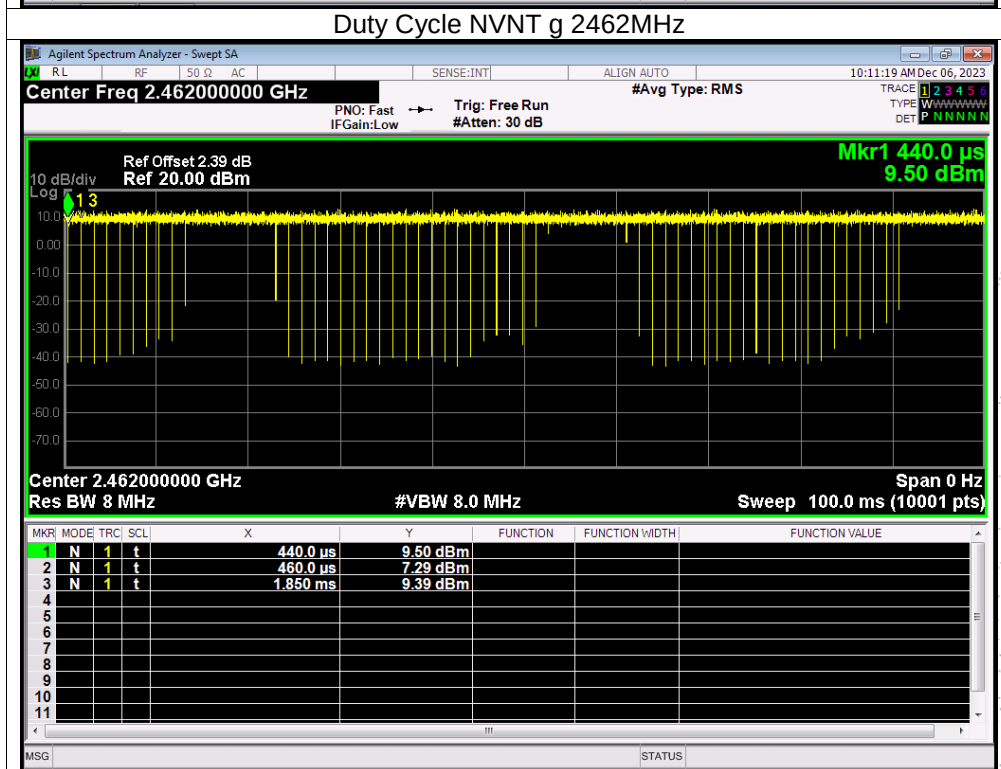
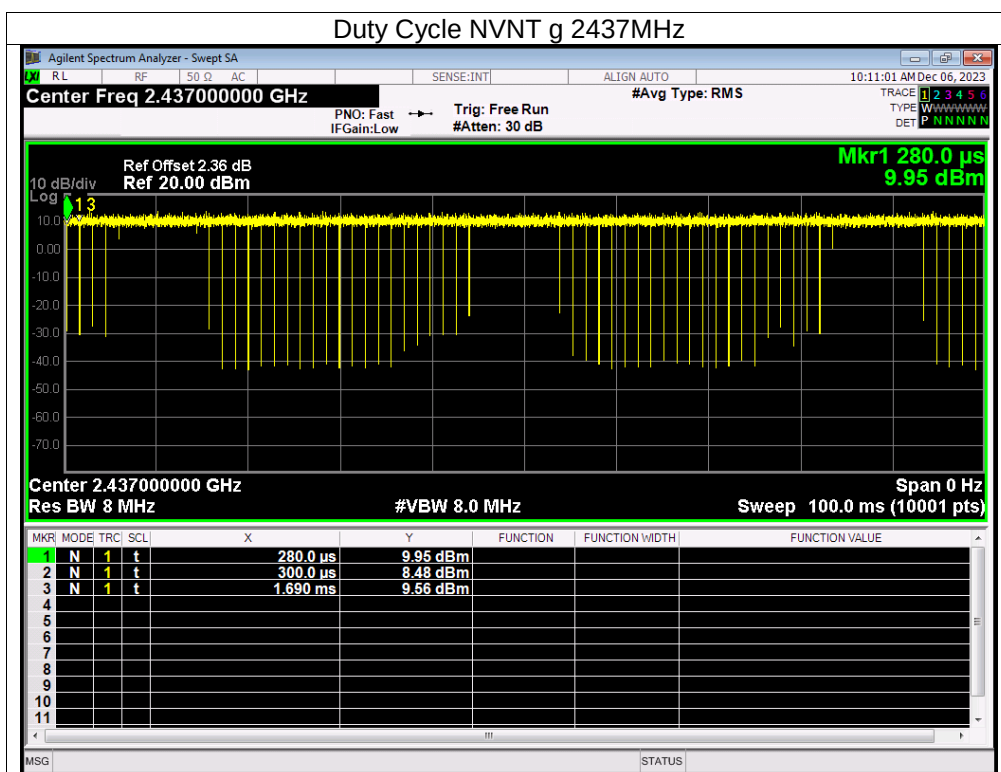


STING
ED

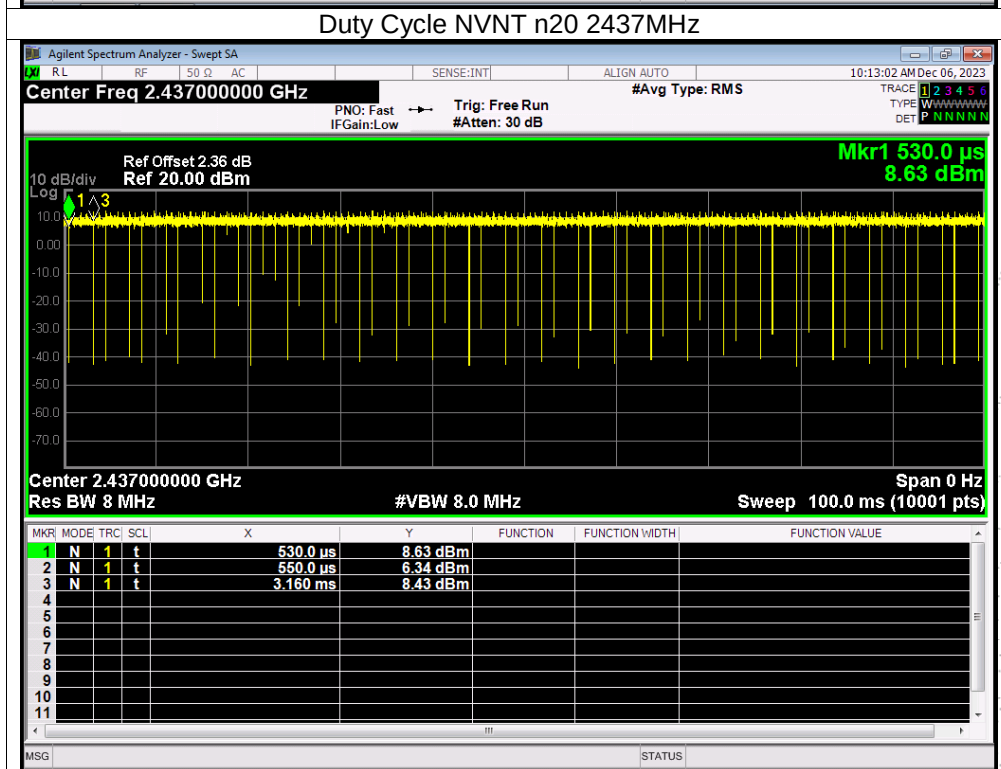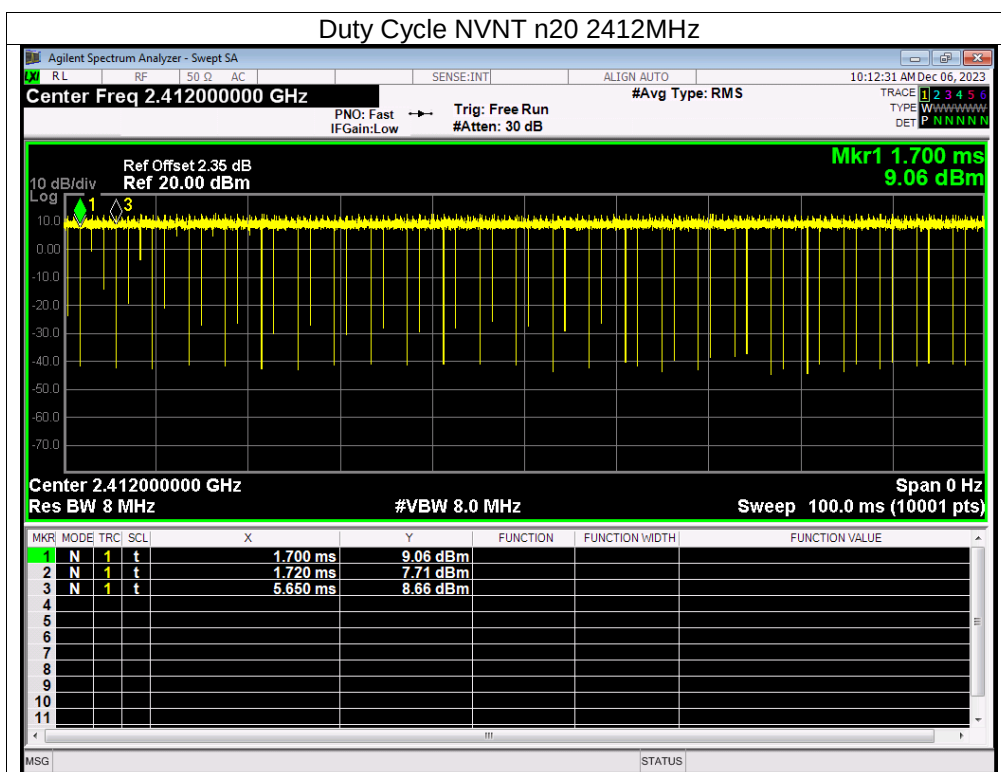

CO. LTD

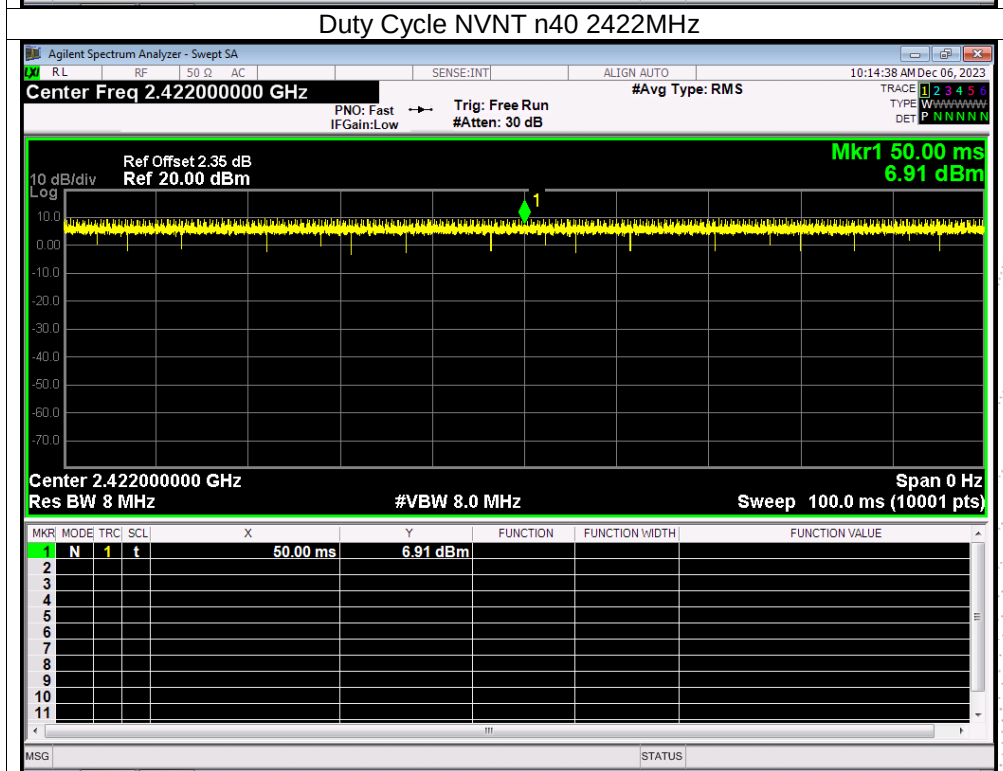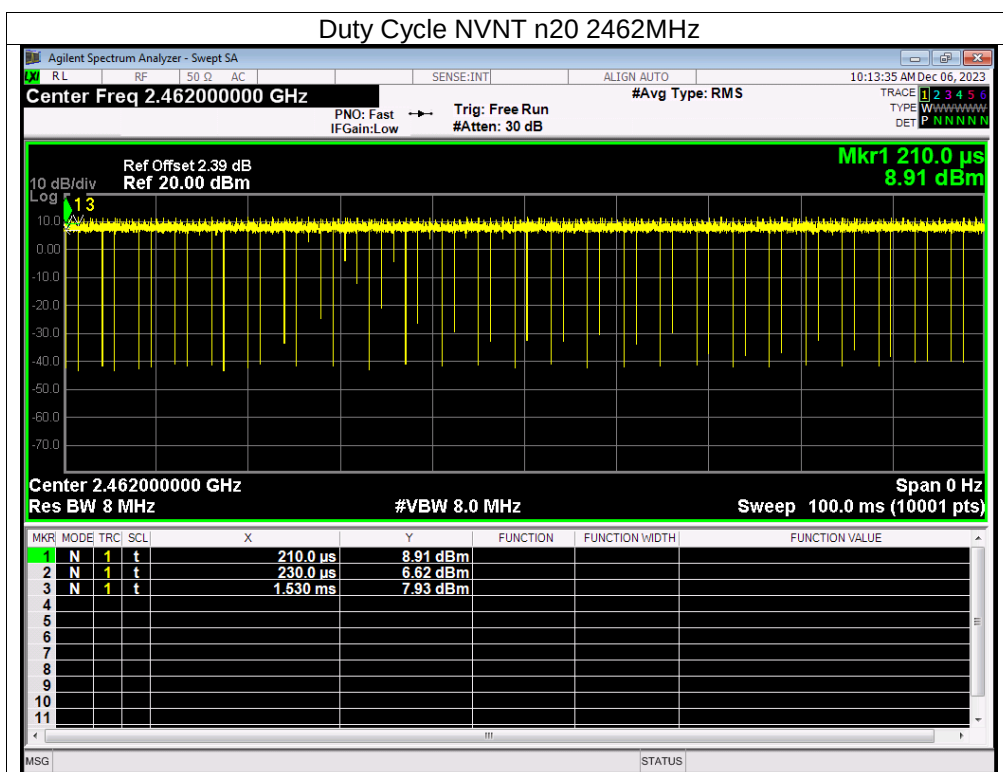

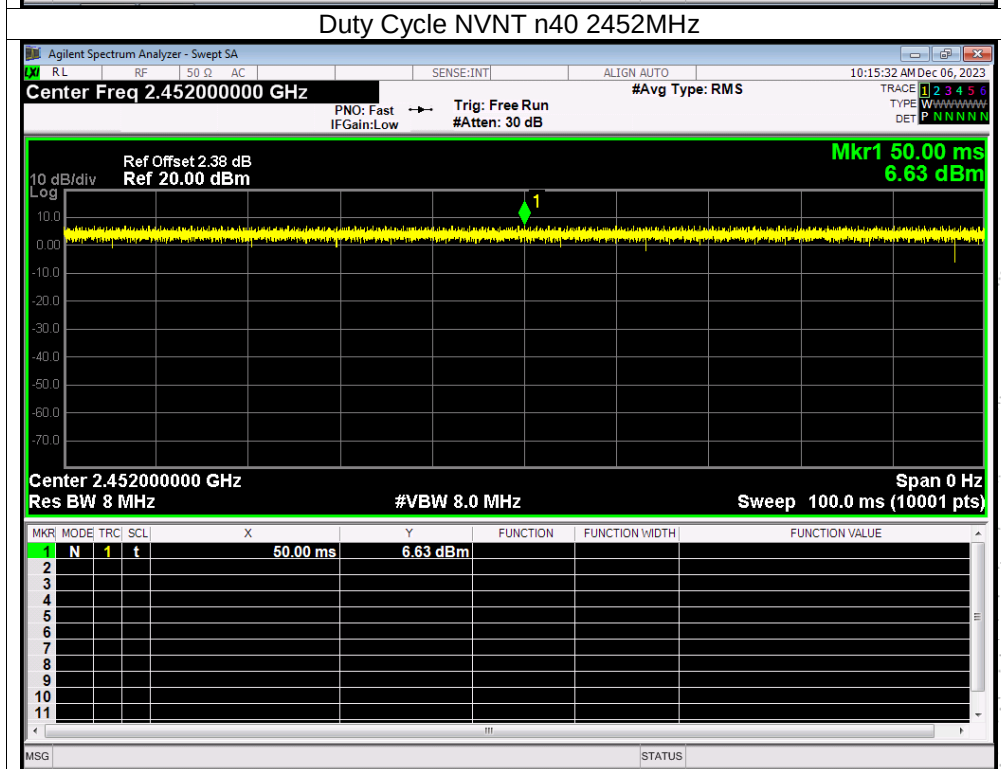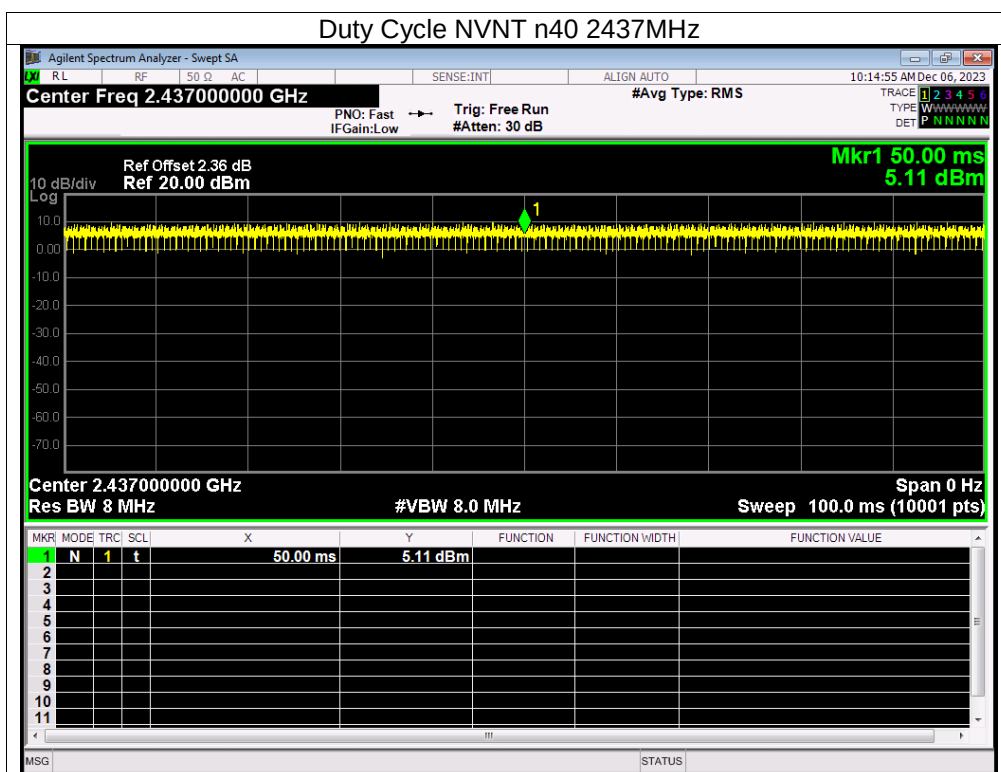

14. Antenna Requirement


14.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.1 Test Result

The EUT antenna is FPC antenna, fulfill the requirement of this section.


15. EUT Photographs

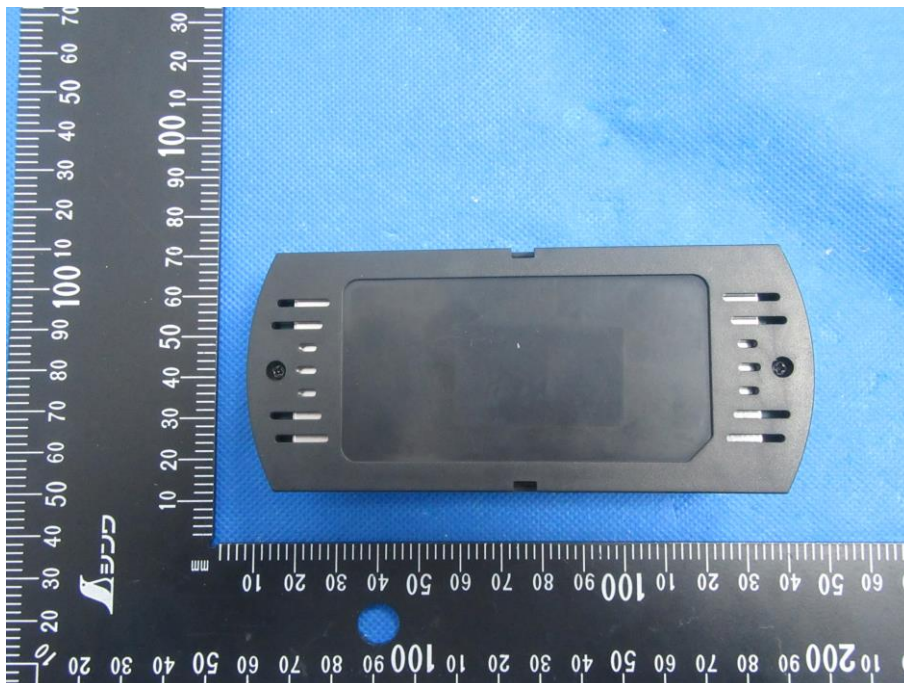

NOTE: Appendix-Photographs Of EUT Constructional Details


16. EUT Test Setup Photographs

Conducted Measurement Photos

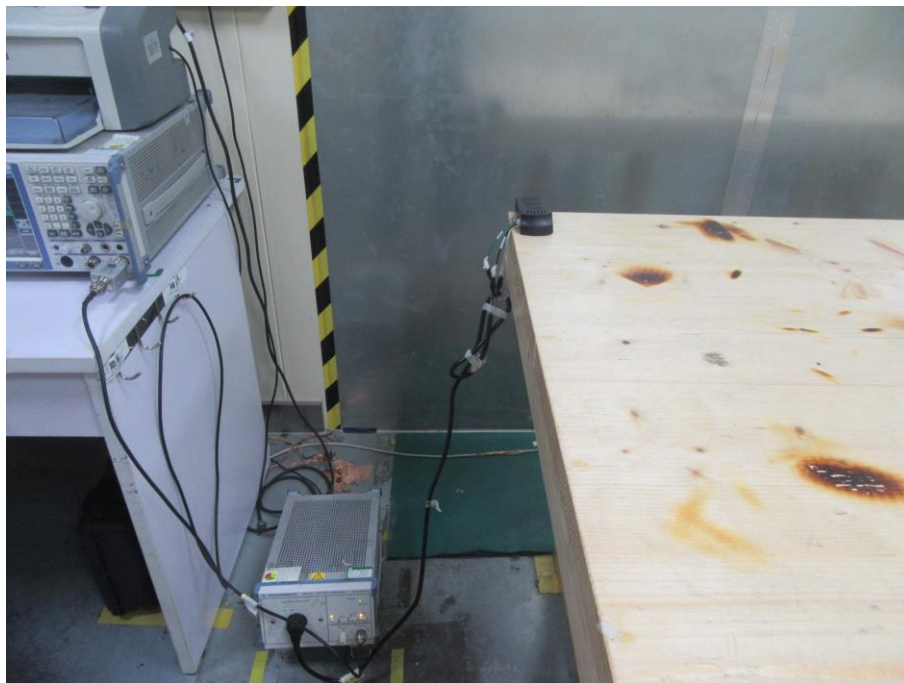

TEST
FOR
OVER
seal

Radiated Measurement Photos

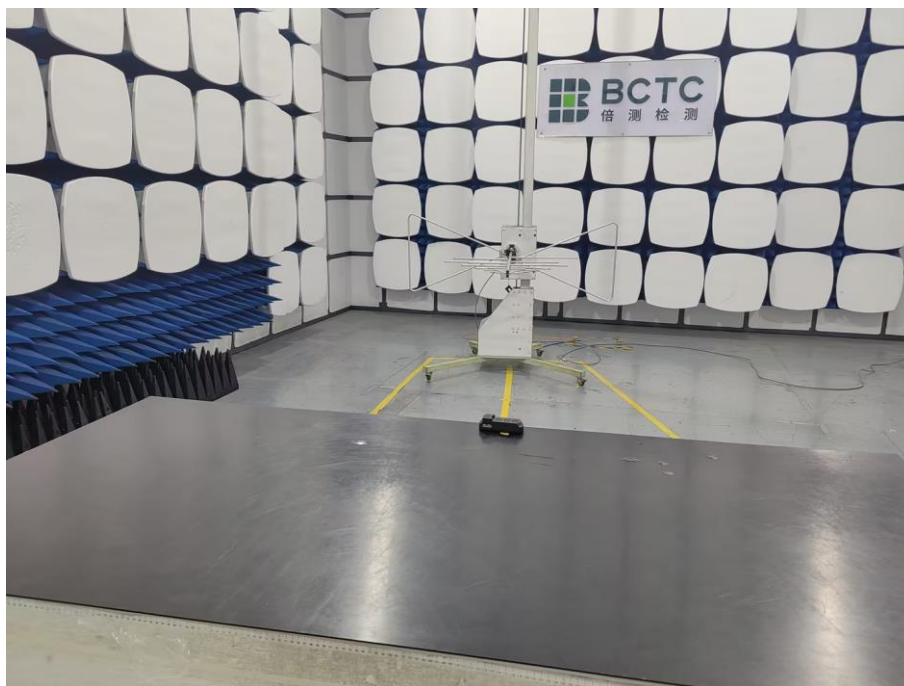

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****