


TX-7470-C232

Paging System Transmitter

USER MANUAL

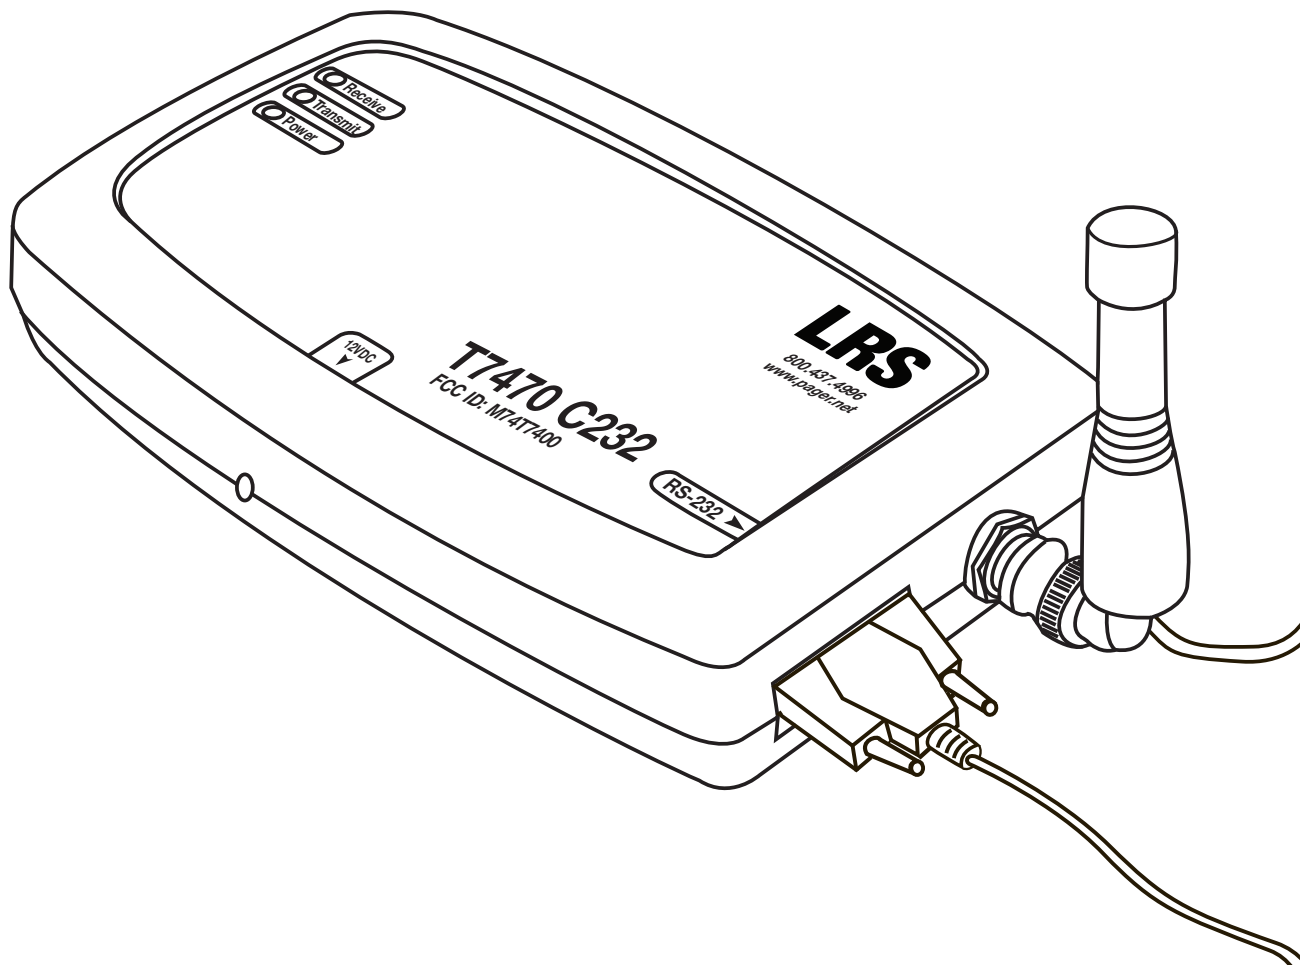

Installation, Warranty and Service Information

LRS

Long Range Systems, LLC
4550 Excel Parkway, Suite 200
Addison, TX 75001
800.437.4996 • www.pager.net

Table Of Contents

Installation and Setup	2
Set Restaurant ID	3
Repeat Delay	4
High Power Setting	4
Frequency	5
Service Questions and Answers	6
Warranty	7

INSTALLATION AND SETUP


Basic Installation

- 1) Plug the 12V power supply into the side of the Transmitter.
- 2) Connect the serial cable from the connector on the Transmitter to the serial port on the host computer.
- 3) Note the COM Port that the serial cable is connected to on the host computer.
- 4) Open HyperTerminal on the host computer.
- 5) Assign a Name for the new connection.
- 6) Select the COM Port coming from the serial cable.
- 7) Use the following settings:
 - Bits per second: 9600
 - Data bits: 8
 - Parity: None
 - Stop bits: 1
 - Flow control: None
- 8) Type ECHO1 and press ENTER. (This echo function will allow you to see what is being typed.)



```
TheftTime=12, TheftTimer=0  
INP1, DISABLED  
>  
ECHO1
```

Screen View of Typing ECHO

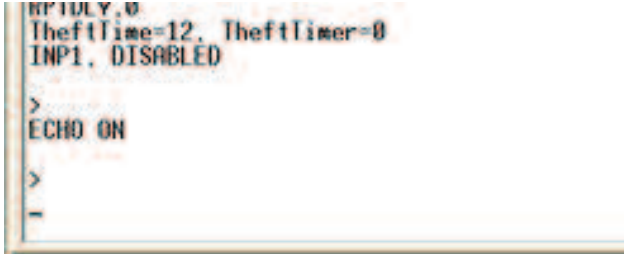

```
RFDLY,0  
TheftTime=12, TheftTimer=0  
INP1, DISABLED  
>  
ECHO ON  
>  
-
```

Screen View of ECHO ON

- 9) You are now ready to use the interface.



Note: At any time, use the STAT command to view any changes.

Set Restaurant ID

This must be set correctly to page pagers.

To set the Restaurant ID, type RID,x and press ENTER twice.
X is the Restaurant ID.

Example: To set an ID of 2, type RID,2 and press ENTER twice.

```
TheftTimer=0  
>  
RID,2
```

Example Restaurant ID to 2

```
TheftTimer=0  
>  
RESTIDSET,2
```

HyperTerminal Output Showing ID as 2

```
>  
RESTIDSET,2  
>  
STAT
```

Type STAT and press ENTER

```
STATUS  
VER 4.46  
Built: Built Sep 23 2009, 10:35:48  
  
RESTID,2  
STNID,1  
HPWR,3  
COPTNO,4
```

Status View Showing Restaurant ID as 2

Repeat Delay

To turn ON Repeat Delay, type RPTDLY,1 and press ENTER twice.

To turn OFF Repeat Delay, type RPTDLY,0 and press ENTER twice.

```
>  
RPTDLY,1  
>
```

Example Repeat Delay ON

```
RF BAUD = 2400  
RIDTIMER = 0  
INP, DISABLED  
IDLIST = 2 2 2 2  
RPTDLY,1  
TheftTimer=0  
>  
-
```

Status View Showing Repeat Delay ON

High Power Setting

To change the Power Setting, type HWPR,x and press ENTER twice.

X is the Power Setting, a value of 0 to 4.

Example: To set a Power Setting of 3, type HWPR,3 and press ENTER twice..

```
TheftTimer=0  
>  
HPWR,1_
```

Example High Power Set to 1

```
RPTDLY,1  
TheftTimer=0  
>  
HPWRSET,1  
>
```

HyperTerminal Output Showing High Power Set to 1

```
RESTID,2  
STNID,1  
HPWR,1  
APGINS,1  
NUMP,4  
ALLPAGE, 0
```

Status View Showing High Power Set to 1

SERVICE QUESTIONS AND ANSWERS

Should your paging system ever fail or should you need additional paging supplies, call Long Range Systems at (800) 437-4996 Monday through Friday 8:30 am to 5:00 pm Central Time.

For weekend or night emergencies:

- Long Range Systems has 24/7 live technical support available
- Please keep in mind that options are limited over the weekend.

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Warranty

Long Range Systems, LLC permits a one-year manufacturer's warranty following the original consumer purchase date of any LRS system. Any individual components or products purchased will receive a 30-day manufacture warranty. This warranty covers any defects due to faulty material or workmanship, but does not include damage to the product resulting from accident, misuse or improper electrical connection. If the product or system should become defective within the warranty period, we will repair or replace with equivalent equipment, free of charge. We will pay transportation charges to return your product via standard FedEx Ground shipping, provided the product is shipped prepaid to:

**Long Range Systems, LLC
4550 Excel Pkwy, Suite 200
Addison, TX 75001**

No return or replacement can be received without prior authorization from the LRS Customer Support department or without the proper RMA# posted on the outside of the shipping container. Contact Customer Support at 800.437.4996 or www.pager.net. This warranty gives you specific legal rights and you may also have rights that vary by state.

Copyright © 2014, Long Range Systems, LLC All Rights Reserved

This manual contains proprietary information of Long Range Systems, LLC (LRS) and is intended for use only by its employees or customers. None of the material contained herein may be copied, reproduced, republished, downloaded, displayed, posted, or transmitted in any form or by any means, including but not limited to, electronic, mechanical, photocopying, recording, or otherwise without the prior written permission of LRS. Additional copies of this manual may be obtained by contacting LRS.

Screen displays, keyboard layouts, hardware descriptions, or software are proprietary to LRS and are subject to copyright and other intellectual property rights of LRS and shall be treated in accordance with the previous paragraph.

All attempts have been made to make the information in this document complete and accurate. LRS is not responsible for any direct or indirect damages or loss of business resulting from inaccuracies or omissions. Specifications and other information contained within this document are subject to change without notice.

Long Range Systems, LLC reserves the right to make changes without further notice to any products herein. LRS, LLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LRS, LLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in LRS, LLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. LRS, LLC products are not designed, intended, or authorized for use as components in systems intended to support or sustain life, or for any other application in which the failure of the LRS, LLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use LRS, LLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold LRS, LLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that LRS, LLC was negligent regarding the design or manufacture of the part, device or system.