

813Gv2 GigaHub Quick Start/Safety and Regulatory Statements Guide



This document provides general installation practices for the GigaHub model 813Gv2.

This document also provides guidance for site preparation, installation, basic troubleshooting, and safety/Regulatory statements.




Scan the QR code at left to access the installation instructions for this product. All product documentation is available online from the Calix Resource Center (support.calix.com).

Package Contents

- ✓ GigaHub - Model 813Gv2
- ✓ Power Adapter (Optional - may ship separately or with UPS*)
- ✓ Tabletop Mounting Stand
- ✓ GigaHub Quick Start Guide (this document)
- ✓ Product identification labels with login credentials (x2)

* **NOTE:** For instructions on installing the optional UPS, refer to the GigaHub Installation Guide.

A Quick Look

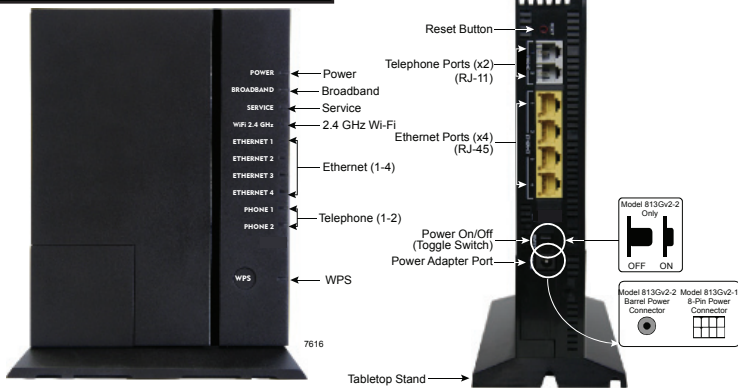

Installation Variables


Before installing the 813Gv2 GigaHub, consider what additional services may be implemented. Various Ethernet and telephone ports are available on the back of the unit which may or may not be used. Prior to determining the unit's final location, you need to account for the following variables:

- Where will the telephone lines be routed?
- Where will the Ethernet cables be routed?
- What type of building material is used in the home? Make sure you have the appropriate drills, drill bits and fasteners for routing subscriber services and/or power cables as they pass through walls and the like.

Tabletop Mounting

Calix GigaHubs can be mounted on a tabletop in a "tower" configuration using the tabletop stand shipped with the product.

Assemble the tabletop stand and the GigaHub as shown in the following diagram.

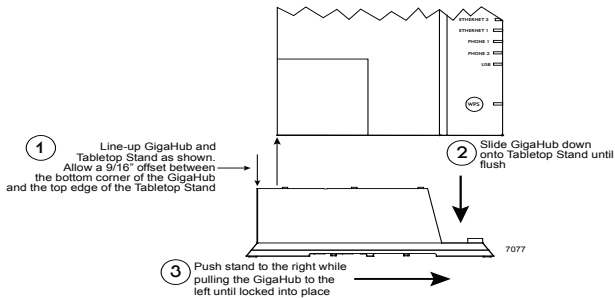


Connecting the Equipment

In order to facilitate table-top mounting of the 813Gv2 GigaHub, do the following:

1. Remove the 813Gv2 GigaHub from its packaging and inventory all parts.
2. Remove the fiber access cover and set aside temporarily.
3. Plug in the power adapter to an available wall socket and attach the other end to the GigaHub's power port.
4. Attach the fiber pigtail to the bulkhead fitting on the GigaHub until it snaps into place. Re-install the fiber access cover.
5. Push the ON/OFF switch (model 813Gv2-2 only) to ON and allow the GigaHub to boot up (about 3 minutes).

NOTE: To ensure proper airflow around the unit, do not block the sides of the GigaHub.

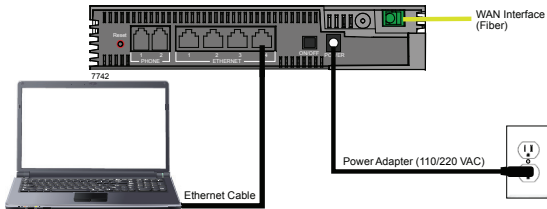


Connecting Outside Services

Subscriber voice, IP video and data services are attached to the rear of the GigaHub.

1. Locate the telephone, video, and data cables coming from the home.
2. Connect the incoming telephone lines to the RJ-11 connectors on the rear of the GigaHub.
3. Connect CAT5 or better to the LAN Ethernet (RJ-45) ports for direct-attached devices.
4. Secure all subscriber service wiring as appropriate.

Default Device Settings

Inserted inside the shipping carton of each 813Gv2 GigaHub, the inventory label (x2) provides necessary product information. This information may be attached to a work order or applied to the exterior of the device for future reference.



- Serial Number of the 813Gv2 GigaHub
- ONU MAC address
- Default Wi-Fi security type
- Wi-Fi security key (WPA Key)
- Default IP address of the home gateway router (needed at initial turn-up)
- Default login credentials (User Name/Password)

Getting Started

To turn up network services on the 813Gv2 GigaHub, two options are available:

1. Connect an active optical fiber to the 813Gv2 GigaHub's bulkhead fitting, power the unit on, and allow the network OLT (for example, a Calix E7) to discover the device as an unprovisioned ONT. At the OLT, the network administrator will provision the GigaHub and provide operational parameters remotely.
2. With the fiber disconnected, access the Smart Activate or Voice Activate application included with the 813Gv2 and then enter the Registration ID into the application. With the Registration ID having previously been entered at the OLT, once the fiber is connected, the GigaHub will come up as a provisioned ONT based on the pre-provisioning that was completed for that Registration ID.

Home Gateway Settings

To turn up home gateway services on the GigaHub, complete the following tasks:

1. Connect your PC to any LAN Ethernet port on the GigaHub using a standard Ethernet cable.
2. Open a browser and enter the IP address of the GigaHub's Embedded Web Interface (EWI): <http://192.168.1.1>.

[Home](#) | [Help](#) | [Logout](#) | [Admin](#)



3. Enter the credentials provided on the label shipped inside the GigaHub box.
4. Navigate to the Quick Start Menu and set-up the following:
 - a. Choose how to connect to the Internet
 - b. Configure your 2.4 GHz Wireless Network
 - c. Set the local time zone (may be automatically set by network)

For more information about device provisioning from the EWI, refer to the GigaHub User's Guide.

Frequently Asked Questions

Q: How do I reset the device without having to unplug the unit?

A: If the RESET button is depressed for less than 5 seconds, it resets the unit using the current configuration settings.

Q: How do I reset the device back to factory settings?

A: Pressing the RESET button on the back of the unit for at least 5 seconds, or access the "Restore Defaults" reset button located in the "Utilities" section of the Embedded Web Interface.

Q: How does the WPS button work?

A: Pressing the WPS button broadcasts the GigaHub's credentials (network password) to other WPS capable devices for a period of 2 minutes, allowing these devices to gain access to the wireless network.

Q: Is the Wireless radio on by Default?

A: Yes.

Q: Is Wireless Security on by Default?

A: Yes, unit is set with WPA2 Key Wi-Fi security type and login/password credentials that are printed on the inventory label and the product label affixed to the device.

Q: What if the User Name or login keys are forgotten?

A: Try setting up the wired connection and configuring the wireless encryption again.

- Press the reset button of the wireless router for at least five seconds.
- Device reverts to factory default settings
- Custom configuration options (such as SSID names) are reset as well.

Q: My Wi-Fi signal strength is lower than I expected?

A: A wireless signal degrades with distance and obstructions. Common signal impairments include walls, ceilings, metal, concrete, cinder blocks, fluorescent lights, microwaves, furniture, etc. While the 813Gv2 has been optimized to provide wireless coverage for most devices, there may be dependencies based on the location where the device is installed. Please contact your service provider for troubleshooting assistance.

Q: What mounting options are available for installing the 813Gv2?

A: The 813Gv2 should be installed using the tabletop stand or wall mount bracket to ensure best Wi-Fi performance and proper fiber optic cable management. The 813Gv2 can be installed flat on a desktop independent of the tabletop stand. Please ensure that the fiber optic cable can be properly routed to the device without excessive bends or pinching of the cable.

Q: What do I do if I cannot log on to the 813Gv2 gateway?

A: Contact your service provider.

Q: Who do I contact for service and support?

A: Contact your service provider.

Safety Information

The 813Gv2 GigaHub is a highly sophisticated electronic device. To get the most out of it, be sure to read the following text about product care, safety and efficient use.

- Treat the product with care, keep it in a clean and dust free environment.
- **Do not** expose the GigaHub to liquid, moisture or humidity.
- **Do not** expose the GigaHub to extreme high or low temperatures; refer to the topic Environmental Conditions for more detailed information.
- **Do not** expose the GigaHub to open flames or lit tobacco products.
- **Do not** drop, throw, or try to bend the product, since rough treatment could damage it.
- **Do not** use this product near water, for example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.
- **Do not** attempt to disassemble the GigaHub. A broken warranty seal will void the warranty. The product does not contain consumer-serviceable components. Only Certified Service Centers should perform service.
- **Do not** use any accessories other than those approved by the manufacturer or your service provider. Use of non-original or non-approved accessories may result in loss of performance, damage to the product, fire, electric shock or injury, and may violate regulations. The warranty does not cover product failures that have been caused by use of non-original or non-approved accessories.

L'information sur la sécurité

Le 813Gv2 GigaHub est un appareil électronique sophistiqué. Pour tirer le meilleur parti de celui-ci, assurez-vous de lire ce qui suit sur les soins, la sécurité et l'utilisation efficace du produit.

- Traitez le produit avec soin, gardez-le dans un environnement propre et exempt de poussière.
- N'exposez pas le GigaHub au liquide ou à l'humidité.
- N'exposez pas le GigaHub à des températures extrêmes élevées ou basses. Se référer à la partie Conditions environnementales pour des informations plus détaillées.
- N'exposez pas le GigaHub à des flammes nues ou à des produits du tabac allumés.
- Ne laissez pas tomber votre appareil, ne le lancez pas et ne tentez pas de le plier, car un traitement brutal pourrait l'endommager.
- N'utilisez pas ce produit près de l'eau, par exemple, près d'une baignoire, un lavabo, un évier ou un lavoir, en sous-sol humide, ou près d'une piscine.
- N'essayez pas de démonter le GigaHub. Un sceau de garantie brisé annule la garantie. Le produit ne contient pas de pièces réparables par le consommateur. Seulement les centres de service agréés devraient effectuer des réparations.
- N'utilisez pas d'accessoires autres que ceux approuvés par le fabricant ou votre fournisseur de services. L'utilisation d'accessoires non originaux ou non approuvés peut entraîner une perte de performance, des dommages au produit, un incendie, des chocs électriques ou des blessures et peut contrevenir aux règlements. La garantie ne couvre pas les pannes provoquées par l'utilisation d'accessoires non standards ou non approuvés.

Potentially Explosive Atmosphere

Do not use the GigaHub in an area where a potentially explosive atmosphere exists.

Atmosphère potentiellement explosive

N'utilisez pas le GigaHub dans un endroit où existe une atmosphère potentiellement explosive.

Intended Use

This product is classified as telecommunication equipment not intended for direct purchase by the public.

This product is designed and approved for use in an indoor location only.



CAUTION! Use of any controls, adjustments, or procedures other than those specified herein may result in hazardous radiation exposure.

Utilisation prévue

Ce produit est classé comme équipement de télécommunication non destiné à l'achat direct par le public.

Ce produit est conçu et approuvé pour utilisation en intérieur uniquement.



MISE EN GARDE ! L'utilisation de contrôles, réglages ou procédures autres que ceux spécifiés dans ce manuel peut entraîner une exposition dangereuse à des rayonnements.

Power Supply

- Ensure that a suitable AC power outlet is located near the GigaHub and easily accessible.
- Connect the power supply cord only to the AC power outlet that meets the specifications marked next to the appliance AC power inlet on the GigaHub.
- Never alter the AC power cord. If necessary have the correct outlet installed by a qualified electrician or call your service provider for assistance.
- To reduce risk of damage to the electric cord, remove it from the outlet by holding onto the AC power adapter rather than the cord. Make sure the cord is positioned so that it will not be stepped on, tripped over or otherwise subjected to damage or stress



WARNING! Do not use any other power adapter except the one that accompanies this unit or a power supply identified in the list below. Use of another adapter could result in damage to the unit. To prevent electrical shock, please do not open the cover. The following power adapters are qualified to be used with this GigaHub.

813Gv2-2 Power Supply Specification

This GigaHub must be powered by Amigo

AMS115-1201500FU or equivalent UL Listed LPS power source rated at:

Input: 90-264 VAC, 47/63 Hz, 0.8A

Output: Nominal 12 VDC, 1.5A Maximum, 18W

813Gv2-1 Power Supply Specification

This GigaHub must be powered by Amigo

AMS157-1202000FU or equivalent UL Listed LPS power source rated at:

Input: 90-264 VAC, 47/63 Hz, 1A,

Output: Nominal 12 VDC, 2A Maximum, 24W

Alimentation électrique

- Assurez-vous qu'une prise de courant C.A. appropriée est située près du GigaHub et qu'elle soit facile d'accès.
- Connectez le câble d'alimentation uniquement à une prise de courant qui correspond aux spécifications indiquées à côté de l'entrée d'alimentation du GigaHub.
- Ne modifiez jamais le câble d'alimentation. Si nécessaire, faites installer la bonne prise de courant par un électricien qualifié ou contactez votre prestataire de services pour assistance.
- Pour réduire le risque de dommage au câble électrique, retirez-le de la prise de courant en tenant l'adaptateur secteur plutôt que le câble. Assurez-vous que le câble est positionné de manière à éviter qu'il soit possible de marcher ou trébucher dessus, ou de l'endommager.



Attention ! N'utilisez pas d'autre adaptateur secteur que celui qui accompagne cet appareil ou une alimentation électrique autre que celle identifiée dans la liste ci-dessous. L'utilisation d'un autre adaptateur pourrait endommager l'appareil. Pour éviter les chocs électriques, n'ouvrez pas le couvercle. L'adaptateur électrique suivant est qualifié pour être utilisé avec le GigaHub.

Spécifications de l'alimentation du 813Gv2-2

L'adaptateur électrique suivant est qualifié pour être utilisé avec le GigaHub

Ce GigaHub doit être alimenté par un adaptateur Amigo AMS115-1201500FU ou une source d'alimentation équivalente certifiée UL LPS de capacité:

Entree: 90-264 VCA, 47/63 Hz, 0.8A,

Sortie: Valeur nominale 12 VDC, 1.5A Maximum, 18W

Specifications de l'alimentation du 813Gv2-1

L'adaptateur électrique suivant est qualifié pour être utilisé avec le GigaHub
Ce GigaHub doit être alimenté par un adaptateur Amigo AMS157-1202000FU ou une source d'alimentation équivalente certifiée UL LPS de capacité:

Entree: 90-264 VCA, 47/63 Hz, 1A,

Sortie: Valeur nominale 12 VDC, 2A Maximum, 24W

Class 1 Laser Device



WARNING! Optical Safety for Fiber Optic Modules. Never look at the transmit laser while it is powered on. Never look into the fiber optic port when the device is powered on. Never look into the end of the fiber optic cable at any time.

Appareil laser de Classe 1



Attention ! Sécurité optique pour les modules de fibre optique. Ne regardez jamais l'émetteur laser lorsqu'il est sous tension. Ne regardez jamais dans le port de fibre optique lorsque l'appareil est sous tension. Ne regardez jamais dans l'extrémité du câble de fibre optique.

Children

Do not allow children to play with the GigaHub. It contains small parts that could become detached and create a choking hazard.

Regulatory Information



CAUTION! Changes or modifications to this product not expressly approved by the party responsible for compliance could void your authority to operate the equipment and invalidate approvals.



MISE EN GARDE ! Les changements ou modifications non approuvés expressément par l'autorité responsable de la conformité peuvent annuler l'autorisation accordée à l'utilisateur d'utiliser cet équipement.

Environmental Conditions

Maximum environmental values during use:

Temperature: 0° C to +40° C (32° to 104° F), Humidity: 5% to 95% RH, non-condensing

RoHS Compliance

This 813Gv2 GigaHub meets the requirements detailed in the European RoHS Directive (2011/65/EU).

WEEE Directive

Requirements according to WEEE directive (2012/19/EU)



Disposal of old electrical and electronic equipment (Applicable in the European countries with separate collection systems).

This symbol on the product indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. Calix offers take-back and recycling services for products in many locations around the world. The customers are advised to contact the local Calix representative for further information.

Federal Communications Commission (FCC)

INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced technician for help.

NON-MODIFICATIONS STATEMENT

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

CAUTION: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

For product, available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

ADDITIONAL CONSIDERATIONS

The country code selection is for non-US models only and is not available on any US models. Per FCC regulations, all Wi-Fi products marketed in the US must be fixed to US operational channels only.

FCC RADIATION EXPOSURE STATEMENT

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

Industry Canada Requirements - English

The manufacturer declares that this product is in conformity with the requirements and other relevant provisions of the following Canadian standards:

- CAN ICES-3 (B)/NMB-3(B)
- This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
 - (1) This device may not cause interference, and
 - (2) This device must accept any interference, including interference that may cause undesired operation of the device.

RADIATION EXPOSURE STATEMENT

The product complies with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

IMPORTANT NOTE - IC RADIATION EXPOSURE STATEMENT: This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

Le fabricant déclare que ce produit est conforme aux exigences et aux autres dispositions pertinentes des normes canadiennes:

- Peut-ICES-3 (B)/NMB-3(B)
- Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
 - (1) l'appareil ne doit pas produire de brouillage, et
 - (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

DECLARATION D'EXPOSITION AUX RADIATIONS

- Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les Etats-Unis et le Canada établies pour un environnement non contrôlé.
- Le produit est sûr pour un fonctionnement tel que décrit dans ce manuel. La réduction aux expositions RF peut être augmentée si l'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible.
- Delete this line and replace it with the following:
- Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps

For Radio Equipment Only



You must set the correct country code with the set WLAN country-code command to avoid violating local radio spectrum laws. This command sets the selectable channel range and transmit power level so that a WLAN connection can be established. For more information about country codes, see the hardware guide for your device.

This device complies with the essential requirements of the Radio Equipment directive: 2014 / 53 / EU. The following test methods have been applied to prove presumption of conformity with the essential requirements of the Radio Equipment directive: 2014 / 53 / EU:

EN 300 328 (2.4 GHz), EN 62311:2008, EN 50385, EN 301489-1, EN 301489-17, IEC 60950-1, IEC 60825-1.

FREQUENCIES	MAX POWER	INDOOR/OUTDOOR
2400-2483.5	100 mW	Indoor

RADIATION EXPOSURE STATEMENT

The minimum distance between the user and/or any bystander and the radiating structure of the transmitter is 20 cm.

				NOTICE OF WIRELESS RADIO LAN USAGE IN THE EUROPEAN COMMUNITY
BE	BG	CZ	DK	This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries, except in France where restrictive use applies. This device may not be used for setting up outdoor radio links in France and in some areas, the RF output power may be limited to 10 mW EIRP in the frequency range of 2454–2483.5 MHz. For detailed information, the end-user should contact the national spectrum authority in France.
DE	EE	IE	EL	
ES	FR	HR	IT	
CY	LV	LT	LU	
HU	MT	NL	AT	
PL	PT	RO	SE	
SK	FI	SE	UK	
U	IS	NO	TR	
CH				

Usage Notes

- To remain in conformance with European National spectrum usage regulations, frequency and channel limitations will be applied on the products per the country where the equipment will be deployed.

Declaration of Conformity

Language	Declaration of Conformity
български [Bulgarian]	С настоящото Calix Inc. Това декларира тази Wireless Broadband Терминал за достъп е в съответствие с Директива 2014/53 / ЕС. Пълният текст на ЕС декларацията за съответствие е достъпна онлайн от сайта на декларациите на Calix (https://www.calix.com/declarations).
hrvatski [Croatian]	Oovime Calix Inc. To izjavljuje ovaj bežični širokopolasni pristup terminala u skladu s Direktivom 2014/53 / EU. Puni tekst izjave o sukladnosti za EU je dostupan online od kaliks web deklaracije (https://www.calix.com/declarations).
English	Hereby, Calix Inc. declares that this Broadband wireless Access Terminal is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available online from the Calix Declarations site (https://www.calix.com/declarations).
český [Czech]	Tím Calix Inc. Která deklaruje toto Wireless Broadband Access Terminal je v souladu se směrnicí 2014/53 / EU. Úplné znění EU prohlášení o shodě je k dispozici online na webových stránkách prohlášení kalichu (https://www.calix.com/declarations).
Deutsch [German]	Hiermit Calix Inc. Das erklärt der Wireless Broadband Access Terminal in Übereinstimmung mit der Richtlinie 2014/53 / EU. Der vollständige Wortlaut der EU-Konformitätserklärung wird online von den Calix Website Erklärungen zur Verfügung (https://www.calix.com/declarations).
Eesti [Estonian]	Käesolevaga Calix Inc. See kinnitab seda traadita lairibaühenduse Terminali koostöös direktiivi 2014/53 / EL. Tervikteksti ELi vastavusdeklaratsiooni on saadaval võrgus Calix veebilehel deklaratsioonid (https://www.calix.com/declarations).
español [Spanish]	Por la presente, Calix Inc. Que declara esta Terminal de banda ancha de acceso inalámbrico está en conformidad con la Directiva 2014/53 / UE. El texto completo de la declaración de conformidad de la UE está disponible en línea desde el sitio web Declaraciones de Calix (https://www.calix.com/declarations).
Ελληνική [Greek]	Δια του παρόντος, Calix Inc. Αυτό δηλώνει αυτό το Wireless Terminal Ευρυζωνική πρόσβαση είναι σε συμμόρφωση με την οδηγία 2014/53 / ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ είναι διαθέσιμο στο διαδίκτυο από την ιστοσελίδα Calix Δηλώσεις (https://www.calix.com/declarations).
français [French]	Par la présente, Calix Inc. Cet accès qui déclare haut débit sans fil terminal est conforme à la directive 2014/53 / UE. Le texte intégral de la déclaration de conformité C'est disponible en ligne à partir des déclarations de site Calix (https://www.calix.com/declarations).

Language	Declaration of Conformity
Italiano [Italian]	Con la presente, Calix Inc. Che dichiara questo terminale di accesso wireless a banda larga è conforme alla Direttiva 2014/53 / UE. Il testo integrale della dichiarazione di conformità UE è disponibile online dal sito Dichiarazioni Calix (https://www.calix.com/declarations).
Latvijas [Latvian]	Ar šo, Calix Inc. Tas paziņo, šis bezvadu platjoslas piekļuves termināls atbilst Direktīvas 2014/53 / ES. Pilns teksts ES atbilstības deklarācijas ir pieejama tiešsaistē no Calix tīmekļa deklarācijas (https://www.calix.com/declarations).
Lietuvos [Lithuanian]	Šiuo dokumentu Calix Inc. Tai deklaruoja tai bevieles plačiajuosteis prieigos terminalas atitinka Direktyvos 2014/53 / ES. Visą tekstą ES atitikties deklaraciją galima rasti internete nuo CALIX svetainės deklaracijos (https://www.calix.com/declarations).
Magyar [Hungarian]	Ezáltal Calix Inc. Hogy kijelenti ezt Wireless Broadband Access Terminal irányelvnek megfelelelően 2014/53 / EU. A teljes szöveg az EU-megfelelőési nyilatkozat elérhető online az Calix honlapján Nyilatkozatok (https://www.calix.com/declarations).
Polski [Polish]	Niniejszym, Calix Inc. Deklaruje, że ten Szerokopasmowy dostęp bezprzewodowy terminal jest zgodny z dyrektywą 2014/53 / UE. Pełny tekst deklaracji zgodności UE jest dostępna on-line ze strony internetowej calix deklaracji (https://www.calix.com/declarations).
português [Portuguese]	Por este meio, Calix Inc. Que declara esta Terminal de Acesso de Banda Larga sem fios está em conformidade com a Directiva 2014/53 / UE. O texto completo da declaração UE de conformidade está disponível online a partir de declarações do Web site da Calix (https://www.calix.com/declarations).
român[Romanian]	Prin prezenta, Calix Inc poate declara que acces de bandă largă fără fir Terminal este în conformitate cu Directiva 2014/53 / UE. Textul integral al declarației de conformitate UE este disponibilă online din calix declarațiile site-ul (https://www.calix.com/declarations).
slovenščina[Slovenian]	S tem lahko calix Inc. razglasi, da širokopasovnega brezžičnega dostopa Terminal je v skladu z Direktivo 2014/53 / EU. Celotno besedilo izjave EU o skladnosti je na voljo na spletnu na spletni strani izjavami calix (https://www.calix.com/declarations).
slovenský [Slovak]	Týmto Calix Inc. môže vyhlásiť tento que Broadband Wireless Access Terminal je v súlade so smernicou 2014/53 / EU. Úplné znenie vyhlásenia o zhode EÚ je k dispozícii online na webovej stránke vyhlásenie kalichu (https://www.calix.com/declarations).

License Information

Open Source Software Utilization Notice

The 813Gv2 GigaHub uses Open Source Software Programs. Such software programs are made available subject to certain third party terms and conditions.

The fact that you are about to begin using or have purchased this product requires that you be informed of the use of these software packages and or libraries and in some cases, the third party terms and conditions applicable to such software. This information can be found on the manufacturer's support portal. Refer to the appropriate software release notes for additional information on Open Source Software Programs used by this product.