## FCC and ISED Test Report

Apple Inc

Model: A3114

# In accordance with FCC 47 CFR Part 15B and ICES-003 and ISED RSS-GEN

Prepared for: Apple Inc

One Apple Park Way

Cupertino California 95014 USA

FCC ID: BCGA3114 IC: 579C-A3114



## COMMERCIAL-IN-CONFIDENCE

Document 75959606-06 Issue 01

SIGNATURE			
A3 lawsen.			
NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Andrew Lawson	Chief Engineer, EMC	Authorised Signatory	15 November 2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

#### **ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15B and ICES-003 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Nathan Harrison	15 November 2023	NB
Testing	Callum Pennells	15 November 2023	Gennells
Testing	Jonas Ayipah	15 November 2023	- Pres

FCC Accreditation ISED Accreditation

492497/UK2010 Octagon House, Fareham Test Laboratory 12669A Octagon House, Fareham Test Laboratory

#### **EXECUTIVE SUMMARY**

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN: 2021, Issue 7: 2020 and Issue 5 and A2 (2021-02) for the tests detailed in section 1.3.





#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2023 TÜV SÜD. This report relates only to the actual item/items tested.

#### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD is a trading name of TUV SUD Ltd Registered in Scotland at East Kilbride, Glasgow G75 0QF, United Kingdom Registered number: SC215164 TUV SUD Ltd is a TÜV SÜD Group Company Phone: +44 (0) 1489 558100 Fax: +44 (0) 1489 558101 www.tuvsud.com/en TÜV SÜD Octagon House Concorde Way Fareham Hampshire PO15 5RL United Kingdom



## Contents

1	Report Summary	2
1.1	Report Modification RecordIntroduction	
1.2	Introduction	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard	4
1.6	EUT Modification Record	5
1.7	Test Location	5
2	Test Details	6
2.1	Conducted Disturbance at Mains Terminals	6
2.2	Radiated Disturbance	
3	Test Equipment Information	18
3.1	General Test Equipment Used	18
4	Incident Reports	19
5	Measurement Uncertainty	20



## 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	15 November 2023

#### Table 1

#### 1.2 Introduction

Applicant Apple Inc

Manufacturer Apple Inc

Model Number(s) A3114

Serial Number(s) C4Y1W4D755

Hardware Version(s) REV 1.0 Software Version(s) 23C22a

Number of Samples Tested 1

Test Specification/Issue/Date FCC 47 CFR Part 15B, 2021

ICES-003, Issue 7: 2020

ISED RSS-GEN, Issue 5, A2 (2021-02)

Start of Test 25-October-2023 Finish of Test 03-November-2023

Name of Engineer(s) Nathan Harrison, Callum Pennells and Jonas Ayipah

Related Document(s) ANSI C63.4: 2014



## 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15B and ICES-003 and ISED RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard	
Configuratio	Configuration and Mode: AC Powered - Transmitter Idle				
2.1	15.107, 3.1 and 8.8 Conducted Disturbance at Mains Terminals		Pass	ANSI C63.4: 2014	
2.2	2.2 15.109, 3.2 and 7.1 Radiated Disturbance		Pass	ANSI C63.4: 2014	

Table 2

COMMERCIAL-IN-CONFIDENCE Page 3 of 20



#### 1.4 Product Information

## 1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

## 1.4.2 EUT Port/Cable Identification

Port	Max Cable Length specified	Usage	Туре	Screened		
Configuration and Mod	Configuration and Mode: AC Powered - Transmitter Idle					
AC Power Port	2 m	Power	AC to DC Power Adapter with Magsafe cable	No		
USB Port 1	2 m	Data	USB Type-C	No		
USB Port 2	Unterminated	Data	USB Type-C	No		
USB Port 3	Unterminated	Data	USB Type-C	No		
Audio Jack Port	0.5 m	Audio Output	3.5 mm Jack	No		

Table 3

## 1.4.3 Test Configuration

Configuration	Description
	The EUT was powered from a 115 V 60 Hz AC supply via an AC to DC adapter, model: A2743.
AC Powered	A set of headphones was used to terminate the EUT's 3.5 mm audio jack port.
	A USB-C to USB-A adapter and optical mouse were used to terminate the USB-C port.

## Table 4

## 1.4.4 Modes of Operation

Mode	Description
Transmitter Idle	The EUT's intentional transmitters were turned off.  The EUT was configured to display video on the EUT screen, whilst playing audio through the headphones. The display was set to maximum brightness and sleep mode was disabled.

Table 5

#### 1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



## 1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted		
Model: A3114, Seria	Model: A3114, Serial Number: C4Y1W4D755				
0 As supplied by the customer		Not Applicable	Not Applicable		

#### Table 6

#### 1.7 Test Location

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation	
Configuration and Mode: AC Powered - Transmitter Idle			
Conducted Disturbance at Mains Terminals	Nathan Harrison	UKAS	
Radiated Disturbance	Callum Pennells and Jonas Ayipah	UKAS	

Table 7

Office Address:

TÜV SÜD Octagon House Concorde Way Fareham Hampshire PO15 5RL United Kingdom



## 2 Test Details

## 2.1 Conducted Disturbance at Mains Terminals

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15B, Clause 15.107 ICES-003, Clause, 3.1 ISED RSS-GEN, Clause 8.8

## 2.1.2 Equipment Under Test and Modification State

A3114, S/N: C4Y1W4D755 - Modification State 0

#### 2.1.3 Date of Test

25-October-2023

#### 2.1.4 Test Method

The EUT was setup according to ANSI C63.4, clause 5.2.

The EUT was placed on a non-conductive table 0.8 m above a reference ground plane. A vertical coupling plane was placed 0.4 m from the EUT boundary.

A Line Impedance Stabilisation Network (LISN) was directly bonded to the ground-plane. The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN was 0.8 m.

Interconnecting cables that hanged closer than 0.4 m to the ground plane were folded back and forth in the centre forming a bundle 0.3 m to 0.4 m long.

Input and output cables were terminated with equipment or loads representative of real usage conditions.

The EUT was configured to give the highest level of emissions within reason of a typical installation as described by the manufacturer.

## 2.1.5 Example Calculation

Quasi-Peak level (dB $\mu$ V) = Receiver level (dB $\mu$ V) + Correction Factor (dB) Margin (dB) = Quasi-Peak level (dB $\mu$ V) - Limit (dB $\mu$ V)

CISPR Average level  $(dB\mu V)$  = Receiver level  $(dB\mu V)$  + Correction Factor (dB) Margin (dB) = CISPR Average level  $(dB\mu V)$  - Limit  $(dB\mu V)$ 



## 2.1.6 Example Test Setup Diagram

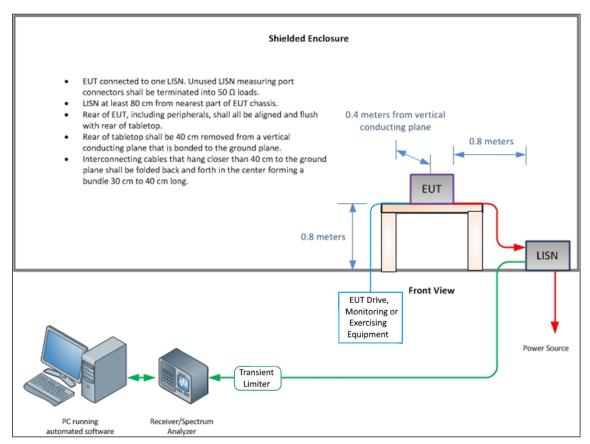


Figure 1 - Conducted Disturbance

#### 2.1.7 Environmental Conditions

Ambient Temperature 20.3 °C Relative Humidity 58.7 % Atmospheric Pressure 984.0 mbar

## 2.1.8 Specification Limits

Line Under Test	Frequency Range (MHz)	Quasi-Peak Test Limit (dBμV)	CISPR Average Test Limit (dBµV)
	0.15 to 0.5	66 to 56 <sup>(1)</sup>	56 to 46 <sup>(1)</sup>
AC Power Port	0.5 to 5	56	46
	5 to 30	60	50

Table 8



## 2.1.9 Test Results

Results for Configuration and Mode: AC Powered - Transmitter Idle.

This test was performed to the requirements of the Class B limits.

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

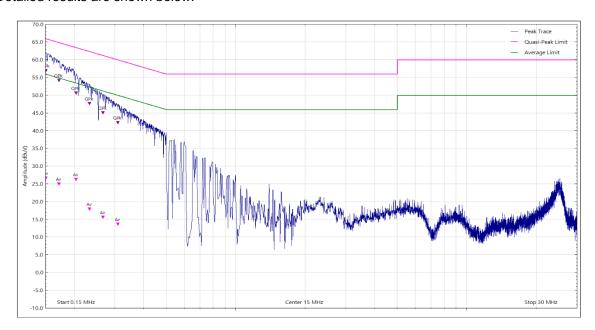


Figure 2 - Graphical Results - AC Power Port - Live Line

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.151	56.25	65.90	-9.65	Q-Peak
0.151	26.04	55.90	-29.86	CISPR Avg
0.172	53.55	64.90	-11.35	Q-Peak
0.172	24.36	54.90	-30.54	CISPR Avg
0.204	25.59	53.40	-27.81	CISPR Avg
0.204	49.94	63.40	-13.46	Q-Peak
0.233	17.25	52.30	-35.05	CISPR Avg
0.233	46.99	62.30	-15.31	Q-Peak
0.266	44.44	61.20	-16.76	Q-Peak
0.266	14.99	51.20	-36.21	CISPR Avg
0.309	13.01	50.00	-36.99	CISPR Avg
0.309	41.61	60.00	-18.39	Q-Peak

Table 9



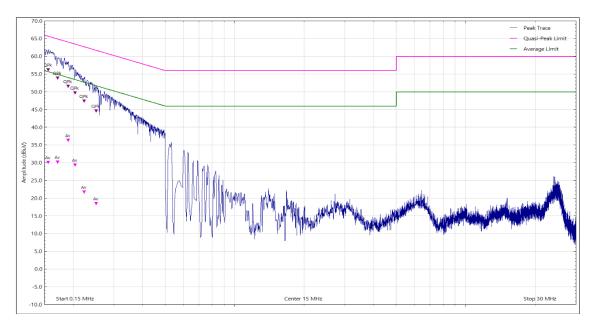


Figure 3 - Graphical Results - AC Power Port - Neutral Line

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.156	55.55	65.70	-10.15	Q-Peak
0.156	29.46	55.70	-26.24	CISPR Avg
0.171	53.23	64.90	-11.67	Q-Peak
0.171	29.55	54.90	-25.35	CISPR Avg
0.190	50.94	64.00	-13.06	Q-Peak
0.190	35.71	54.00	-18.29	CISPR Avg
0.204	49.05	63.40	-14.35	Q-Peak
0.204	28.72	53.40	-24.68	CISPR Avg
0.223	46.72	62.70	-15.98	Q-Peak
0.223	21.12	52.70	-31.58	CISPR Avg
0.251	43.93	61.70	-17.77	Q-Peak
0.251	17.79	51.70	-33.91	CISPR Avg

Table 10



## 2.1.10 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 12.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Screened Room 12	MVG	EMC-3	5621	36	07-Aug-2026
Emissions Software	TUV SUD	EmX V3.1.12	5125	-	Software
Test Receiver	Rohde & Schwarz	ESU40	3506	12	30-Mar-2024
Transient Limiter	Hewlett Packard	11947A	2377	12	02-Mar-2024
Termination (50ohm)	Meca	405-1	550	12	24-Nov-2023
Cable (N-Type to N-Type, 2 m)	Junkosha	MWX221- 02000AMSAMS/B	5729	6	05-Dec-2023
Cable (N-Type to N-Type, 8 m)	Junkosha	MWX221- 08000NMSNMS/B	6321	12	04-Feb-2024
LISN (CISPR 16, Single Phase)	Rohde & Schwarz	ESH3-Z5	1390	12	02-Feb-2024

Table 11



#### 2.2 Radiated Disturbance

#### 2.2.1 Specification Reference

FCC 47 CFR Part 15B, Clause 15.109 ICES-003, Clause 3.2 ISED RSS-GEN, Clause 7.1

#### 2.2.2 Equipment Under Test and Modification State

A3114, S/N: C4Y1W4D755 - Modification State 0

#### 2.2.3 Date of Test

26-October-2023 to 03-November-2023

#### 2.2.4 Test Method

The EUT was set up on a non-conductive table 0.8 m above a reference ground plane within a semianechoic chamber on a remotely controlled turntable.

A pre-scan of the EUT emissions profile using a peak detector was made at a 3 m antenna distance whilst varying the antenna-to-EUT azimuth and polarisation.

For an EUT which could reasonable be used in multiple planes, pre-scans were performed with the EUT orientated in X, Y and Z planes with reference to the ground plane.

Using a list of the highest emissions detected during the pre-scan along with their bearing and associated antenna polarisation, the EUT was then formally measured using a Quasi-Peak, Peak or CISPR Average detector as appropriate.

The readings were maximised by adjusting the antenna height, polarisation and turntable azimuth, in accordance with the specification.

#### 2.2.5 Example Calculation

Below 1 GHz:

Quasi-Peak level ( $dB\mu V/m$ ) = Receiver level ( $dB\mu V$ ) + Correction Factor (dB/m) Margin (dB) = Quasi-Peak level ( $dB\mu V/m$ ) - Limit ( $dB\mu V/m$ )

Above 1 GHz:

CISPR Average level  $(dB\mu V/m)$  = Receiver level  $(dB\mu V)$  + Correction Factor (dB/m) Margin (dB) = CISPR Average level  $(dB\mu V/m)$  - Limit  $(dB\mu V/m)$ 

Peak level (dB $\mu$ V/m) = Receiver level (dB $\mu$ V) + Correction Factor (dB/m) Margin (dB) = Peak level (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)



## 2.2.6 Example Test Setup Diagram

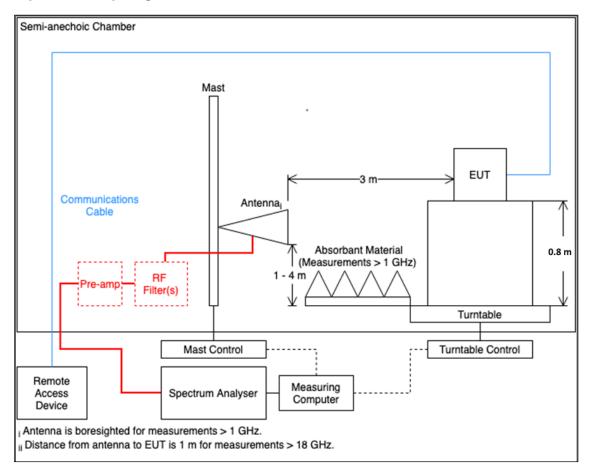


Figure 4 - Radiated Disturbance Example Test Setup

## 2.2.7 Environmental Conditions

Ambient Temperature 20.3 °C Relative Humidity 58.8 % Atmospheric Pressure 1002.0 mbar

## 2.2.8 Specification Limits

Required Specification Limits, Field Strength - Class B Test Limit at a 3 m Measurement Distance					
Frequency Range (MHz)	Test Limit (μV/m)	Test Limit (dBµV/m)			
30 to 88	100	40.0			
88 to 216	150	43.5			
216 to 960	200	46.0			
Above 960	500	54.0			

## Supplementary information:

Note 1. A Quasi-peak detector is to be used for measurements below 1 GHz.

Note 2. A CISPR Average detector is to be used for measurements above 1 GHz.

Note 3. The Peak test limit above 1 GHz is 20 dB higher than the CISPR Average test limit.

Table 12



## 2.2.9 Test Results

Results for Configuration and Mode: AC Powered - Transmitter Idle.

This test was performed to the requirements of the Class B limits.

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Highest frequency generated or used within the EUT: 7.115 GHz Which necessitates an upper frequency test limit of: 36 GHz

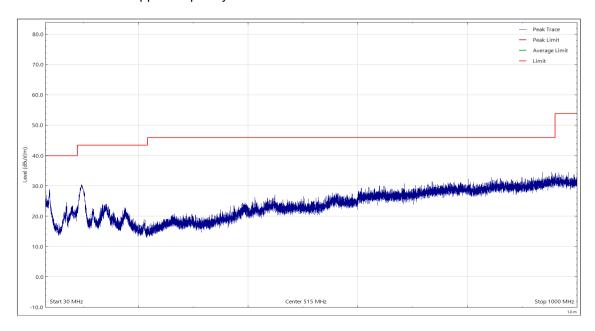


Figure 5 - 30 MHz to 1 GHz, Quasi-Peak, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 13

<sup>\*</sup>No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.



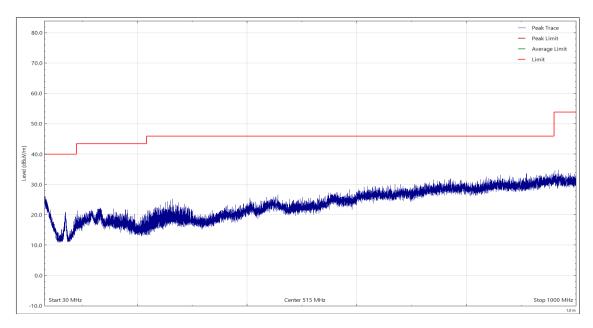


Figure 6 - 30 MHz to 1 GHz, Quasi-Peak, Horizontal

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 14

<sup>\*</sup>No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.



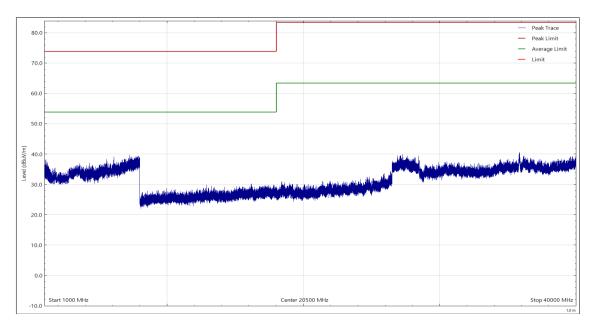


Figure 7 - 1 GHz to 40 GHz, Peak & CISPR Average, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 15

<sup>\*</sup>No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.



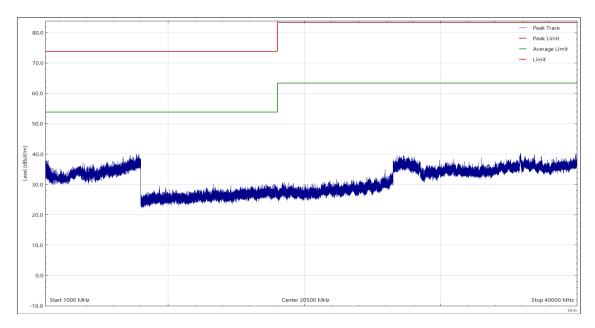


Figure 8 - 1 GHz to 40 GHz, Peak & CISPR Average, Horizontal

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 16

<sup>\*</sup>No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.



## 2.2.10 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 12.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Screened Room 12	MVG	EMC-3	5621	36	07-Aug-2026
Emissions Software	TUV SUD	EmX V3.1.12	5125	-	Software
Test Receiver	Rohde & Schwarz	ESU40	3506	12	30-Mar-2024
Turntable & Mast Controller	Maturo Gmbh	NCD/498/2799.01	5612	-	TU
Tilt Antenna Mast	Maturo Gmbh	TAM 4.0-P	5613	-	TU
Cable (N-Type to N-Type, 8 m)	Junkosha	MWX221- 08000NMSNMS/B	6321	12	04-Feb-2024
Cable (SMA to SMA, 2 m)	Junkosha	MWX221- 02000AMSAMS/B	5725	6	05-Dec-2023
Cable (K Type 2m)	Junkosha	MWX241- 02000KMS	5421	12	08-Mar-2024
Cable Assembly-18GHz	Junkosha	MWX241/B	5816	6	10-Feb-2024
Pre-Amplifier (1 GHz to 10 GHz)	Miteq Corp	AFS5-01001000-20- 10P-5	1200	12	27-Feb-2024
Pre-Amplifier (8 - 18GHz)	Wright Technologies	APS06-0061	6306	12	06-Feb-2024
Pre-Amplifier (18 GHz to 40 GHz)	Schwarzbeck	BBV 9721	5218	12	06-Feb-2024
Antenna (Bi-Log, 30 MHz to 1 GHz)	Teseq	CBL6111D	5615	24	15-Mar-2025
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5611	12	15-Oct-2024
Antenna (DRG, 7.5 GHz to 18 GHz)	Schwarzbeck	HWRD750	5348	12	15-Oct-2024
Antenna (DRG, 15 GHz to 40 GHz)	Schwarzbeck	BBHA 9170	5217	12	06-Feb-2024

Table 17

TU - Traceability Unscheduled



## **3 Test Equipment Information**

## 3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	75 Mk3	455	12	15-Dec-2023
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB-40	5481	12	28-Apr-2024

Table 18

TU - Traceability Unscheduled



## 4 Incident Reports

No incidents reports were raised.



## 5 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Conducted Disturbance at Mains Terminals	150 kHz to 30 MHz, LISN, ±3.7 dB
Radiated Disturbance	30 MHz to 1 GHz, Bilog Antenna, SAC, ±5.2 dB 1 GHz to 6 GHz, Horn Antenna, SAC, ±5.1 dB 6 GHz to 18 GHz, Horn Antenna, SAC, ±4.9 dB 18 GHz to 40 GHz, Horn Antenna, SAC, ±6.3 dB

Table 19

Worst case error for both Time and Frequency measurement 12 parts in 106.

#### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.