

## Antenna Gain test report

FCC ID: 2ABZ2-AA550

Equipment: Mobile Phone

Brand Name: ONEPLUS

Model Name: CPH2583

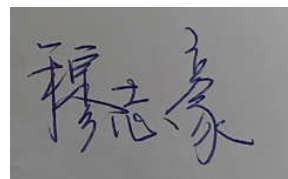
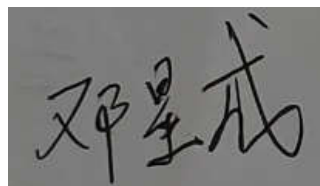
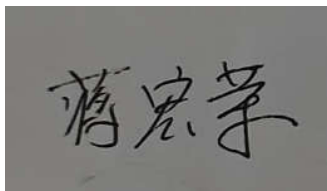
Manufacturer: OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip

Terra Building, Binhe Avenue North, Futian

District, Shenzhen, Guangdong, P.R. China

Issue Date: August 24, 2023



Project Engineer: Jim Jiang Date:2023/8/24

Checked by: Stephen Deng Date:2023/8/24

Approved by: Shine Mu Date:2023/8/24

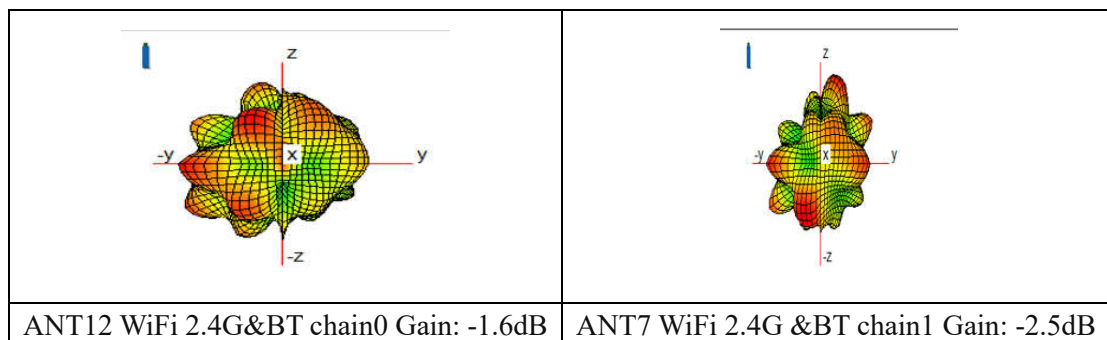
**Antenna Gain and Antenna Type specification:**

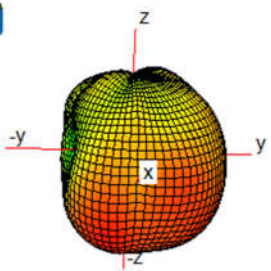
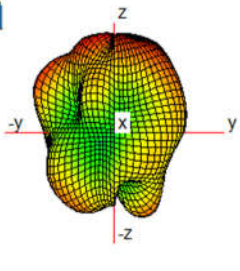





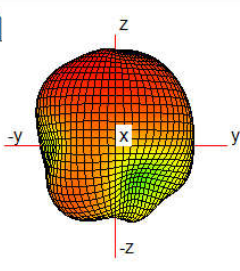


Antenna Gain (dBi)		Ant 7	Ant 12	Antenna Type	Antenna model name	Manufacturer
2.4G WiFi	2412~2462MHz	-2.5	-1.6	IFA(Inverted F Antenna)	AA550	OnePlus
BT	2402~2480MHz	-2.5	-1.6	IFA(Inverted F Antenna)	AA550	OnePlus
Antenna Gain (dBi)		Ant 9	Ant 15	Antenna Type	AA550	OnePlus
5G WiFi	5150~5250 MHz	-1	3	IFA(Inverted F Antenna)	AA550	OnePlus
	5250~5350 MHz	-1	3	IFA(Inverted F Antenna)	AA550	OnePlus
	5470~5725 MHz	-1.5	2	IFA(Inverted F Antenna)	AA550	OnePlus
	5725~5850 MHz	-1.5	2	IFA(Inverted F Antenna)	AA550	OnePlus
6G WiFi	5925-6425 MHz	-1	1	IFA(Inverted F Antenna)	AA550	OnePlus
	6425-6525 MHz	-2	-2.8	IFA(Inverted F Antenna)	AA550	OnePlus
	6525-6875 MHz	-2	-2	IFA(Inverted F Antenna)	AA550	OnePlus
	6875-7125 MHz	-0.5	0	IFA(Inverted F Antenna)	AA550	OnePlus
NFC	13.56MHz	/	/	FPC(Flexible Printed Circuit) 25mm x 50mm	AA550	OnePlus
WPT	110-148.5KHz	/	/	Loop 45mm x 45mm	AA550	OnePlus

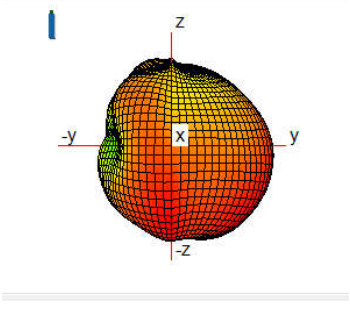
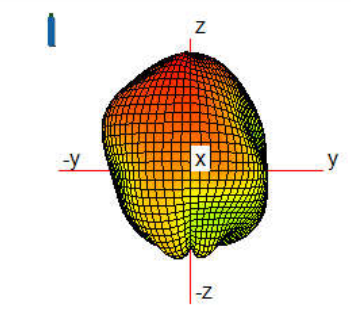
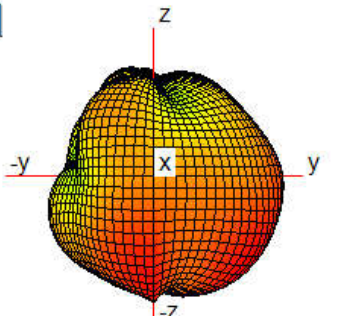
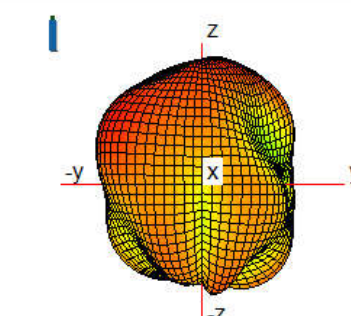
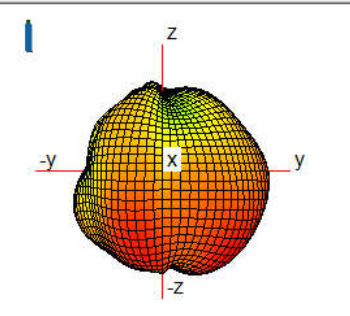
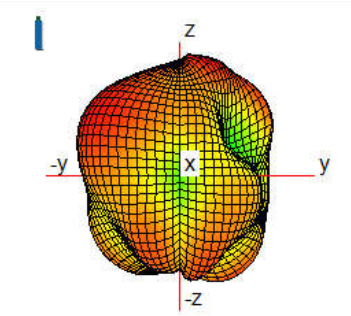
Table1 Antenna Gain and Antenna Type specification

Note: Antenna gain was measured in the anechoic chamber, 3D scan was exercised, and the highest numbers are reported in this document. According to Test standard: IEEE Std 149-2021, we measure antenna gain .

**Antenna Radiation Pattern:**



	
<p>ANT9 WiFi 5G B1 chain0 Gain: -1dB</p>	<p>ANT15 WiFi 5G B1 chain1 Gain: 3dB</p>
	
<p>ANT9 WiFi 5G B2 chain0 Gain: -1dB</p>	<p>ANT15 WiFi 5G B2 chain1 Gain:3dB</p>
	
<p>ANT9 WiFi 5G B3 chain0 Gain: -1.5dB</p>	<p>ANT15 WiFi 5G B3 chain1 Gain:2dB</p>
	
<p>ANT9 WiFi 5G B4 chain0 Gain:-1.5dB</p>	<p>ANT15 WiFi 5G B4 chain1 Gain: 2dB</p>
	
<p>ANT9 WiFi 6G B5 chain0 Gain: -1dB</p>	<p>ANT15 WiFi 6G B5 chain1 Gain: 1dB</p>

	
ANT9 WiFi 6G B6 chain0 Gain: -2dB	ANT15 WiFi 6G B6 chain1 Gain: -2.8dB
	
ANT9 WiFi 6G B7 chain0 Gain: -2dB	ANT15 WiFi 6G B7 chain1 Gain:-2dB
	
ANT9 WiFi 6G B8 chain0 Gain: -0.5dB	ANT15 WiFi 6G B8 chain1 Gain:0dB

**List of Test and Measurement Instruments**

**TEST EQUIPMENT**

NO.	Equipment	Manufacturer	Model No.	Cal.data	Cal.due
1	GTS RayZone-2800	General Test	SN636692864	2023/06/14	2024/06/14
2	Network Analyzer 5071C	Kesight	MY4690575	2023/06/10	2024/06/10
3.	MaxSign Libra Test software	General Test	Version-1.1.16	NA	NA

## I. Measurement Setup:

### A. Reflection Coefficient Measurement:

**Instrument:** Network Analyzer (Kesight E5071C).

**Setup:**

1. Calibrate the Network Analyzer by one port calibration using Kesight 85093C Electronic calibration module .
2. Connect the antenna under test to the Network Analyzer.
3. Measure the S11(reflection coefficient),Return Loss....

### B. Pattern Measurement:

A Fully Anechoic Chamber is used to simulate free-space conditions.

A Fully Anechoic Chamber is a shielded room lined with RF/microwave absorber on all walls, ceiling, and floor.

RF/microwave absorber reduces reflections from the inner walls of the shield.

Absorber performance depends on the depth and design of the absorber and the angle of incidence of the field.

Normal incidence is best, shallower angles are worse.

