

6 Randolph Way Hillsborough, NJ 08844 Tel: (908) 927 9288

Fax: (908) 927 0728

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

of

WALL MOUNTED RTA MODEL: **WMRTA** FCC ID: DWNWMRTA

May 03, 2013

This report concerns (check one): Original grant x Class II change  Equipment type: Low Power Intentional Radiator					
Deferred grant requested per 47 c Company agrees to notify the Co of the intended date of announce issued on that date.	If yes, defer until:(date)				
Transition Rules Request per 15.37? yes nox If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR [10-1-90 Edition] provision.					
Report prepared for: Report prepared by: Report number:	SOMFY SYSTEMS Inc. Advanced Compliance Lab 0048-130430-01				



The test result in this report IS supported and covered by the NVLAP accreditation

# **Table of Contents**

Report Cover Page1	l
Table of Contents2	2
Figures3	3
1. GENERAL INFORMATION4	1
1.1 Verification of Compliance4	ļ
1.2 Equipment Modifications5	5
1.3 Product Information	5
1.4 Test Methodology	ó
1.5 Test Facility	ó
1.6 Test Equipment	ó
1.7 Statement of the Document Use	7
2. PRODUCT LABELING	3
3. SYSTEM TEST CONFIGURATION9	)
3.1 Justification9	)
3.2 Special Accessories	)
3.3 Configuration of Tested System9	)
4. SYSTEM SCHEMATICS	13
5. CONDUCTED EMISSION DATA1	14
5.1 Test Methods and Conditions	4
5.2 Test Data	14
6. RADIATED EMISSION DATA1	17
6.1 Field Strength Calculation	17
6.2 Test Methods and Conditions	۱7
6.2 Test Data1	17
6.4. Occupied Bandwidth1	19
7 DHOTOS OF TESTED FUT	2

# **Figures**

Figure 2.1 FCC ID Label	8
Figure 2.2 Location of Label on Back of the EUT	8
Figure 3.1 Radiated Test Setup, Position 1	10
Figure 3.2 Radiated Test Setup, Position 2	10
Figure 3.3 Radiated Test Setup, Position 3	11
Figure 3.4 Conducted Test Setup, Front	12
Figure 3.5 Conducted Test Setup, Rear	12
Figure 4.1 EUT Schematics	13
Figure 5.1 Line Conducted	15
Figure 5.2 Neutral Conducted	16
Figure 6.1 Bandwidth Plot	19
Figure 6.2 Pulse Train Timing	21
Figure 7.1 Front View	23
Figure 7.2 Rear View	24
Figure 7.3 Insider View	25
Figure 7.4 Component Side	26
Figure 7.5 Foil Side	27

# 1. GENERAL INFORMATION

## 1.1 Verification of Compliance

EUT: WALL MOUNTED RTA

Model: WMRTA

Applicant: SOMFY SYSTEMS INC.

Test Type: FCC Part 15C CERTIFICATION (15.231(a))

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY

Test Date: May 03, 2013

Report Number: 0048-130430-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty $u_c$	norm.	±2.36	±2.99	±1.83

Date: May 03, 2013

Wei Li

Lab Manager

Advanced Compliance Lab

EUT: WALL MOUNTED RTA Model No: WMRTA FCC ID: DWNWMRTA Report No. 0048-130430-01 Date: May 03, 2013

# **1.2 Equipment Modifications**

N/A

## 1.3 Product Information

## **System Configuration**

ITEM	DESCRIPTION	FCC ID	CABLE
Product	WALL MOUNTED RTA (1)	DWNWMRTA	
Housing	PLASTICS		
Power Supply	3V Battery		
Operation Freq.	433.9 MHz		
Device Type	Periodic Operation		
Receiver	Receiver	Verification	

(1) EUT submitted for grant.

## 1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2003 at an antenna to EUT distance of 3 meters.

## 1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

## 1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A00290	3448A00290 EMI Receiver	
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	15/10/13 15/01/14
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/14
Fischer Custom	LISN-1	900-4-0008	Line Impedance Stabilization	18/03/14
			Networks	
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization	24/03/14
			Networks	
EMCO	3115	4945	Double Ridge Guide Horn Antenna	22/01/14
Agilent	E4440A	US40420700	PSA Spectrum Analyzer	25/08/14

All Test Equipment Used are Calibrated Traceable to NIST Standards.

EUT: WALL MOUNTED RTA
FCC ID: DWNWMRTA
Report No. 0048-130430-01
Model No: WMRTA
Date: May 03, 2013

## 1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

## 2. PRODUCT LABELING

## FCC ID: DWNWMRTA

This device complies with part 15 of the FCC Rules. Operating is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.




Figure 2.1 FCC ID Label

Figure 2.2 FCC ID Label Location

## 3. SYSTEM TEST CONFIGURATION

## 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). Its antenna is on PCB. The EUT is WALL MOUNTED RTA and does not send data.

The transmission does stop when the button is released after the completion of the frame. The length of the time is less than 5 seconds. The transmissions can only be triggered manually and cannot be triggered automatically/pre-programed to operate at a specific time.

Testing was performed as EUT was operated continuously. Fresh batteries were used.

## 3.2 Special Accessories

N/A

## 3.3 Configuration of Tested System

Figure 3.1 to Figure 3.5 illustrate this system, which is tested standing along.



Figure 3.1 Radiated Test Setup, position 1-X



Figure 3.2 Radiated Test Setup, position 2-Y



Figure 3.3 Radiated Test Setup, position 3-Z

## N/A

# **Figure 3.4 Conducted Setup- Front**

## N/A

**Figure 3.5 Conducted Setup- Rear** 

EUT: WALL MOUNTED RTA Model No: WMRTA FCC ID: DWNWMRTA Report No. 0048-130430-01 Date: May 03, 2013

# 4. SYSTEM SCHEMATICS

See Attachment.

**Figure 4.1 System Schematics** 

\_\_\_\_\_

## 5. CONDUCTED EMISSION DATA

#### **5.1 Test Methods and Conditions**

The EUT was under normal operational mode during the conducted emission test. EMI Receiver was scanned from 150KHz to 30MHz with maximum hold mode for maximum emission. Recorded data was sent to the plotter to generate output in linear format. At the input of the spectrum analyzer, a HP transient limiter is inserted for protective purpose. This limiter has a 10 dB attenuation in the range of 150KHZ to 30MHZ. That factor was automatically compensated by the receiver, so the readings are the corrected readings. The reference of the plot is the CISPR 22 Class B limit in Figure 5.1 through Figure 5.2.

Conducted Emission Technical Requirements						
	Cla	ss A	Class B			
Frequency Range	Quasi-Peak	Average	Quasi-Peak	Average		
	dBuV	dBuV	DBuV	dBuV		
150kHz -0.5MHz	79 (8912uV)	66 (1995uV)	66-56	56-46		
0.5MHz-30MHz	73 (4467uV)	60 (1000uV)				
0.5MHz- 5MHz			56	46 (250uV)		
5MHz-30MHz			60	50		

Emissions that have peak values close to the specification limit (if any) are also measured in the quasi-peak mode to determine compliance.

## 5.2 Test Data

TAT/A

Figure 5.1-5.2 show the neutral and line conducted emissions for the standard operation.

IV/A	
Test Personnel:	
Tester Signature:	Date:
Typed/Printed Name:	

<u>N/A</u>

Fig. 5.1 Conducted Emission-Line

## <u>N/A</u>

Fig. 5.2 Conducted Emission- Neutral

## 6. RADIATED EMISSION DATA

## **6.1 Field Strength Calculation**

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dBμV/m

RA: Amplitude of EMI Receiver before correction in dBµV

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

The pulse train timing plots are showed in Figure 6.2 and attached operation description file, which explains how the worst case time in 100ms was determined:

The total time for each pulse train is 139.62 ms, The short pulse is 0.640ms, The middle pulse is 2.5 ms, The long pulse is 4.8ms.

Coeff. = (55x0.640+1x4.8+5x2.5)/100=0.525

The maximum average field strength should be 0.525 of the peak field strength measured. So we use peak value minus 5.6dB as calculated maximum average field strength.

#### 6.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range under 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Up to 10<sup>th</sup> harmonics were investigated.

#### 6.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 6.1.

Test Personnel: I have

Typed/Printed Name: Edward Lee

#### **Radiated Test Data**

Nauiaic	u I CSt D	ata							
Freq. (MHz)	Worst H/V	Height.	Azimut h	Peak@3m (dBuV/m)	QP/Avg @3m (dBuV/m)	PK Lim (dBu V/m)	QP /Avg. Lim (dBuV/m)	PK Margin (dBuV/m)	QP/Avg. Margin. (dBuV/m)
434	H,X(1)	1.0	180	83.9	78.3	100.8	80.80(3)	-16.9	-2.5
868	Н,Х	1.0	000	59.5	53.9	80.8	60.80(4)	-21.3	-6.9
1302	Н,Х	1.1	235	52.4	46.8	74	54.0(2)	-21.6	-7.2
1736	Н,Х	1.1	270	55.3	49.7	80.8	60.80	-25.5	-11.1
2710	Н,Х	1.1	090	52.3	46.7	74	54.0(2)	-21.7	-7.3
434	V,X	1.1	270	70.6	65	100.8	80.80	-30.2	-15.8
868	V,X	1.1	238	51.8	46.2	80.8	60.80	-29	-14.6
1302	V,X	1.1	090	53.4	47.8	74	54.0	-20.6	-6.2
1736	V,X	1.0	090	53.4	47.8	80.8	60.80	-27.4	-13.0
2710	V,X	1.0	180	50.7	45.1	74	54.0	-23.3	-8.9
434	H,Y	1.0	000	82.1	76.5	100.8	80.80	-18.7	-4.3
868	H,Y	1.0	315	56.6	51.0	80.8	60.80	-24.2	-9.8
1302	H,Y	1.1	180	50.8	45.2	74	54.0	-23.2	-8.8
1736	H,Y	1.1	000	53.3	47.7	80.8	60.80	-27.5	-13.1
2710	H,Y	1.1	315	52.3	46.7	74	54.0	-21.7	-7.3
434	V,Y	1.1	270	76.8	71.2	100.8	80.80	-24	-9.6
868	V,Y	1.0	090	55.1	49.5	80.8	60.80	-25.7	-11.3
1302	V,Y	1.0	090	55.6	50.0	74	54.0	-18.4	-4.0
1736	V,Y	1.1	270	54.3	48.7	80.8	60.80	-26.5	-12.1
2710	V,Y	1.1	180	53.2	47.6	74	54.0	-20.8	-6.4
434	H,Z	1.0	000	74.9	69.3	100.8	80.80	-25.9	-11.5
868	H,Z	1.0	180	54.9	49.3	80.8	60.80	-25.9	-11.5
1302	H,Z	1.1	315	52.3	46.7	74	54.0	-21.7	-7.3
1736	H,Z	1.1	000	53.9	48.3	80.8	60.80	-26.9	-12.5
2710	H,Z	1.1	000	51.7	46.1	74	54.0	-22.3	-7.9
434	V,Z	1.0	180	81.9	76.3	100.8	80.80	-18.9	-4.5
868	V,Z	1.0	270	58.3	52.7	80.8	60.80	-22.5	
1302	V,Z	1.1	000	54.4	48.8	74	54.0	-19.6	
1736	V,Z	1.1	000	57.4	51.8	80.8	60.80	-23.4	
2710	V,Z	1.1	000	53.2	47.6	74	54.0	-20.8	-6.4

<sup>(1)</sup> See Figure 3.1, 3.2 and 3.3 for definition of position X-1, Y-2, Z-3.

## 6.4 Occupied Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency, in this case, 1.0848MHz(433.92x0.25%). Bandwidth is determined at the points 20dB down from the modulated carrier. Figure 5.2 shows the occupied bandwidth plot.

<sup>(2)</sup> Restricted band.

<sup>(3)</sup> Fundamental limit is 3750-12500 microvolts/meter linear interpolations (average reading) for 260-

<sup>470</sup> MHz fundamental frequency range; 4390uV/m for 433.4MHz Fundamental. Per FCC 15.231(b).

<sup>(4)</sup> Spurious limit is 375-1250 microvolts/meter linear interpolations (average reading). Per 15.231(b).






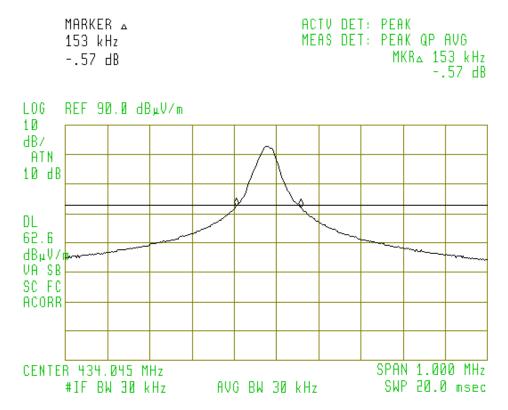


Figure 6.1 Occupied Bandwidth

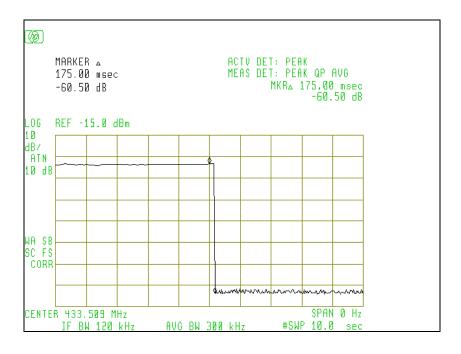

Tx stopped within 5s after button released

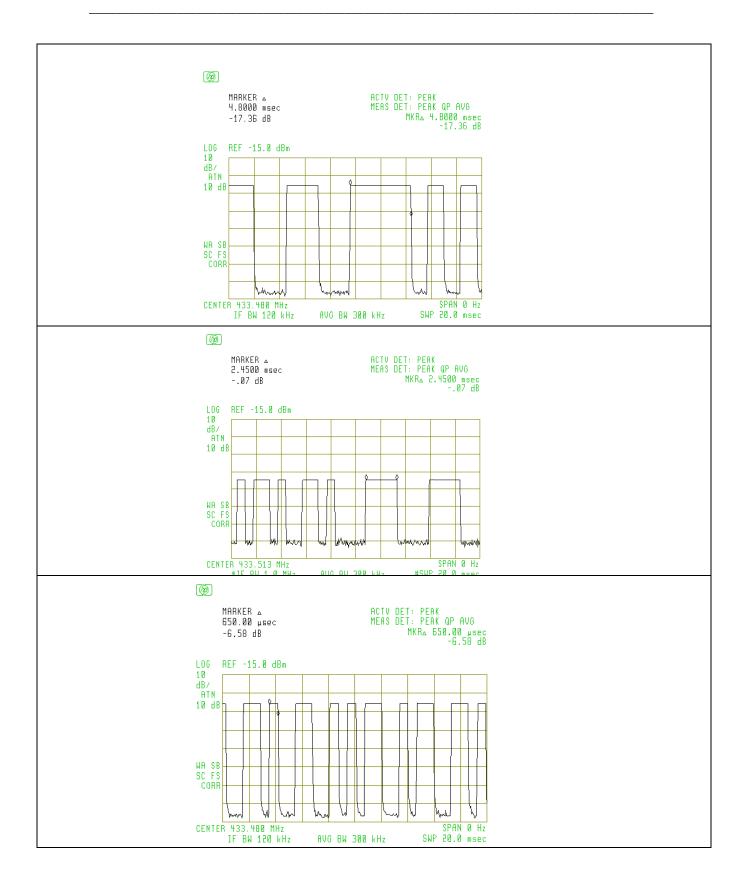

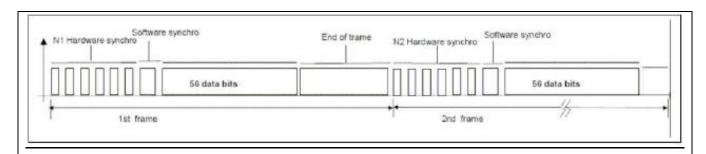

Details and calculations are provided in Operational Description File:

The pulse train timing plots are showed in Figure 6.2 and attached operation description file, which explains how the worst case time in 100ms was determined:

The total time for each pulse train is 139.62 ms, The short pulse is 0.640ms, The middle pulse is 2.5 ms, The long pulse is 4.8ms.

Coeff. =(55x0.640+1x4.8+5x2.5)/100=0.525

The maximum average field strength should be 0.525 of the peak field strength measured. So we use peak value minus 5.6dB as calculated maximum average field strength.

Figure 6.2 Pulse Train Timing

EUT: WALL MOUNTED RTA Model No: WMRTA FCC ID: DWNWMRTA Report No. 0048-130430-01 Date: May 03, 2013

## 7. PHOTOS OF TESTED EUT

The following photos show the inside details of the EUT.