


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac20	5180	Ant1	17.98
NVNT	ac20	5200	Ant1	17.878
NVNT	ac20	5240	Ant1	18.145
NVNT	ac20	5180	Ant2	17.896
NVNT	ac20	5200	Ant2	17.971
NVNT	ac20	5240	Ant2	18.391
NVNT	ac40	5190	Ant1	36.566
NVNT	ac40	5230	Ant1	36.632
NVNT	ac40	5190	Ant2	36.602
NVNT	ac40	5230	Ant2	36.596
NVNT	ac80	5210	Ant1	76.312
NVNT	ac80	5210	Ant2	76.144
NVNT	ac160	5250	Ant1	154.593
NVNT	ac160	5250	Ant2	154.713
NVNT	ax160	5250	Ant1	156.536
NVNT	ax160	5250	Ant2	156.44
NVNT	ax20	5180	Ant1	19.171
NVNT	ax20	5200	Ant1	19.189
NVNT	ax20	5240	Ant1	19.063
NVNT	ax20	5180	Ant2	19.072
NVNT	ax20	5200	Ant2	19.15
NVNT	ax20	5240	Ant2	19.255
NVNT	ax40	5190	Ant1	37.856
NVNT	ax40	5230	Ant1	37.874
NVNT	ax40	5190	Ant2	37.886
NVNT	ax40	5230	Ant2	37.85
NVNT	ax80	5210	Ant1	77.704
NVNT	ax80	5210	Ant2	77.596



Test Graphs



OBW NVNT ac20 5180MHz Ant1


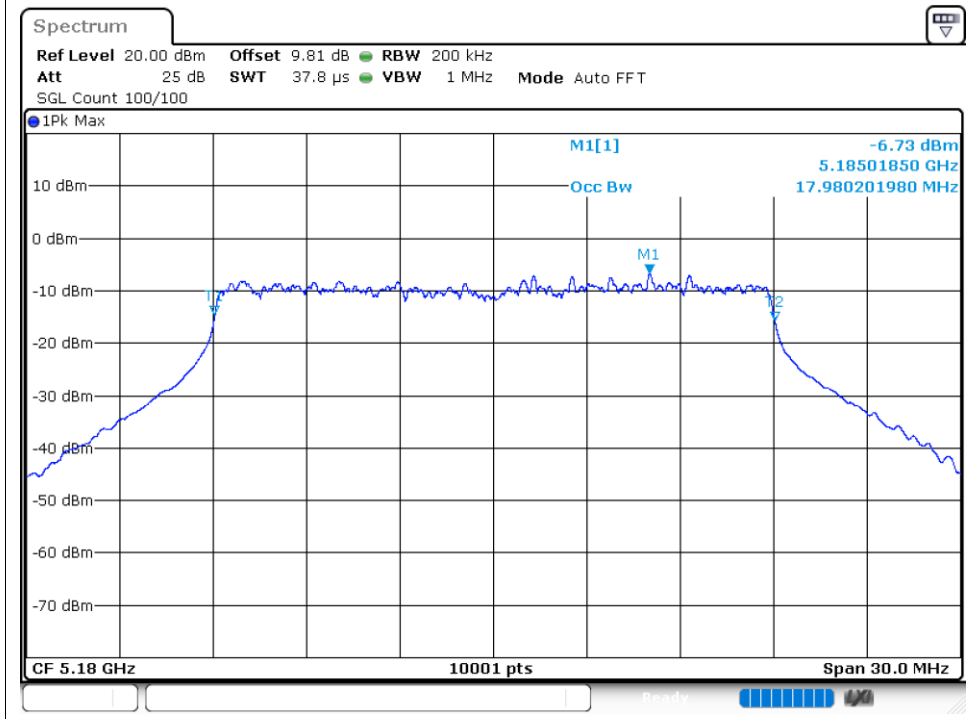




OBW NVNT ac20 5200MHz Ant1


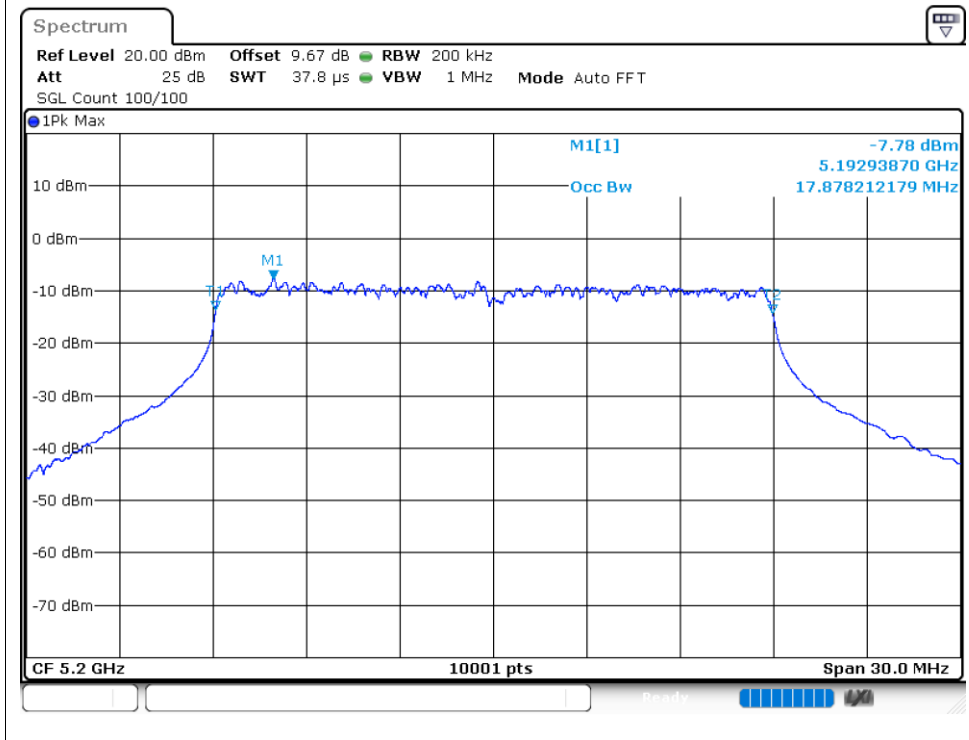


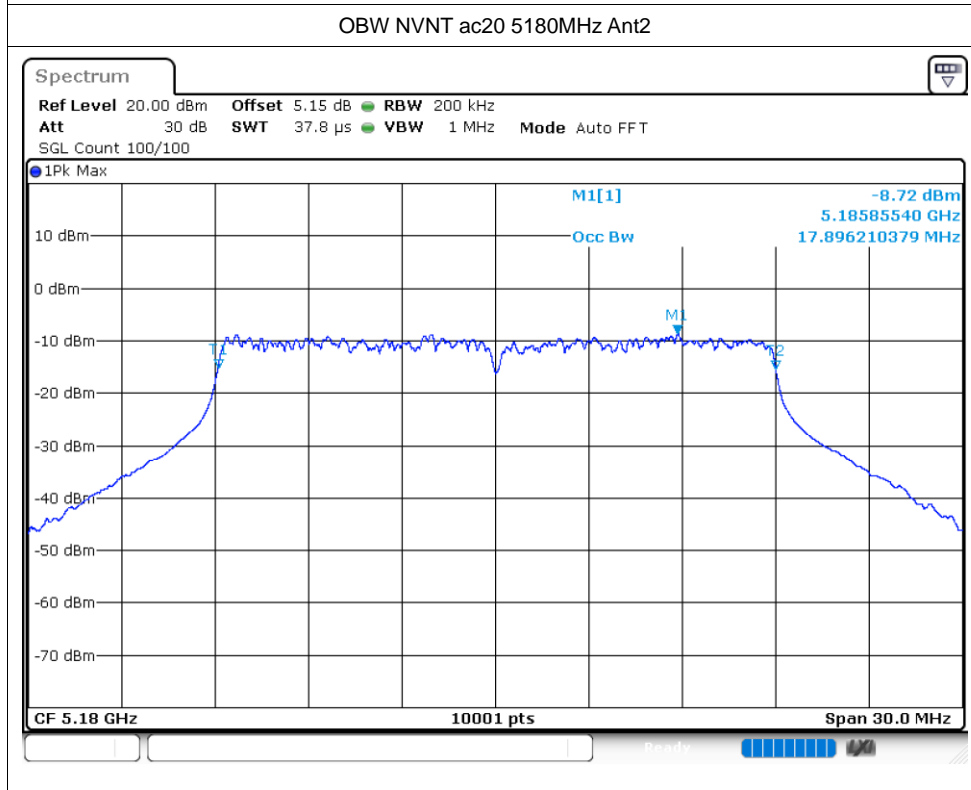
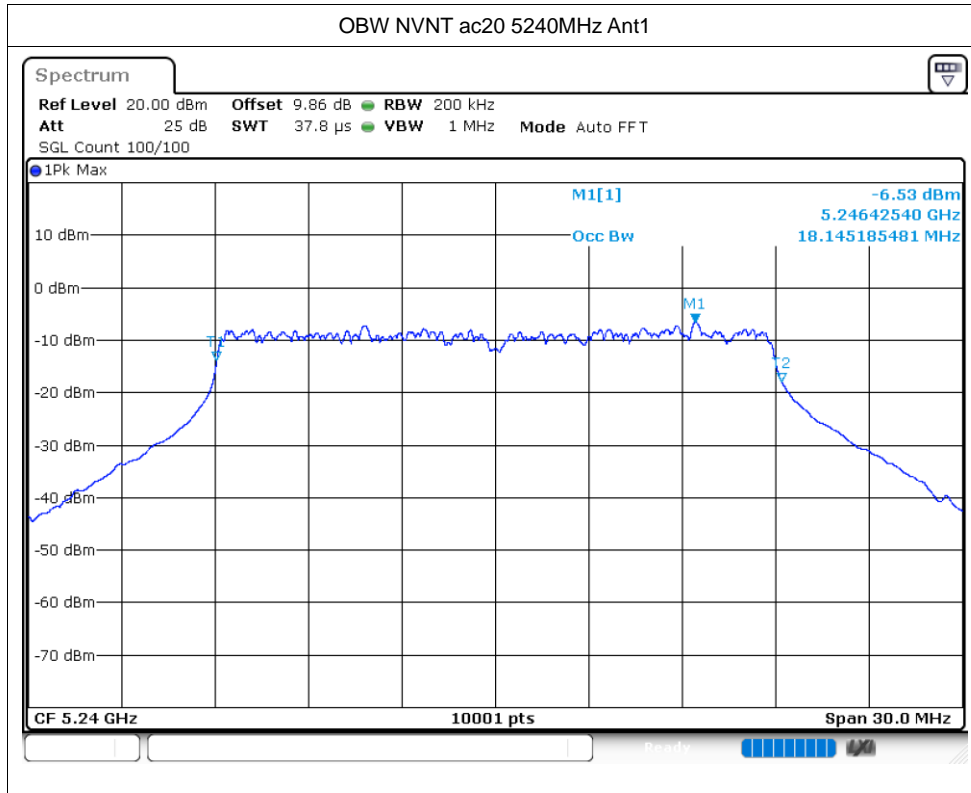


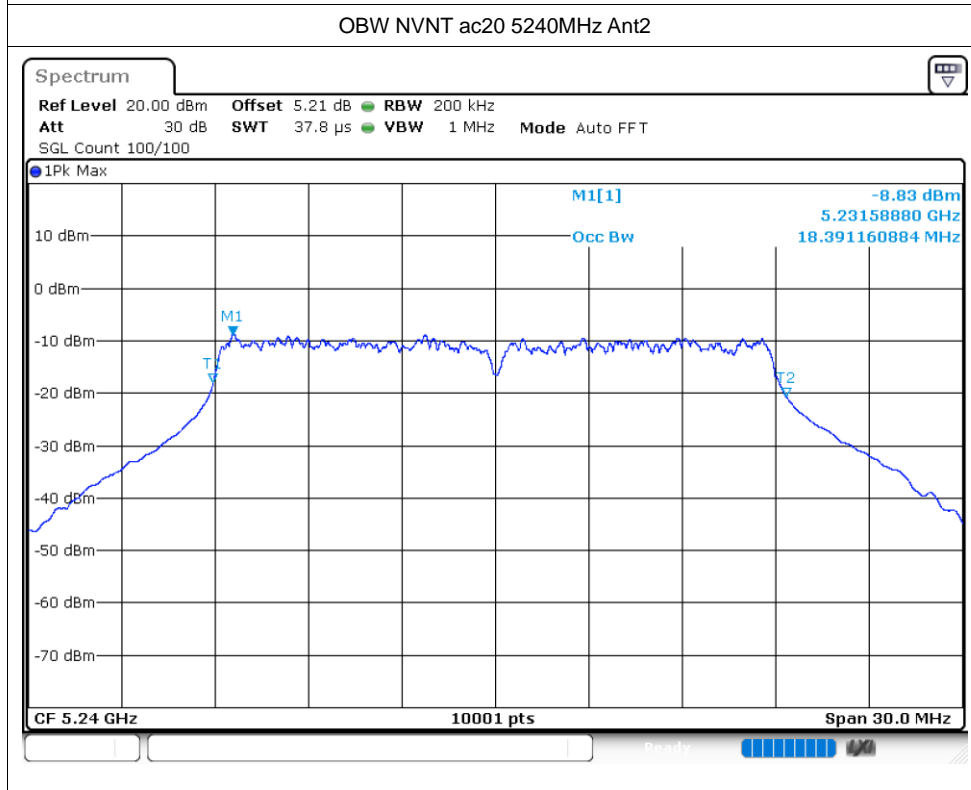
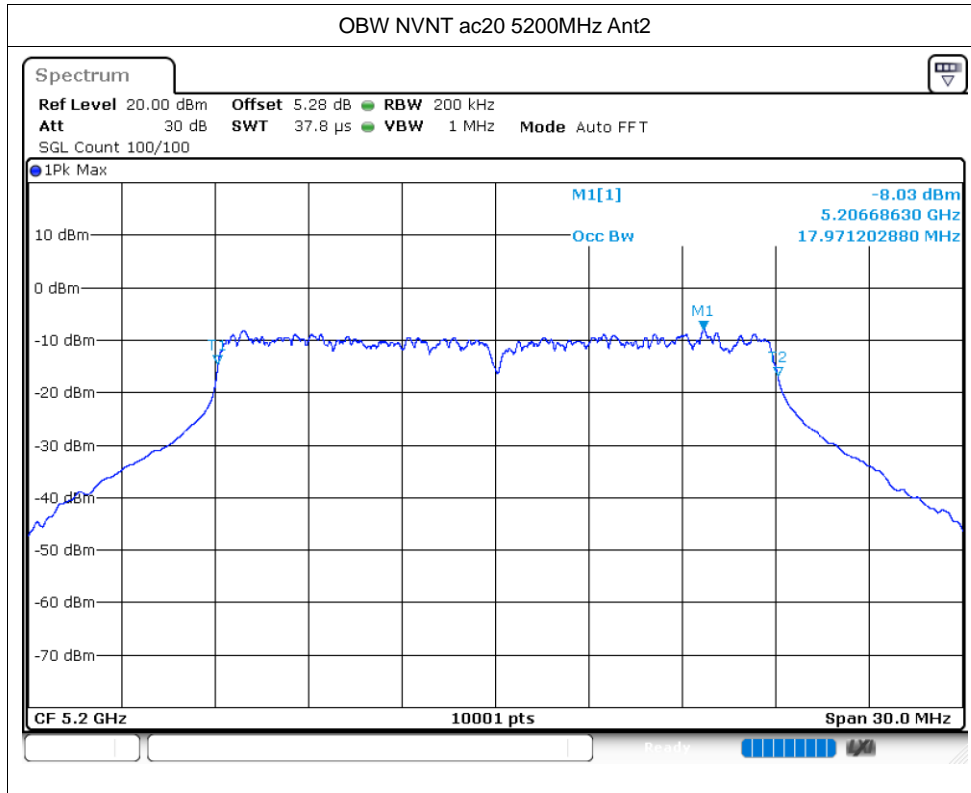


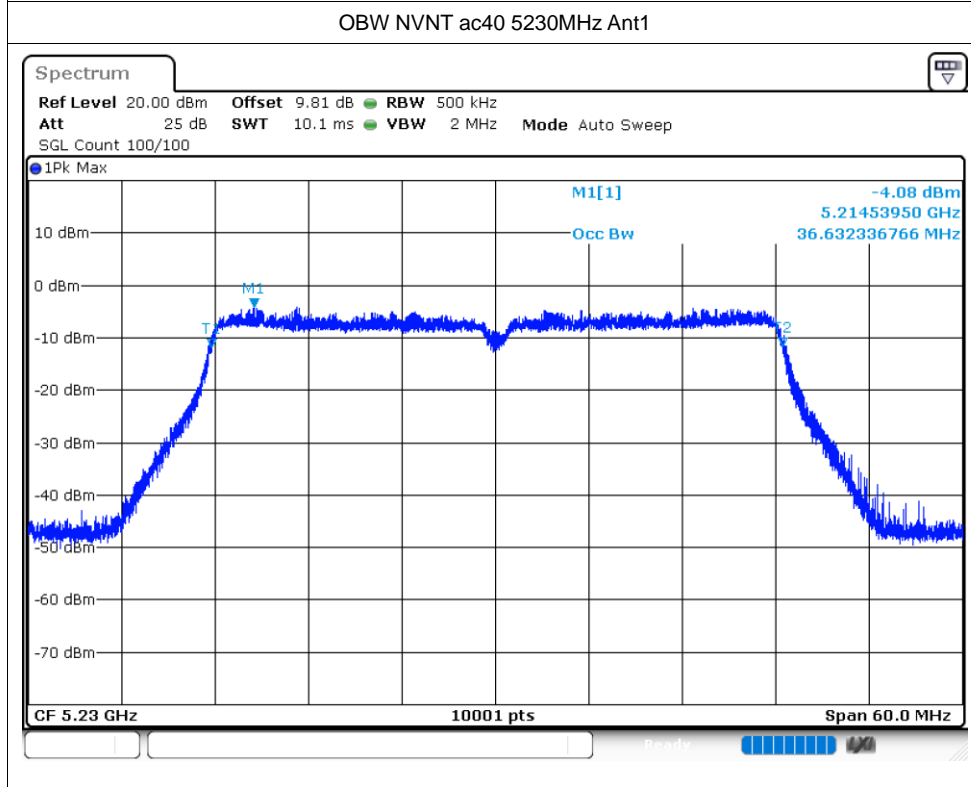
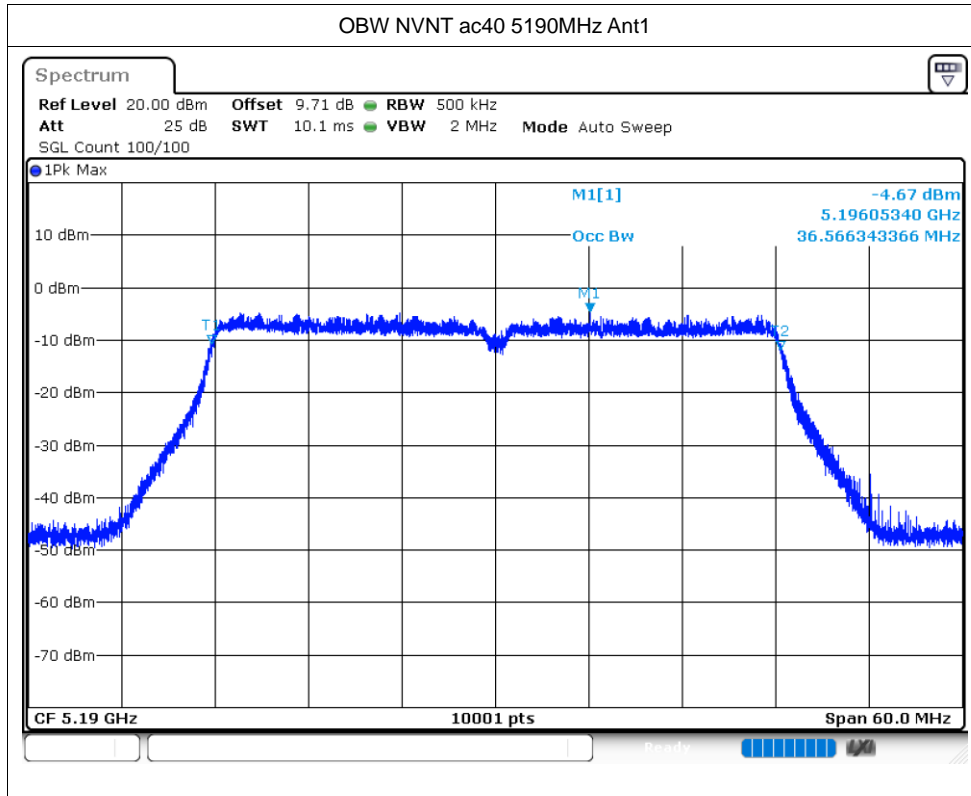


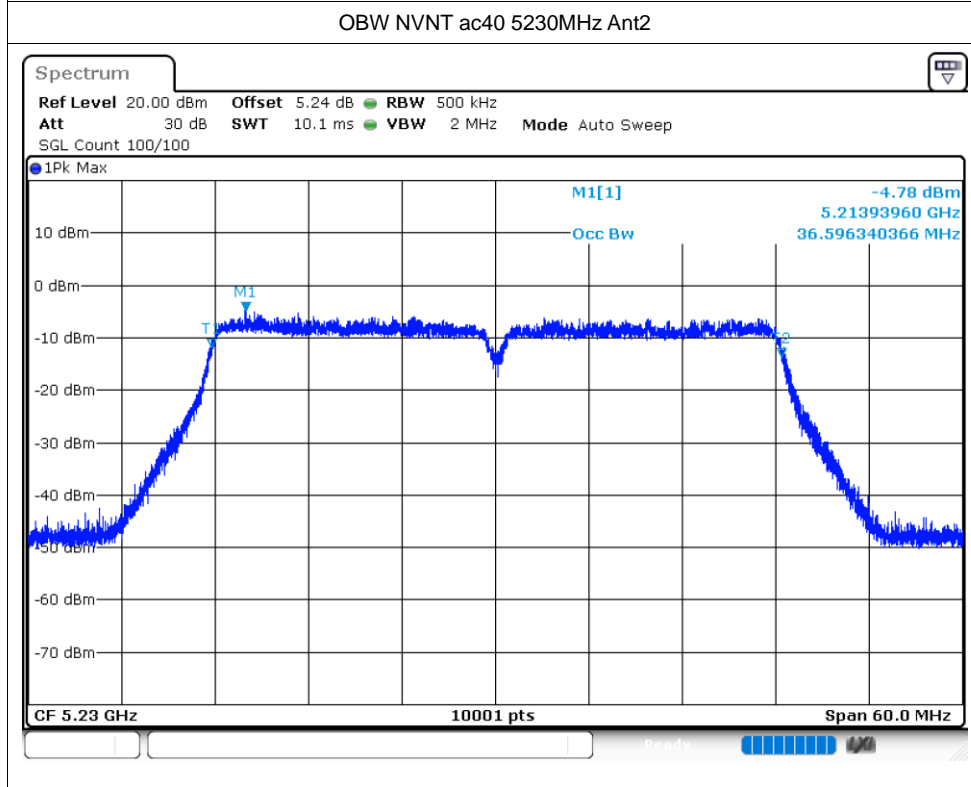
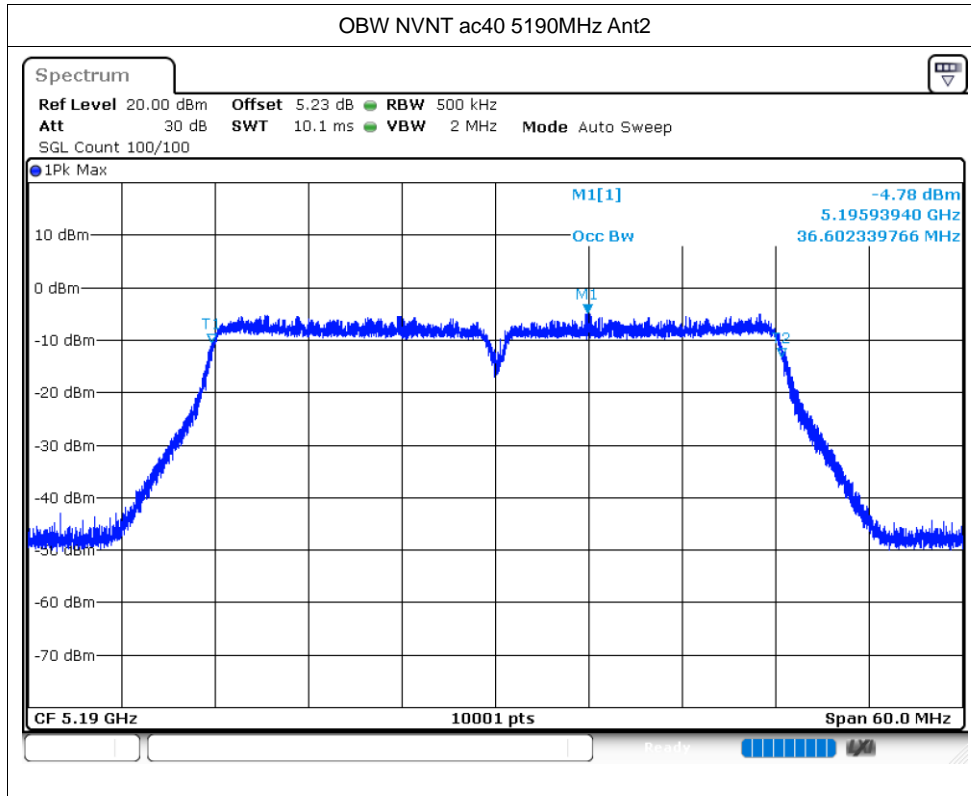


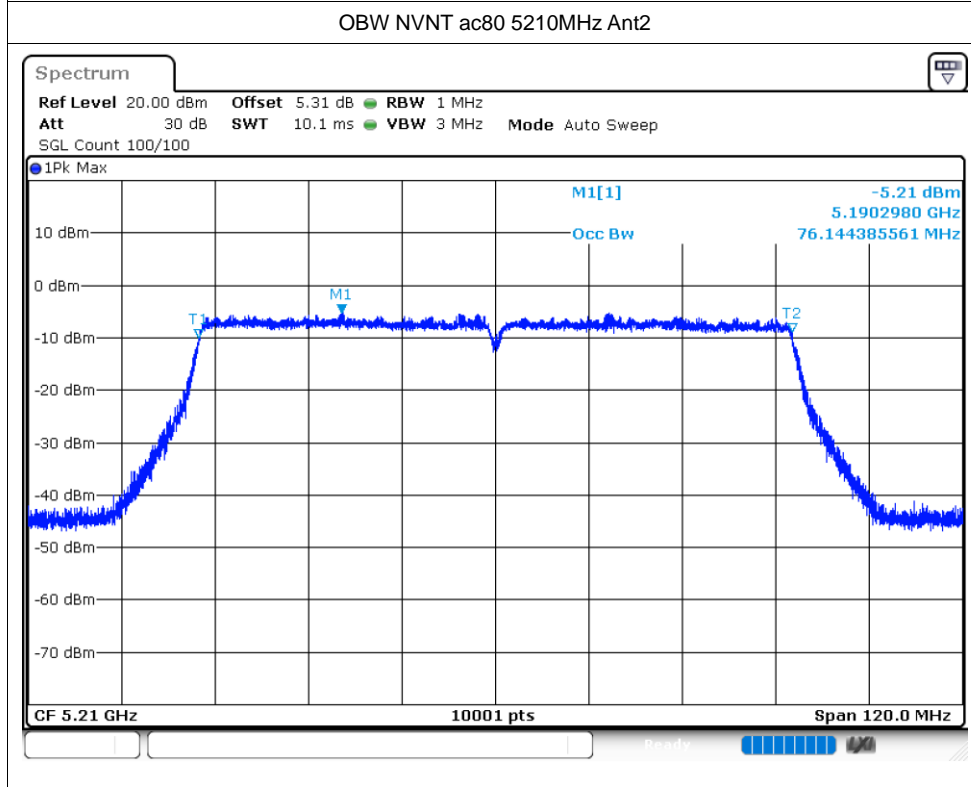
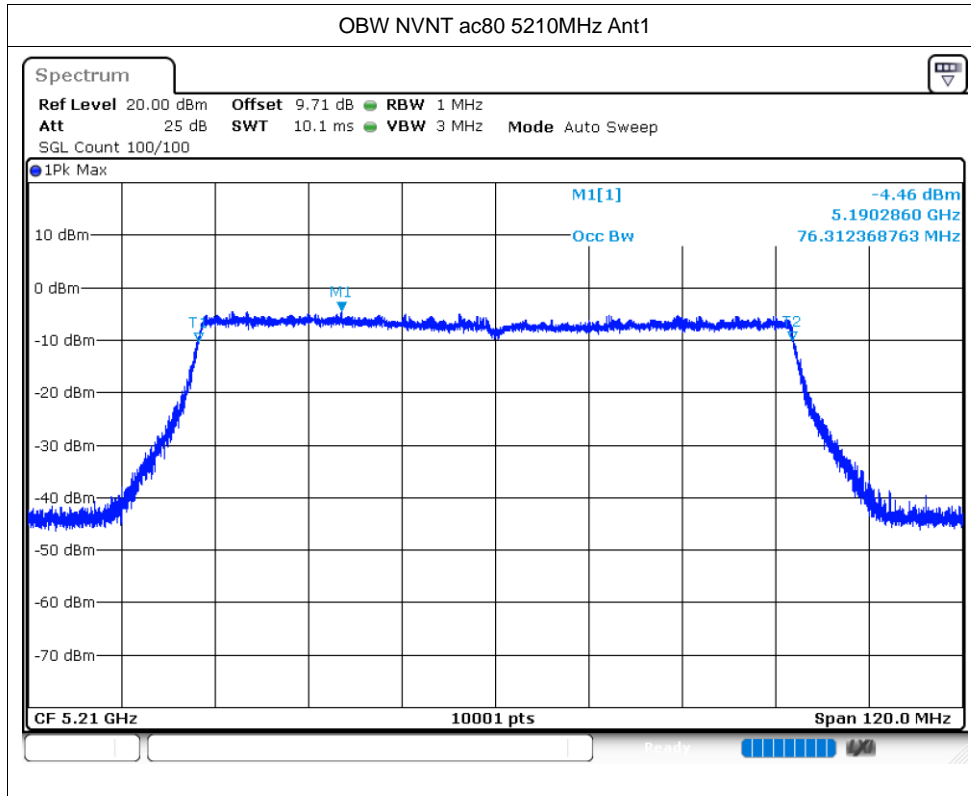


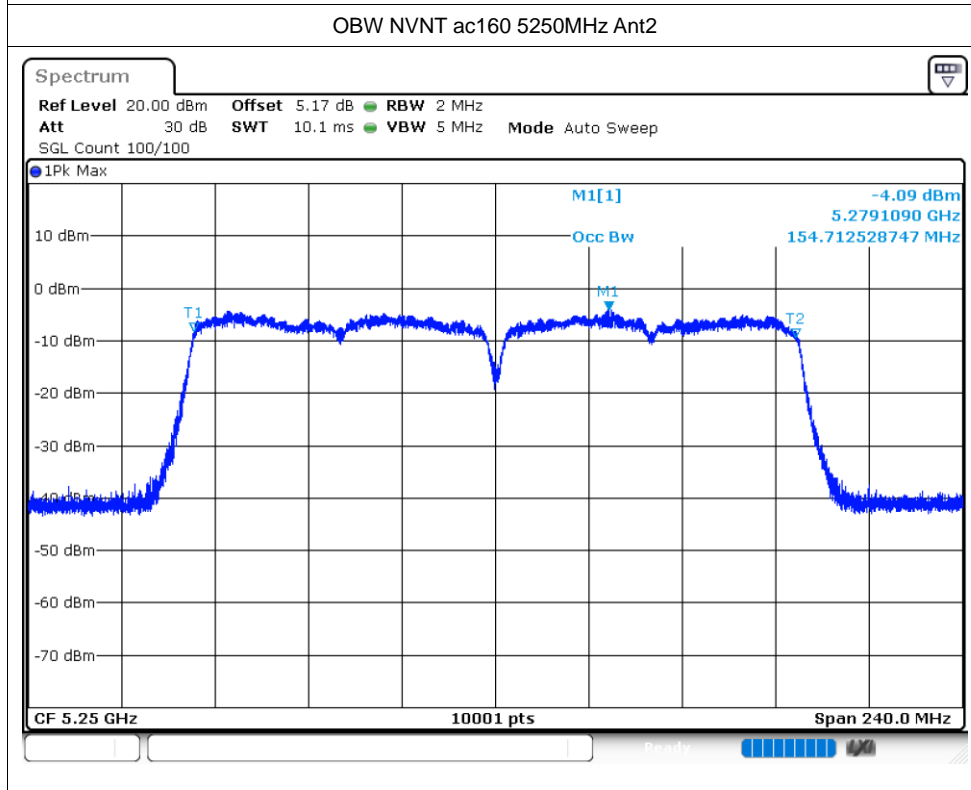
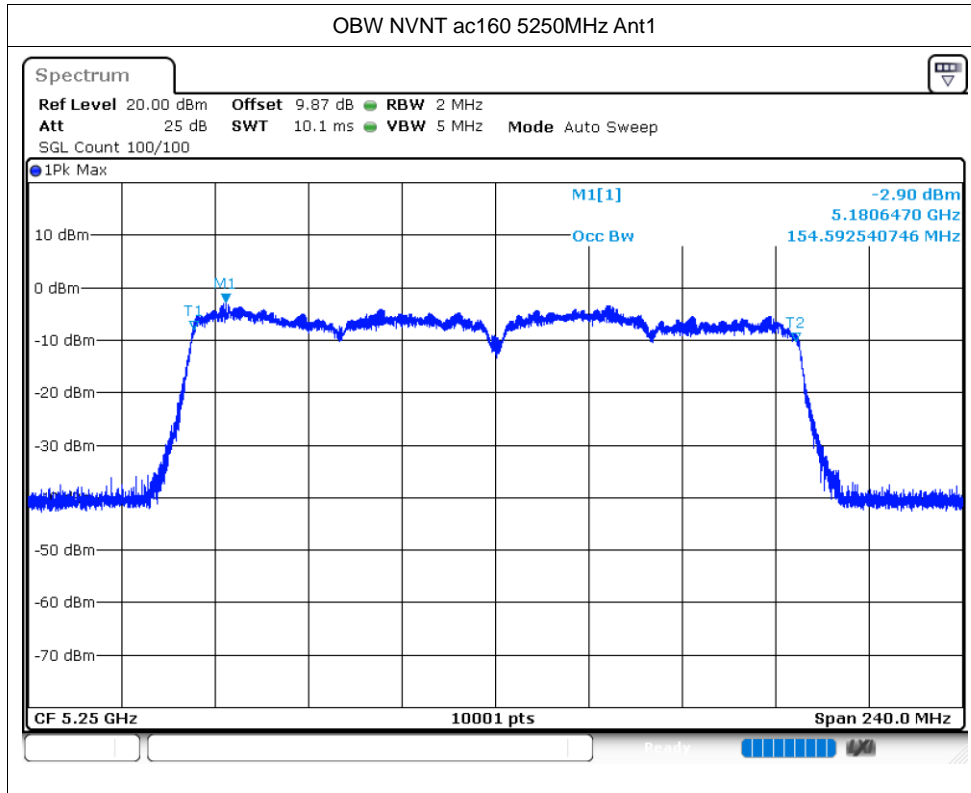


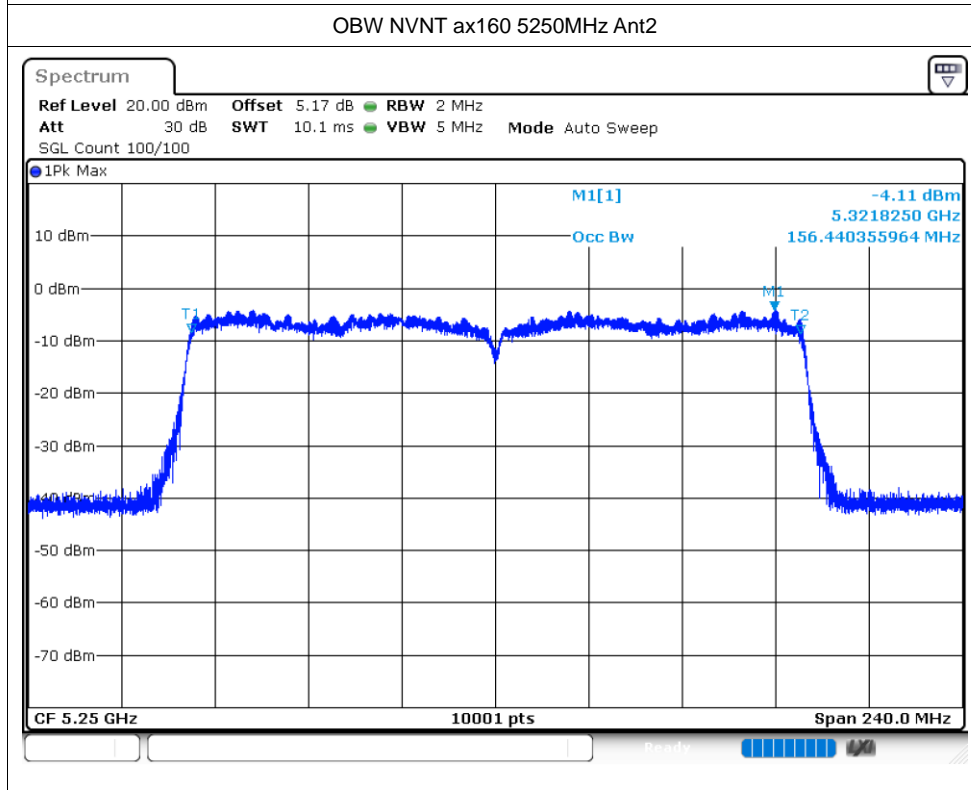
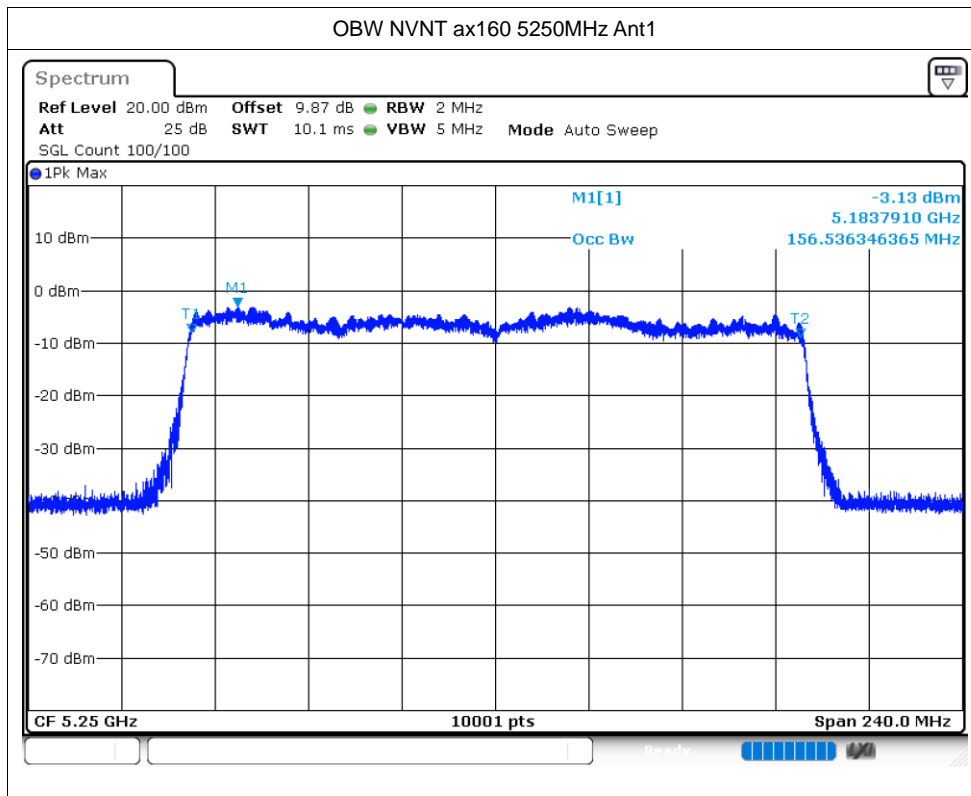


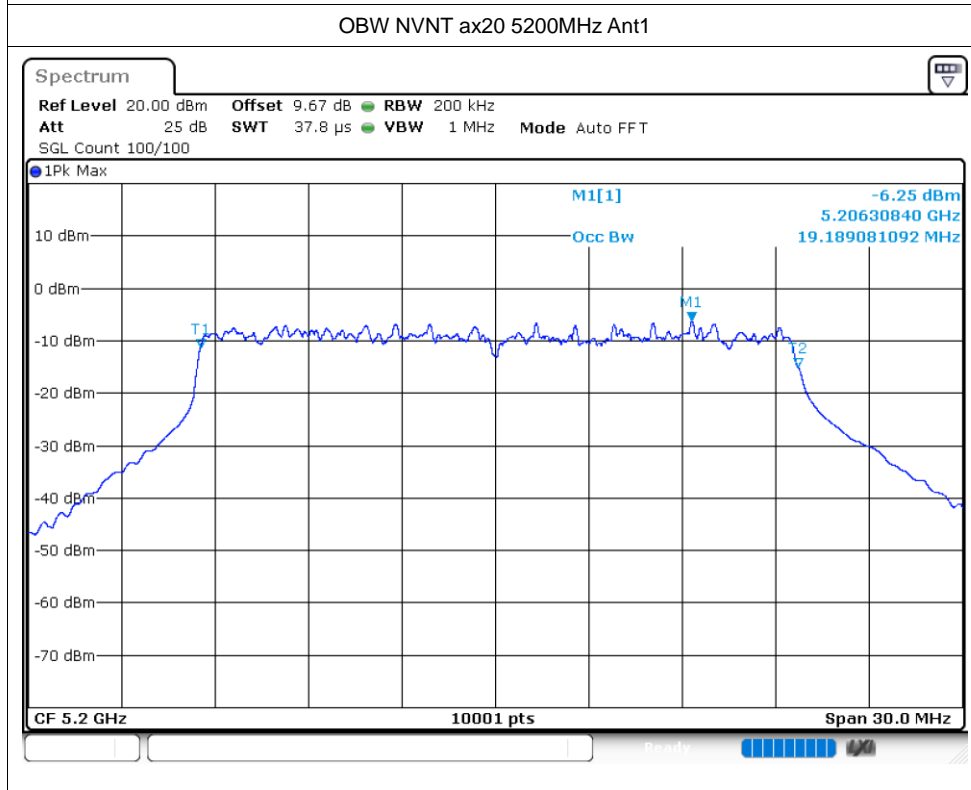
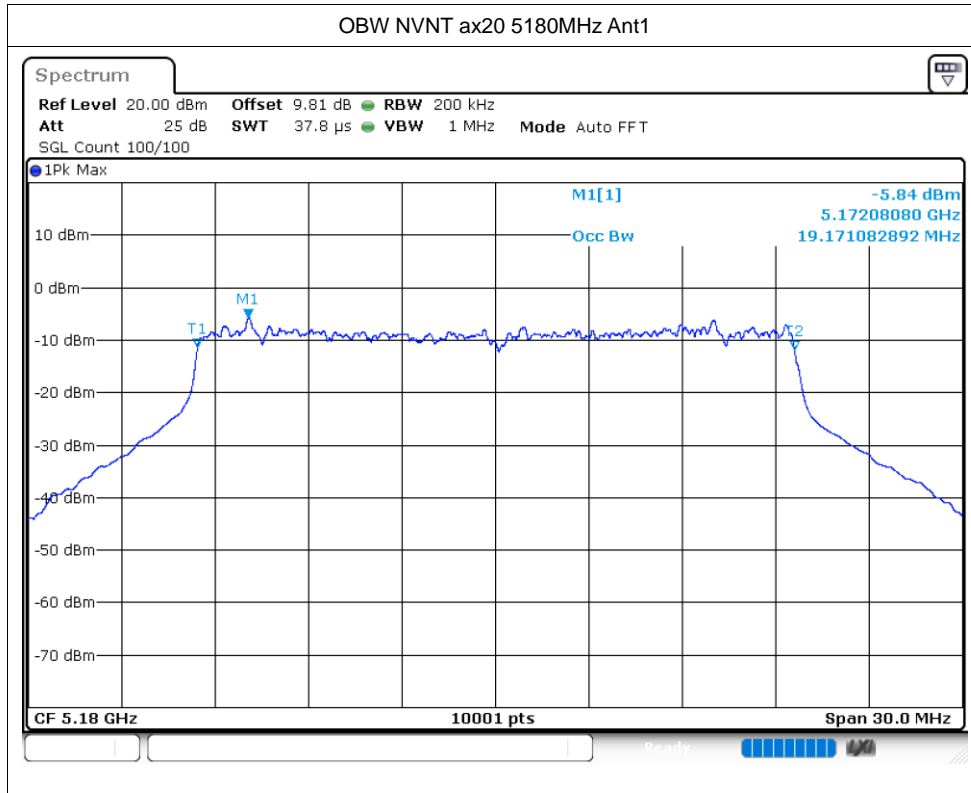


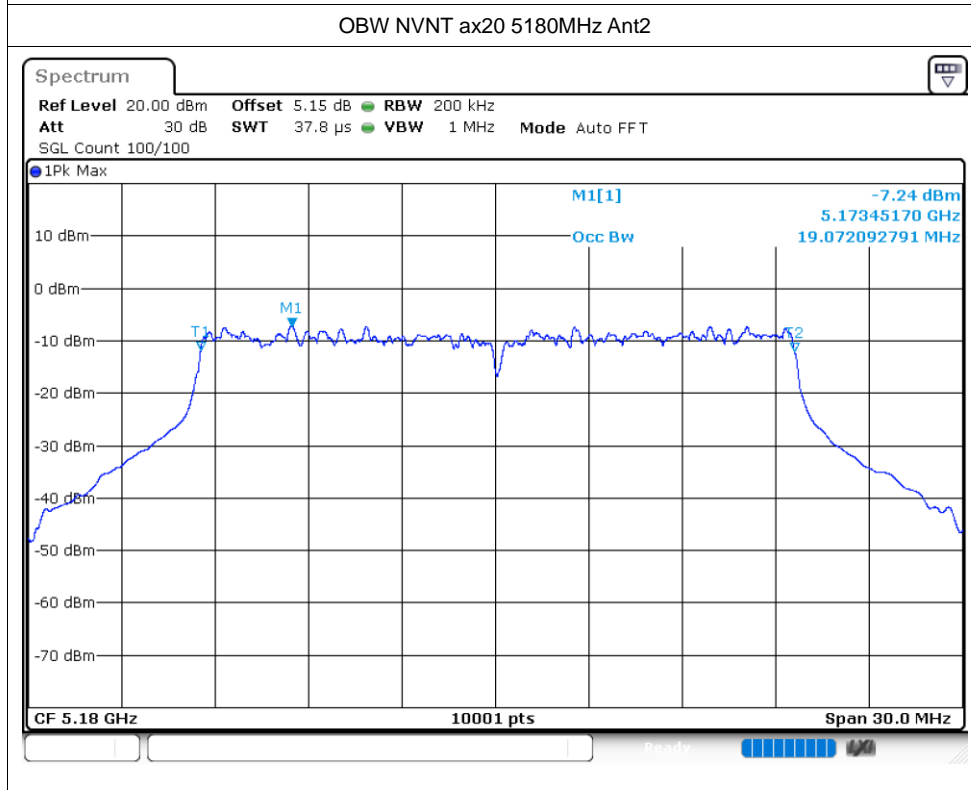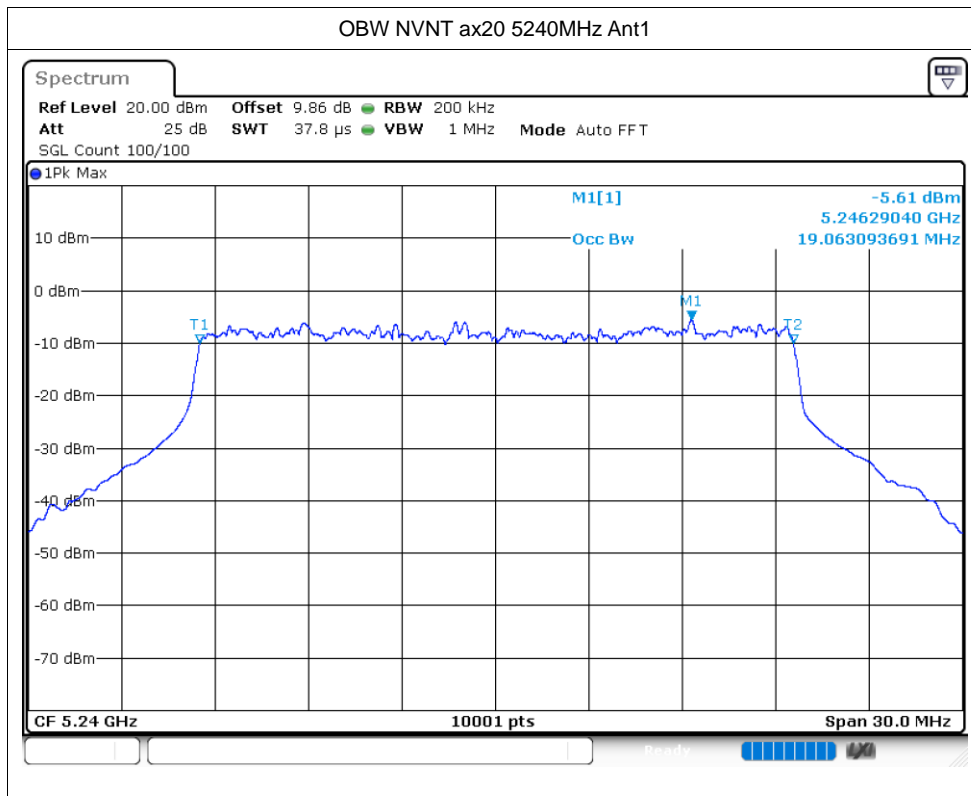

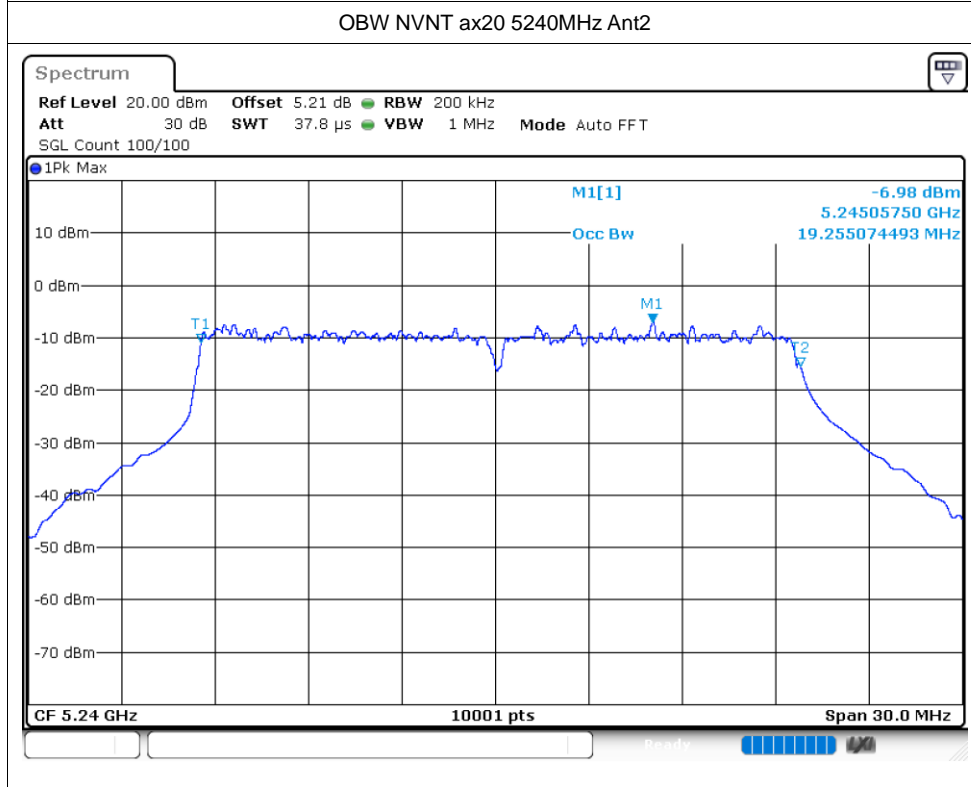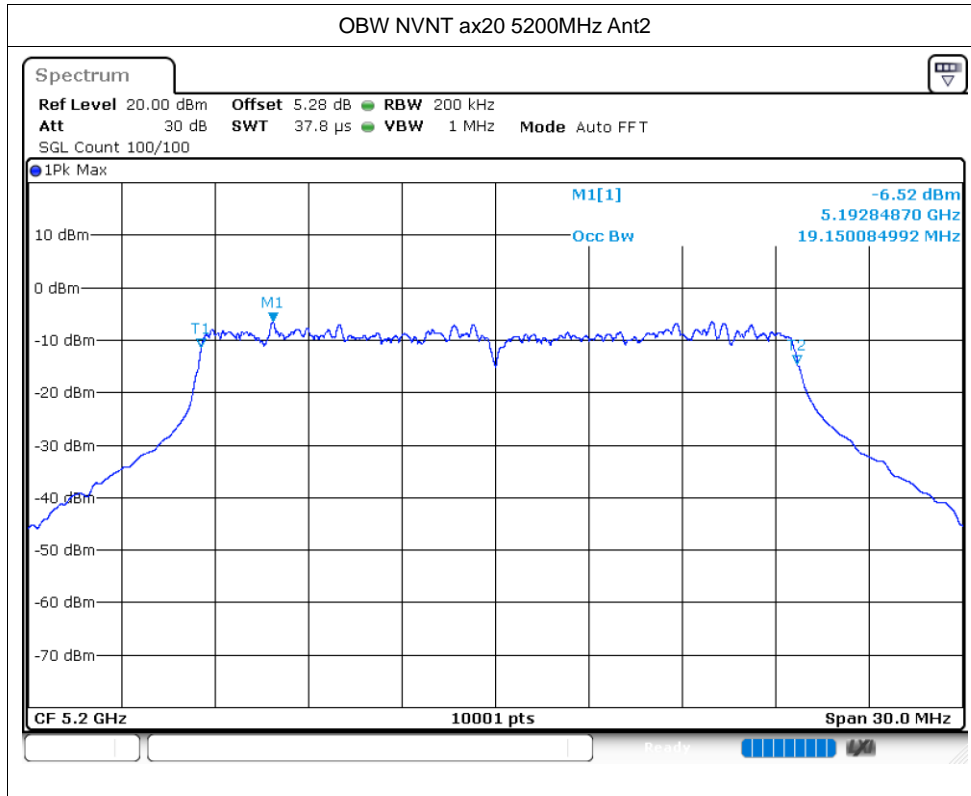

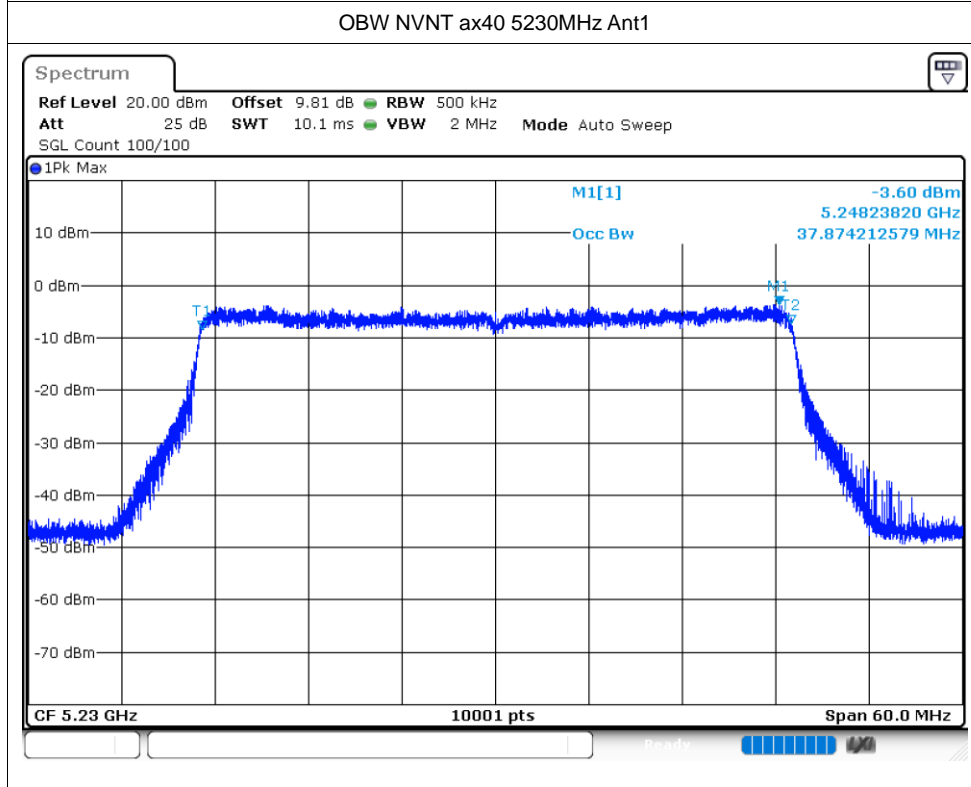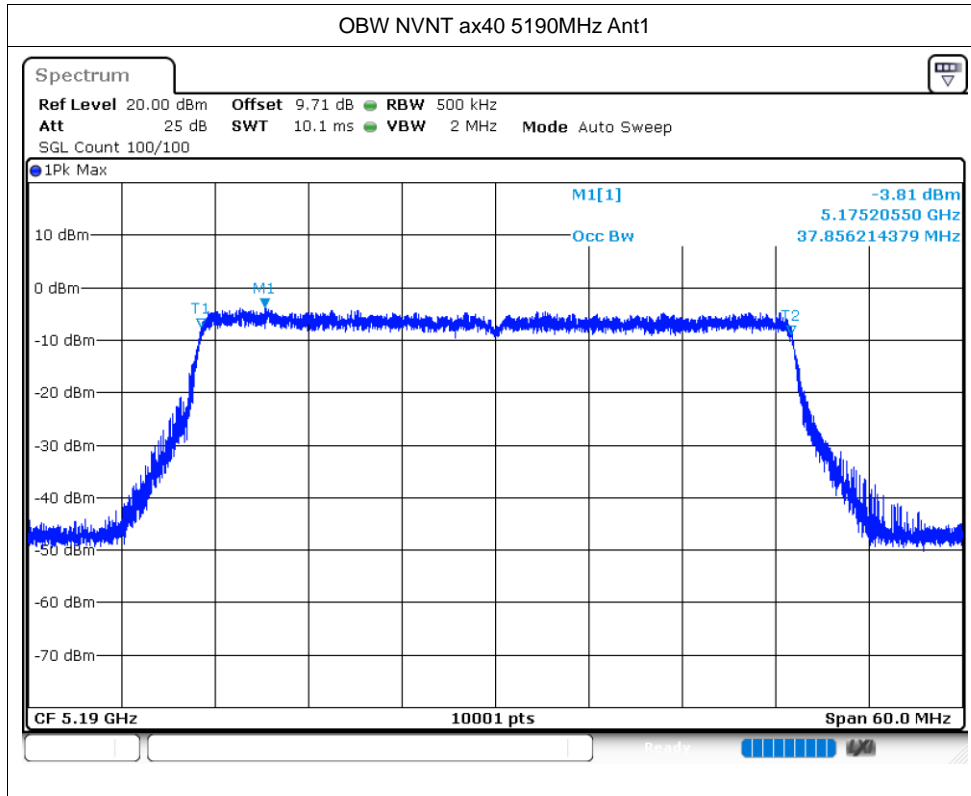

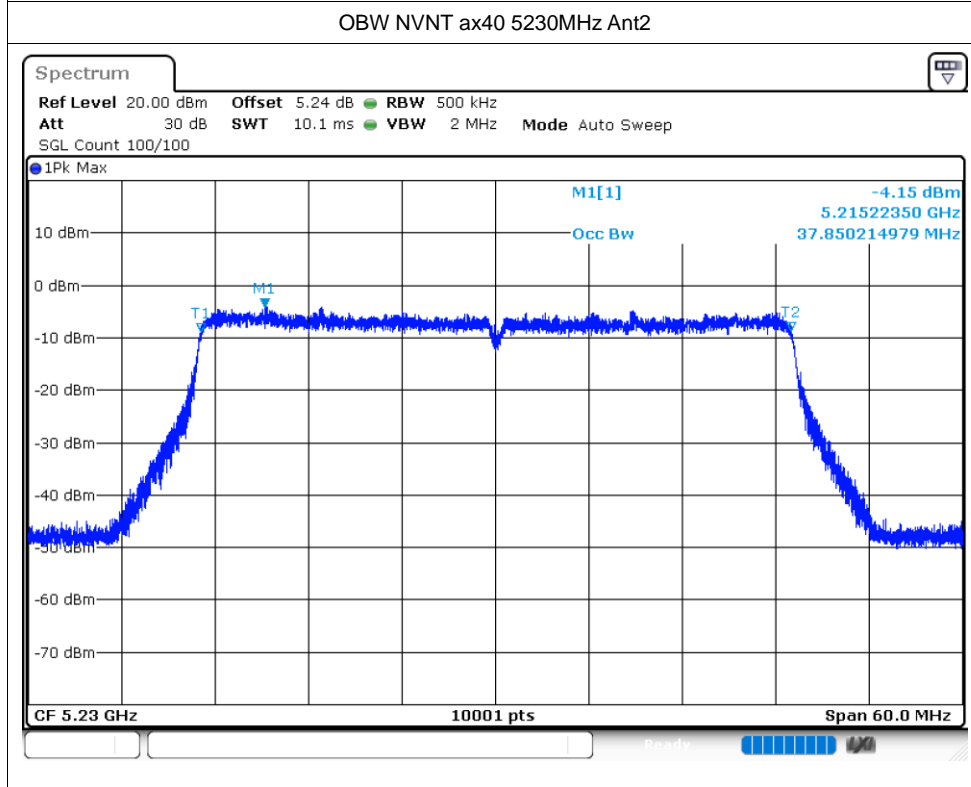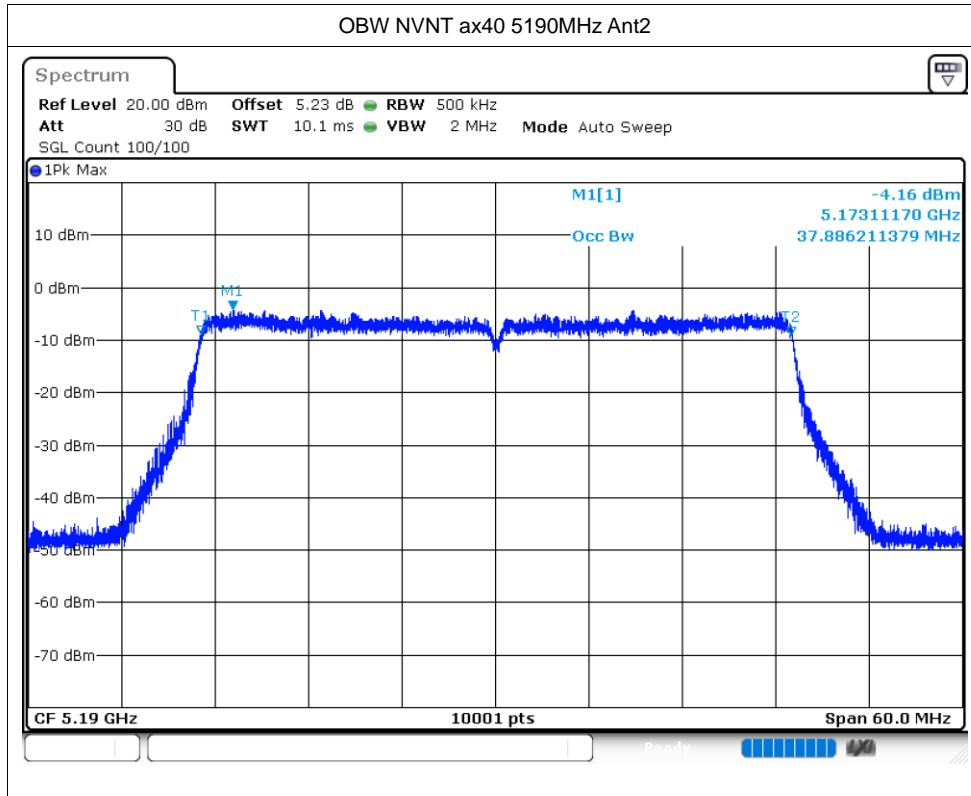

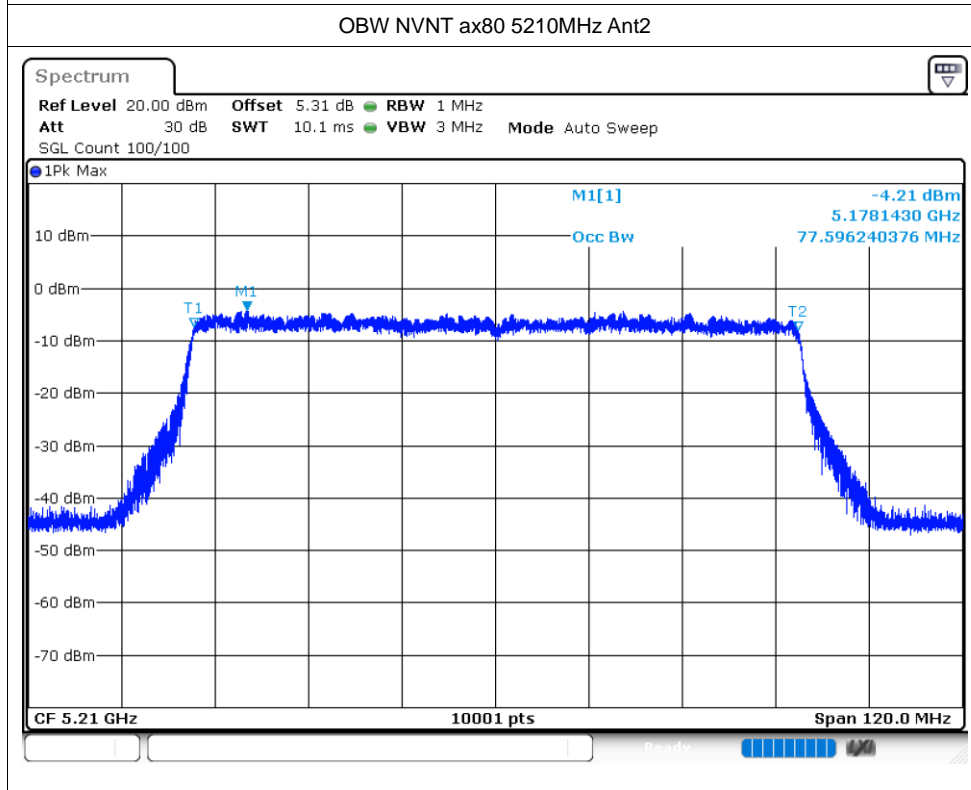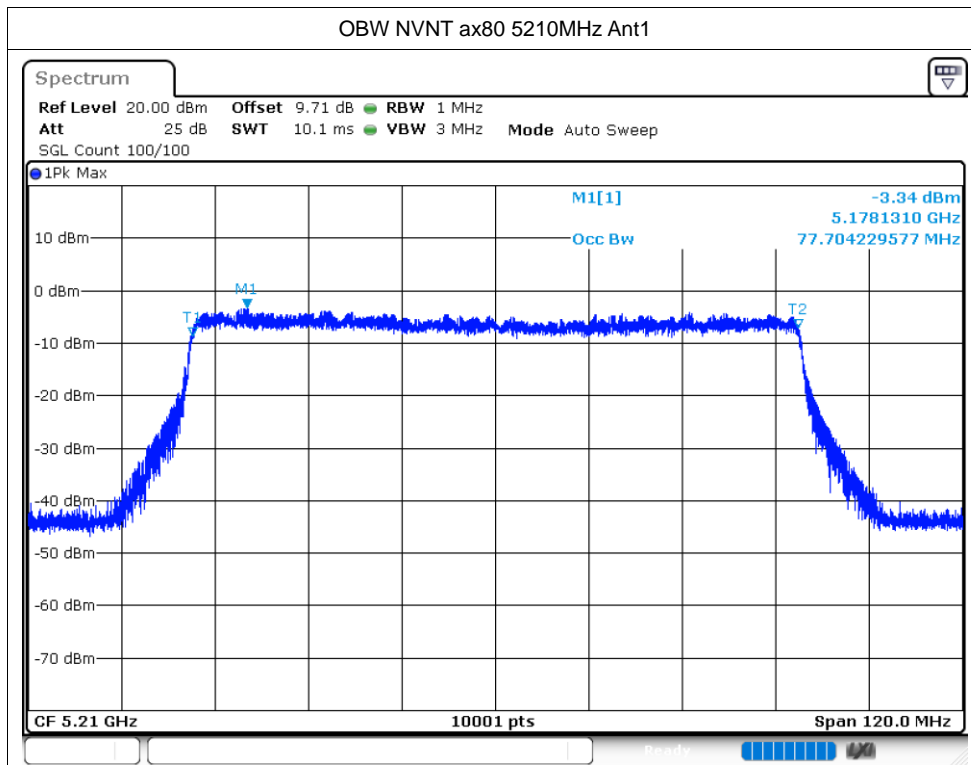


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5180	Ant1	-8.55	0.05	-8.5	-5.38	-5.01	Pass
NVNT	ac20	5180	Ant2	-8.17	0.05	-8.12			
NVNT	ac20	5200	Ant1	-8.61	0.05	-8.56	-5.23	-5.01	Pass
NVNT	ac20	5200	Ant2	-8.09	0.05	-8.04			
NVNT	ac20	5240	Ant1	-8.05	0.05	-8	-5.09	-5.01	Pass
NVNT	ac20	5240	Ant2	-8.29	0.05	-8.24			
NVNT	ac40	5190	Ant1	-10.09	0.09	-10	-7.45	-5.01	Pass
NVNT	ac40	5190	Ant2	-10.84	0.09	-10.75			
NVNT	ac40	5230	Ant1	-9.88	0.09	-9.79	-7.45	-5.01	Pass
NVNT	ac40	5230	Ant2	-10.93	0.1	-10.83			
NVNT	ac80	5210	Ant1	-13.56	0.2	-13.36	-10.46	-5.01	Pass
NVNT	ac80	5210	Ant2	-14.21	0.2	-14.01			
NVNT	ac160	5250	Ant1	-16.57	0.37	-16.2	-13.98	-5.01	Pass
NVNT	ac160	5250	Ant2	-16.54	0.37	-16.17			
NVNT	ax160	5250	Ant1	-17.96	0.41	-17.55	-15.23	-5.01	Pass
NVNT	ax160	5250	Ant2	-18.82	0.41	-18.41			
NVNT	ax20	5180	Ant1	-8.52	0.05	-8.47	-5.23	-5.01	Pass
NVNT	ax20	5180	Ant2	-8.04	0.05	-7.99			
NVNT	ax20	5200	Ant1	-8.54	0.06	-8.48	-5.09	-5.01	Pass
NVNT	ax20	5200	Ant2	-7.78	0.06	-7.72			
NVNT	ax20	5240	Ant1	-8.78	0.06	-8.72	-5.53	-5.01	Pass
NVNT	ax20	5240	Ant2	-8.37	0.06	-8.31			
NVNT	ax40	5190	Ant1	-10.59	0.1	-10.49	-7.70	-5.01	Pass
NVNT	ax40	5190	Ant2	-11.09	0.11	-10.98			
NVNT	ax40	5230	Ant1	-10.61	0.11	-10.5	-7.70	-5.01	Pass
NVNT	ax40	5230	Ant2	-10.93	0.11	-10.82			
NVNT	ax80	5210	Ant1	-14.25	0.22	-14.03	-10.97	-5.01	Pass
NVNT	ax80	5210	Ant2	-14.7	0.22	-14.48			



Test Graphs



PSD NVNT ac20 5180MHz Ant1


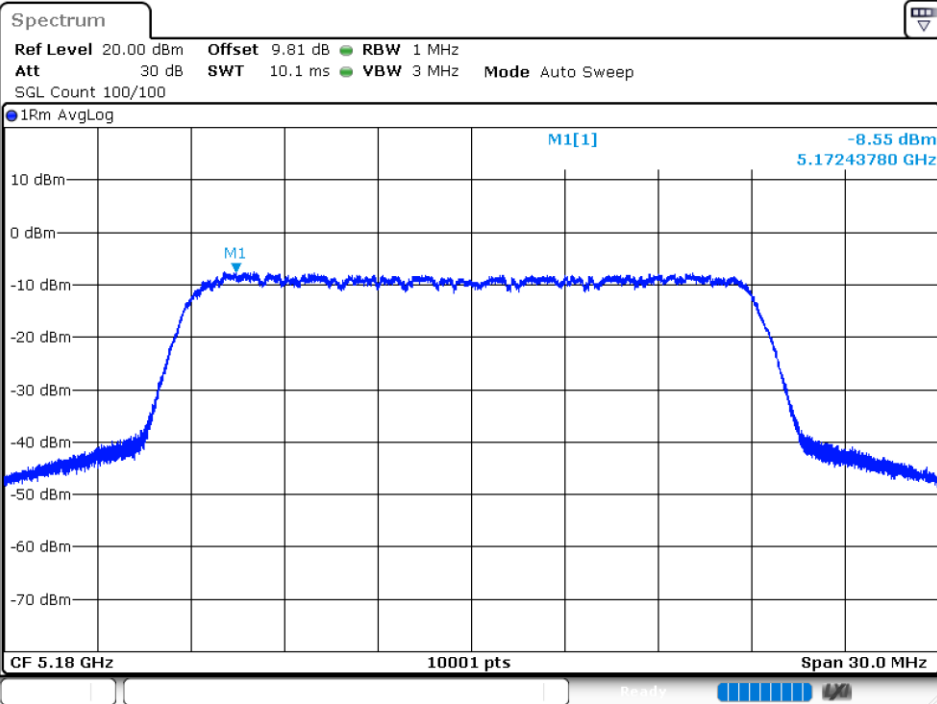




PSD NVNT ac20 5200MHz Ant1


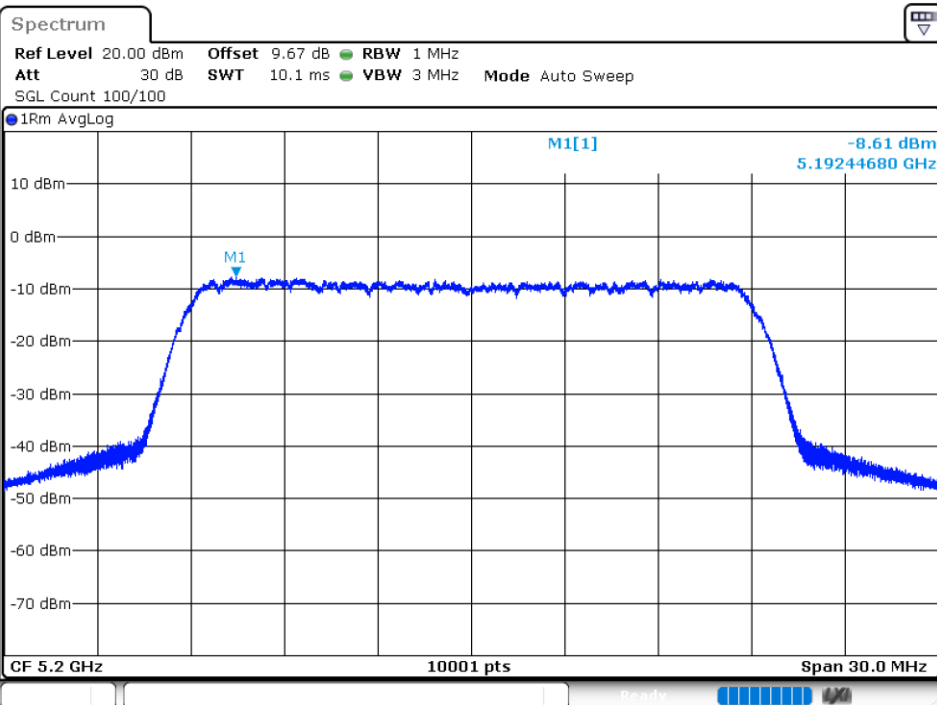


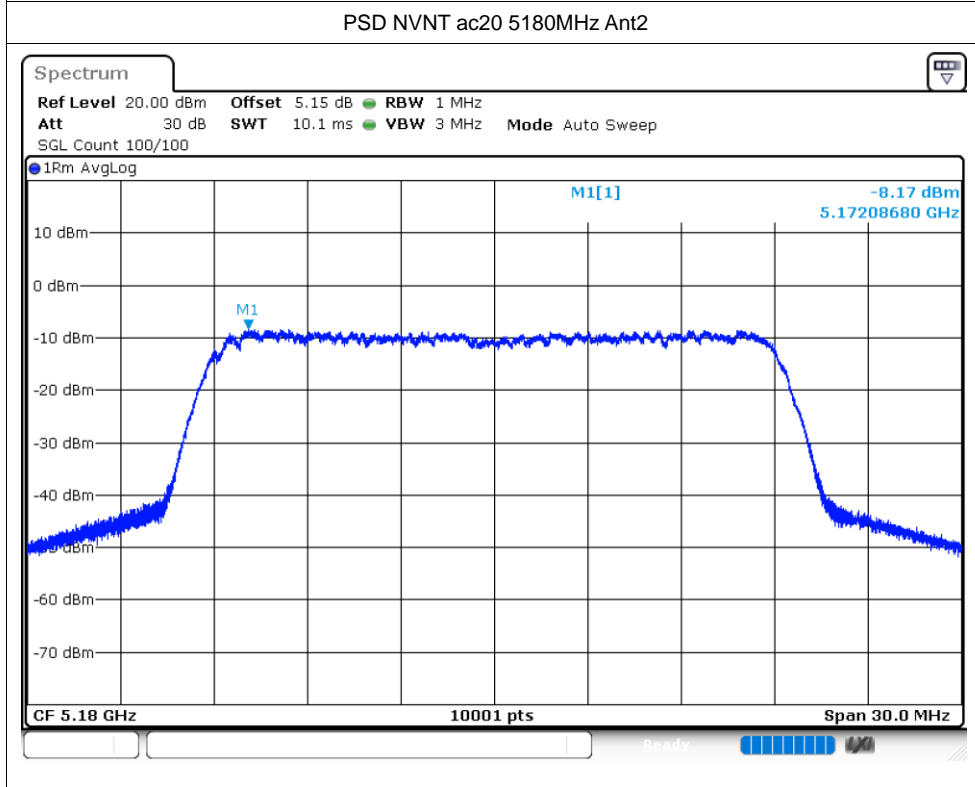
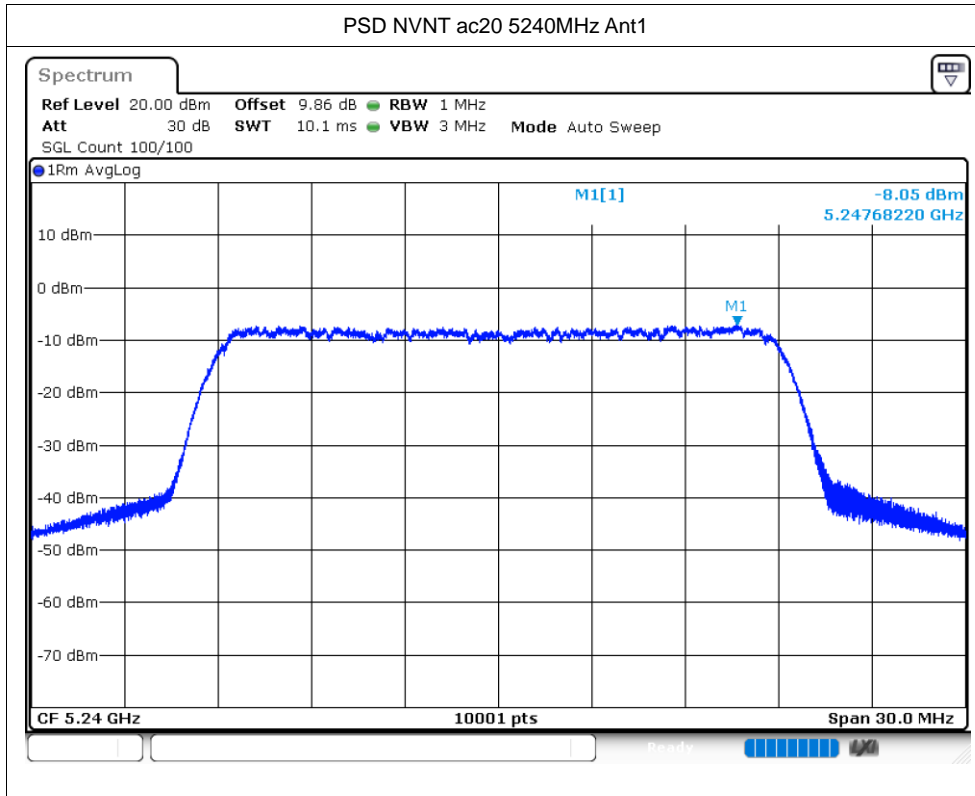


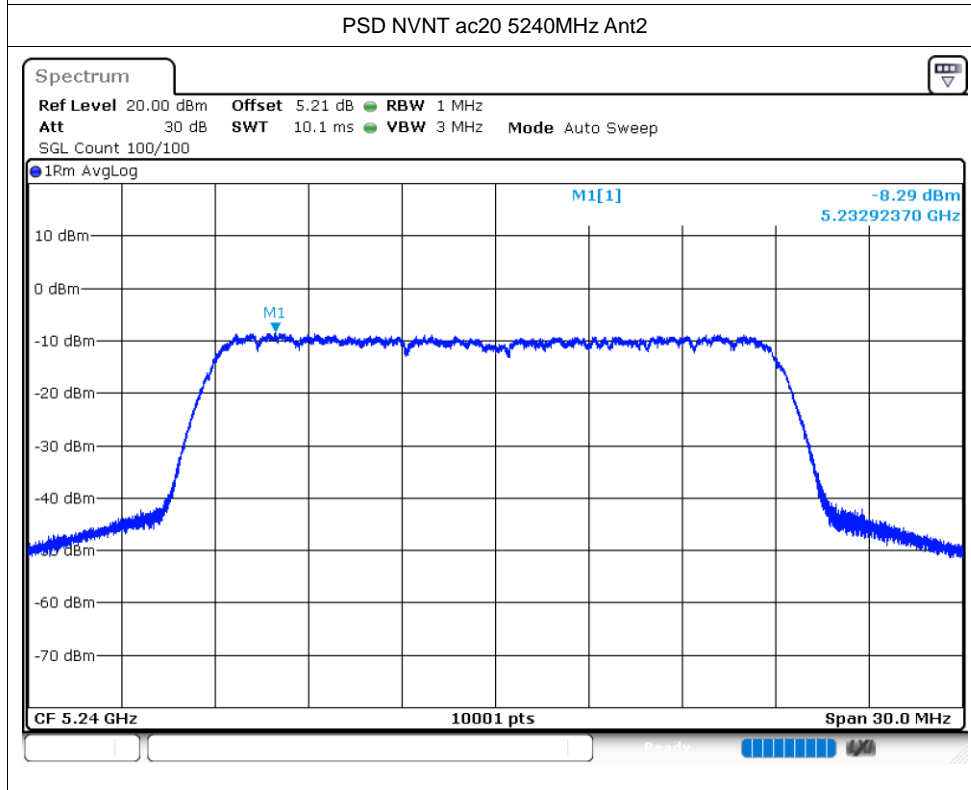
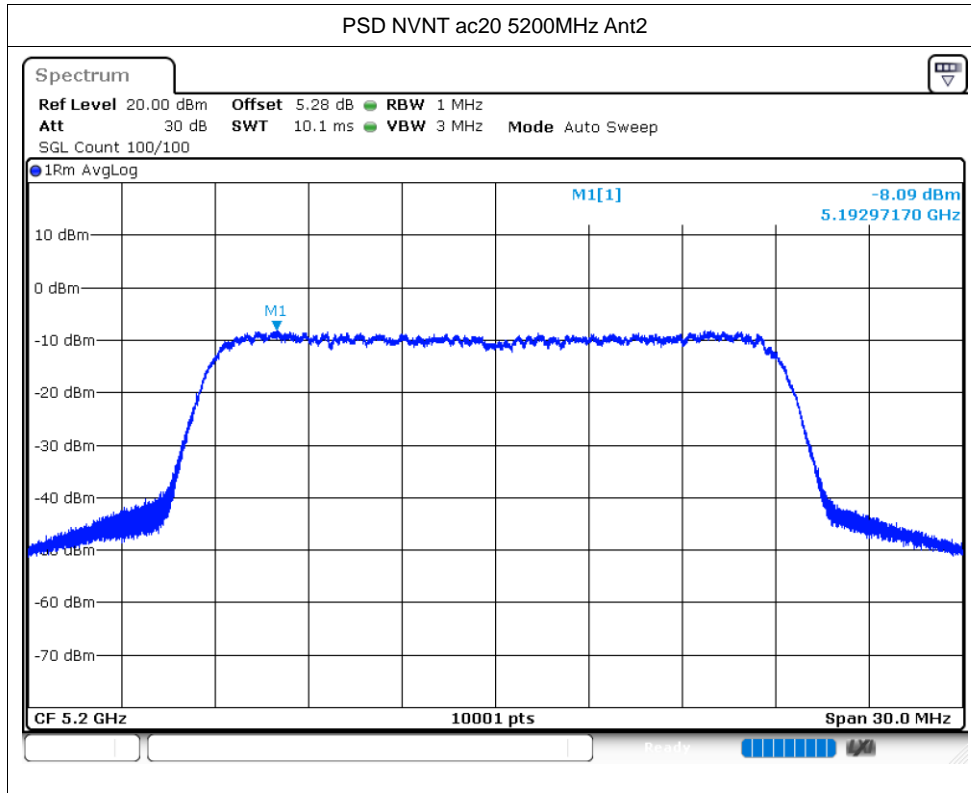


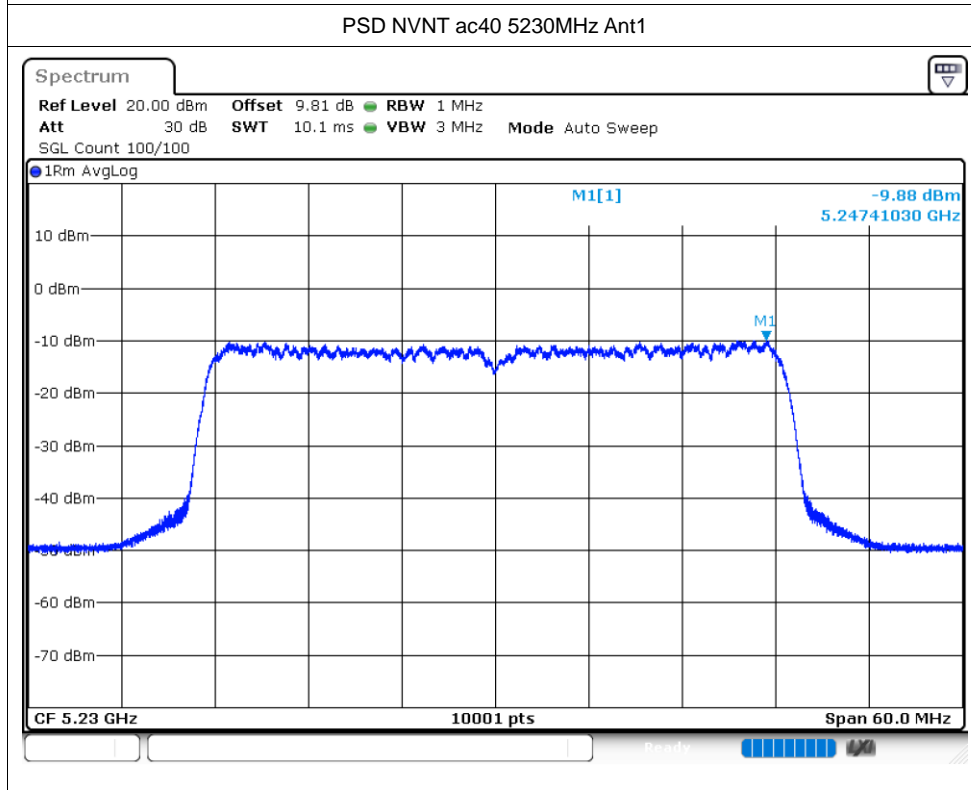
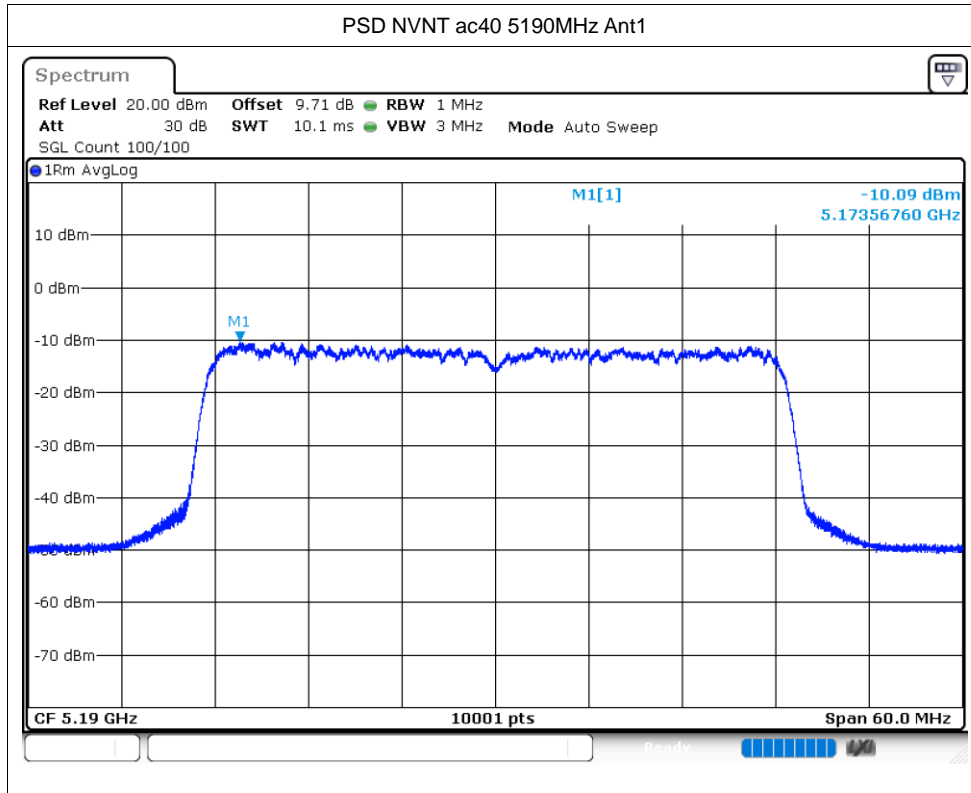


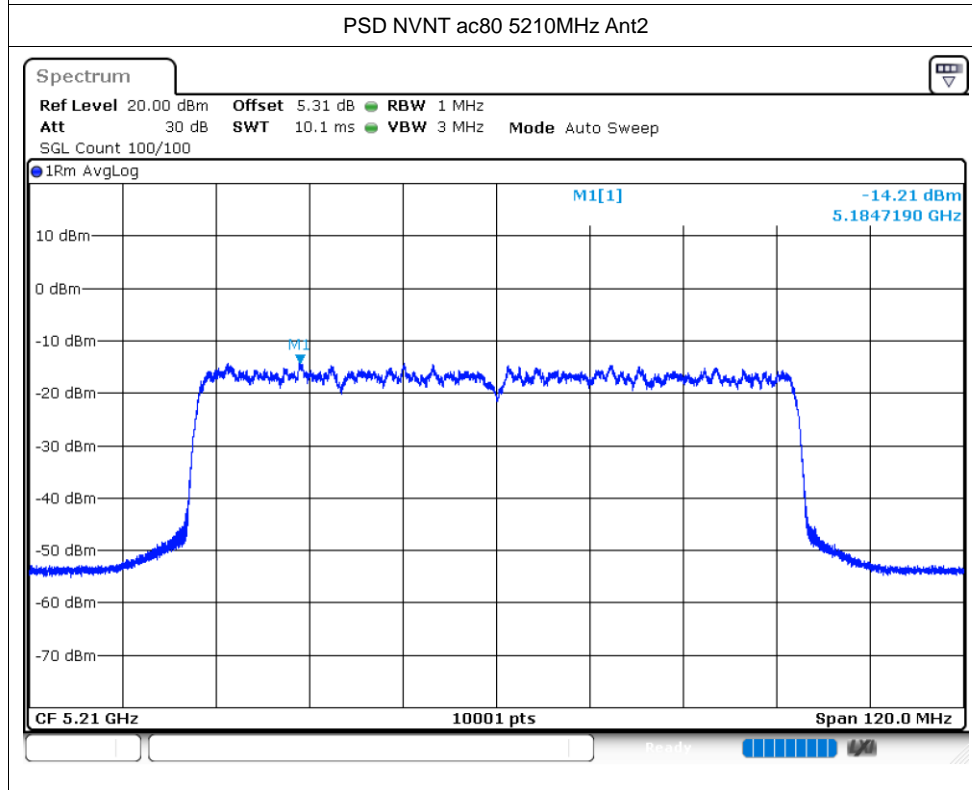
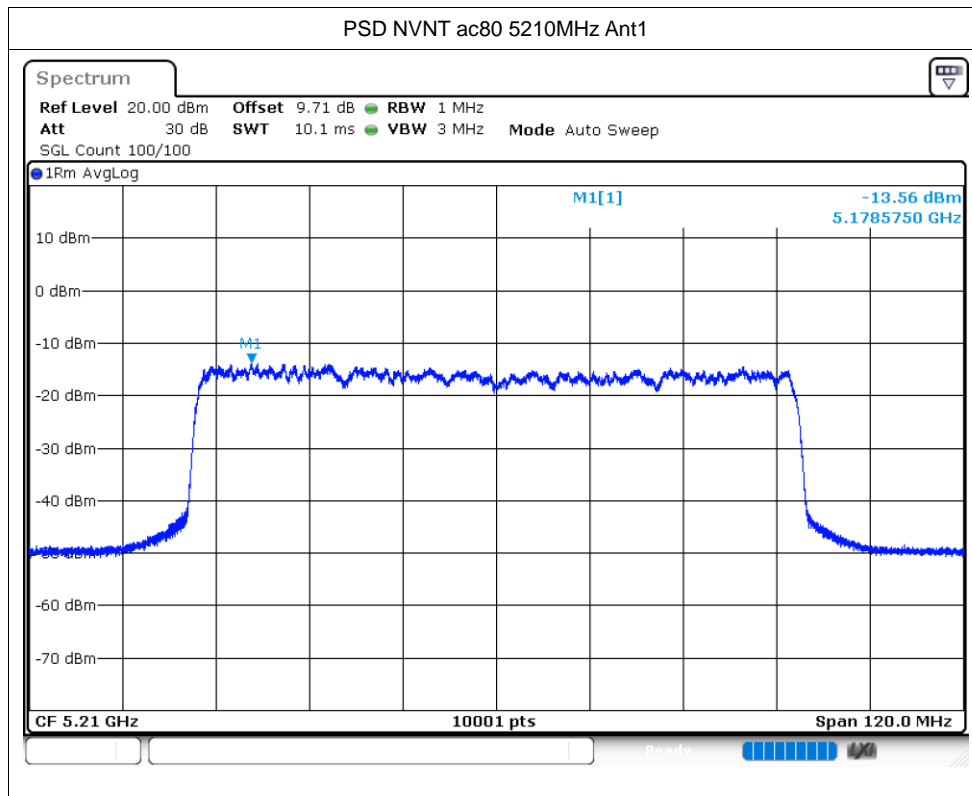


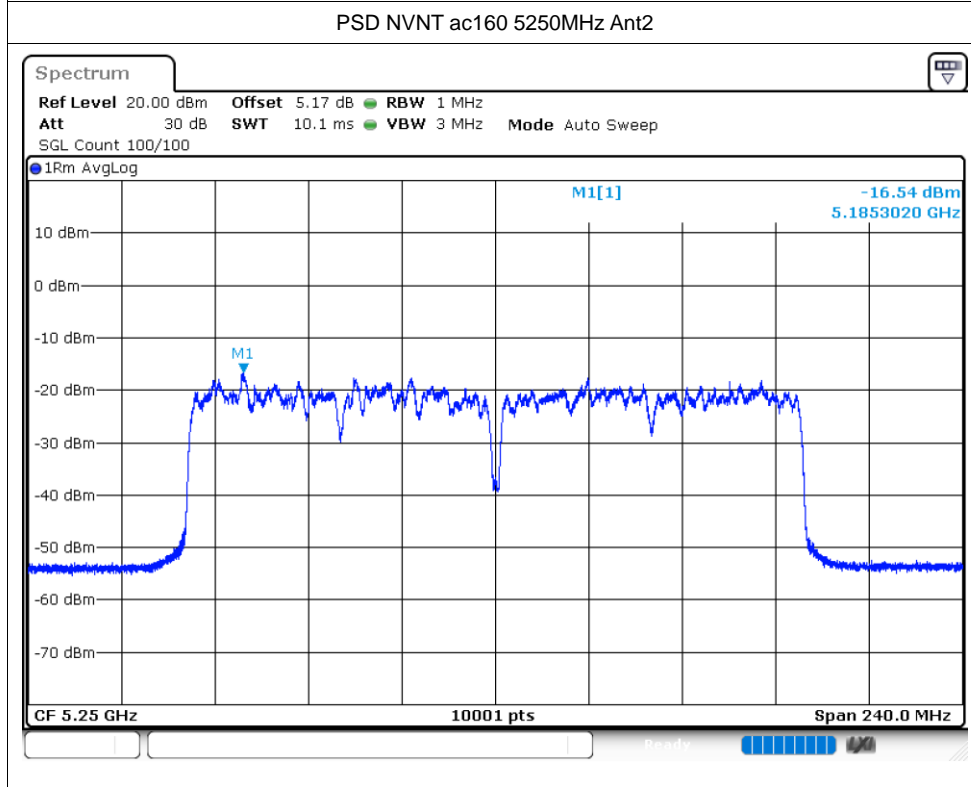
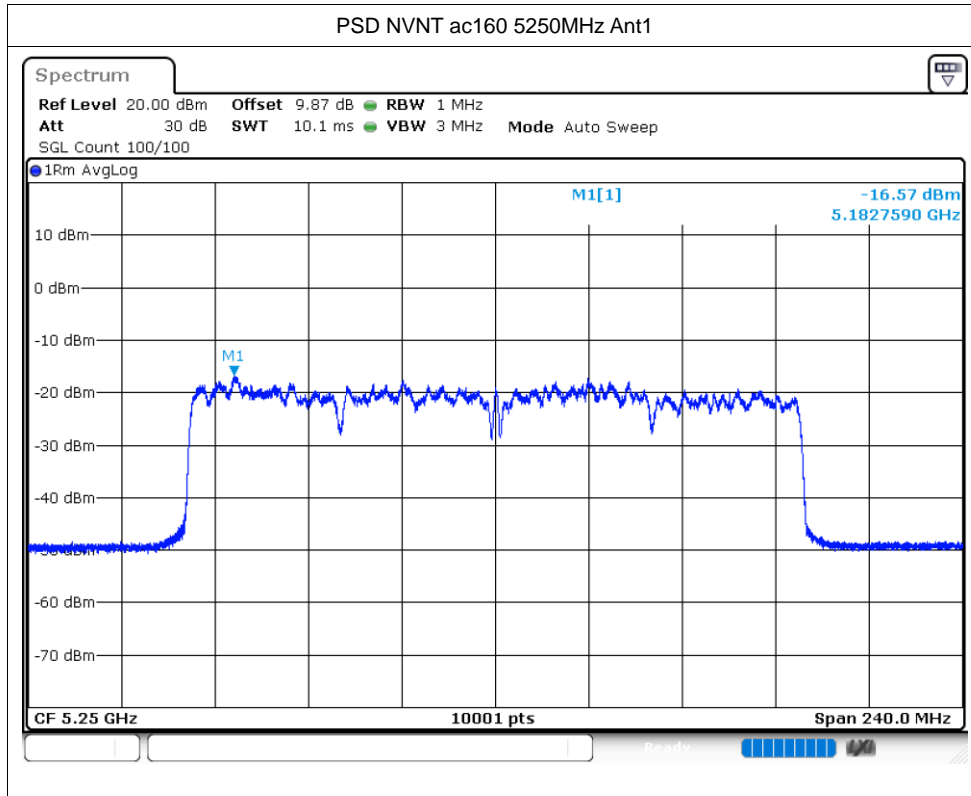


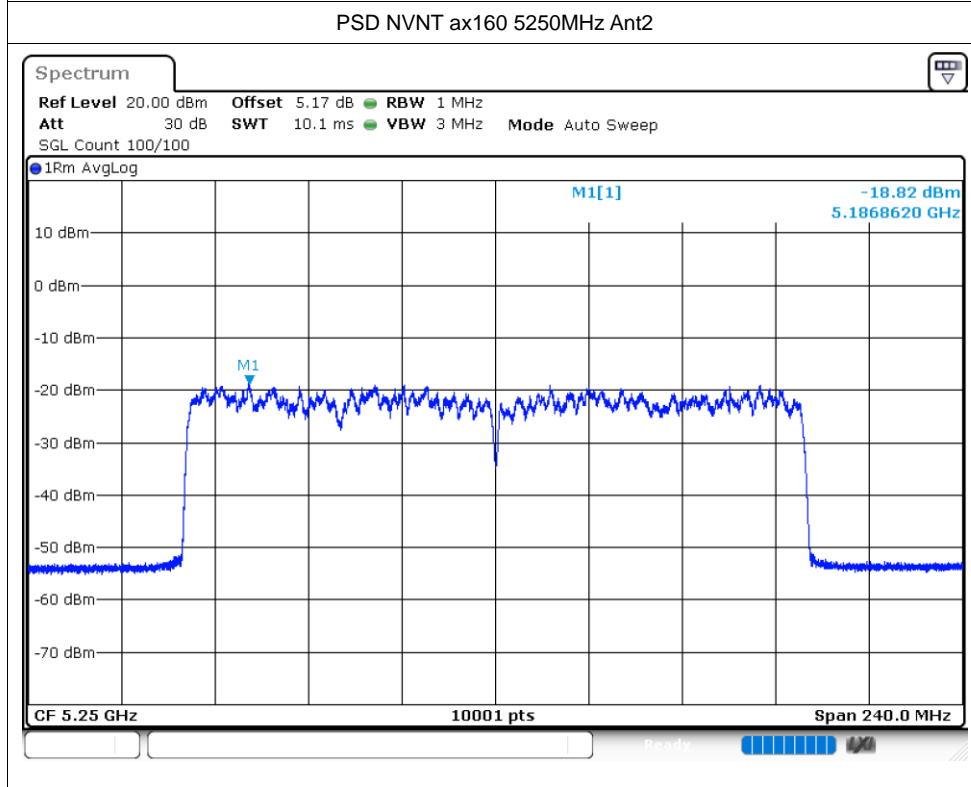
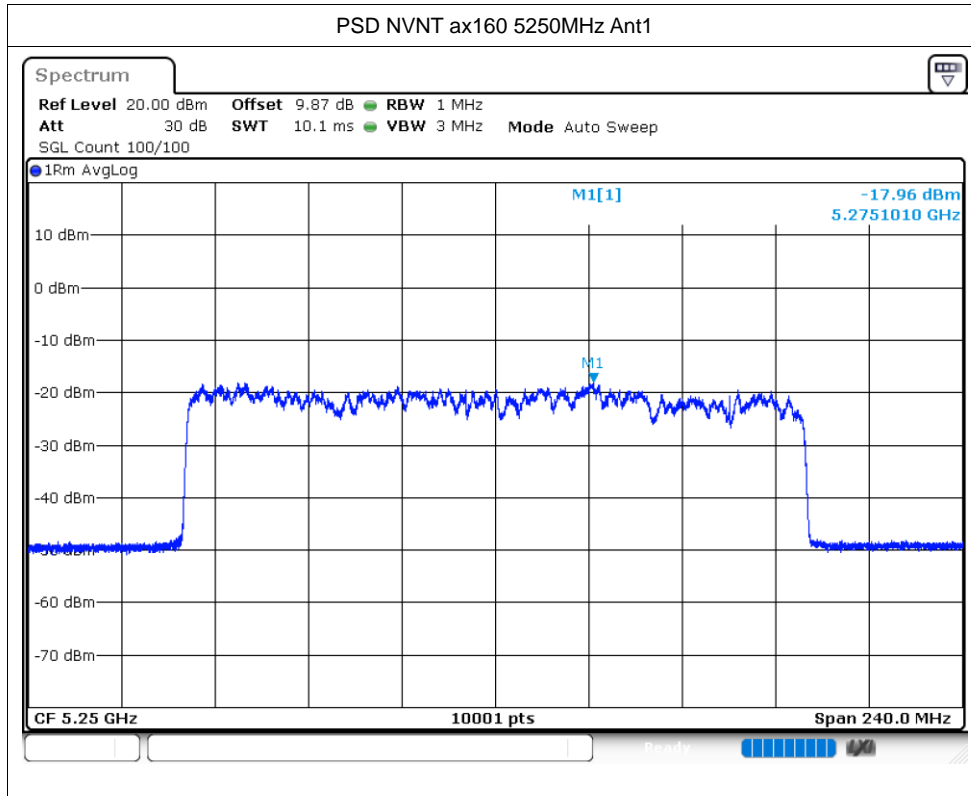


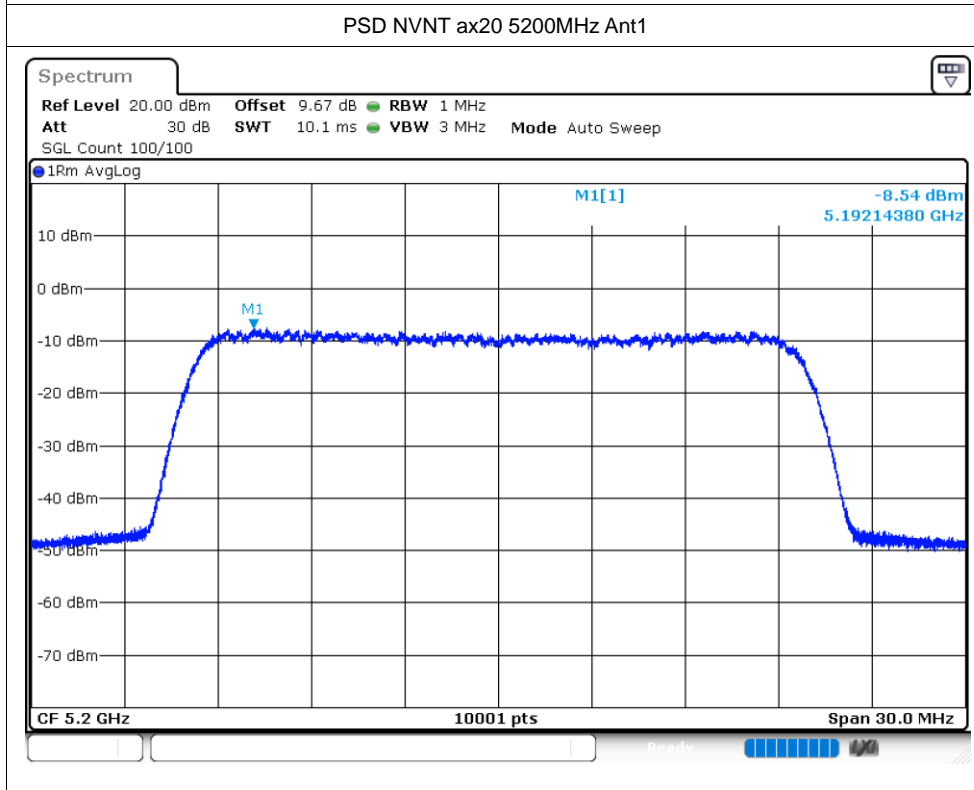
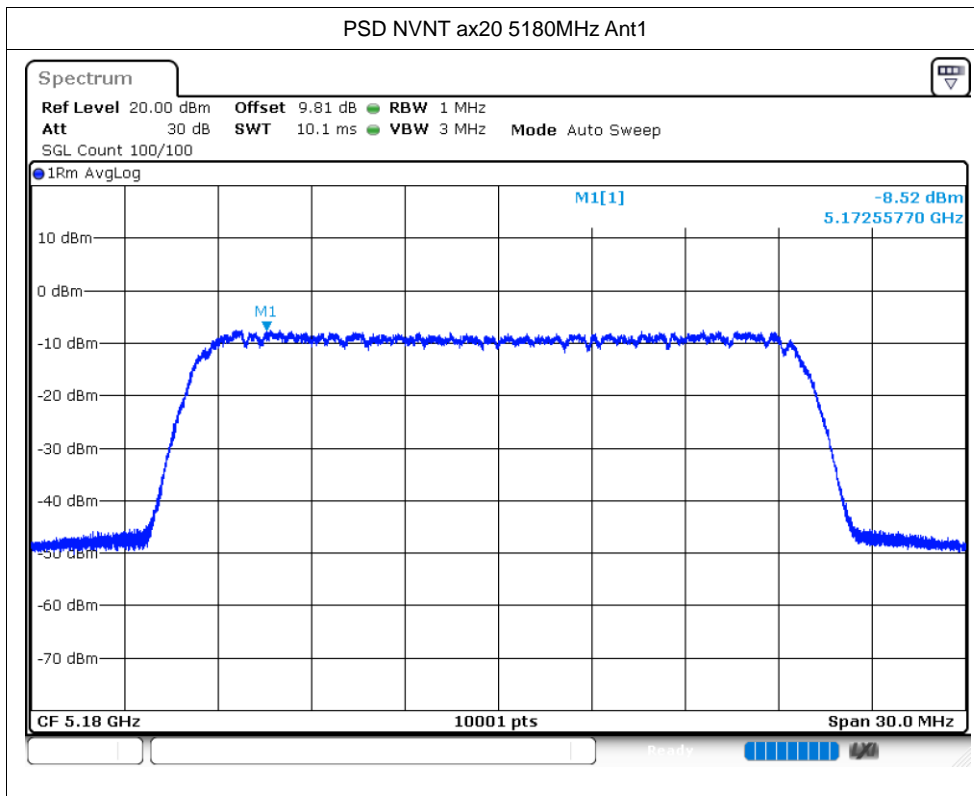


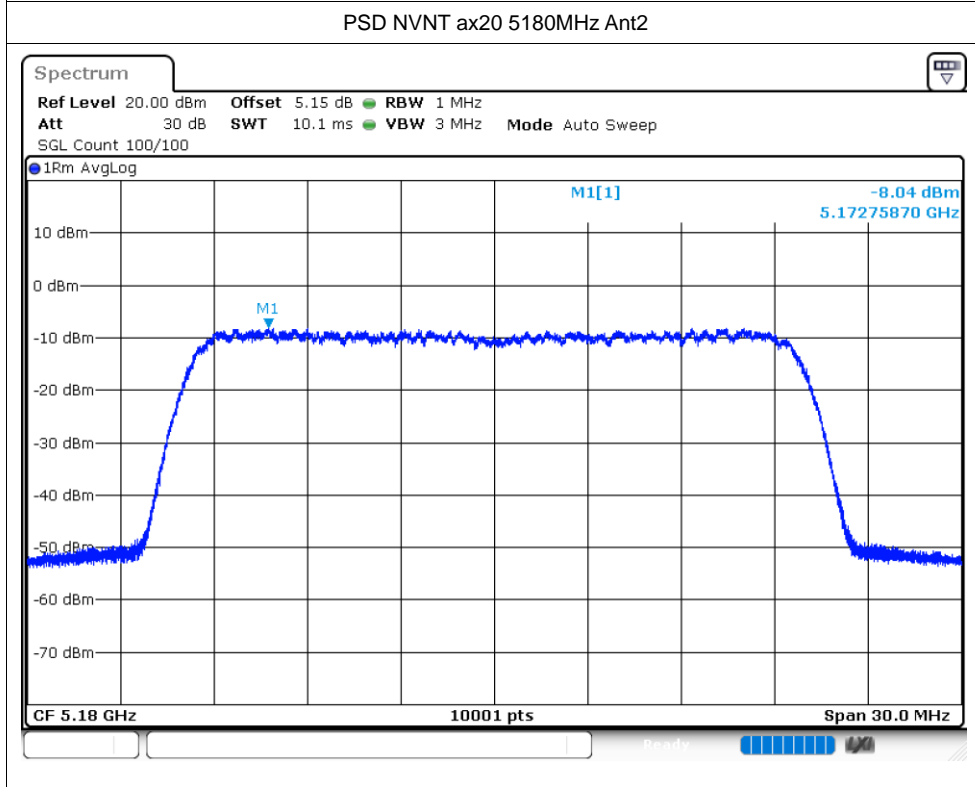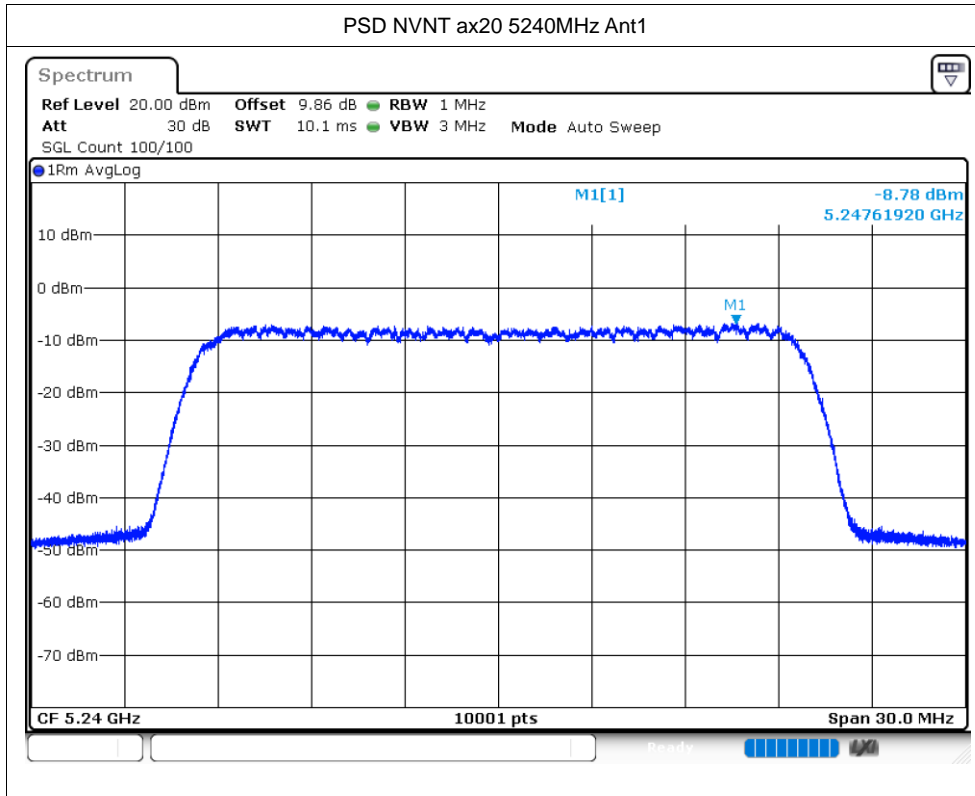

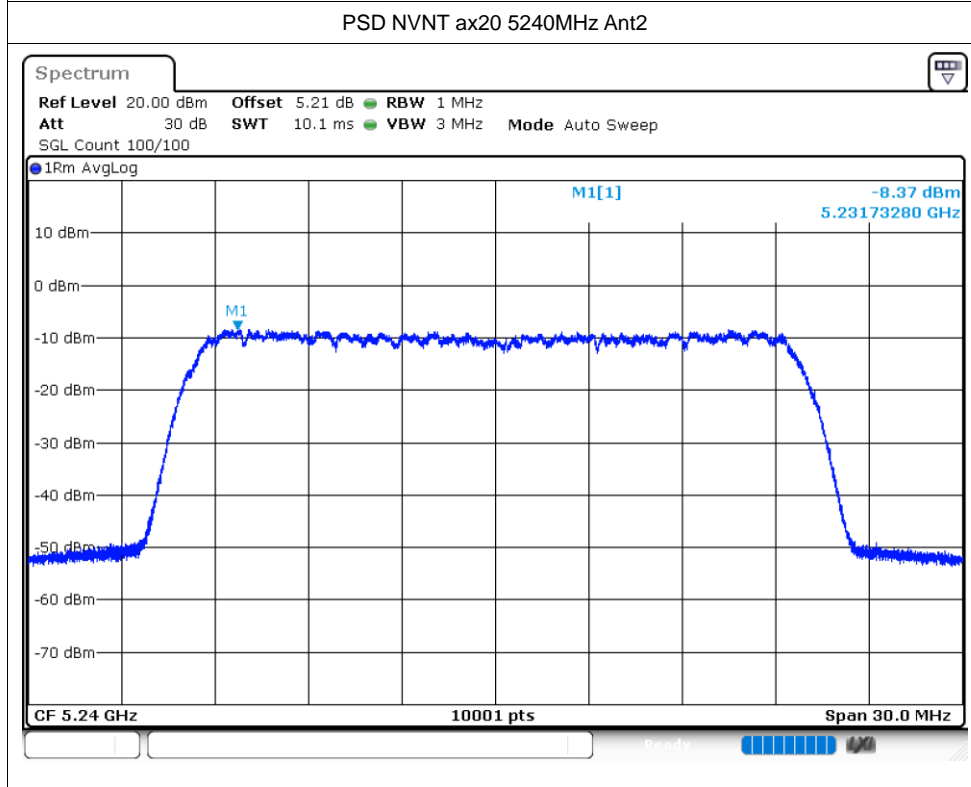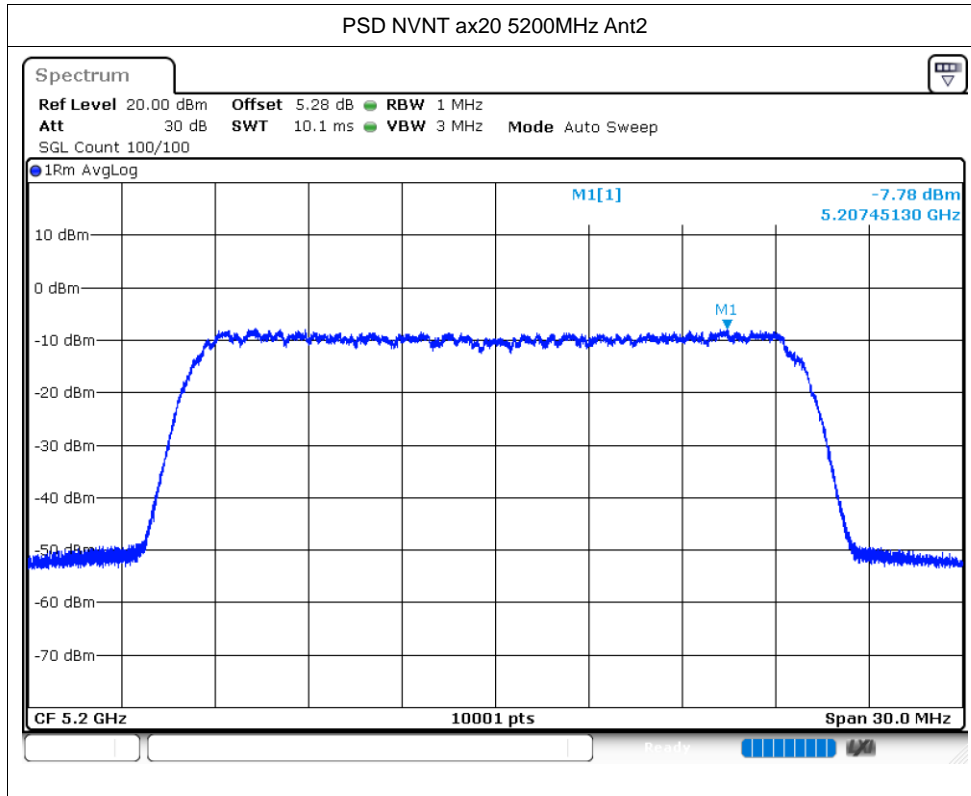

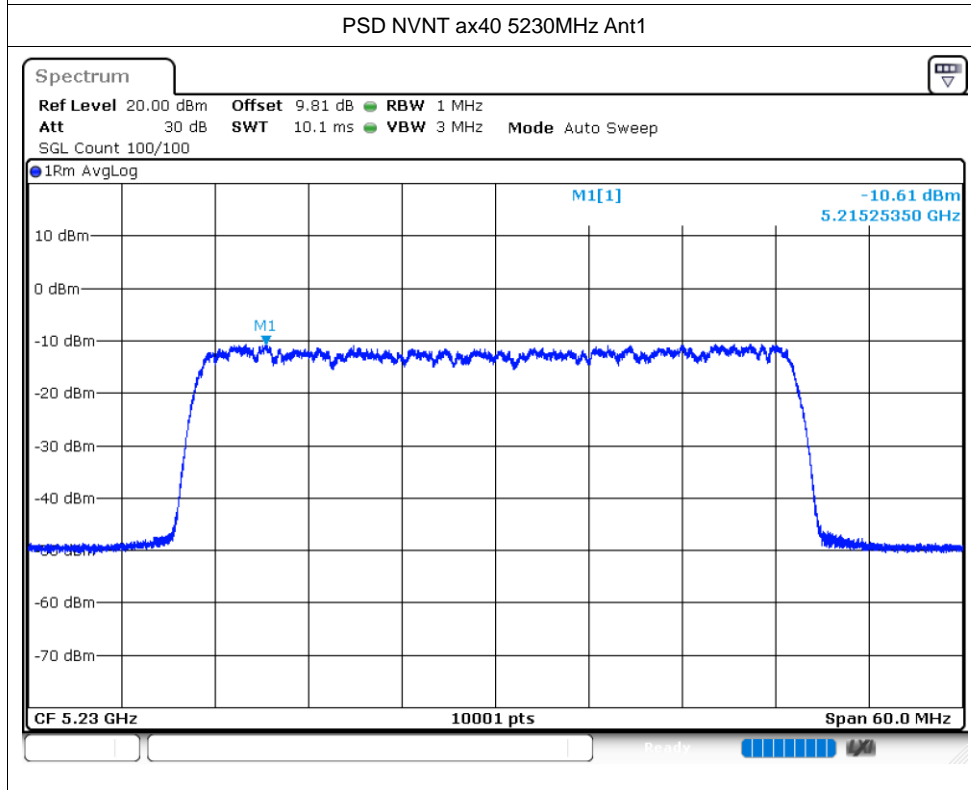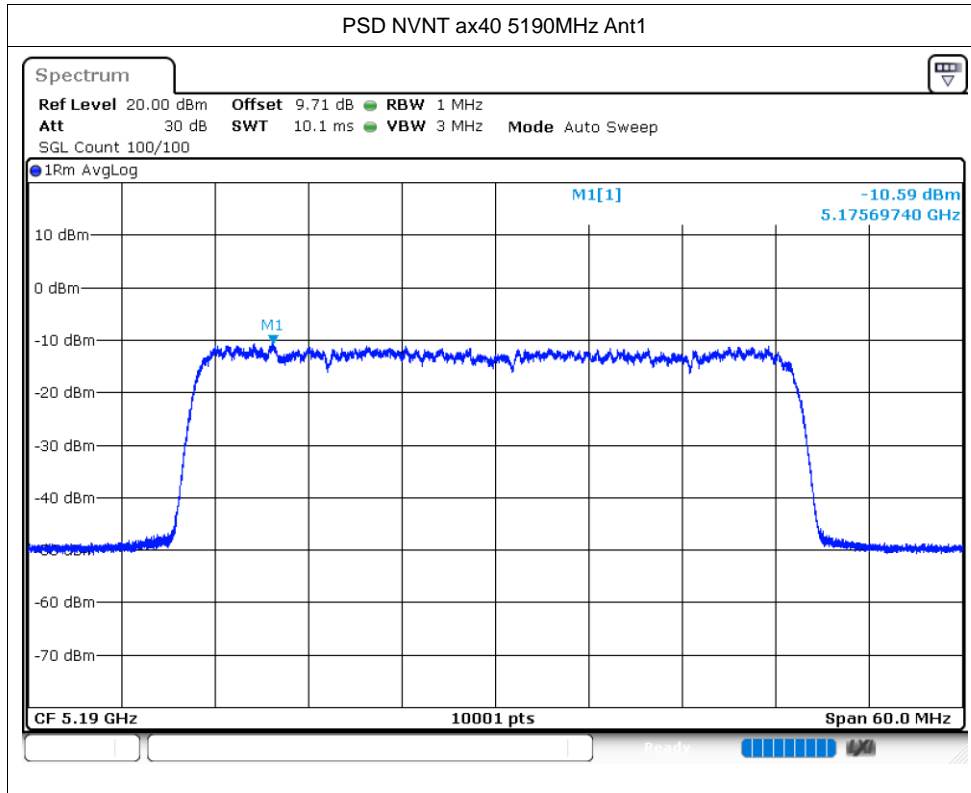

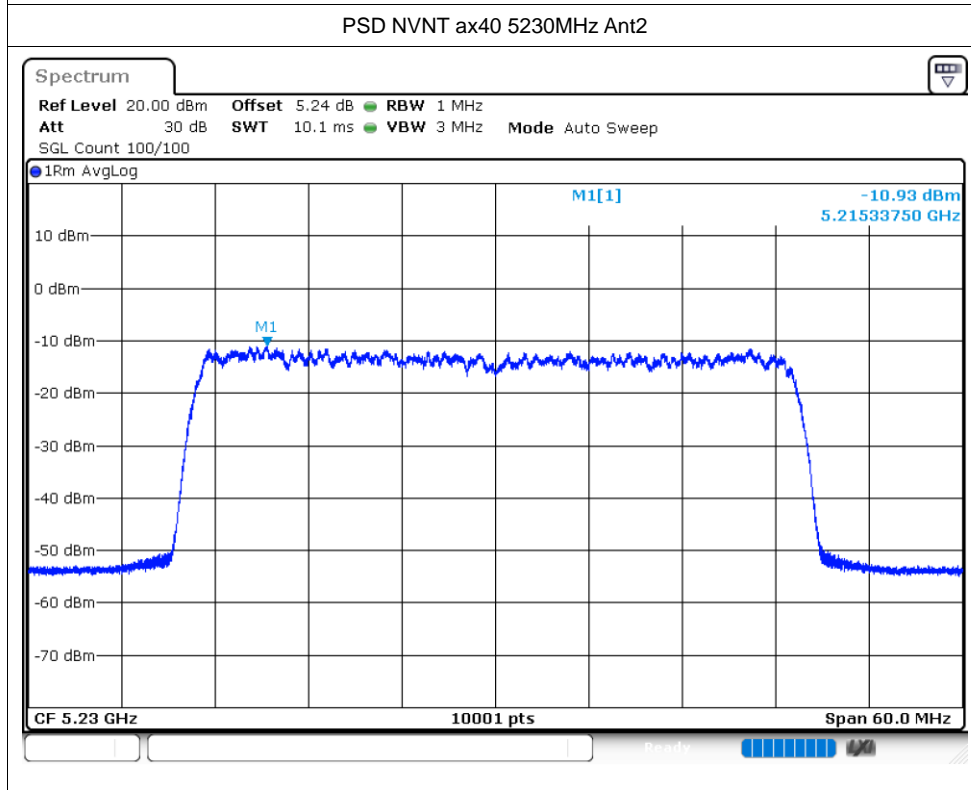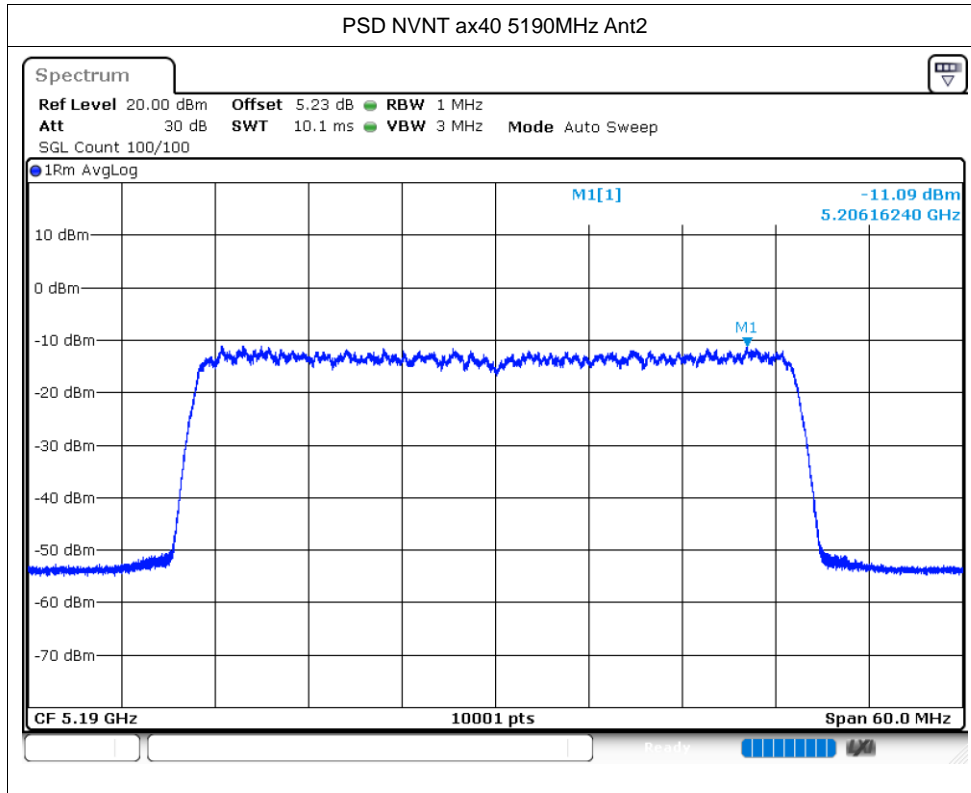

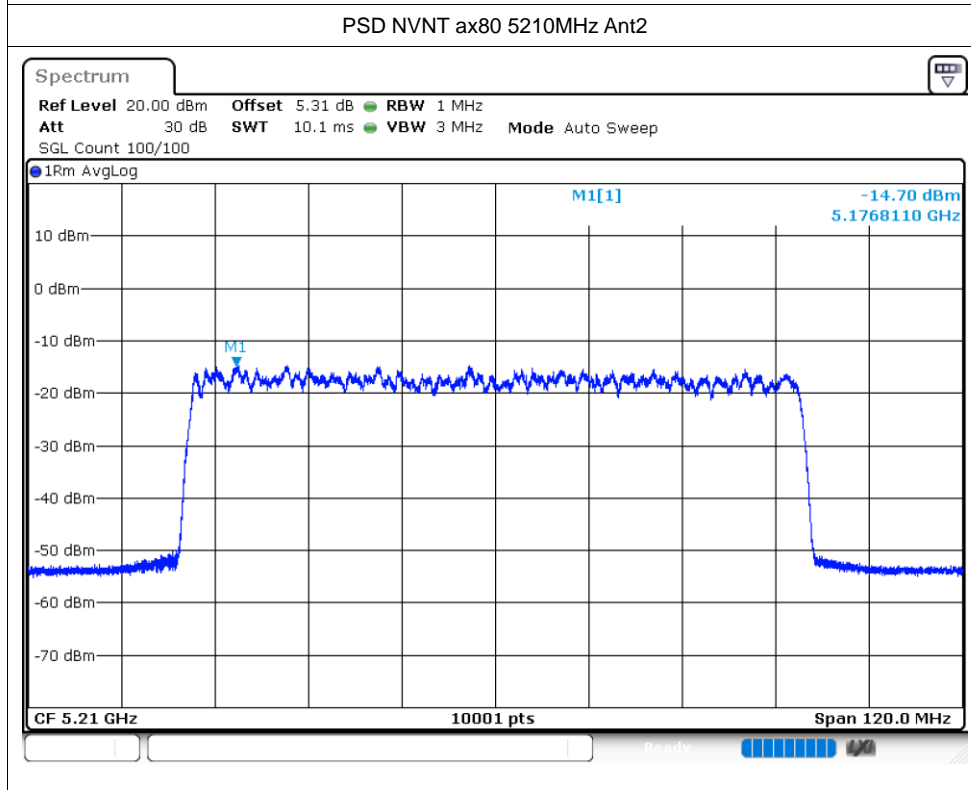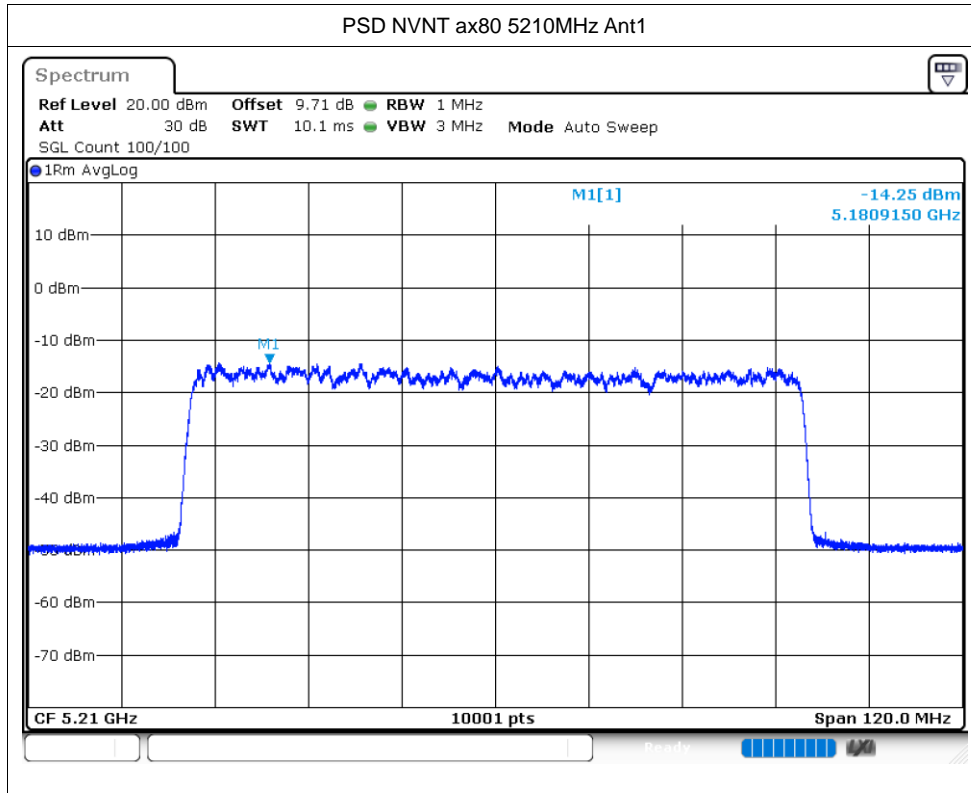

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5180	Ant1	-37.08	-27	Pass
NVNT	ac20	5240	Ant1	-37.47	-27	Pass
NVNT	ac20	5180	Ant2	-41.35	-27	Pass
NVNT	ac20	5240	Ant2	-41.81	-27	Pass
NVNT	ac40	5190	Ant1	-36.65	-27	Pass
NVNT	ac40	5230	Ant1	-38.05	-27	Pass
NVNT	ac40	5190	Ant2	-41.33	-27	Pass
NVNT	ac40	5230	Ant2	-41.92	-27	Pass
NVNT	ac80	5210	Ant1	-37.91	-27	Pass
NVNT	ac80	5210	Ant2	-41.63	-27	Pass
NVNT	ac160	5250	Ant1	-37.43	-27	Pass
NVNT	ac160	5250	Ant2	-40.9	-27	Pass
NVNT	ax160	5250	Ant1	-38.08	-27	Pass
NVNT	ax160	5250	Ant2	-41.99	-27	Pass
NVNT	ax20	5180	Ant1	-37.3	-27	Pass
NVNT	ax20	5240	Ant1	-36.17	-27	Pass
NVNT	ax20	5180	Ant2	-41.28	-27	Pass
NVNT	ax20	5240	Ant2	-42.19	-27	Pass
NVNT	ax40	5190	Ant1	-36.82	-27	Pass
NVNT	ax40	5230	Ant1	-37.54	-27	Pass
NVNT	ax40	5190	Ant2	-41.79	-27	Pass
NVNT	ax40	5230	Ant2	-42.78	-27	Pass
NVNT	ax80	5210	Ant1	-37.88	-27	Pass
NVNT	ax80	5210	Ant2	-41.78	-27	Pass

