

SHENZHEN CHAINWAY INFORMATION TECHNOLOGY CO., LTD

C6000 Pro User Manual

FCC ID:2AC6AC6000B



Statement

2013 by ShenZhen Chainway Information Technology Co., Ltd. All rights reserved.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, without permission written from Chainway. This includes electronic or mechanical means, such as photocopying, recording, or information storage and retrieval systems. The material in this manual is subject to change without notice.

The software is provided strictly on an “as is” basis. All software, including firmware, furnished to the user is on a licensed basis. Chainway grants to the user a non-transferable and non-exclusive license to use each software or firmware program delivered hereunder (licensed program). Except as noted below, such license may not be assigned, sublicensed, or otherwise transferred by the user without prior written consent of Chainway. No right to copy a licensed program in whole or in part is granted, except as permitted under copyright law. The user shall not modify, merge, or incorporate any form or portion of a licensed program with other program material, create a derivative work from a licensed program, or use a licensed program in a network without written permission from Chainway. Chainway reserves the right to make changes to any software or product to improve reliability, function, or design.

Chainway does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

No license is granted, either expressly or by implication, estoppel, or otherwise under any Chainway intellectual property rights. An implied license only exists for equipment, circuits, and subsystems contained in Chainway products.

Contents

Statement.....	2
Chapter 1 Brief Instruction.....	5
1.1 Brief Instruction.....	5
1.2 Precaution Before Using Battery.....	6
Chapter 2 Installation Guide.....	8
2.1 Appearance.....	8
2.2 Buttons.....	9
2.3 Micro SD、SIM、PSAM Card Installation.....	10
2.4 Battery Charging.....	10
2.5 Device Power on/off.....	11
Chapter 3 Call Function.....	12
3.1 Phone.....	12
3.2 Contacts.....	13
3.3 Messaging.....	14
Chapter 4 Barcode Reader.....	15
Chapter 5 RFID Reader.....	16
5.1 High Frequency.....	16
5.1.1 14443A.....	16
5.1.2 14443B.....	17
5.1.3 15693.....	18
5.2 NFC.....	19
Chapter 6 Other Functions.....	20
6.1 PING.....	20
6.2 Bluetooth.....	21
6.3 GPS.....	22

6.4 Volume Settings.....	23
6.5 Sensor.....	24
6.6 Keyboard.....	25
6.7 Network.....	25
Chapter 7 Device Specifications.....	26

Chapter 1 Brief Instruction

1.1 Brief Instruction

Chainway C6000 is a series of Android powered smart terminals, with data capture, data processing, wireless communication. It is with high-reliability & high-expansibility. Auto & Accurate data collection is achieved in various business fields via a complete solution of premium options, the flexible solution among options and operators is suited-up. You will find out with C6000, much easier deployment, reduced complexity, decreased maintenance, are the benefits for enterprises.

C6000 meets industrial level IP65 (IEC sealing), is sufficient to routine applications, eg, railway inspection, road parking toll, vehicle inspection, logistics express, power inspection, warehousing management, chain retail, etc. Whether the mobile operators are working indoor or outdoor, with Chainway C6000, your business is always & highly efficient on-line.

Meeting industrial standards, designed to support various of mobile solutions. With the build-in high performance Cortex A-53 2.0 GHz octa-core technology, the operators need only one device to enjoy a convenient and easy job, C6000 will be the ideal choice for key-fact business in mobile solutions, for simplified task flow, enhanced work efficiency, for shortened time to customer response, more satisfied customer care service.

Chainway C6000 comes with world wide band 4G technology. Multi channels data and voice communication guarantees the real-time communication and data efficiency, C6000 brings you the best ROI.

1.2 Precaution Before Using Battery

- Do not leave batteries unused for extended periods of time, either in the product or in storage. When the battery has been unused for 6 months, check the charge status and charge or dispose of the battery as appropriate.

- The typical estimated life of a Lithium-Ion battery is about two to three years or 300 to 500 charge cycles, whichever occurs first. One charge cycle is a period of use from fully charged, to fully discharged, and fully recharged again. Use a two to three year life expectancy for batteries that do not run through complete charge cycles.

- Rechargeable Lithium-Ion batteries have a limited life and will gradually lose their capacity to hold a charge. This loss of capacity (aging) is irreversible. As the battery loses capacity, the length of time it will power the product (run time) decreases.

- Lithium-Ion batteries continue to slowly discharge (self-discharge) when not in use or while in storage. Routinely check the battery's charge status. The user manual typically includes information on how to check battery status, as well as battery charging instructions.

- Observe and note the run time that a new fully-charged battery provides for powering your product. Use the new battery run time as a basis to compare run times for older batteries.

The run time of your battery will vary depending on the product's configuration and the applications that you run.

- Routinely check the battery's charge status.

- Carefully monitor batteries that are approaching the end of their estimated life.

- Consider replacing the battery with a new one if you note either of the following conditions:

- The battery run time drops below about 80% of the original run time.

- The battery charge time increases significantly.
- If a battery is stored or otherwise unused for an extended period, be sure to follow the storage instructions in this document. If you do not follow the instructions, and the battery has no charge remaining when you check it, consider it to be damaged. Do not attempt to recharge it or to use it. Replace it with a new battery.
 - Always follow the charging instructions provided with your product. Refer to your product's user manual and/or online help for detailed information about charging its battery.
 - Charge or discharge the battery to approximately 50% of capacity before storage.
 - Charge the battery to approximately 50% of capacity at least once every six months.
 - Remove the battery and store it separately from the product.
 - Store the battery at temperatures between 5 °C and 20 °C (41 °F and 68 °F).

Chapter 2 Installation Guide

2.1 Appearance

The C6000 device has black and white appearance optional.






2.2 Buttons

Button	Function
Power Button	Press and hold to turn the device on or off.
Custom Function Button	Customize function by software
SCAN	Scan Button
X	Cancel Button
Num	Switch white keyboard function
Fn	Switch orange keyboard function
Setting Button	Right of the Fn Button
Enter	Enter Button

2.3 Micro SD、SIM、PSAM Card Installation

Detailed installation of Micro SD、SIM、PSAM Card steps are as follows:

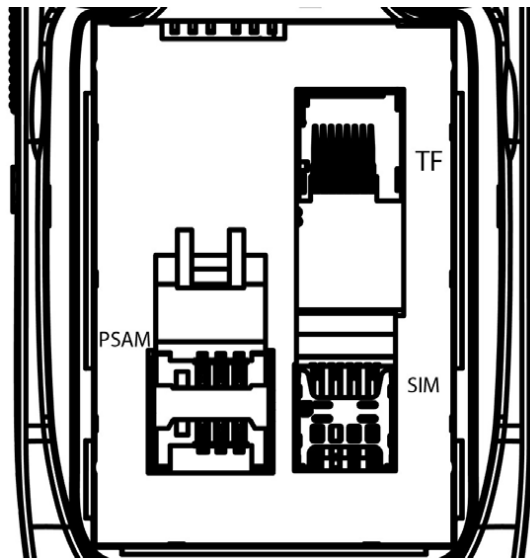

2.4 Battery Charging

Use the standard adapter to charge the battery via the USB connector of the snap-on. Don't use other brands of charger for device.


2.5 Device Power on/off



Press the 'Power' button on the top about 3s due to power on/off. And press it shortly to wake up.


Chapter 3 Call Function


3.1 Phone

Click this icon .

Click the number button to input the numbers.


Click the  button to confirm and dial.


Click the  to end the calling.

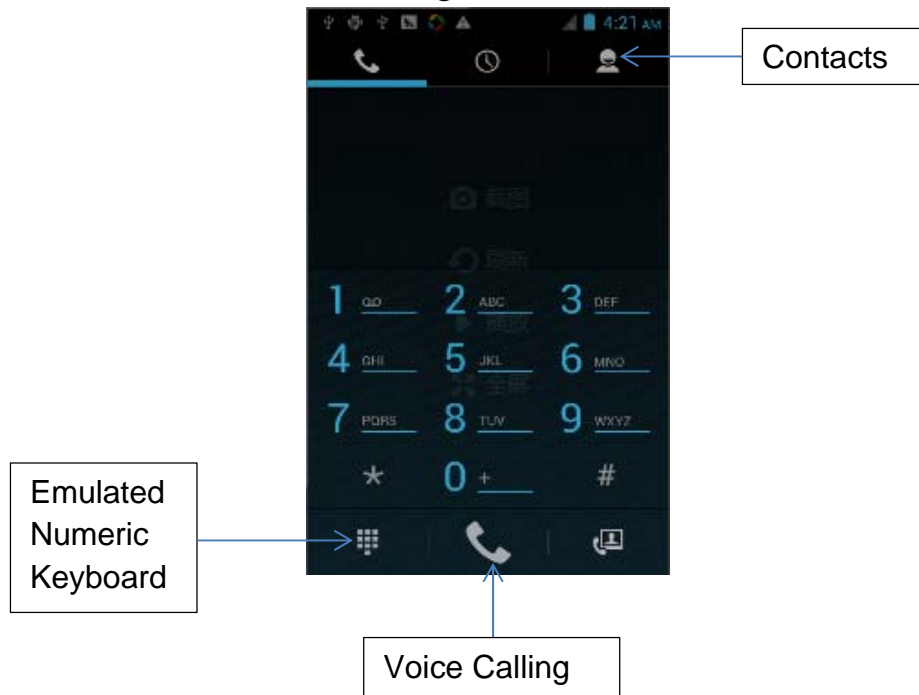


3.2 Contacts


Click 'Contacts' to open the contacts list.


Click  to add the new contact.

Click  to import/export or delete the contact list.

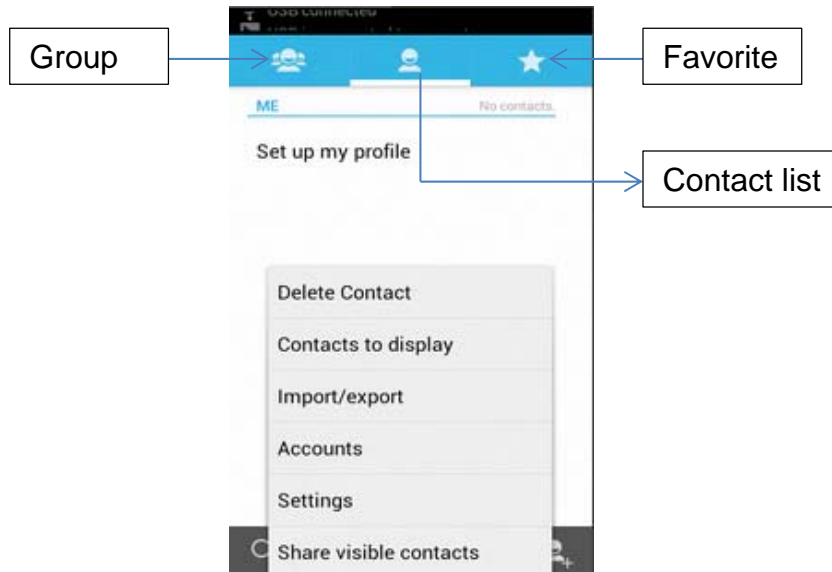


3.3 Messaging

Click  to open the message list.

Click  to input the content.


Click  to send the message.

Click  to add photos, videos.




Chapter 4 Barcode Reader

Open the Barcode Demo in APP Center and then press the 'Scan' button to start scanning.

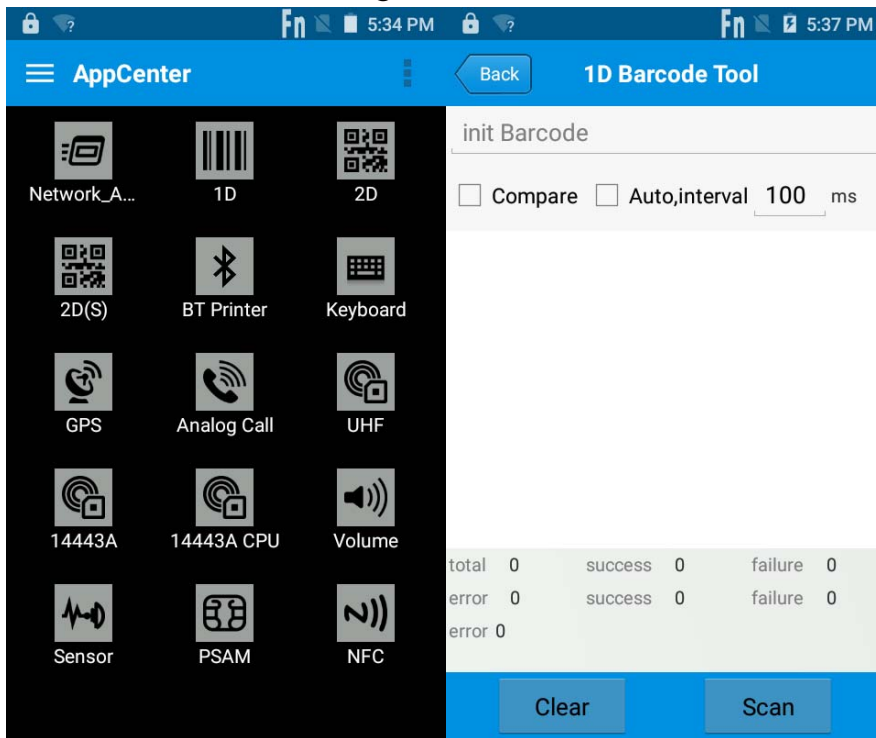

Note: Please scan the barcode correctly, otherwise the scanning might be failed.

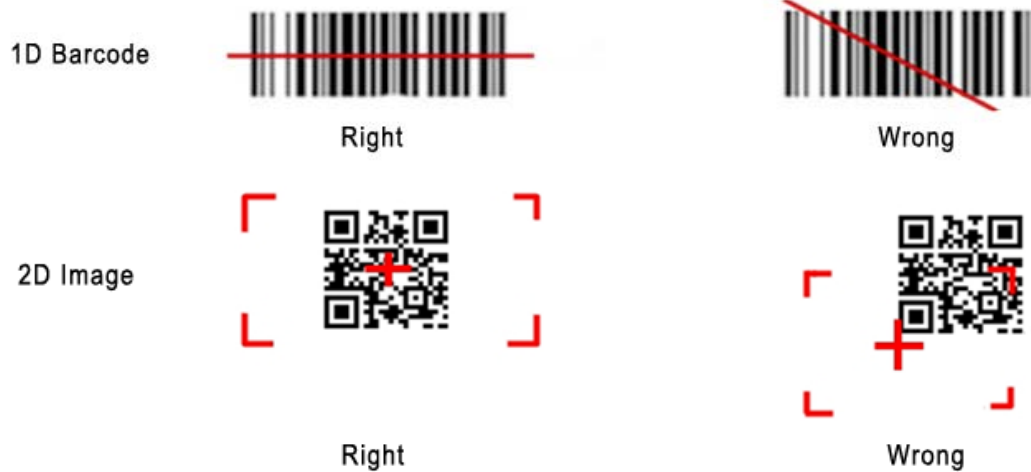


Chapter 5 RFID Reader

5.1 High Frequency

5.1.1 14443A


Open the 14443A demo within Appcenter, and press the 'Scan' button to start reading.

Mifare and Ultralight reading/writing are also supported.

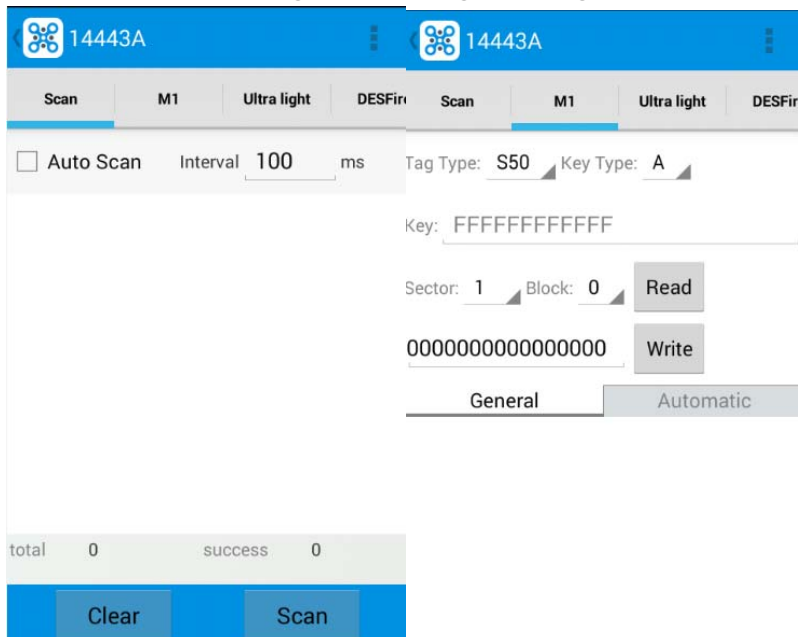


5.1.2 14443B

Open the 14443B demo within Appcenter, and gain UID of the card.

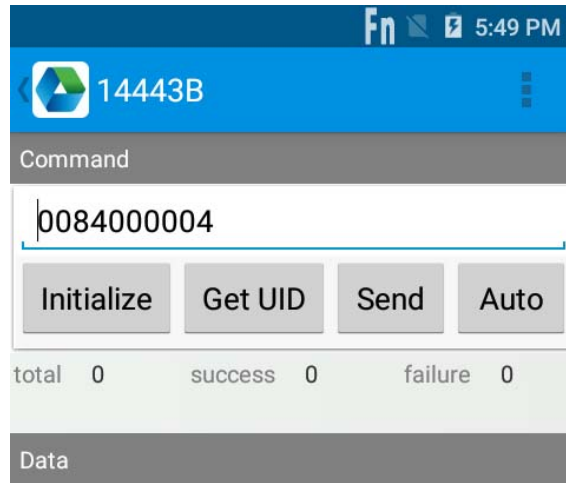


5.1.3 15693

Open the “15693” demo within Appcenter, and then reading and writing information of the tag.

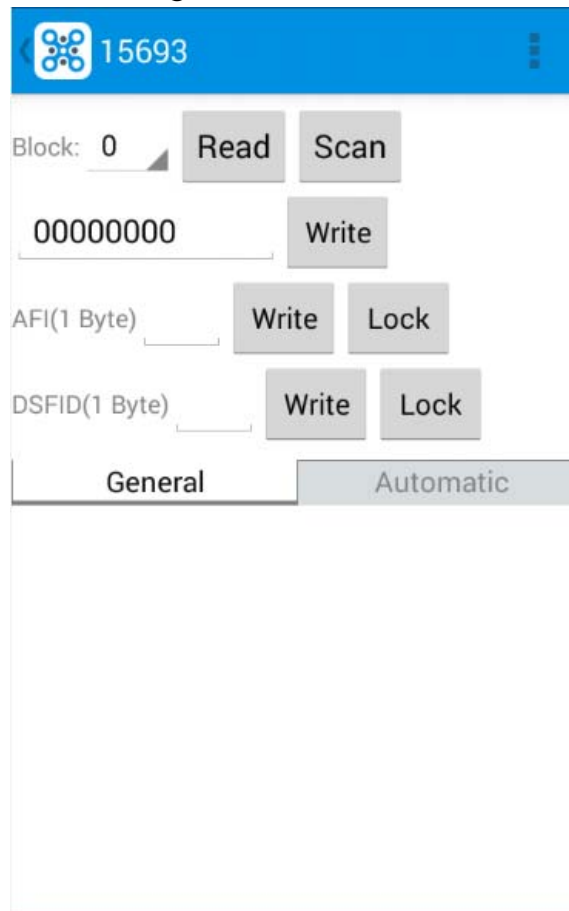

5.2 NFC


Open the “NFC” demo within Appcenter, and then reading and writing information of the tag.

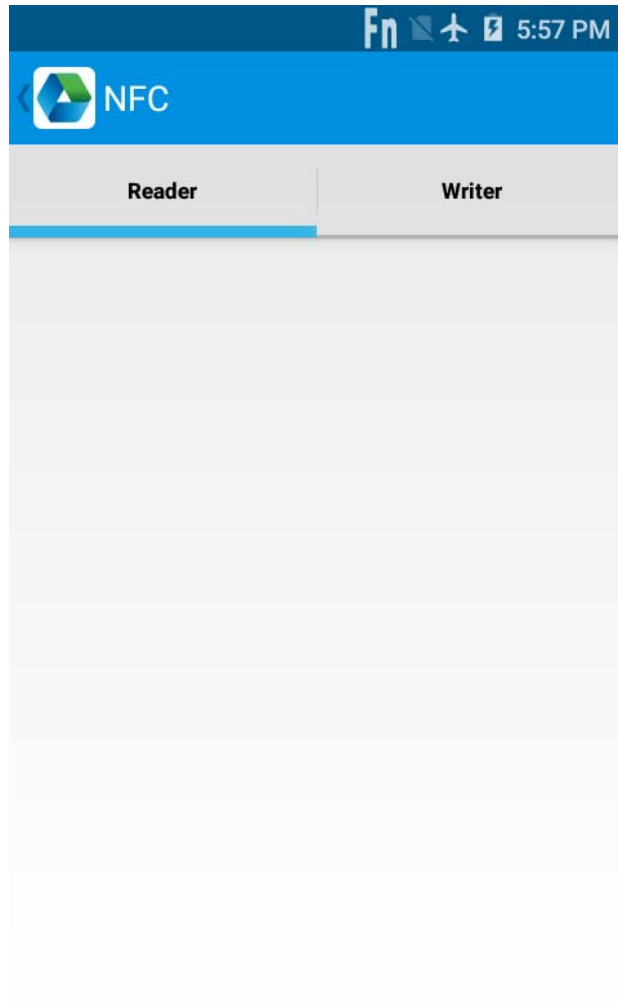

Chapter 6 Other Functions


6.1 PING

1. Open the Ping in Appcenter.
2. Set the Ping parameters and select the internal/external addresses.

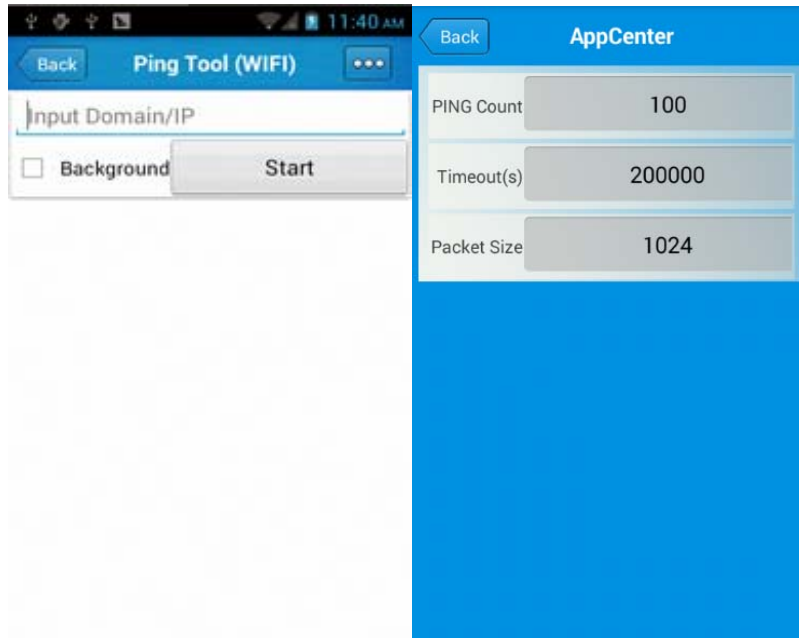


6.2 Bluetooth

1. Open the Bluetooth demo in Appcenter and turn on the Bluetooth.
2. Input the content or select the file, then scan the nearby Bluetooth printer and pair them.
3. Select the printer and click 'Print' to print the content.

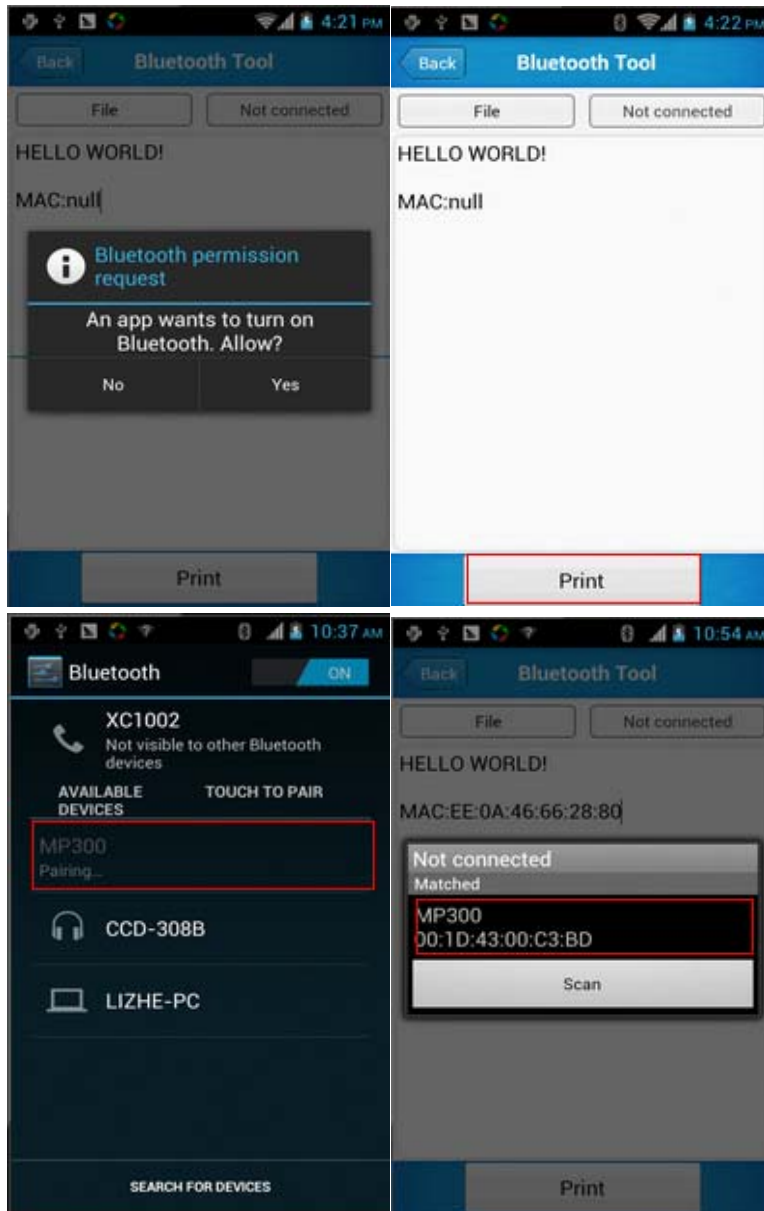

6.3 GPS

1. Open the GPS demo in Appcenter and turn on GPS module.
2. Set the GPS parameters and get the GPS data information.

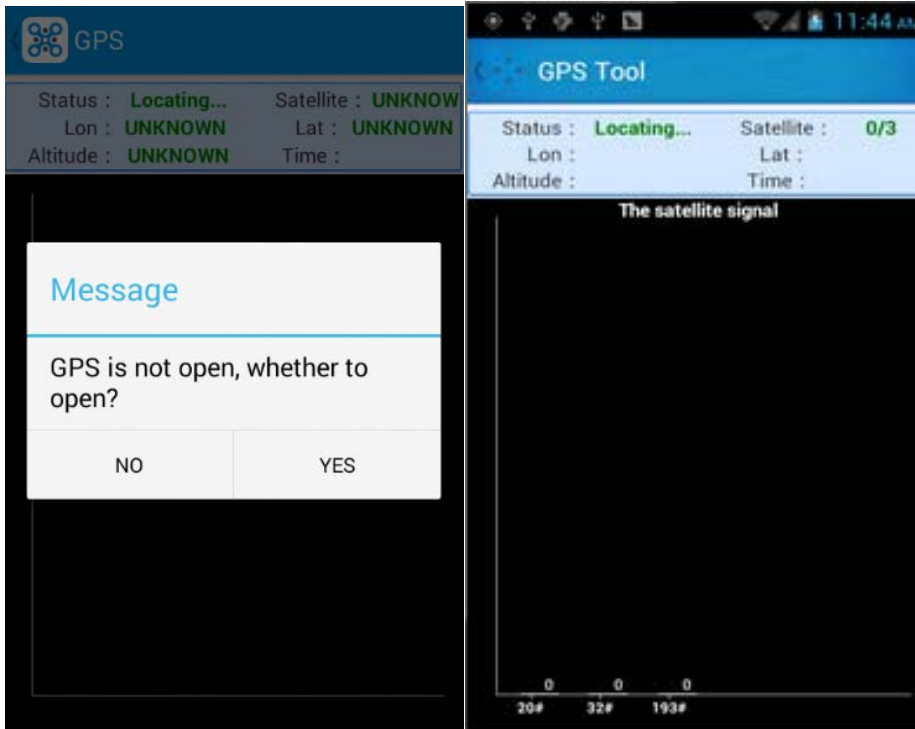


6.4 Volume Settings

1. Open the Volume Setting demo in Appcenter.
2. Set the volumes based on the requirements.



6.5 Sensor

1. Open the Sensor demo in Appcenter.
2. Test the sensor based on the requirements.

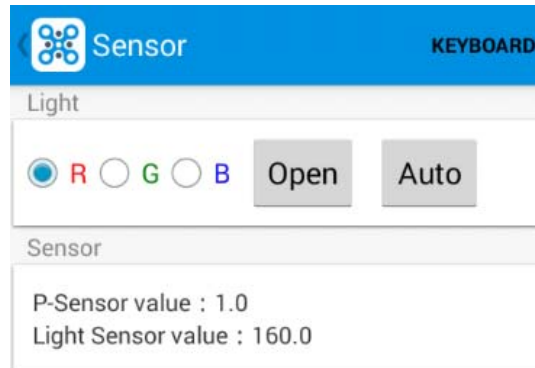


6.6 Keyboard

1. Open the Keyboard demo in Handset Appcenter.
2. Set and test the key values of the device.

6.7 Network

1. Open the Network demo in Appcenter.
2. Test the WIFI/Mobile signal based on the requirements.

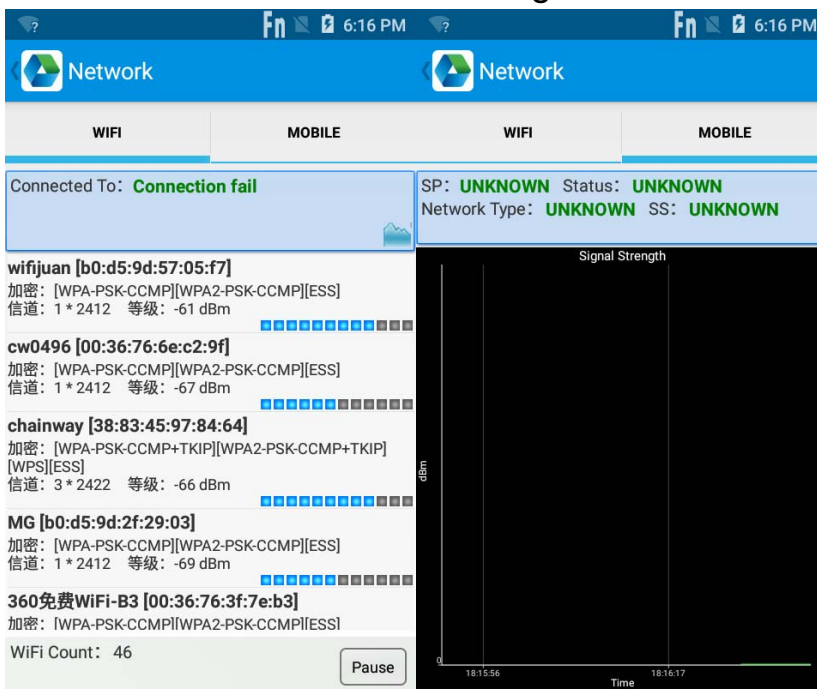

Chapter 7 Device Specifications

Physical Parameters

Dimensions	157.6mm*73.7mm*29mm
Weight	292 g / 10.3 oz.
Screen	4" WVGA (480*800), 16.7M colors
Keyboard	3 TPsoft keys, numeric keypad, 3 side buttons
Battery	Main bat. (rechargeable li-ion polymer, 3.7V, 4200 mAh)
Expansion Slot	MicroSD/TF, maximum capacity of 32G
SIM Slot	1 PSAM, 1 SIM, 1 MicroSD
Audio	0.5W wat
Camera	8/13MP Autofocus with flash

Performance Parameters

CPU	Cortex A-53 2.0 GHz octa-core
OS	Android 10
Memory	3GB + 32GB / 2GB + 16GB
Interface	USB 2.0, Type-C, OTG
Storage Card Type	TF card
Maximum Expansion Storage	128GB

Environmental Parameters

Operating Temperature	-4oF to 122oF / -20oC to 50oC
Storage Temperature	-40oF to 158oF / -40oC to 70oC
Humidity	5%RH-95%RH (non-condensing)
Dropping Survive	Multiple 2 m / 6.56 ft. drops to concrete across the operating temperature range
Sealing	IP65, IEC compliance

Wireless Communication

WWAN	<p>2G: GSM850/GSM900/DCS1800/PCS1900</p> <p>3G: CDMA EVDO: BC0</p> <p>WCDMA: B1/B2/B4/B5/B8</p> <p>TD-SCDMA: A/F(B34/B39)</p> <p>4G: B1/B2/B3/B4/B5/B7/B8/B12/B17/B20/B28A/ B28B/B34/B38/B39/B40/B41</p>
WLAN	Depending on the country's ISP
WPAN	V2.1+EDR, 3.0+HS and V4.1+HS, BT5.0

Data Collection

1D Barcode Scan Engine	<p>1D barcode (Symbol SE955, laser, hardware decoding): UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.</p> <p>2D barcode (Symbol SE4500, COMS, software decoding): Data Matrix, QR Code, Aztec Code, PDF417, US Planet, UK Postal, etc.</p>												
2D Barcode Scan Engine	<p>2D CMOS laser scanner: Symbol SE4500</p> <p>Sensor resolution: 750 (horizontal) * 480 (perpendicular) pixel (gray level)</p> <p>Roll tolerance: 360° Pitch tolerance: ±60° Skew tolerance: ±60° Ambient light: 9000ft.candles/96900 lux (lightless) Aiming LED (VLD): 655nm ± 10nm Illumination element: 650nm ± 5nm Field of view: 40° horizontal, 25° perpendicular Barcode type: PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal Dutch Postal (KIX),etc.</p> <p>Decode ranges:</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 33%;">SR Focus</td> <td style="width: 33%;">Near</td> <td style="width: 33%;">Far</td> </tr> <tr> <td>5 mil Code 39:</td> <td>2.1 in./53 mm.</td> <td>7.5 in./191 mm.</td> </tr> <tr> <td>100% UPC/ENA:</td> <td>1.6 in./41 mm.</td> <td>15.5 in./394 mm.</td> </tr> <tr> <td>6.7 mil PDF417:</td> <td>3.4 in./86 mm.</td> <td>7.1 in./180 mm.</td> </tr> </table>	SR Focus	Near	Far	5 mil Code 39:	2.1 in./53 mm.	7.5 in./191 mm.	100% UPC/ENA:	1.6 in./41 mm.	15.5 in./394 mm.	6.7 mil PDF417:	3.4 in./86 mm.	7.1 in./180 mm.
SR Focus	Near	Far											
5 mil Code 39:	2.1 in./53 mm.	7.5 in./191 mm.											
100% UPC/ENA:	1.6 in./41 mm.	15.5 in./394 mm.											
6.7 mil PDF417:	3.4 in./86 mm.	7.1 in./180 mm.											
RFID	HF 13.56MHz, ISO14443A/ISO15693 (optional).												

Developing Environment

SDK	Chainway SDK
Programming Language	Java
Developing Tool	Eclipse/Android Studio

FCC statements:

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types C6000 (FCC ID:2AC6AC6000B) has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use when properly worn on the body is 0.812 W/kg and for head is 0.707 W/kg. Simultaneous RF exposure is 1.543W/Kg. This device was tested for typical body - worn operations with the back of the handset kept 10mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 10mm separation distance. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.