


User Manual



Product Overview

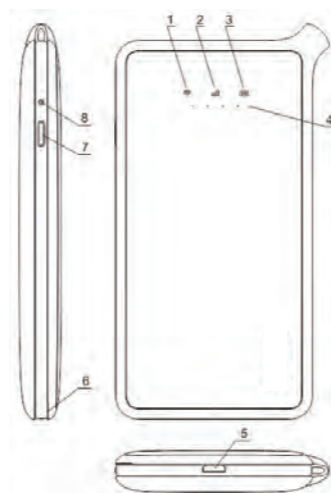

1. Wi-Fi LED Indicator
2. Signal LED Indicator
3. Battery LED Indicator
4. Strength LED Indicator
5. Micro USB (Input)
6. Handle position for opening front panel
7. Power button
8. Reset button


Function Introduction

1. Power on: Press power button for 3 seconds.
2. Power off: Press power button for 5 seconds.
3. Reset: Press power button for 18 seconds.
4. Restore Factory Settings: Press reset button for 5 seconds.
5. Battery Capacity and Signal Strength: Press the power button, the battery capacity will be shown in the first 3 seconds, then the signal strength will be shown afterwards.

LED Indicator Type	Status	Remarks
Wi-Fi LED Indicator	On	Ready for internet connection
	Off	No internet connection
	Flashing	Service connecting
Signal LED Indicator	On	The signal strength is shown by strength LED indicator (4)
	Flashing	Service Error
	On	The battery capacity is shown by strength LED indicator (4)
Battery LED Indicator	On	The battery capacity is shown by strength LED indicator (4)
	Flashing	Charging

Local SIM

The Figure 1 at right side is Micro SIM slot. The front panel can be opened as shown in Figure 2.



Note:

1. Please turn off the device first if you want to insert/pull out the SIM card.
2. Manage and select SIM card by visiting the site "192.168.43.1".
3. You are expected to manage the data usage and status while using a physical SIM card.

Product Introduction


Brand: GlocalMe
Box Content: Device, User Manual, Micro USB cable

Technical Specification:

- Max Upload Speed: 50Mbps
- Max Download Speed: 150Mbps
- Wi-Fi: IEEE802.11b/g/n
- Micro USB
- Battery Capacity: 3500mAh
- Power Input: DC 5V 1A

Quick Start Guide

1. Register an Account: Scan the QR code below to download the GlocalMe App. You can register for an account after installation.
2. Activate Device: Use the GlocalMe app to scan the QR code on the back panel of the device.
3. Purchase Package: Purchase package or top up through the GlocalMe app.
4. Power On: Press power button for 3 seconds.
5. Connect to GlocalMe: When the Wi-Fi LED indicator "Wi-Fi" is staying on, turn on Wi-Fi on your cell phone, select GlocalMe Wi-Fi, enter the password to connect to the internet. (Wi-Fi name and password can be seen on the back panel, as shown below)
6. Device Management: Enter "192.168.43.1" in the address bar of web browser, and enter the username and password to login. (The initial username and password are shown above)



FAQ

1. How long does it take to fully charge the E1? Approximately 3.5 hours.
2. How long can it work continuously? Approximately 12 hours once fully charged.
3. How can I change my Wi-Fi name and password? Once connected, enter "192.168.43.1" in the address bar of web browser, enter the new SSID (Wi-Fi name) and password.
4. What should I do if my device is lost or stolen? Deactivate the device through GlocalMe APP to prevent non-permitted use of your account balance and report the loss to our Customer Service team.
5. How many connections can it support at the same time? E1 can support up to 5 connections at the same time.
6. How long does it take to connect to the internet once switched on? It depends on the local network condition, normally it will take 1-2 minutes. If it is used for the first time in a country, it may take up to 10 minutes.
7. What is the cause of the LEDs remaining switched off when pressing the power button? It may be caused by low battery, please charge first.
8. What should I do if it stops responding? Press the power button for 18 seconds.
9. What should I do if the local SIM doesn't work? Manage and select SIM card by visiting the site "192.168.43.1". Manually enter the APN of the SIM card (login to 192.168.43.1, go to "Settings" -> "APN settings", manually enter the APN info of your SIM card and Save.)

For more info, please visit www.glocalme.com

Warning

Specific Absorption Rate (SAR) information. SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value, in general, the closer you are to a wireless base station antenna, the lower the power output. Before a new device can be made available for sale to the public, it must be tested and certified by the FCC that it does not exceed the exposure limit established by the FCC. Tests for each device are performed in positions and locations as required by the FCC. For body worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause.

Undesired operation, Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and complies with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is suggested to try to correct the interference by the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit to the receiver.
- Consult the manufacturer or an experienced radio/TV technician for help.



Information on the disposal and recycling of the device

This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset, adapter, or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal waste and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, household waste disposal service, or retail store. Disposal of the device and batteries (if included) is subject to WEEE. Directive Recast (Directive 2012/19/EU) and Battery Directive (Directive 2006/66/EC). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risk of any hazardous substances that may be present.



Website: www.glocalme.com
Phone Number: +852 8191 2660 or +86 400 822 1581 (China)
E-mail: service@ucloudlink.com
Facebook: GlocalMe HK GlocalMe International
Twitter: @GlocalMeOnline
HONGKONG U-CLOUDLINK NETWORK TECHNOLOGY LIMITED
Address (HK): Suite 603, 6/F, Laws Commercial Plaza, 788 Cheung Sha Wan Road, Kowloon Hong Kong

1

2

3

4

5

6

7

8