

# EDL - Micro Secure Digital Data Link PS

Micro Sized Software Defined Radio

Aeronix's 802.16 Micro Data Link is a conduction cooled very small, lightweight, modular, and scalable data link that enhances security and range. Aeronix can customize the packaging and functionality to meet customer requirements. The EDL-Micro provides guaranteed control, high quality video transmission, data security, and adaptive data rates with flexible bandwidths for extended range. The size, weight, and power consumption is perfect for small and mini unmanned vehicles.


At exactly **6.125 cubic inches** and weight of **5.9 ounces**, the 802.16 Micro Data Link currently provides the capability of on the move communications (telemetry, control, video, etc.) Point-to-Point or multipoint networked operations. Its software programmable architecture provides greater flexibility in waveform choice and allows users to easily upgrade to future waveforms without changing hardware.

- 1.75"W x 2.5L" x 1.4H"
- 5.9 ounces
- Scalable ARM and High Speed DSP
- H.264 Video Compression
- RS-170 Video Input
- Graphics Accelerator
- Software Defined Radio
- 1 Watt RF Output
- Conduction Cooled /Industrial Temperature
- Modular RF 2.4—2.7 GHz (4.6—5.8 GHz - planned)
- OTG USB 2.0



## Tactical 802.16 Waveform

- AES Encryption with 128 or 256 bit key (no latency).
- Software Reprogrammable as needed for application specific requirements.
- Doppler correction for ground-to-air and air-to-air operation.
- Performs ACM at BPSK, QPSK, QAM16, QAM64, PSK8, and PSK16
- Additional PSK modulation modes for rotorcraft
- Implements the Point to Multi-point portion of the IEEE 802.16-2004 Specification.
- QoS built into 802.16 waveform.
- SCA Compatible architecture.

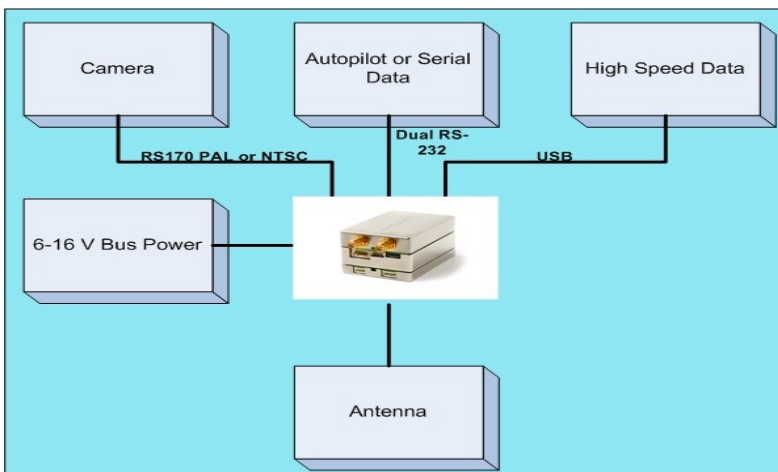

## Applications

Telemetry, Sensor, Control, VoIP, Data, Video, including:

- **UAV Data Link** - High speed secure data link from UAV to ground collection station.
- **Sensor** - USB for transferring sensor data, 2 UART ports and Video Input
- **Air Relay** - Over-the-hill communications link for VoIP



1775 West Hibiscus Boulevard ■ Suite 200 ■ Melbourne Florida 32901 ■ Tel.(321) 984-1671 ■ Fax.(321) 984-0366

[www.aeronix.com](http://www.aeronix.com)

# EDL - Micro Secure Digital Data Link PS


Micro Sized Software Defined Radio



Networking	
Waveform	Tactical 802.16 Modulations Supported: BPSK, QPSK, QAM16, QAM64, 8PSK, 16PSK
Network: Point to Multipoint	Network includes one Base-Station with multiple Subscribers Total of 20 subscribers supported
Network::Point-to-Point	High performance mode with reduced overhead. User configured mode via GUI.
Uplink / Down Link Ratio	Ratio is user configurable via GUI slide bar. Max = 70%, Min = 30% of aggregate throughput.
Network Routing	Routing configuration via automatic setup modes and user configuration
IP I	IPv4 and IPv6 Support
Operating System	Linux general purpose processor operating system
Coded Burst Rate (Mbps)	Maximum radio burst transmission capability at maximum channel width of 28 (Mbps)

Management Features	
Remote Management	Radios can be configured remotely over the network via USER login via GUI
User Interface	Web Based GUI Serial Command IF USB OTG 2.0 External USB-to-Ethernet card available SNMPv3 Capable
Software Selectable BS /SS	Radios can be configured via GUI selection as either a base-station or subscriber-station.

Security	
Encryption	AES256 Cover - Cover for network management information and data. Configured on/off via user GUI.
Pedigree	U.S. design and manufacture
FIPS 140-2	Future

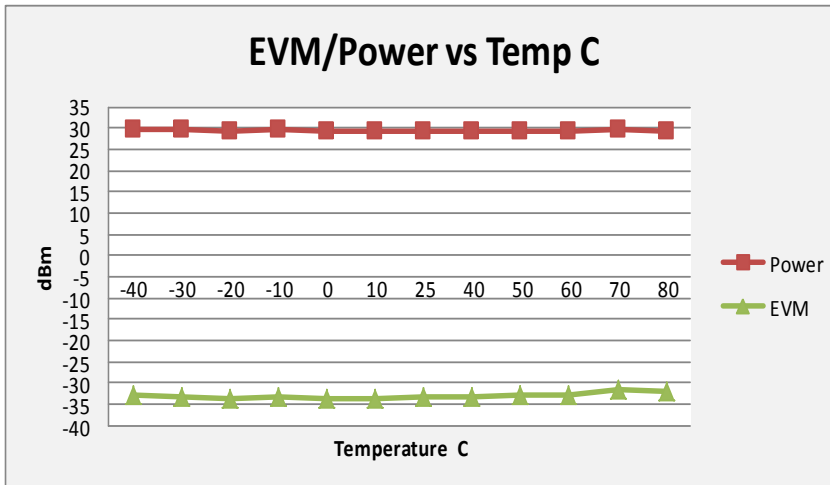

Radio Specifications	
RF Freq.	2.4 –2.7 GHz
Channels Supported	(User Configured via GUI)
Channel BW	3.5. 7.0 14.0 MHz
Channel Tuning Steps	Configured in 1 MHz steps via GUI
RF Output Power	1W Average at BPSK (2W preamble )
Noise Figure	<4 dB

Connector Interfaces	
High Speed I/O Network I/O	Micro USB, drives Ethernet Dongle
DC Power	6v to 16v
Low Speed I/O	RS232
Tx/Rx I/O	Supports external switching amplifiers if more power is desired.
Video I/O	RS170 NTSC or PAL Video In
RF I/O	Single RF SMA antenna interface

Physical Characteristics	
Size	1.75"W x 2.5L" x 1.4H" (6.125 cubic inch)
Weight	~ 5.9oz
Power	Typical 8 W, Max 10 watts

Environmental	
Temp	-40 to 60C, cold plate
Shock	50g
Chassis	Unsealed
Cooling	Conduction

User Data Rates	
BPSK@ 3.5MHz	1 Mbps
QAM16@3.5 MHz	6.5 Mbps
BPSK@ 7MHz	2.01 Mbps
QAM16@7MHz	11.8 Mbps
QAM64@7MHz	17.6 Mbps
QAM64@14 MHz	37.9 Mbps

Situational Range Performance	
10 dB ground patch to 0 dB air omni	7.5 miles, 12 km
3 dB ground omni to 0 dB air omni	4 miles, 6 km
27 dB ground directional to 0 dB air omni	40 miles, 64km
4 dB ground omni to 4 db ground omni	2 miles, 3.5 km



1775 West Hibiscus Boulevard ■ Suite 200 ■ Melbourne Florida 32901 ■ Tel.(321) 984-1671 ■ Fax.(321) 984-0366

[www.aeronix.com](http://www.aeronix.com)